

---

# CS 61A      Structure and Interpretation of Computer Programs

## Spring 2017 **Solutions**

---

MOCK FINAL

### INSTRUCTIONS

- You have 1 hour to complete the exam.
- The exam is closed book, closed notes, closed computer, closed calculator, except one 8.5" × 11" cheat sheet of your own creation.
- Mark your answers **on the exam itself**. We will *not* grade answers written on scratch paper.

Last name	
First name	
Student ID number	
Instructional account (cs61a-*)	
BearFacts email (_@berkeley.edu)	
TA	
Name of the person to your left	
Name of the person to your right	
<i>All the work on this exam is my own.</i> (please sign)	

### 1. (10 points) On My Way to San Jose

For each of the expressions in the table below, write the output displayed by the interactive Python interpreter when the expression is evaluated. If an error occurs, write "Error". The first box has been filled in for you. Assume that the Link class has been defined. Assume that you have started `python3` and executed the following statements:

```
class City:
    num = 0
    def __init__(self, name, \
        pop, people=[]):
        self.name = name
        self.pop = pop
        self.people = list(people)
        self.num += 1

class Place(City):
    lnk = Link.empty
    def __init__(self, name, city=None):
        self.name = name
        self.city = city
        lnk = self.lnk
        while lnk != Link.empty:
            lnk = lnk.rest
        lnk = self
```

```
class People:
    def __init__(self, place, name, first=0):
        self.place = place
        self.name = name
        if not first:
            self.friend = People(self.place, \
                "Friend", 1)
        print(self.place.city)
        self.place.city.people.append(self)

    def goto(self, place):
        self.place = place
        print(self.name+" is at "+place.name)
```

```
san_jose = City("San Jose", 1)
tech_museum = Place("Tech Museum", san_jose)
steve, bob = People(tech_museum, "Steve"), People(Place("Library", san_jose), "bob")
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

<pre>len(Place.lnk)</pre> <p>0</p>	<pre>san_jose.goto = People.goto san_jose.goto(tech_museum)</pre> <p>ERROR</p>
<pre>bob.goto(tech_museum)</pre> <p>bob is at Tech Museum</p>	<pre>san_jose.goto = steve.goto san_jose.goto(tech_museum)</pre> <p>Steve is at Tech Museum</p>
<pre>print(bob.goto(san_jose))</pre> <p>bob is at San Jose None</p>	<pre>berkeley = City("Berkeley", 2, \ [steve, bob]) City.num</pre> <p>0</p>
<pre>People.__init__(san_jose, \ san_jose, "Yali's")</pre> <p>ERROR</p> <pre>san_jose.name</pre> <p>"Yali's"</p>	<pre>berkeley.people[0] == \ san_jose.people[1]</pre> <p>True</p>
<pre>san_jose.city = san_jose People.__init__(san_jose, \ san_jose, "Yali's")</pre> <p>Object Object</p> <pre>san_jose.name</pre> <p>"Yali's"</p>	<pre>[i.name for i in berkeley.people]</pre> <p>["Steve", "bob"]</p>

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## 2. (10 points) Aaaaaaaaaaaaa

Fill in the environment diagram that results from executing the code below until the entire program is finished, an error occurs. *You may not need to use all of the spaces or frames.*

A complete answer will:

- Add all missing names and parent annotations to all frames.
- Add all missing values created or referenced during execution.
- Show the return value for each local frame.

# Assignment Project Exam Help

```


1 w, x = lambda a: x, lambda: x
2 def a(x):
3     def a():
4         nonlocal a
5         b()
6         a = w
7
8     def b():
9         nonlocal a
10        a = [x]
11        for i in range(2):
12            a.append(a[-1]())
13    a()
14    return a
15 x = a(x)
16 w = x(a)

```

<https://powcoder.com>

Add WeChat powcoder

Global	_____	_____
_____	_____	_____
_____	_____	_____
Return Value	_____	_____
f2: _____ [parent = _____]	_____	_____
Return Value	_____	_____
f3: _____ [parent = _____]	_____	_____
Return Value	_____	_____
f4: _____ [parent = _____]	_____	_____
Return Value	_____	_____
f5: _____ [parent = _____]	_____	_____
Return Value	_____	_____
f6: _____ [parent = _____]	_____	_____
Return Value	_____	_____

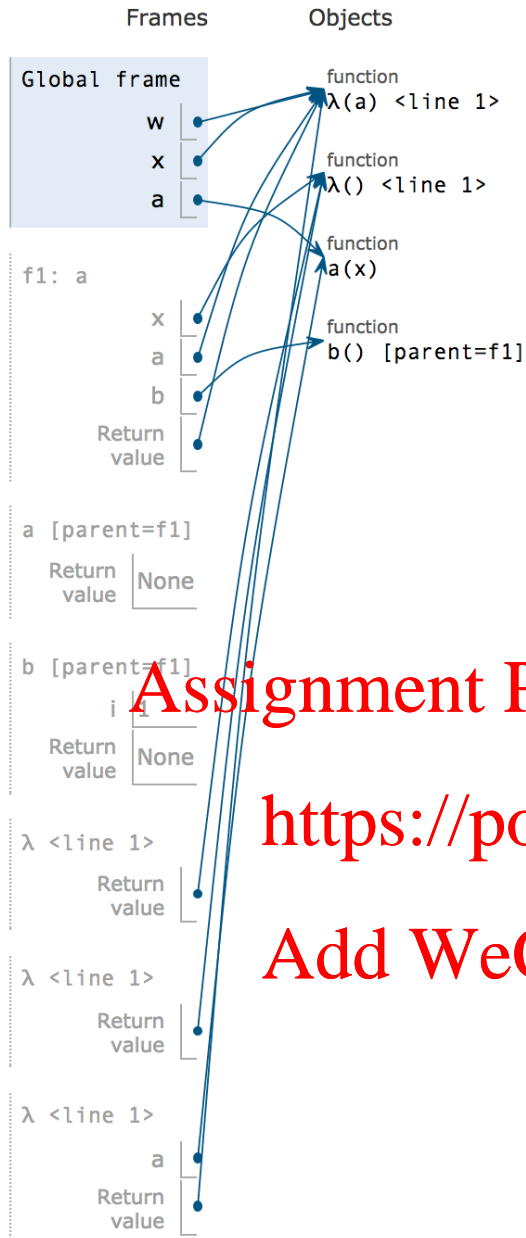

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

3. (10 points) **Scheme-ing Merge** Given two sorted lists, `lst1` and `lst2`, return a list that sorts both in ascending order. Break ties in any way you wish.

```
(define (merge lst1 lst2)

  (cond ((_____ ) _____)

        ((_____ ) _____)

        ((_____ ) _____)

        (else (_____))))
```

;Solution:

```
(define (merge lst1 lst2)
  (cond ((null? lst1) lst2)
        ((null? lst2) lst1)
        ((<= (car lst1) (car lst2)) (cons (car lst1) (merge (cdr lst1) lst2)))
        (else (cons (car lst2) (merge (cdr lst2) lst1)))
  )
)
```

**Assignment Project Exam Help**

<https://powcoder.com>

4. (10 points) **Scheme-ing to Find a Path**  
Here is the `BinTree` class provided for your reference:

```
class BinTree:
    empty = ()
    def __init__(self, label, left=empty, right=empty):
        self.label = label
        self.left = left
        self.right = right
```

**Add WeChat powcoder**

Given a binary search tree and an entry, return the path in order to reach the entry from the root in the form of a list. Assume the entry exists in the tree.

```
def pathfinder(bst, entry):
    """
    >>> bintree = BinTree(4, BinTree(2, BinTree(1)), BinTree(5))
    >>> pathfinder(bst, 2)
    [4, 2]
    >>> pathfinder(bst, 1)
    [4, 2, 1]
    """
    if _____:
        _____

    elif _____:
        _____
```

```
elif _____:

    return _____

else:

    return _____

# Solution:
def pathfinder(bst, entry):
    if bst is BinTree.empty:
        return []
    if bst.entry.label == entry:
        return [bst.label]
    elif bst.label > entry:
        return [bst.label] + pathfinder(bst.left, entry)
    else:
        return [bst.label] + pathfinder(bst.right, entry)
```

## Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

## 5. (10 points) Homework Party: The SQL

You are a veteran at RuneSQL, a popular RPG (role-playing game) where you hone your skills to become the best player in the database! However, you are a little short on SUPER DUPER EPIC RARE 61A homework party hats. Other players (a.k.a. n00bs) are fortunately predictable. Through your many years of being a crafty RuneSQL economist, you have taken note of the trends in hat\_prices. The following chart shows the price per unit (in millions of RuneSQL coins) and quantity for a batch offer of party hats at a certain time (in minutes).

hat\_prices

time	price	quantity
0	0.5	20
30	.3	10
60	0.75	40
90	0.7	25
120	1.3	25
150	1.25	30
180	0.4	5
210	0.45	10

Theres a catch! You will have to wait 1 hour after buying a single batch of hats or n00bs will get suspicious and market prices will change. Write a SQL select statement to show you the path to the maximum number of hats you can buy for 50 million coins, your current budget.

-- Expected result:

-- 0, 60, 210|70

```

WITH paths(path, prev_time, units, money) as (

    SELECT -----
        FROM hat_prices UNION
    SELECT -----
        -----

    FROM hat_prices, paths

    WHERE money >= 0 and time - prev_time > 30

)
SELECT ----- FROM -----;

```

Solution:

```

WITH paths(path, prev_time, units, money) as (
    SELECT time, time, quantity, 50-price*quantity FROM hat_prices UNION
    SELECT path ||      ,      || time, time, units + quantity,
money - price * quantity FROM hat_prices, paths
    WHERE money >= 0 and time - prev_time > 30
)
SELECT path, max(units) FROM paths;

```