



PowerShell Conference Europe

Next Up:

Robert Prüst

3

2

1



PowerShell Conference Europe

When low-code solutions are too dumb and high-code solutions are too clever

Robert Prüst

Many thanks to our sponsors:



Jane Street



IRONMAN SOFTWARE

KNOWLEDGE
FACTORY



SynEdgy

Robert Prüst




- Husband of awesome wife & Father of 2 great kids
- MCT
- Developer @ Wortell

Challenge

Our engineers
need to get a grip
on Azure Alerts



Low Code solutions

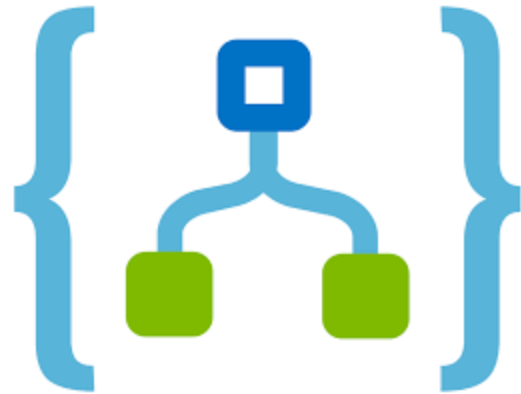

Pros

- Visual Designer
- Built-in Connectors
- Managed Execution & Retry policies

Cons

- Limited logic complexity
- Hard to manage custom code
- Performance issues (cold start)

JavaScript $\leq$ 1024 chars

Call external runbooks/functions

High Code solutions



Pros

- Full programming flexibility
- Scalable and performant
- Ideal for backend logic & integrations

Cons

- Requires developer skills
- More effort to manage dependencies, error handling, orchestration
- Harder to visualize


Making tools for others to use...



In comes a new contender...



Logic Apps with PowerShell Code

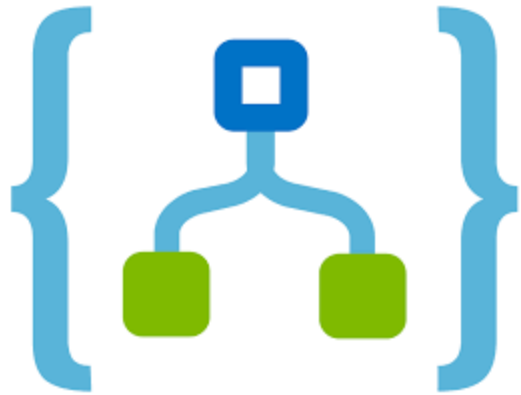

Requirements

- SKU: Standard (instead of Consumption)
 - App Service Plan

Output & Input Data

- Push-WorkflowOutput
- Get-TriggerOutput
- Get-ActionOutput

Name	Type	Description
Name	String	The name for the trigger or action.
Inputs	JToken	The input values passed into the trigger or action.
Outputs	JToken	The outputs from the executed trigger or action.
StartTime	DateTime	The start time for the trigger or action.
EndTime	DateTime	The end time for the trigger or action.
ScheduledTime	DateTime	The scheduled time to run the trigger or action or trigger.
OriginHistoryName	String	The origin history name for triggers with the Split-On option enabled.
SourceHistoryName	String	The source history name for a resubmitted trigger.
TrackingId	String	The operation tracking ID.
Code	String	The status code for the result.
Status	String	The run status for the trigger or action, for example, Succeeded or Failed.
Error	JToken	The HTTP error code.
TrackedProperties	JToken	Any tracked properties that you set up.

In PowerShell, if you reference an object that has **JValue** type inside a complex object, and you add that object to a string, you get a format exception. To avoid this error, use **ToString()**.

Modules

- Public -> PSGallery
 - host.json -> ManagedDependency
 - requirements.psd1
- Private
 - site\wwwroot\Modules\<ModuleName>*.psm1/*.psd1

Managed Identities

- System or User Managed Identity
 - Provide role access in order for the scripts to do what you want them to do
 - Connect-AzAccount -Identity

Troubleshoot scripts

- Write-Output
- Application Insights
 - traces
 - | where operation_Name has "PowerShell"
 - | where message has "OUTPUT:" or message has "INFORMATION:"

Q&A

15 minutes

