Application note 012c TVM

This application note demonstrates C47/R47 TVM (Time Value of Money) functionality through 26 worked examples.

Contents

Learning outcomes of tutorial problems included: 2
Section 3: 11 problems from a worked out financial calculator tutorial. 2
Section 4: 12 numerical test cases from the calculator community as downloadable RPN programs. 2
Introduction 3
List of worked out application note examples: 3
Section 1: Reference to HP TVM calculators: 4
Section 2: Math Reference R47/C47 TVM: 5
1. Variable Definitions 5
2. Derived Variables 6
3. General TVM Equation 6
4. Solving for Present Value (PV) 6
5. Solving for Future Value (FV) 6
6. Solving for Payment (PMT) 6
7. Solving for Number of Periods (NPPER) 6
8. Solving for Interest Rate (I%/a) 6
Section 3: Worked out tutorial Baker, Lin & Pursley 7
Section 4: Duncan's collection of TVM stress tests 12
From the SwissMicros Forum, dm319's problem set 12
Results to dm319's problem set: 34 digits accurate 14
Duncan's collection of TVM problems as programmed for C47 / R47 16

Learning outcomes of tutorial problems included:

Section 3: 11 problems from a worked out financial calculator tutorial.

The learning outcomes of Section 2 focus on TVM fundamentals: understanding how the five core variables interact, setting payment and compounding periods correctly, and recognizing when to use Begin versus End mode.

Examples 3A/3B/3C demonstrate that different problem approaches yield the same answer.
Example 5 teaches period conversion (annual to bi-weekly).
Examples 6 and 7 show how adding constraints changes the calculation.
Example 11 covers nominal to effective interest rate conversions.

Section 4: 12 numerical test cases from the calculator community as downloadable RPN programs.

The learning outcomes of Section 3 shift to understanding the TVM functions by programming same: structuring complete TVM programs, organizing multi-step calculations, and controlling solver behaviour.

Problems demonstrate straightforward setup and solving and progress to teach program sequencing when multiple TVM operations are required. Problems 5/5b and 6/6b specifically teach solver bias control, showing how to obtain different valid solutions by setting initial guesses.

All programs are available at 47calc.com, on the appnote section for practice and adaptation.

Introduction

The C47/R47 TVM implementation follows HP financial calculator conventions but requires explicit setup of payment and compounding periods. The five core TVM registers are n (number of periods), I/a (annual interest rate as percentage), PV (present value), PMT (payment per period), and FV (future value). Special settings control pp/a (payment periods per year), cp/a (compounding periods per year), and Begin/End mode (when interest applies). Functions EFF/a and DEFF/a convert between nominal and effective annual rates.

List of worked out application note examples:

Section 2 discusses the variables and math used in R47/C47 TVM module:

Section 3 demonstrates typical financial calculations using problems from the Baker & Lin tutorial:

- Example 1: Calculate FV given initial investment and time horizon
- Example 2: Calculate PV of a future amount
- Example 3: Compare lottery options (lump sum vs annuity stream)
- Example 3A: Same comparison using BEGIN mode
- Example 3B/C: Alternative approach comparing future values instead of present values
- Example 4: Calculate required annual savings to reach investment goal
- Example 5: Calculate bi-weekly savings (26 periods per year)
- Example 6: Determine required rate of return given savings capacity
- Example 7: Required return with existing capital and ongoing contributions
- Example 11: Convert nominal to effective interest rates for quarterly and daily compounding

Section 4 tackles numerical edge cases from dm319 (Duncan's) calculator test suite, implemented as RPN:

- Problem 1: Monthly mortgage payment over 38 years
- Problem 1b: Reverse calculation verifying interest rate
- Problem 2: Payment differential from rate change, then PV calculation
- Problem 3: Kahan's extreme test (60×60×24×365 periods)
- Problem 4: Zero interest rate round-trip (exposes floating point precision limits)
- Problem 5: Multiple solution test (default solver finds first root at 14.44%)
- Problem 5b: Biased solver finds second root at 53.17%
- Problem 6: Multiple solution test (default finds -36.89%)
- Problem 6b: Biased solver finds second root at 58.46%
- Problem 7: Near-zero FV with fractional payments
- Problem 8: Small interest rate precision test
- Problem 9: Period calculation in END mode
- Problem 10: Period calculation in BEGIN mode
- Problem 11: Sequential FV then I/a calculation
- Problem 12: Sequential I/a then FV calculation
- Problem 12a: Sequential I/a then FV calculation

Program 'Pall' executes the complete test suite with timing, and subroutine 'TT' logs results to text files. Execution times on USB-powered DM42 hardware range from 0.4 to 4.3 seconds per problem.

Section 1: Reference to HP TVM calculators:

Photo HP10BII+, credit

The **HP 10bII+** shown in the image on the right is referenced throughout **Section 3: Business Finance Essentials**. That tutorial was originally written with the 10bII+ as its primary example and is therefore reproduced verbatim in this application note. As a result, terminology, key names, and examples in that section follow the conventions of the 10bII+, even when equivalent operations on other calculators may be entered differently. The 10bII+ represents Hewlett-Packard's algebraic (non-RPN) financial calculator lineage. While it does not use Reverse Polish Notation, its internal time-value-of-money (TVM) model is mathematically identical to that of HP's RPN calculators, making it a useful neutral reference when explaining financial concepts independently of entry method.

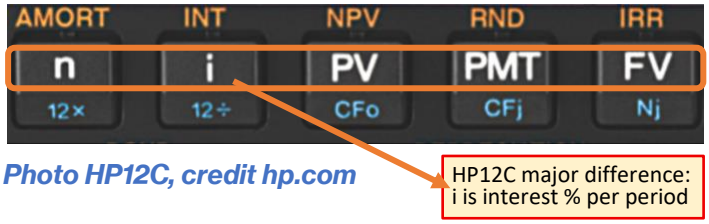

Photo HP12C, credit hp.com

The **HP-12C**, the classic workhorse of the financial industry, is similar to most modern RPN financial calculators but differs in one key respect: interest rates are entered per period rather than per year, so an annual rate must be converted explicitly at entry. While this can appear unfamiliar to users of algebraic calculators, it makes the compounding structure explicit and avoids hidden assumptions.

Photo HP30b, credit hp.com

The **HP 30b**, a later HP model, adds an RPN mode alongside algebraic entry, showing that differences among these calculators lie primarily in interface rather than underlying TVM mathematics. A subtle but important point is that apparent discrepancies in results almost always stem from differing conventions such as payment timing or rate entry rather than from different formulas; once these are aligned, all platforms yield the same numerical answers.

The **C47 / R47** follows the modern type, like the 30b. The functions in orange directly nod back to the HP models, where applicable:

5 Standard TVM keys:

n ⇒ The number of (payment) periods
I/a ⇒ The interest rate, I%/a (enter 10 for 10% per annum), a.k.a. discount rate or rate of return.
PV ⇒ The Present Value
PMT ⇒ The Annuity Payment
FV ⇒ The Future Value

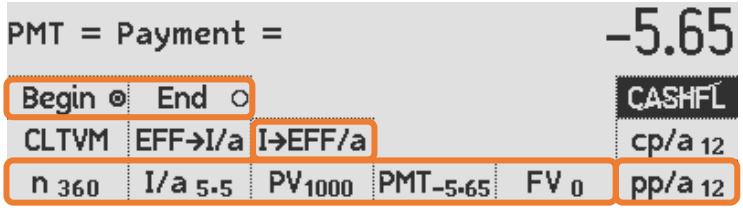

C47 / R47 TVM menu

Special options:

EFF→I/ ⇒ Input effective rate to I%/a
I→EFF/ ⇒ Convert I%/a to effective rate /a
pp/a ⇒ Payment periods per year, generally 1 or 12.
cp/a ⇒ Compounding periods per year, generally 1 or 12.
Begin ○ End ◉ ⇒ Interest on the beginning of the period, or end of the period.

Section 2: Math Reference R47/C47 TVM:

This section gives the direct formulas used by R47/C47 in the TVM module.

The general TVM formula (3) can be used in a solver, but where possible, the analytic formulas are used. Should any formula fail due to numerical issues such as divide by zero or log of a negative number, the fallback generic equation is solved, if that might help.

1. Variable Definitions

Table of variables, as used in the TVN formulas below.

Variable	Description
PV	Present Value (principal amount today)
FV	Future Value (amount at end of term)
PMT	Payment amount per period
I%/a	Nominal annual interest rate (percentage), 5 entered for 5% per annum
NPPER	Number of payment periods (total payments)
PPER/a	Payment periods per annum (12=monthly, 4=quarterly, 1=annual)
CPER/a	Compounding periods per annum (12=monthly, 365=daily, etc.)
p	Payment timing: 0 = END mode, 1 = BEGIN mode

p is greyed out, as it is no real accessible variable, but is listed as it is used in the formulas below.
p is controlled with the BEGIN/END buttons and the associated flag.

2. Derived Variables

Nominal rate per compounding period (ic):

$$ic = (I\%/a \div 100) \div CPER/a \quad (1)$$

Effective interest rate per payment period (ip):

$$ip = (1 + ic)^{(CPER/a \div PPER/a)} - 1 \quad (2)$$

Special case when CPER/a = PPER/a: $ip = ic$ **(2a)**

3. General TVM Equation

$$0 = PV + (1+ip\times p)\times(PMT\div ip)\times[1-(1+ip)^{(-NPPER)}] + FV\times(1+ip)^{(-NPPER)} \quad (3)$$

Special case (ip ≈ 0): $0 = PV + PMT\times NPPER + FV$ **(3a)**

4. Solving for Present Value (PV)

$$PV = -[(1+ip\times p)\times(PMT\div ip)\times[1-(1+ip)^{(-NPPER)}] + FV\times(1+ip)^{(-NPPER)}] \quad (4)$$

Special case (ip ≈ 0): $PV = -PMT\times NPPER - FV$ **(4a)**

5. Solving for Future Value (FV)

$$FV = -PV\times(1+ip)^{NPPER} - (1+ip\times p)\times(PMT\div ip)\times[(1+ip)^{NPPER} - 1] \quad (5)$$

Special case (ip ≈ 0): $FV = -PV - PMT\times NPPER$ **(5a)**

6. Solving for Payment (PMT)

$$PMT = -[PV + FV\times(1+ip)^{(-NPPER)}]\times ip \div [(1+ip\times p)\times[1-(1+ip)^{(-NPPER)}]] \quad (6)$$

Special case (ip ≈ 0): $PMT = -(PV + FV) \div NPPER$ **(6a)**

7. Solving for Number of Periods (NPPER)

Case 1: No payments (PMT = 0)

$$NPPER = \ln(-FV \div PV) \div \ln(1 + ip) \quad (7)$$

Case 2: With payments (PMT ≠ 0, ip ≠ 0)

$$NPPER = \ln(A \div B) \div \ln(1 + ip) \quad (8)$$

$$A = -FV\times ip + PMT\times(1+ip\times p) \quad (8a)$$

$$B = PV\times ip + PMT\times(1+ip\times p) \quad (8b)$$

Case 3: Zero interest (ip ≈ 0)

$$NPPER = -(PV + FV) \div PMT \quad (9)$$

8. Solving for Interest Rate (I%/a)

Requires iterative solution - no closed form exists: solved via the R47/C47 real solver in TVM mode

$$I\%/a = 100\times CPER/a\times[(1+ip)^{(PPER/a\div CPER/a)} - 1] \quad (10)$$

Where ip has to be solved for in Equation (3).

Section 3: Worked out tutorial Baker, Lin & Pursley

From the great tutorial[1] by Dr. Kevin Bracker; Dr. Fang Lin; and jpursley at Pressbooks or Wayback Machine:

All references below coloured in yellow are directly taken from linked document, under the appropriate Creative Commons license NC4.0 by in this referenced document.

Example One:

6 [n] 7 [I/a] 10 000 [PV] 0 [PMT] Here, on C47/R47 you have to specify the details of compounding. Do 1 [pp/a] and [cp/a] will be defaulted to the same. Ensure End is set: [Begin ○ End ◉]. [FV] is -15 007.30	You are investing $10,000 today and want to know how much you will have after 6 years if you earn a 7% rate of return over the 6-year time frame. Since you are starting with $10,000, that is your present value. You have 6 years, so the number of time periods is 6. The 7% rate of return means you have a 7% interest rate. In this example we are not using an annuity, so we are going to set the Annuity Payment to zero. 6 N 7 I/Y 10,000 PV 0 PMT FV -15,007.30 HP 10bII+

Example Two:

5 [n] 9 [I/a] 0 [PMT] 6 000 [FV] Here, on C47/R47 you have to specify the details of compounding. Do 1 [pp/a] and [cp/a] will be defaulted to the same. Ensure End is set: [Begin ○ End ◉]. [PV] is -3 899.59	You are going to receive $6000 in 5 years. Assuming a 9% discount rate, what is this worth to you today? 5 N 9 I/Y 0 PMT 6000 FV PV -3899.59 HP 10bII+

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

[1] Business Finance Essentials, *TVM 5-Key Approach Guided Tutorial with HP10BII+*, Dr. Kevin Bracker; Dr. Fang Lin; and jpursley

Example Three:

25 [n] 6 [I/a] 400 000 [PMT] 0 [FV] Here, on C47/R47 you have to specify the details of compounding. Do 1 [pp/a] and [cp/a] will be defaulted to the same. Ensure End is set: [Begin ○ End ◉]. [PV] is -5 113 342.46	Assume you have just won a $10 Million Lottery Jackpot. However, instead of paying you the $10 Million up front, you have the choice of receiving $5 Million today or $400,000 per year at the end of each year for the next 25 years. Assuming a 6% discount rate, which would you prefer? In order to answer this, you need to find the PV of the $400,000 per year for 25 years. This is done as follows: 25 N 6 I/Y 400,000 PMT 0 FV PV 5,113,342.46 (Note that we dropped the negative sign) Our understanding is that the lure is 0.4M x 25 = 10M, vs. the single payment of half of that, but right now. HP 10bII+ To get back to the original question, receiving the $10M in total over 25 years is clearly better than receiving $5M now!

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

Example Three A:

All the same as Ex 3, set to BEGIN: [Begin ◉ End ○] [PV] is -5 420 143.01	To be more realistic, as the first 400k will be paid immediately, set to Begin, and see the 'deal' being worth even more making it the right decision to take the deal. PV 5,420,143.01 (Note that we dropped the negative sign) HP 10bII+

Example Three B & C: calculating using future end values

C47/R47 Solution B: 25 [n] 6 [I/a] 5 000 000 [PV] 0 [PMT] 1 [pp/a] [Begin] [FV] is -21 459 353.60	Although the original solution THREE A (in yellow above) is the most elegant, a more "hand-waiving" intuitive way (as opposed to the quickest way) to illustrate the compounding comparison better, is equally easily done on the C47/R47: We simply compare the tangible future values of both deals instead of the 'financial' way of evaluating the current worth of a future investment: Clearly the same answer, that $23.3M is more convincing than $21.5M:	
C47/R47 Solution C: 25 [n] 6 [I/a] 0 [PV] 400 000 [PMT] 1 [pp/a] [Begin] [FV] is -23 262 553.09	B: We first check what $5M would do for us in 25 years: 25 N 6 I/Y 5 000 000 PV 0 PMT FV $21,459,353.60 (dropped the negative sign)	C: Then what the "deal" would do for us in the same 25 years: 25 N 6 I/Y 0 PV 400 000 PMT FV $23,262,553.09 (dropped the negative sign) HP 10bII+

Example Four:

20 [n] 10 [I/a] 0 [PV] 1 000 000 [FV] Here, on C47/R47 you have to specify the details of compounding. Do 1 [pp/a] and [cp/a] will be defaulted to the same. Ensure End is set: [Begin ○] [End ◉] [PMT] is -17 459.62	You want to become a millionaire and plan to do so through a savings/investment plan. Assuming you want to reach your goal in 20 years and anticipate earning a 10% rate of return, how much must you save at the end of each year in order to reach your goal? HP 10bII+ 20 N 10 I/Y 0 PV 1,000,000 FV PMT $17,459.62 This means you will need to save $17,459.62 per year in order to achieve your goal.

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

Example Five:

C47/R47 has the setting Payment Periods Per Year, so type 26 [pp/a] and it is assumed the Compounding Periods Per Year [cp/a] is the same. 30 ENTER 26 X [n] 10 [I/a] (still the same as Ex 4) 0 [PV] (still the same as Ex 4) 1 000 000 [FV] (still the same as Ex 4) Ensure End is set: [Begin ○] [End ◉] (still the same as Ex 4). [PMT] is -202.75	Now assume that you want to accumulate $1 million in 30 years, but instead of saving each year, you are going to save every two weeks (we will earn a 10% annual rate of return). There are 26 2-week periods in each year, so now you have to adjust your calculator to work with 26 periods per year. You can do this as follows: 26 SHIFT P/YR HP 10bII+ 780 N 10 I/Y 0 PV 1,000,000 FV PMT $202.75

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

Example Six:

C47/R47 has the setting Payment Periods Per Year, so type 1 [pp/a] and it is assumed the Compounding Periods Per Year [cp/a] is the same. (still the same as Ex 4, 5) 35 [n] -3 000 [PMT] 0 [PV] (still the same form Ex 4, 5) 1 000 000 [FV] (still the same form Ex 4, 5) Ensure End is set: [Begin ○ End ◉] (still the same as Ex 4, 5). [I/a] is 10.89 %	Let's keep working with the goal of becoming a millionaire. However, instead of calculating how much you must save, we'll assume you can save $3000 per year and want to find the rate of return you will need to earn to reach your goal. This time we will give ourselves 35 years of saving $3000 per year. 35 N 0 PV -3000 PMT 1,000,000 FV I/Y 10.89% HP 10bII+

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

Example Seven:

C47/R47 has the setting Payment Periods Per Year, so type 1 [pp/a] and it is assumed the Compounding Periods Per Year [cp/a] is the same. (still the same as Ex 4, 5, 6) 35 [n] (still the same as Ex 6) -3 000 [PMT] (still the same as Ex 6) -40 000 [PV] 1 000 000 [FV] (still the same as Ex 4, 5, 6) Ensure End is set: [Begin ○ End ◉] (still the same as Ex 4, 5, 6). [I/a] is 7.63 %	Here is one last variation on our millionaire example. This time, instead of starting with nothing, let's assume that we already have $40,000 and plan to save an additional $3000 per year over the next 35 years. Now, what rate of return must we earn in order to accumulate $1,000,000 at the end of the 35th year? 35 N -40,000 PV -3000 PMT 1,000,000 FV I/Y 7.63% HP 10bII+

Note: light grey represents settings the same as the previous problem, i.e. no need to re-enter those.

Examples Eight through Ten are "Cash Flow Problems" cannot yet be done by C47:

Example Eleven:

C47/R47 does have EFF% from the latest version 00.109.02.00.

7.8 [I/a] to enter NOM% or Nominal interest value 4 [cp/a] for 4 compounding periods per year. [I→EFF/a] is 8.0311 % (Or press 4 [pp/a] for 4 Payment Periods Per Year, which does not matter, but [cp/a] will always follow.)	4 SHIFT P/YR (this sets your periods per year to 4 for quarterly compounding. Be careful here as this means all your time value of money calculations will use 4 periods per year until you change your P/YR again...just like if you changed the P/YR for a 5-key problem.) 7.8 SHIFT NOM% (this enters the 7.8% nominal rate) SHIFT EFF% (this solves for the effective annual rate to generate your final answer of 8.03%) HP 10bII+
7.6 [I/a] to enter NOM% or Nominal interest value 365 [cp/a] for 365 Periods Per Year. [I→EFF/a] is 7.8954%	For the 7.6% compounded daily it is: 365 SHIFT P/YR 7.6 SHIFT NOM% SHIFT EFF% This will give you your answer of 7.90% HP 10bII+

Section 4: Duncan's collection of TVM stress tests

From the SwissMicros Forum, dm319's problem set

From Duncan's (DM319) post, relating to comparative tests for TVM on multiple calculators. Do follow the linked reference for updated results on all tested calculators: Table from quoted link, as of 2024-09-30, modified typographically. Added text in brown.

#	Ref	N	I%YR	PV	PMT	FV	P/YR	Mode
1	DM	38 x 12	5.25%	270'000	?	0	12	end
1b	DM	38 x 12	?	270'000	-14'584/12	0	12	end
2	SlideRule	360	15% → 12%	100'000	?-?	0	12	end

HP Museum post. Calculate PMT, given n = 360, I%YR = 15%, PV = 100000, FV = 0, then calculate PMT again with I%YR = 12%. Subtract the two results, and put that back into PMT, then change n = 36 and I%YR = 15% again, and calculate PV.

3	Kahan 1983	60x60x24x365	10%	0	-0.01	?	=N	end

HP Museum post

4	DM	480	0 → ?	100'000	?→ PMT	0	12	end

Calculate PMT first given I%YR = 0, then re-input this back into PMT and calculate I%YR. On the HP-12c this is best done by pressing x<>y twice before putting back into PMT. On C47/R47 this is not required as the last solved value remains in the I/a register.

5	Dieter	10	?	50	-30	400	1	end
6	Dieter	10	?	50	-30	80	1	end

HP Museum post. Note that both have more than one solution.

7	A Chan	10	?	-100	10	1e-10	12	end

HP Museum post

8	Miguel	32	?	-999'999	0	1e6	1	end

HP Museum post

9	DM	?	25	100000	-2083.333334	0	12	end
10	DM	?	25	100000	-2040.816327	0	12	begin

11	robve	60x24x365	1/6% → ?	0	-0.01	?→ FV	=N	end
12	robve	40	? → I%YR	900	-400	-1000 → ?	1	begin

HP Museum post. Calculate for FV first, re-input back to FV and compute I%YR. 12: Calculate for i first, re-input back into i and compute FV.

Results to dm319's problem set: 34 digits accurate

Answer in C47 / R47	Reference answer
Dm319 Problem 1: P1 PMT = -1368.1483553505775721288281631986 80	-1368.1483553505775721288281631986 80147 [2]
Dm319 Problem 1b: P1b I/a = 4.3732183723100868353546878264977 51 %	4.3732183723100868353546878264977509 17 [3]
Dm319 Problem 2: P2 PV = 6803.0921619855971136255557644647 22	6803.0921619855971136255557644647221 25 [4]
Dm319 Problem 3: P3 FV = 331667.0066907768917803419084359626	331667.0066907768917803419084359625614 [5]
Dm319 Problem 4: P4 I/a = -7.98336798336798336798336798336798 4E-34 %	-7.98336798336798336798336798336798 2E-34 [6]
Dm319 Problem 5: First solution P5 I/a = 14.4358713280799569742047012988770 5 %	14.4358713280799569742047012988770455 1 [7]
Dm319 Problem 5: Second solution P5b I/a= 53.1722132683847243104602413743711 6 %	53.1722132683847243104602413743711606 4 [8]
Dm319 Problem 6: First solution P6 I/a = -36.8933698741777442072399140113542 6 %	-36.8933698741777442072399140113542555 4 [9]
Dm319 Problem 6: Second solution P6.2 I/a= 58.4619552662209870987032074464595 8 %	58.4619552662209870987032074464595838 7 [10]
Dm319 Problem 7: I/a = 2.1818181818158016528925658782870 02E-10 %	2.1818181818158016528925658782870 02246E-10 [11]
Dm319 Problem 8: I/a = 3.1250016113292160042447454442681 75E-06 %	3.1250016113292160042447454442681 74638E-06 [12]
Dm319 Problem 9: n = 1060.3033900005100071273285298848 91	1060.3033900005100071273285298848906 18 [13]
Dm319 Problem 10: n = 1076.3195443677066464351061310443 47	1076.3195443677066464351061310443474 83 [14]
Dm319 Problem 11: FV = 5260.3824260003264940140903578284 63 I%/a = 1.6666666666666666666666666666667 57E-01 %	5260.3824260003264940140903578284627 63 1.6666666666666666666666666666667 166E-01 [15]
Dm319 Problem 12a: I%/a = 80.0000000009845091990726031767 2220 FV = -999.9999999999999999999995988604 358	80.0000000009845091990726031767 2220 -999.9999999999999999999995988604 358347 [16]

Red digits reflect the C47/R47 resource compromise: with 51 internal decimal digits a few trailing output digits corrupt. With 75 digits (custom compile), all red digits turn green and 100% accuracy is achieved. Blue digits (>34) are shown only to verify correct rounding at the 34th digit. Since 75 digits benefit only two pathological cases and increase resource usage, 51 digits are selected for production.

---

[2] WolframAlpha Web check: WA
[3] TVM check Python3
[4] WolframAlpha Web check: WA
[5] TVM check: WA Notebook: N[(1/100) * 315360000 * ((315360001 / 315360000)^31536000 - 1), 40]
[6] The precise result is 0 but cannot be achieved due to the input rounding at 34 digits, as well as internal rounding at 51 digits
[7] TVM check Python3
[8] TVM check Python3
[9] TVM check Python3
[10] TVM check Python3
[11] TVM check Python3
[12] TVM check Python3
[13] TVM check: WA Notebook: N[-Log[1 – 1E5 * 25 / (1200 * 2083333334/1E6)] / Log[1225/1200], 40]
[14] TVM check: WA Notebook: N[-Log[1 - 2500000000000 / (2040816327 * 1225)] / Log[1225/1200], 40]
[15] WolframAlpha Web check: WA
[16] TVM check Python3

TVM accuracy in digits. Note the 'max' column:

Test	Max	2.00bp0	2.07b5p0	2.07b5	2.07b11	3.00b0	3.01b0p1	3.01b0p2	3.01b0p3	3.01b0
P1	34	34	34	34	34	34	34	34	34	34
P1b	34	34	34	34	34	34	34	34	34	34
P2	34	33	33	33	33	33	34	34	34	34
P3	34	29	29	29	29	29	34	34	34	34
P4	68	19	19	19	19	19	39	39	39	50
P5	34	34	34	34	34	34	34	34	34	34
P5B	34	34	34	34	34	34	34	34	34	34
P6	34	34	34	34	34	34	34	34	34	34
P6B	34	34	34	34	34	34	34	34	34	34
P7	44	25	25	25	25	25	37	37	37	40
P8	40	37	37	37	37	37	39	39	39	40
P9	34	32	32	32	32	32	31	31	31	34
P10	34	31	31	31	31	31	31	30	31	34
P11	35	n/a	28	28	28	28	35	35	35	35
P12a	34	n/a	n/a	n/a	28	28	29	28	29	34

Note the non-standard digit counting used for comparisons: digits are defined as the first 34 significant digits starting from the first non-zero digit; for numbers < 1, counting begins at "0." rather than at the first non-zero digit. Thus 0.00123 is counted as 3 + 34 digits from "0." (and reported accordingly), whereas 12300.0000 is counted as 34 digits starting from "1". This convention enables meaningful comparison of very small floating-point values, as required by P4, whose correct result is so small that its 34 significant digits begin only at the 35th digit after the decimal point.

TVM operating times in s, on battery, for good measurements (USB power sometimes is just too fast)

Test	Max	2.00bp0	2.07b5p0	2.07b5	2.07b11	3.00b0	3.01b0p1	3.01b0p2	3.01b0p3	3.01b0
P1	2,4	2,4	1,7	0,6	0,7	0,6	1,0	0,0	1,3	0,0
P1b	2,0	2,0	1,0	0,4	0,4	0,4	1,3	1,3	1,6	1,9
P2	12,2	4,5	3,5	1,4	1,3	1,3	12,2	0,2	3,9	0,1
P3	4,1	4,1	2,3	0,9	1,0	0,9	2,5	0,1	2,6	0,1
P4	4,5	4,5	3,3	1,3	1,3	1,3	1,4	1,1	1,4	0,6
P5	1,9	1,8	1,1	0,4	0,4	0,4	1,1	1,8	1,9	1,1
P5B	2,5	2,0	1,0	0,4	0,5	0,4	1,6	2,5	2,5	1,4
P6	3,9	2,1	1,3	0,5	0,4	0,4	2,4	3,9	3,9	2,2
P6B	3,1	2,1	1,3	0,5	0,5	0,5	1,7	3,1	3,1	1,7
P7	2,2	2,2	1,3	0,5	0,5	0,4	1,3	1,3	1,3	0,6
P8	1,6	1,5	0,8	0,3	0,3	0,2	1,4	1,6	1,6	0,8
P9	14,7	14,7	11,0	4,6	4,5	4,5	3,3	0,1	4,0	0,1
P10	10,2	10,2	7,7	3,2	3,1	3,2	3,3	0,1	4,5	0,0
P11	2,4	n/a	2,4	0,9	1,0	1,0	2,2	1,1	2,4	0,6
P12a	3,2	n/a	2,3	0,9	0,5	0,6	2,5	3,2	3,1	1,7

The above abbreviations for version and models are:

Legend & Notes			
Abbrev.	**Full version**	**Platform / type**	**Test date**
2.00bp0	C47-00.109.02.00b.pkg0	C47 on DM42	2024-05-29
2.07b5p0	C47-00.109.02.07b5.pkg0	C47 on DM42	2025-04-22
2.07b5	C47-00.109.02.07b5	C47 on DM42n	2025-04-22
2.07b11	R47-00.109.02.07b11	R47	2026-02-20
3.00b0	R47-00.109.03.00b0	R47	2026-02-20
3.01b0p1	C47-00.109.03.01b0.pkg1	C47	2026-02-21
3.01b0p2	C47-00.109.03.01b0.pkg2	C47	2026-02-21
3.01b0p3	C47-00.109.03.01b0.pkg3	C47	2026-02-22
3.01b0	R47-00.109.03.01b0	R47	2026-02-21

Duncan's collection of TVM problems as programmed for C47 / R47

These problems were solved using RPN programs, illustrating the use thereof on C47: All programs are included in the distro as loadable programs and a state file:

Dm319 Problem 1:

N=456, i%/a=5.25, PV=270000, PMT=??, FV=0, pp/a=12, cp/a=12

```
0001:  LBL 'P1'
0002:    38
0003:    12
0004:    *
0005:    STO 'NPPER'
0006:    5.25
0007:    STO 'I%/a'
0008:    270 000
0009:    STO 'PV'
0010:    0
0011:    STO 'PMT'
0012:    0
0013:    STO 'FV'
0014:    12
0015:    STO 'PPER/a'
0016:    STO 'CPER/a'
0017:    ENDP
0018:    PMT
0019:  END
```

Dm319 Problem 1b:

N=456, i%/a=??, PV=270000, PMT=-14584/12, FV=0, pp/a=12, cp/a=12

```
0001:  LBL 'P1b'
0002:    38
0003:    12
0004:    *
0005:    STO 'NPPER'
0006:    0
0007:    STO 'I%/a'
0008:    270 000
0009:    STO 'PV'
0010:    -14 584
0011:    12
0012:    /
0013:    STO 'PMT'
0014:    0
0015:    STO 'FV'
0016:    12
0017:    STO 'PPER/a'
0018:    STO 'CPER/a'
0019:    ENDP
0020:    I/a
0021:  END
```

Dm319 Problem 2:

```
0001:  LBL 'P2'
0002:    360
0003:    STO 'NPPER'
0004:    15
0005:    STO 'I%/a'
0006:    100 000
0007:    STO 'PV'
0008:    0
0009:    STO 'FV'
0010:    12
0011:    STO 'PPER/a'
0012:    STO 'CPER/a'
0013:    ENDP
0014:    0
0015:    STO 'PMT'
0016:    PMT
0017:    12
0018:    STO 'I%/a'
0019:    DROPX
0020:    PMT
0021:    -
0022:    STO 'PMT'
0023:    36
0024:    STO 'NPPER'
0025:    15
0026:    STO 'I%/a'
0027:    PV
0028:  END
```

Dm319 Problem 3:

```
0001:  LBL 'P3'
0002:    60
0003:    X^2
0004:    24
0005:    *
0006:    365
0007:    *
0008:    STO 'NPPER'
0009:    STO 'PPER/a'
0010:    STO 'CPER/a'
0011:    10
0012:    STO 'I%/a'
0013:    0
0014:    STO 'PV'
0015:    -0.01
0016:    STO 'PMT'
0017:    ENDP
0018:    FV
0019:  END
```

Dm319 Problem 4:

```
0001:  LBL 'P4'
0002:    480
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    100 000
0007:    STO 'PV'
0008:    0
0009:    STO 'PMT'
0010:    STO 'FV'
0011:    12
0012:    STO 'PPER/a'
0013:    STO 'CPER/a'
0014:    ENDP
0015:    PMT
0016:    I/a
0017:  END
```

Dm319 Problem 5: First solution

Default result, without biasing the solver.

```
0001:  LBL 'P5'
0002:    10
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    50
0007:    STO 'PV'
0008:    -30
0009:    STO 'PMT'
0010:    400
0011:    STO 'FV'
0012:    1
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    I/a
0017:  END
```

Dm319 Problem 5: Second solution

The key to the second solution is to point the solver to closer to the expected second result, i.e. store 50 in I%/a to make it search starting at 50. See brown:

```
0001:  LBL 'P5b'
0002:    10
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    50
0007:    STO 'PV'
0008:    -30
0009:    STO 'PMT'
0010:    400
0011:    STO 'FV'
0012:    1
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    50
0017:    STO 'I%/a'
0018:    DROPX
0019:    I/a
0020:  END
```

Dm319 Problem 6: First solution

Default result, without biasing the solver.

```
0001:  LBL 'P6'
0002:    10
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    50
0007:    STO 'PV'
0008:    -30
0009:    STO 'PMT'
0010:    80
0011:    STO 'FV'
0012:    1
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    -36
0017:    STO 'I%/a'
0018:    I/a
0019:  END
```

Dm319 Problem 6: Second solution

The key to the second solution is to point the solver to closer to the expected second result, i.e. store 50 in I%/a to make it search starting at 50. See brown:

```
0001:  LBL 'P6b'
0002:    10
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    50
0007:    STO 'PV'
0008:    -30
0009:    STO 'PMT'
0010:    80
0011:    STO 'FV'
0012:    1
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    50
0017:    STO 'I%/a'
0018:    DROPX
0019:    I/a
0020:  END
```

Dm319 Problem 7:

```
0001:  LBL 'P7'
0002:    10
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    -100
0007:    STO 'PV'
0008:    10
0009:    STO 'PMT'
0010:    1.*10^-10
0011:    STO 'FV'
0012:    12
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    I/a
0017:  END
```

Dm319 Problem 8:

```
0001:  LBL 'P8'
0002:    32
0003:    STO 'NPPER'
0004:    0
0005:    STO 'I%/a'
0006:    -999 999
0007:    STO 'PV'
0008:    0
0009:    STO 'PMT'
0010:    1.*10^6
0011:    STO 'FV'
0012:    1
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    I/a
0017:  END
```

Dm319 Problem 9:

```
0001:  LBL 'P9'
0002:    0
0003:    STO 'NPPER'
0004:    25
0005:    STO 'I%/a'
0006:    100 000
0007:    STO 'PV'
0008:    -2 083.333 334
0009:    STO 'PMT'
0010:    0
0011:    STO 'FV'
0012:    12
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    ENDP
0016:    n
0017:  END
```

Dm319 Problem 10:

```
0001:  LBL 'P10'
0002:    0
0003:    STO 'NPPER'
0004:    25
0005:    STO 'I%/a'
0006:    100 000
0007:    STO 'PV'
0008:    -2 040.816 327
0009:    STO 'PMT'
0010:    0
0011:    STO 'FV'
0012:    12
0013:    STO 'PPER/a'
0014:    STO 'CPER/a'
0015:    BeginP
0016:    n
0017:  END
```

Dm319 Problem 11:

```
0001:  LBL 'P11'
0002:    REM 'Problem 11, first calculate FV then I/a'
0003:    60
0004:    24
0005:    365
0006:    *
0007:    *
0008:    STO 'NPPER'
0009:    STO 'PPER/a'
0010:    STO 'CPER/a'
0011:    1
0012:    6
0013:    /
0014:    STO 'I%/a'
0015:    0
0016:    STO 'PV'
0017:    -0.01
0018:    STO 'PMT'
0019:    ENDP
0020:    FV
0021:    I/a
0022:  END
```

Dm319 Problem 12a:
Force interest to positive root: bias 55

```
0001:  LBL 'P12a'
0002:    REM 'Problem 12 first do I/a then FV'
0003:    40
0004:    STO 'NPPER'
0005:    900
0006:    STO 'PV'
0007:    -400
0008:    STO 'PMT'
0009:    -1 000
0010:    STO 'FV'
0011:    1
0012:    STO 'PPER/a'
0013:    STO 'CPER/a'
0014:    BeginP
0015:    55
0016:    STO ‘I%/a’
0017:    I/a
0018:    FV
0019:  END
```

Sequencing program 'Pall':

Run all problem files and reporting results and time durations of processing:

```
0001:  LBL 'Pall'
0002:    0
0003:    STO 01
0004:  XEQ 'P1'
0005:    'TVM P1:'
0006:  XEQ 'TT'
0007:  XEQ 'P1b'
0008:    'TVM P1b:'
0009:  XEQ 'TT'
0010:  XEQ 'P2'
0011:    'TVM P2:'
0012:  XEQ 'TT'
0013:  XEQ 'P3'
0014:    'TVM P3:'
0015:  XEQ 'TT'
0016:  XEQ 'P4'
0017:    'TVM P4:'
0018:  XEQ 'TT'
0019:  XEQ 'P5'
0020:    'TVM P5:'
0021:  XEQ 'TT'
0022:  XEQ 'P5b'
0023:    'TVM P5B(50):'
0024:  XEQ 'TT'
0025:  XEQ 'P6'
0026:    'TVM P6:'
0027:  XEQ 'TT'
0028:  XEQ 'P6b'
0029:    'TVM P6B(50):'
0030:  XEQ 'TT'
0031:  XEQ 'P7'
0032:    'TVM P7:'
0033:  XEQ 'TT'
0034:  XEQ 'P8'
0035:    'TVM P8:'
0036:  XEQ 'TT'
0037:  XEQ 'P9'
0038:    'TVM P9:'
0039:  XEQ 'TT'
0040:  XEQ 'P10'
0041:    'TVM P10:'
0042:  XEQ 'TT'
0043:  XEQ 'P11'
0044:    'TVM P11:'
0045:  XEQ 'TT'
0046:  XEQ 'P12a'
0047:    'TVM P12a:'
0048:  XEQ 'TT'
0049:  END
```

Subroutine 'TT':

Print results to text files:

```
0001:  LBL 'TT'
0002:    LASTT
0003:    STO 00
0004:    DROPX
0005:    Printxy
0006:    RCL 00
0007:    RCL 01
0008:    -
0009:    10.0
0010:    /
0011:    ' Sec'
0012:    SIG 02
0013:    +
0014:    Printx
0015:    RCL 00
0016:    STO 01
0017:  END
```

Original	012:	2024-06-01, on C47 version 00.109.02.00
Updated	012a:	2025-04-22, on C47 version 00.109.00.07b5
Updated	012b:	2026-02-05, on C47/R47 version 00.109.03.00
Updated	012c:	2026-02-22, on C47/R47 version 00.109.03.01

Author Jaco Mostert; Proofread by Duncan Murray

Copyright (C) 2026 The C47/R47 Development Team. Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license can be downloaded from gnu.org.
Quoted yellow portions copyright to CC NC4.0 license as stated in referenced document.