


Robust Loss Functions: Label Noise Robustness Comparison (seed=42, single run)
 ★ = SDIV with optimal (β, λ) — measured at $\eta=0$ only (noise-rate experiments use default params)

PathMNIST (9-class histopathology)



DermaMNIST (7-class dermatoscopy)

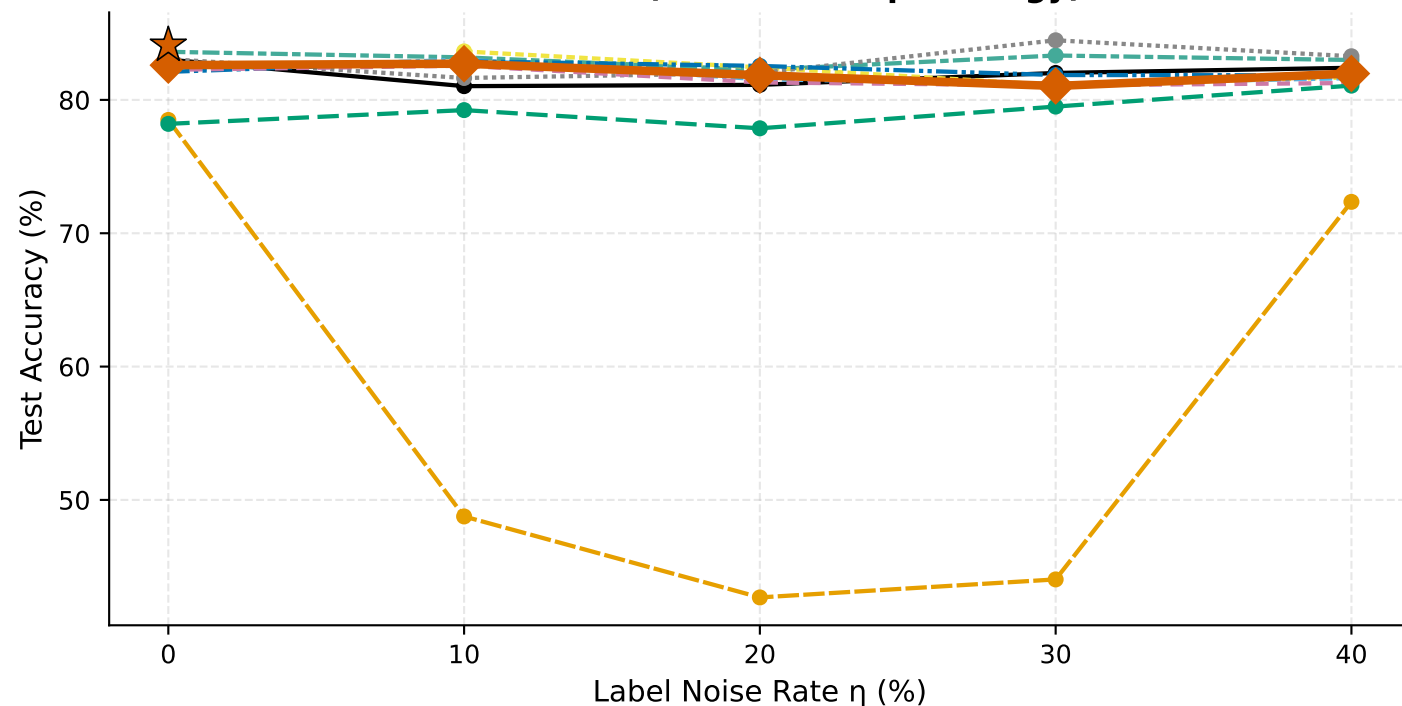