

2028

DATA ANALYST

Understanding the Role of a



Presented by
Pankaj Singh



SWIGGY CASE STUDY



INTRODUCTION

Swiggy is one of India's leading on-demand convenience and food delivery platforms. Founded in 2014 and headquartered in Bengaluru, it operates as a multi-service app that allows users to order meals from local restaurants, get groceries delivered in minutes, book dining tables, and send packages across the city.

PROJECT QUESTION

1. Display all customers who live in 'Delhi'.
2. Find the average rating of all restaurants in 'Mumbai'.
3. List all customers who have placed at least one order.
4. Display the total number of orders placed by each customer.
5. Find the total revenue generated by each restaurant.
6. Find the top 5 restaurants with the highest average rating.
7. Display all customers who have never placed an order.
8. Find the number of orders placed by each customer in 'Mumbai'.
9. Display all orders placed in the last 30 days.
10. List all delivery partners who have completed more than 1 delivery
11. Find the customers who have placed orders on exactly three different days.
12. Find the delivery partner who has worked with the most different customers.
13. Identify customers who have the same city and have placed orders at the same restaurants, but on different dates.



1. Display all customers who live in 'Delhi'.

QUERY

```
3 • select *
4   from customers
5  where city = 'delhi';
6
```

RESULT

	customer_id	name	email	phone_number	city	address
▶	2	Rohini Verma	rohini.verma@yahoo.com	9823456789	Delhi	B-23, Saket
	5	Manish Kumar	NULL	9834567890	Delhi	D-45, Lajpat Nagar
	18	Sonali Mishra	NULL	9878345678	Delhi	N-54, Karol Bagh
•	NULL	NULL	NULL	NULL	NULL	NULL

2. FIND THE AVERAGE RATING OF ALL RESTAURANTS IN 'MUMBAI'.

QUERY

```
6
7 • select avg(rating) as avg_rating
8   from restaurants
9   where city = 'mumbai';
```



RESULT

Result Grid		Filter Rows:	Export:
	Average_Rating		
▶	4.300000		

3. LIST ALL CUSTOMERS WHO HAVE PLACED AT LEAST ONE ORDER..

QUERY

```
SELECT DISTINCT
  o.customer_id, c.name, COUNT(o.order_id) AS total_orders
FROM
  orders o
  JOIN
  customers c USING (customer_id)
GROUP BY customer_id;
```



RESULT

Result Grid				Filter Rows:	Export:	Wra
	customer_id	name	total_orders			
▶	1	Amit Sharma	2			
	2	Rohini Verma	3			
	3	Rajesh Gupta	3			
	4	Sneha Mehta	2			
	5	Manish Kumar	4			
	6	Priya Singh	3			
	7	Vikas Reddy	3			
	8	Anjali Patel	3			
	9	Suresh Nair	1			
	10	Kavita Deshmukh	2			
	11	Vivek Bhatt	2			
	12	Meera Joshi	2			
	13	Pankaj Jain	2			
	14	Nidhi Saxena	3			
	15	Ashok Kumar	3			



4. DISPLAY THE TOTAL NUMBER OF ORDERS PLACED BY EACH CUSTOMER.

QUERY

```
SELECT
    c.customer_id, c.name, COUNT(o.order_id) AS total_order
FROM
    customers c
    LEFT JOIN
    orders o USING (customer_id)
GROUP BY c.customer_id;
```

RESULT

	customer_id	name	total_order
▶	1	Amit Sharma	2
	2	Rohini Verma	3
	3	Rajesh Gupta	3
	4	Sneha Mehta	2
	5	Manish Kumar	4
	6	Priya Singh	3
	7	Vikas Reddy	3
	8	Anjali Patel	3
	9	Suresh Nair	1
	10	Kavita Deshmukh	2
	11	Vivek Bhatt	2
	12	Meera Joshi	2
	13	Pankaj Jain	2
	14	Nidhi Saxena	3
	15	Ashok Kumar	3

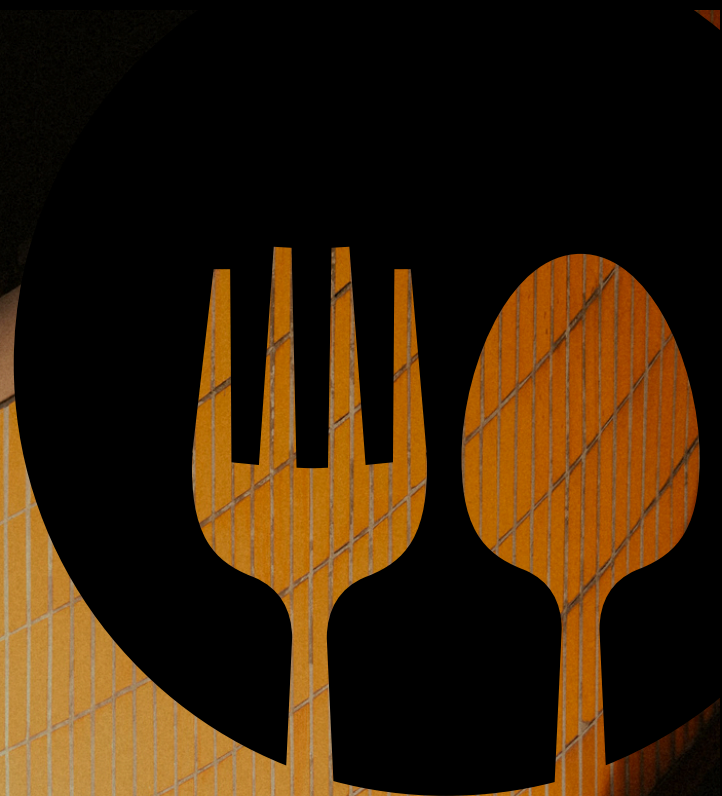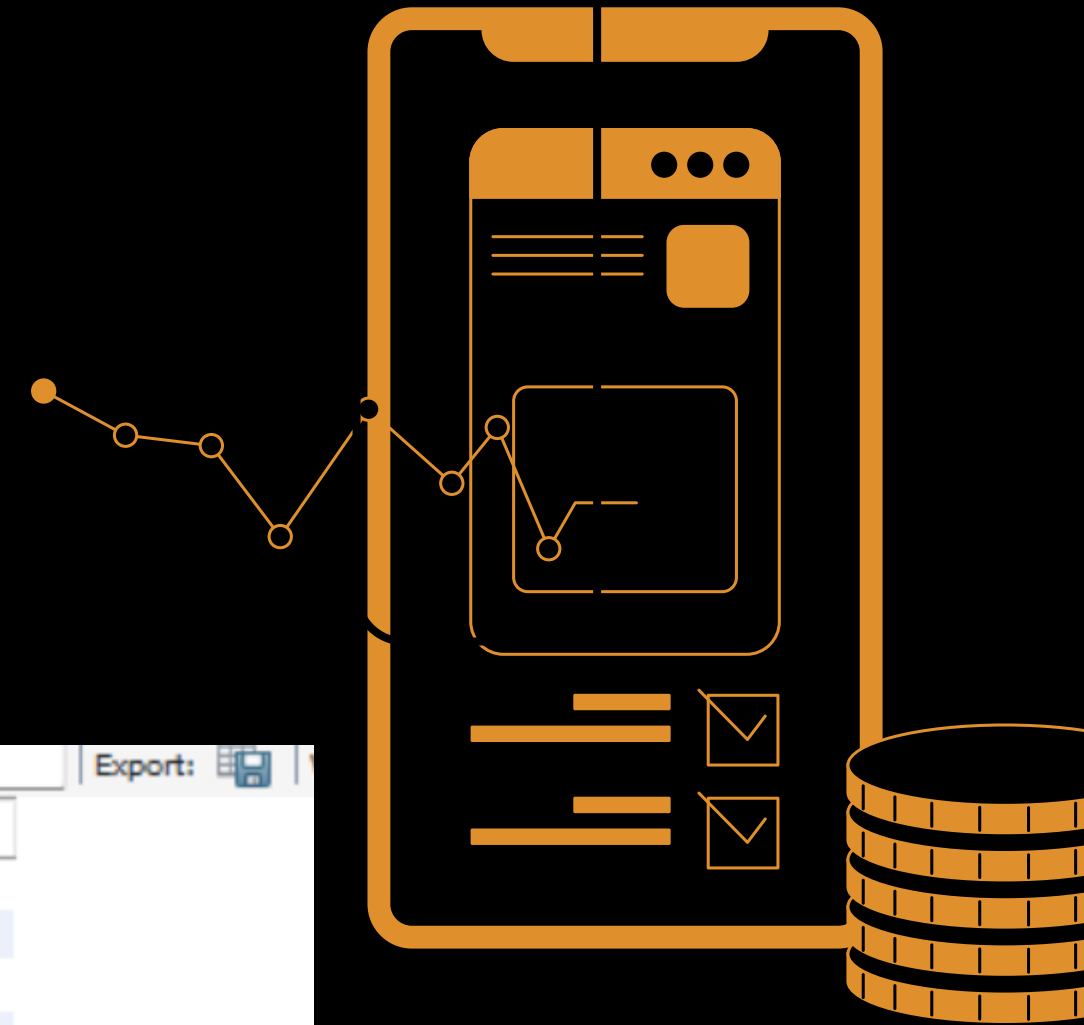

5. FIND THE TOTAL REVENUE GENERATED BY EACH RESTAURANT.

QUERY

```
SELECT
    c.customer_id, c.name, COUNT(o.order_id) AS total_order
FROM
    customers c
    LEFT JOIN
    orders o USING (customer_id)
GROUP BY c.customer_id;
```

RESULT




	restaurant_id	restaurant_name	total_amount
▶	1	Spice of India	1100.00
	2	Tandoori Flames	1200.00
	3	Biryani House	5300.00
	4	Curry Pot	3200.00
	5	Taste of Punjab	600.00
	6	Desi Biryani	650.00

6.FIND THE TOP 5 RESTAURANTS WITH THE HIGHEST AVERAGE RATING.

QUERY

```
SELECT
    restaurant_id,
    name AS restaurant_name,
    ROUND(AVG(rating), 2) AS average_rating
FROM
    restaurants
WHERE
    rating IS NOT NULL
GROUP BY restaurant_id
ORDER BY AVG(rating) DESC
LIMIT 5;
```

RESULT

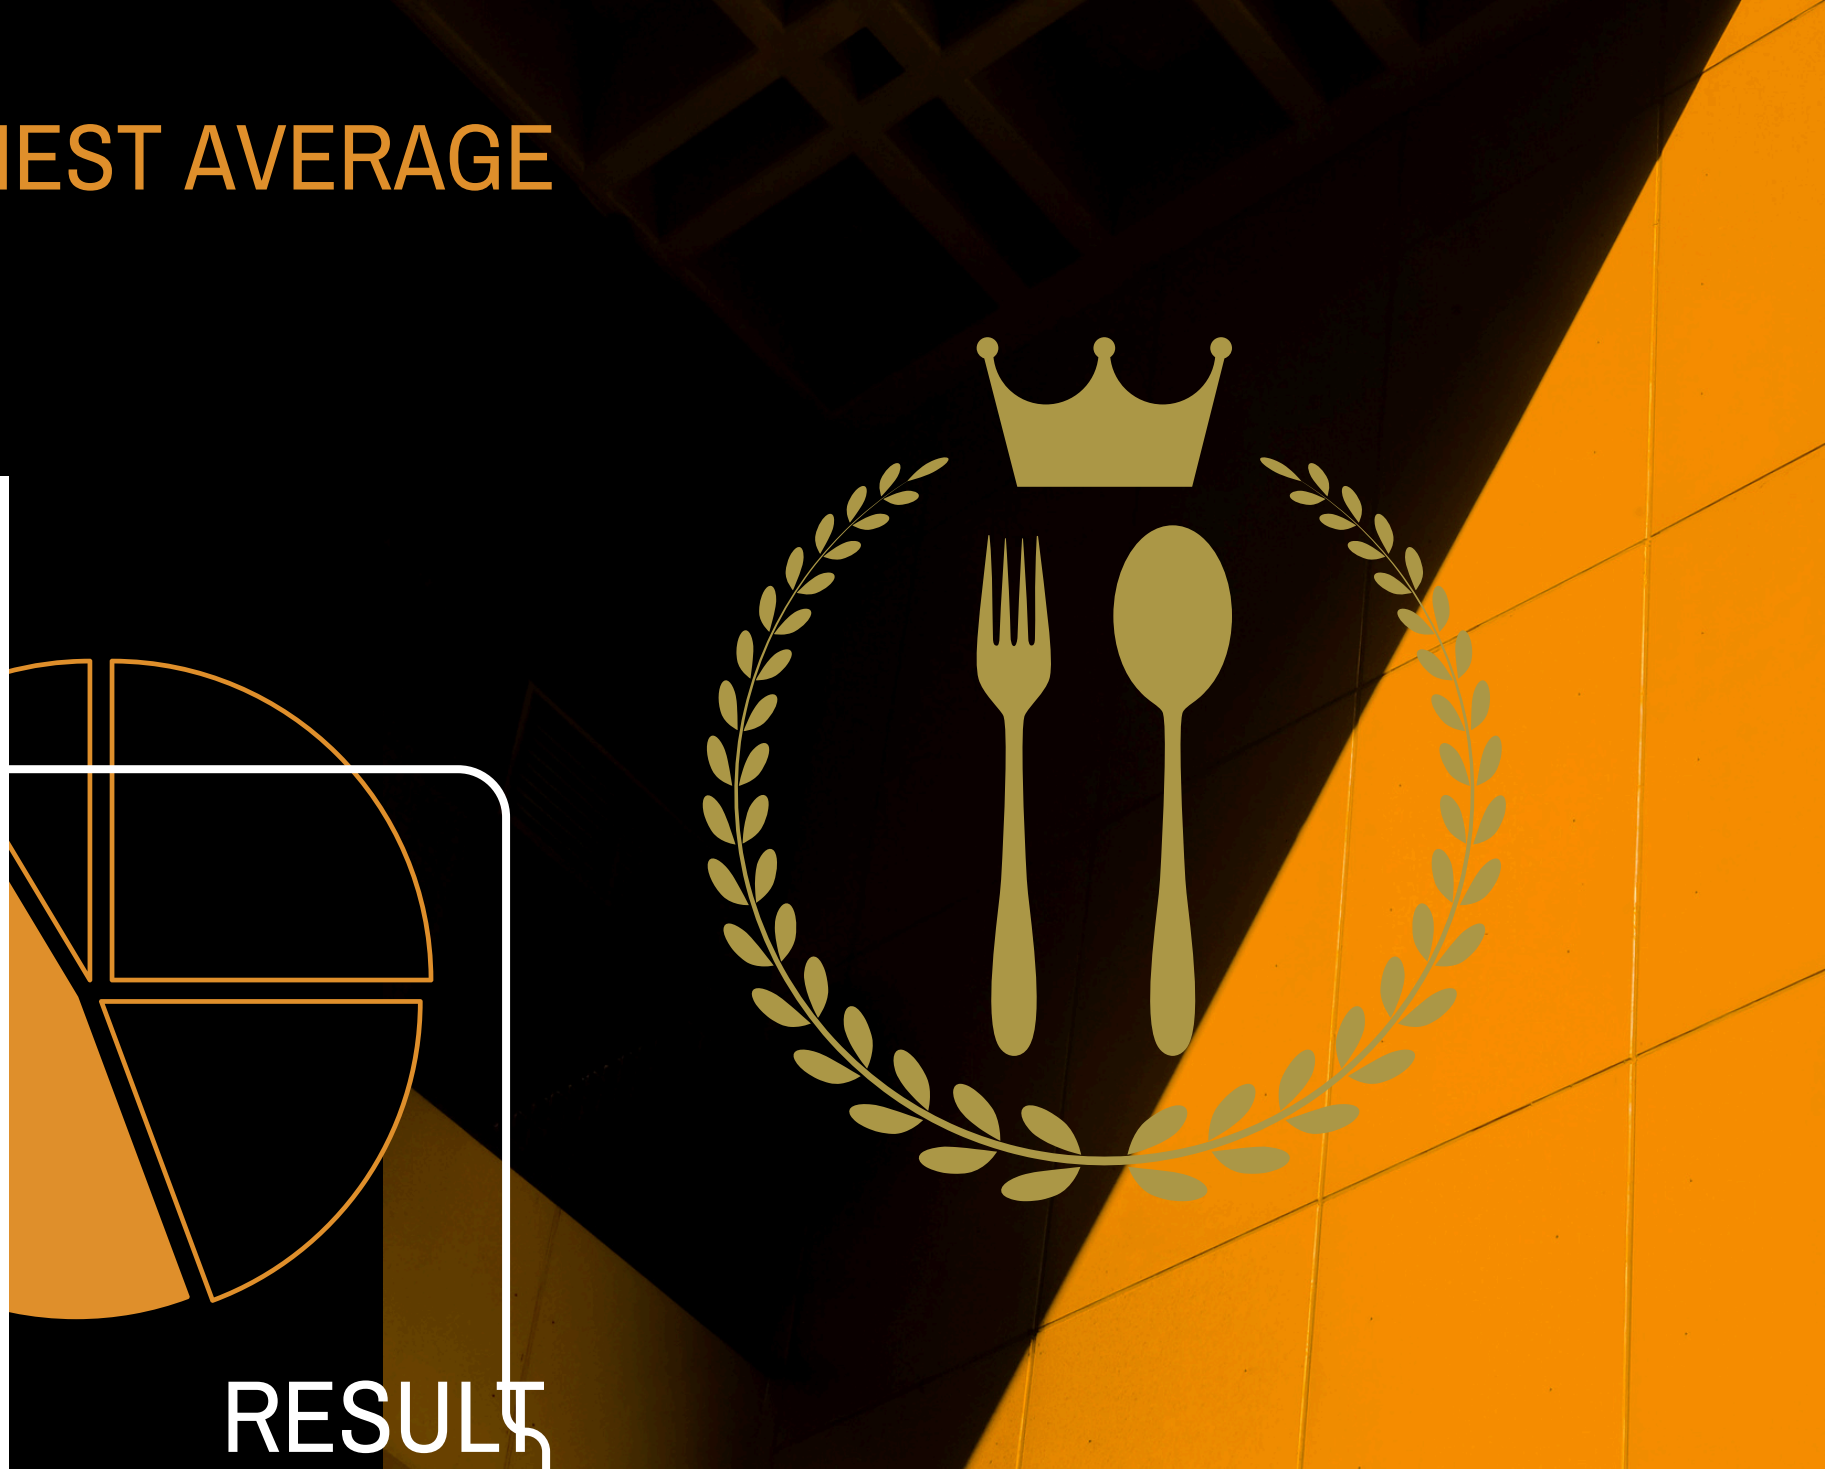

	restaurant_id	restaurant_name	average_rating
▶	3	Biryani House	4.80
	22	Paradise Biryani	4.80
	30	Lucknowi Nawabi	4.70
	6	Royal Biryani	4.70
	12	Flavours of Bengal	4.60

7.DISPLAY ALL CUSTOMERS WHO HAVE NEVER PLACED AN ORDER.


QUERY

```
SELECT
    c.customer_id, c.name, COUNT(o.order_id) AS total_order
FROM
    customers c
    LEFT JOIN
    orders o USING (customer_id)
WHERE
    o.order_id IS NULL
GROUP BY c.customer_id;
```



RESULT


Result Grid  Filter Rows:			
	customer_id	name	total_order
▶	24	Sonal Kaur	0
	25	Vivek Malhotra	0
	26	Divya Iyer	0
	27	Rakesh Yadav	0
	28	Mona Sharma	0

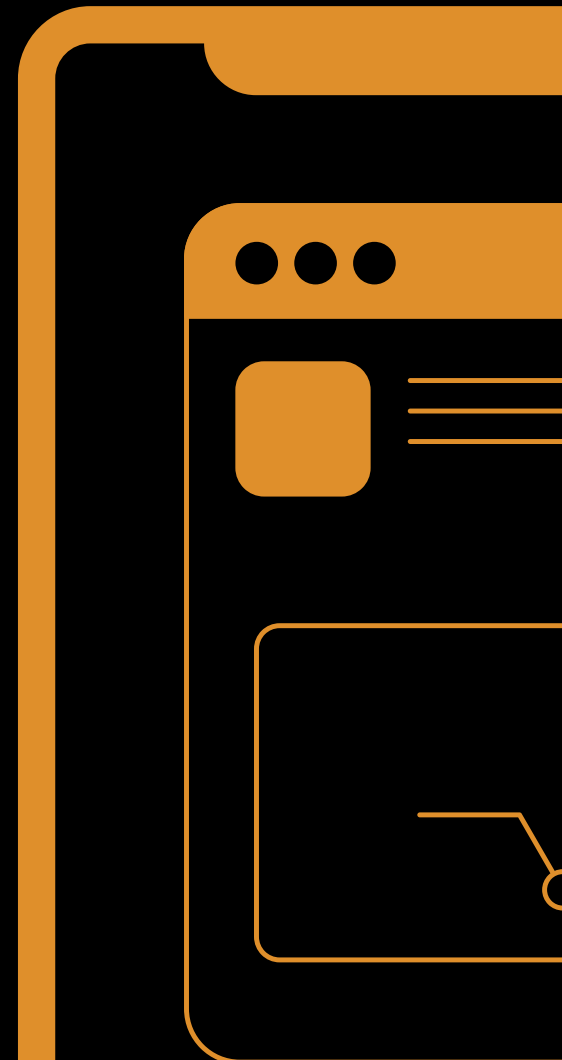

8.FIND THE NUMBER OF ORDERS PLACED BY EACH CUSTOMER IN 'MUMBAI'.

QUERY

```
SELECT
    c.customer_id, c.name, COUNT(o.order_id) AS total_order
FROM
    customers c
    JOIN
    orders o USING (customer_id)
WHERE
    c.city = 'mumbai'
GROUP BY c.customer_id;
```

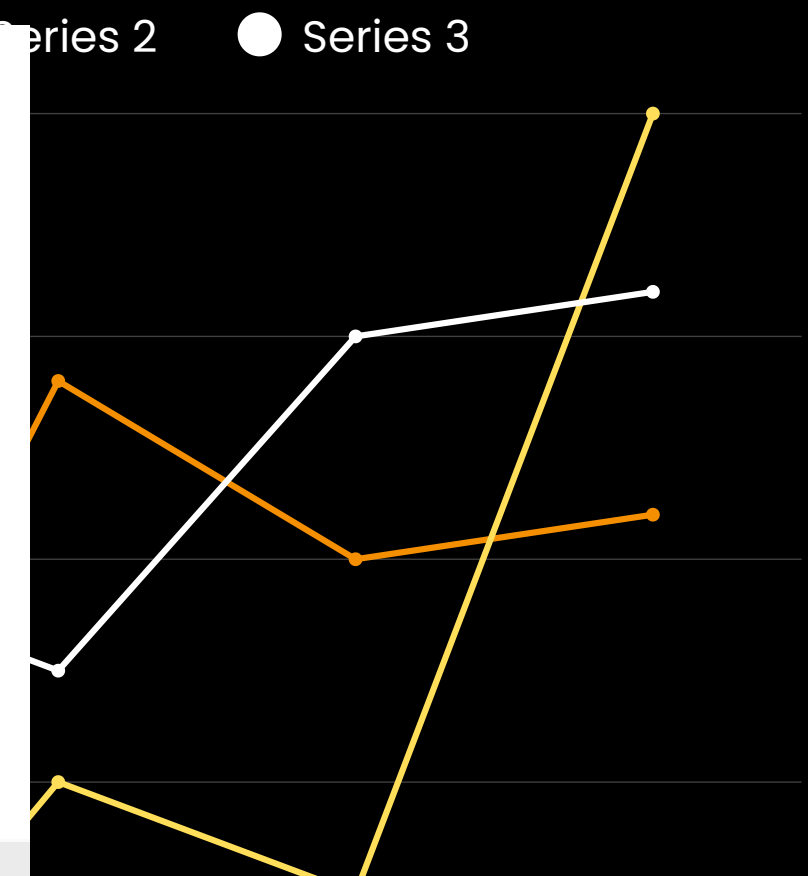

RESULT

	customer_id	name	total_order
▶	1	Amit Sharma	2
	3	Rajesh Gupta	3
	19	Arjun Desai	2
	23	Ravi Singh	2

9.DISPLAY ALL ORDERS PLACED IN THE LAST 30 DAYS.

QUERY

```
SELECT
    order_id, order_date
FROM
    orders
WHERE
    order_date >= DATE_SUB('2024-08-15',
        INTERVAL (30) DAY)
ORDER BY order_date DESC
LIMIT 30;
```

Order
Now

RESULT

	order_id	order_date
▶	54	2024-08-15 00:00:00
	46	2024-08-15 00:00:00
	33	2024-08-14 00:00:00
	52	2024-08-14 00:00:00
	32	2024-08-13 00:00:00

10..LIST ALL DELIVERY PARTNERS WHO HAVE COMPLETED MORE THAN 1 DELIVERY

QUERY

```
SELECT
  dp.partner_id,
  dp.name AS partner_name,
  COUNT(od.order_delivery_id) AS total_deliveries
FROM
  deliverypartners dp
  JOIN
  orderdelivery od USING (partner_id)
GROUP BY dp.partner_id
HAVING COUNT(od.order_id) > 1;
```



	partner_id	partner_name	total_deliveries
▶	4	Suresh Reddy	6
	5	Anita Desai	4
	2	Ravi Kumar	5
	6	Rajesh Gupta	4
	3	Priya Patel	3



11.FIND THE CUSTOMERS WHO HAVE PLACED ORDERS ON EXACTLY THREE DIFFERENT DAYS.

QUERY

```
SELECT
  c.customer_id,
  c.name,
  COUNT(DISTINCT (order_date)) AS total_delivery_days
FROM
  customers c
  JOIN
  orders o USING (customer_id)
GROUP BY customer_id
HAVING COUNT(DISTINCT (o.order_date)) = 3;
```

RESULT

	customer_id	name	total_delivery_days
▶	2	Rohini Verma	3
	6	Priya Singh	3
	8	Anjali Patel	3
	14	Nidhi Saxena	3
	15	Ashok Kumar	3

BUSINESS
ANALYST




12. FIND THE DELIVERY PARTNER WHO HAS WORKED WITH THE MOST DIFFERENT CUSTOMERS

QUERY

```
SELECT
  dp.partner_id,
  dp.name,
  COUNT(DISTINCT o.order_id) AS total_different_customer
FROM
  deliverypartners dp
  JOIN
    orderdelivery od USING (partner_id)
  JOIN
    orders o USING (order_id)
GROUP BY partner_id
ORDER BY COUNT(DISTINCT o.order_id) DESC
LIMIT 1;
```

RESULT

	partner_id	name	total_different_customer
▶	4	Suresh Reddy	6

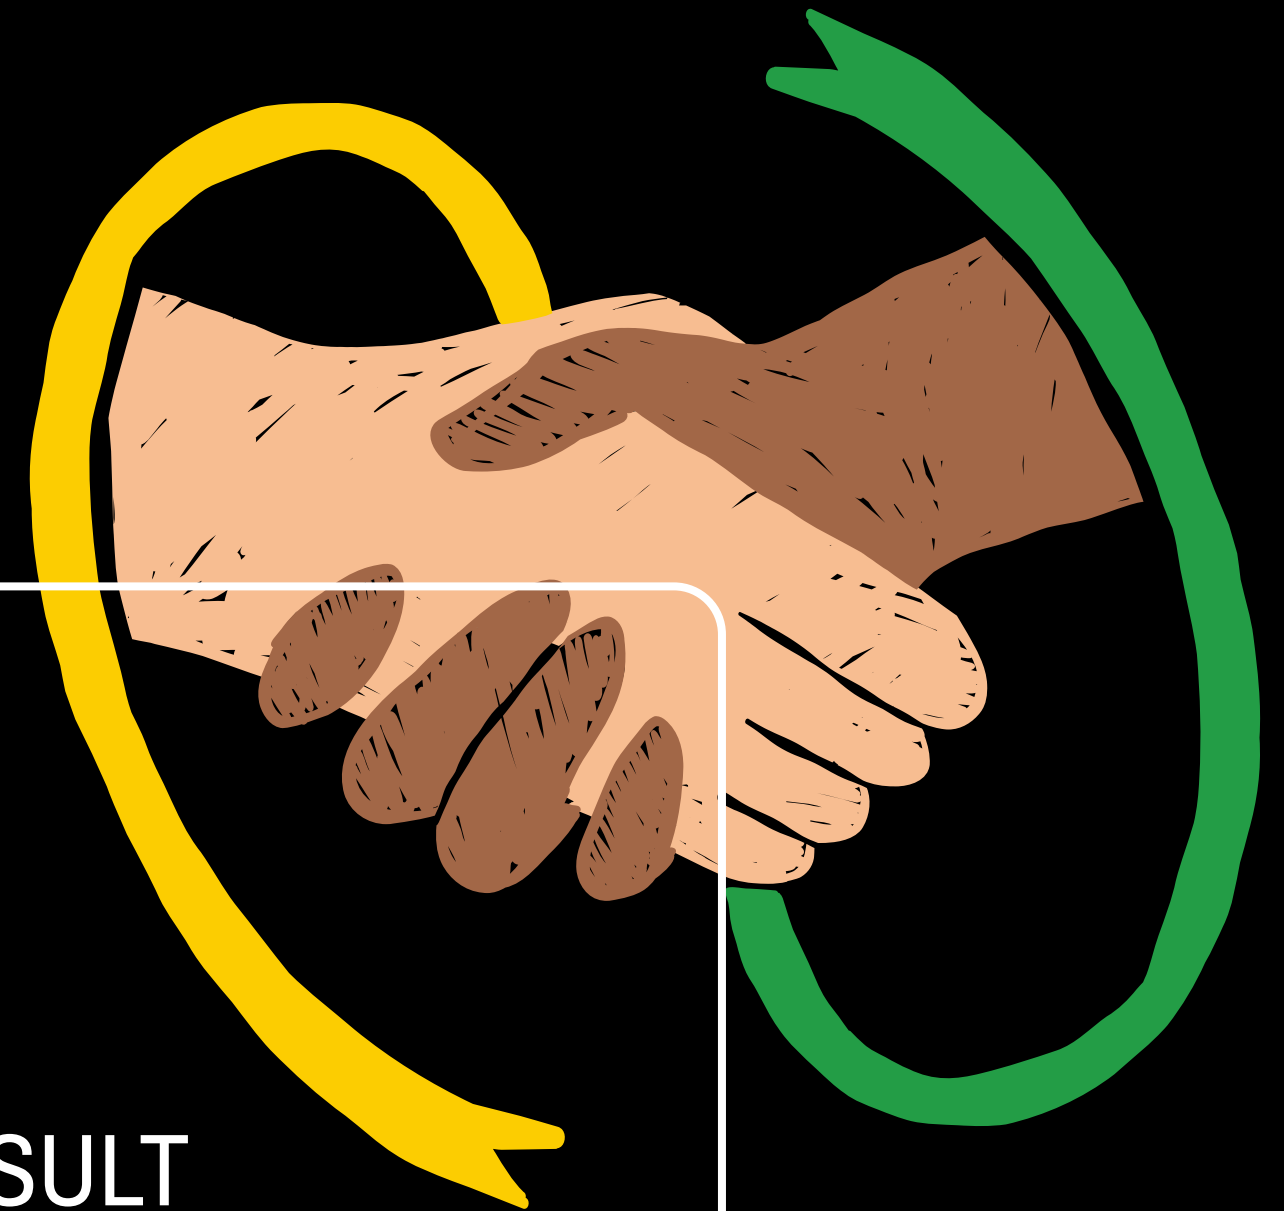

13.IDENTIFY CUSTOMERS WHO HAVE THE SAME CITY AND HAVE PLACED ORDERS AT THE SAME RESTAURANTS, BUT ON DIFFERENT DATES.

QUERY

```
SELECT DISTINCT
  c1.name AS customer_1,
  c2.name AS customer_2,
  c1.city,
  r.name AS restaurant_name,
  DATE(o1.order_date) AS customer_1_order_date,
  DATE(o2.order_date) AS customer_2_order_date
FROM
  Customers c1
  JOIN
  Orders o1 ON c1.customer_id = o1.customer_id
  JOIN
  Customers c2 ON c1.city = c2.city
  AND c1.customer_id < c2.customer_id
  JOIN
  Orders o2 ON c2.customer_id = o2.customer_id
  AND o1.restaurant_id = o2.restaurant_id
  AND DATE(o1.order_date) <> DATE(o2.order_date)
  JOIN
  Restaurants r ON o1.restaurant_id = r.restaurant_id
```



RESULT

	customer_1	customer_2	city	restaurant_name	customer_1_order_date	customer_2_order_date
►	Manish Kumar	Sonali Mishra	Delhi	Biryani House	2024-08-04	2024-08-05
	Arjun Desai	Ravi Singh	Mumbai	Veggie Delight	2024-08-03	2024-08-09
	Manish Kumar	Sonali Mishra	Delhi	Biryani House	2024-08-07	2024-08-05

for your attention

THANK YOU

Presented by
Pankaj Singh



SWIGGY CASE STUDY