

Git & Github Task 2 (23-oct-2026)

1. Install git.

Downloaded Git from official website and installed

2. Create a repo in github with README.md and. ignore file.

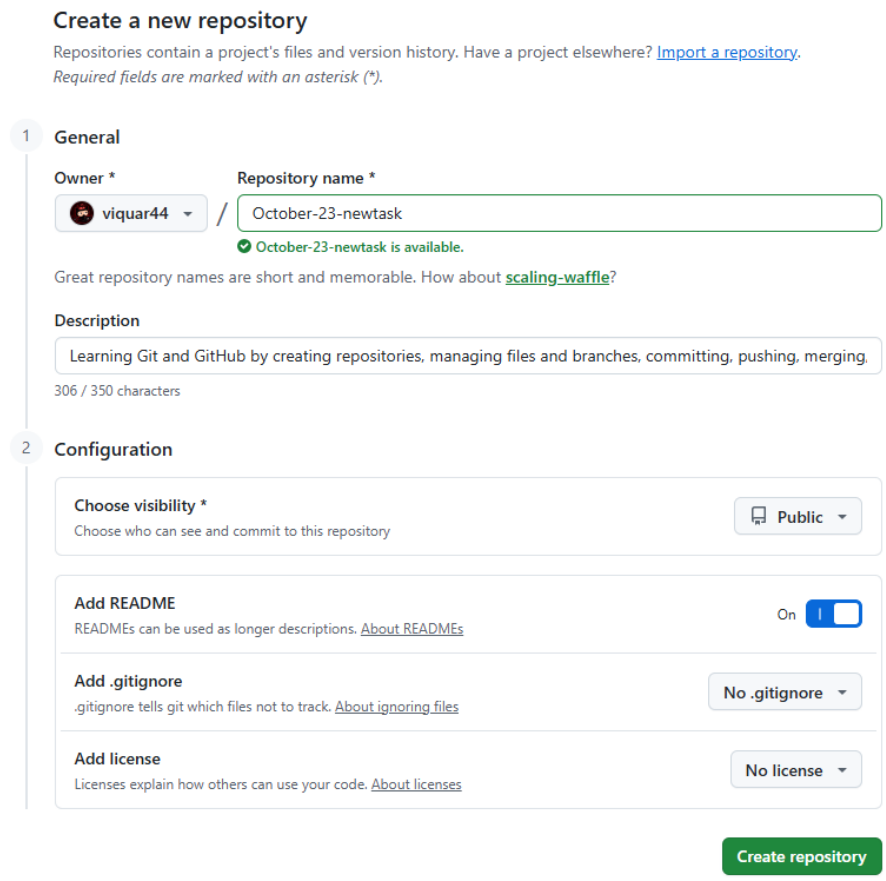

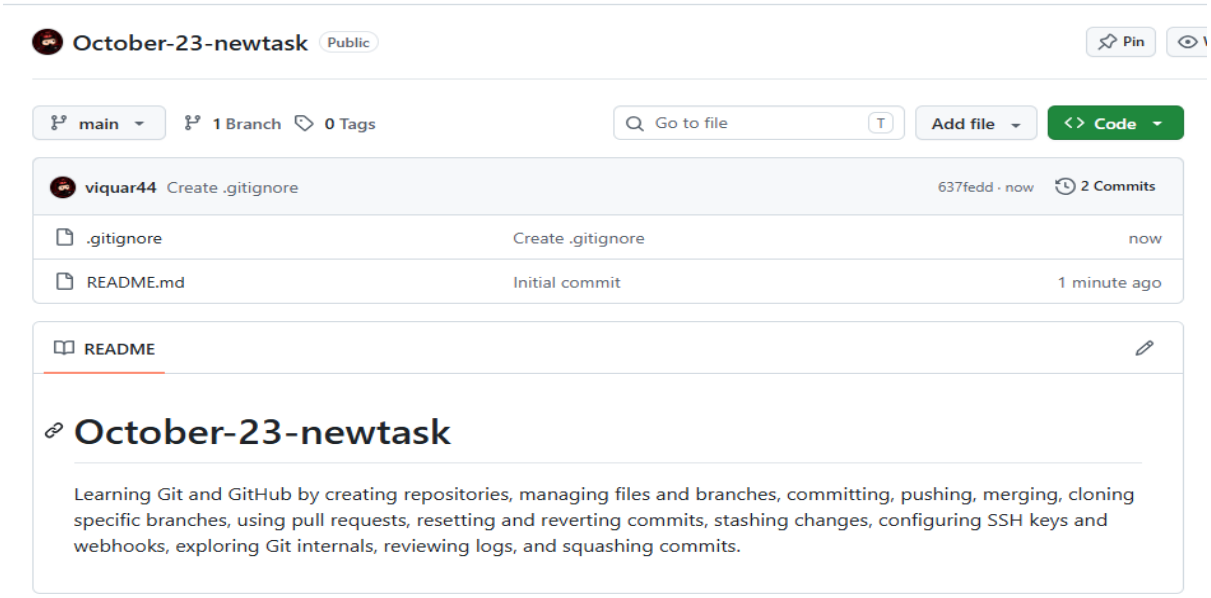

3. Clone the created repo to local.

Step 1: Check the git version **(git - -version)**

Step 2: create a ssh keygen **(ssh-keygen)** and deploy that keygen to repository

Step 3: clone the repo in local (git clone git@github.com:viquar44/October-23-newtask.git)

Step 4: now initiate git in local machine **(git init)** and get to the dir **(cd Dirname)**

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ git --version
git version 2.56.0.windows.2

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ ssh-keygen
Generating public/private ed25519 key pair.
Enter file in which to save the key (/c/Users/User/.ssh/id_ed25519):
Enter passphrase for "/c/Users/User/.ssh/id_ed25519" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/User/.ssh/id_ed25519
Your public key has been saved in /c/Users/User/.ssh/id_ed25519.pub
The key fingerprint is:
SHA256:NqsTpkMZEhzI3p2p72ISJAdVMfpNRMVPFCOplVsa4vM User@DESKTOP-2QHC9VQ
The key's randomart image is:
+--[ED25519 256]--+
|.+oo+ooo.o+=     |
|o.o. o  + * o    |
|..o.. +. = *     |
|.ooo.*  o +      |
|o. .oo. So       |
| . .o o. oE      |
|  ...o ..        |
| . oo...         |
|  o oo..         |
+----[SHA256]-----+

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ cat /c/Users/User/.ssh/id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIHCUGXHZ5SYtuAX0qImmLYRpQ6T77xr4pycaO8gQ/t0n User@DESKTOP-2QHC9VQ

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$
```

Deploy keys / Add new

Title

task

Key

ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIHCUGXHZ5SYtuAX0qImmLYRpQ6T77xr4pycaO8gQ/t0n User@DESKTOP-2QHC9VQ

Begins with 'ssh-rsa', 'ecdsa-sha2-nistp256', 'ecdsa-sha2-nistp384', 'ecdsa-sha2-nistp521', 'ssh-ed25519', 'sk-ecdsa-sha2-nistp256@openssh.com', or 'sk-ssh-ed25519@openssh.com'.

☑ Allow write access

Can this key be used to **push** to this repository? Deploy keys always have pull access.

Add key

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ git init
Initialized empty Git repository in C:/Users/User/Desktop/Task-23/.git/

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23 (master)
$ ls
October-23-newtask/

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23 (master)
$ cd Octoner-23-newtask/
bash: cd: Octoner-23-newtask/: No such file or directory

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23 (master)
$ cd October-23-newtask/


User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
README.md

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls -a
./  ../  .git/  .gitignore  README.md

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

4. Create two files in local repo.

Step 1: Created 2 files in local repo **(Touch one two)**

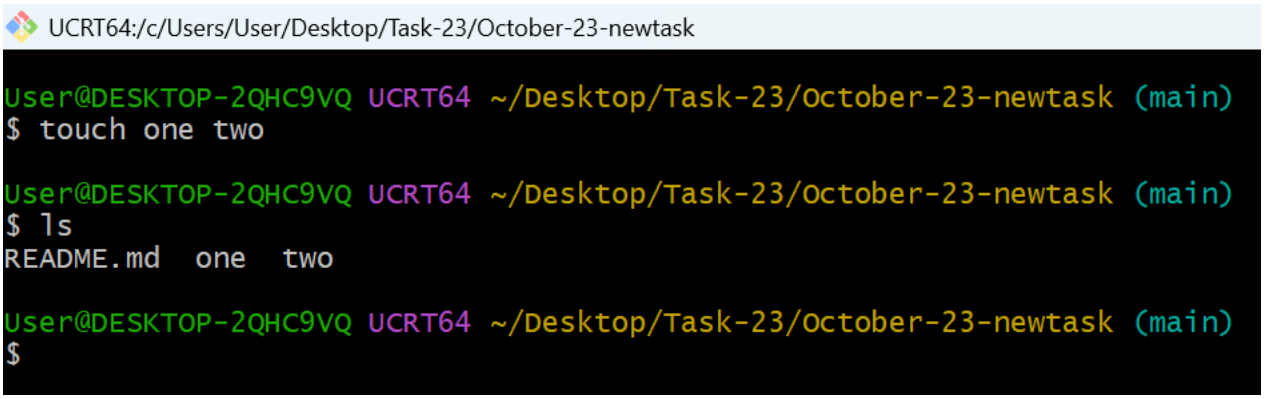



5. Commit two files and push to central Repository.

Step 1: Check the status **(git status)** and add files for tracking **(git add . or git add one two)**

Step 2: Commit tracking files **(git commit -m "two new files one and two")**

Step 3: push to central Repository **(git push -u origin main)**

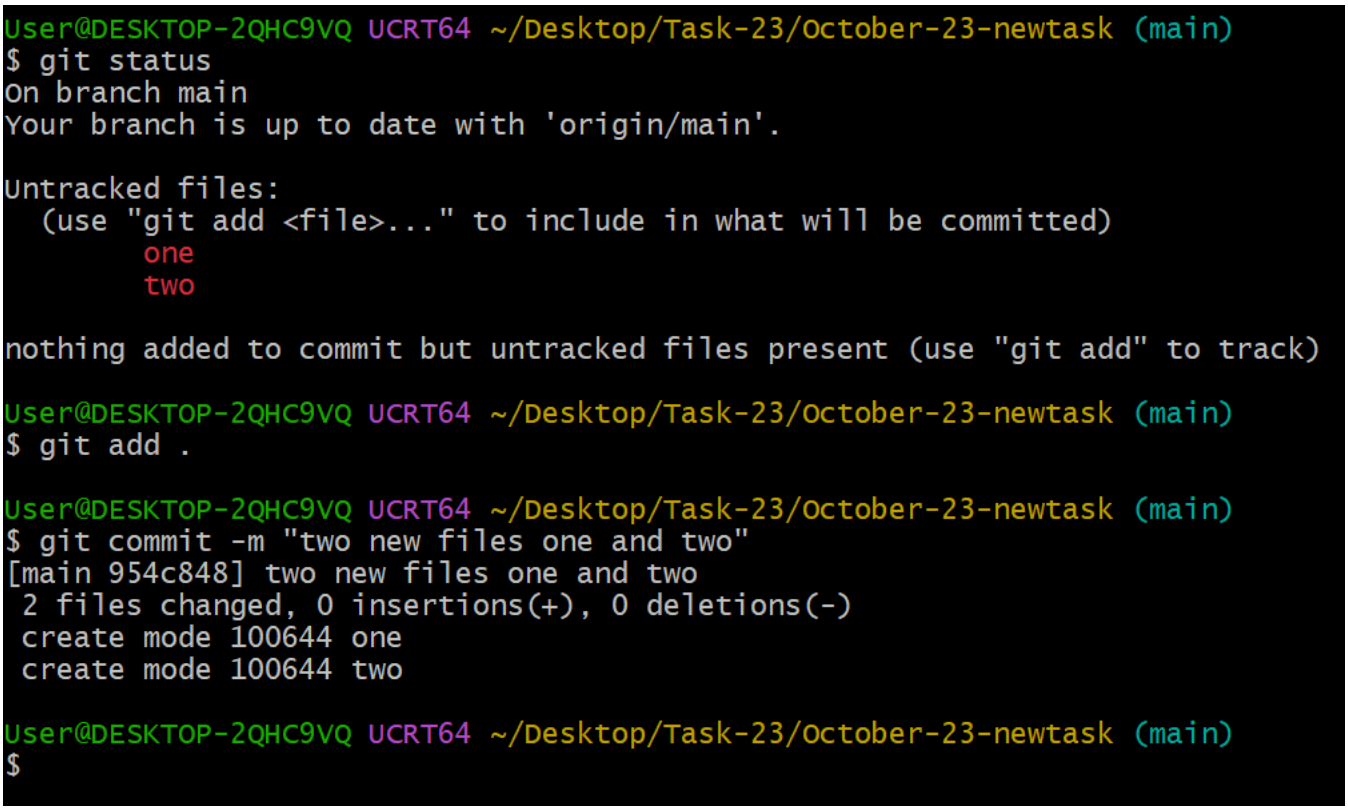

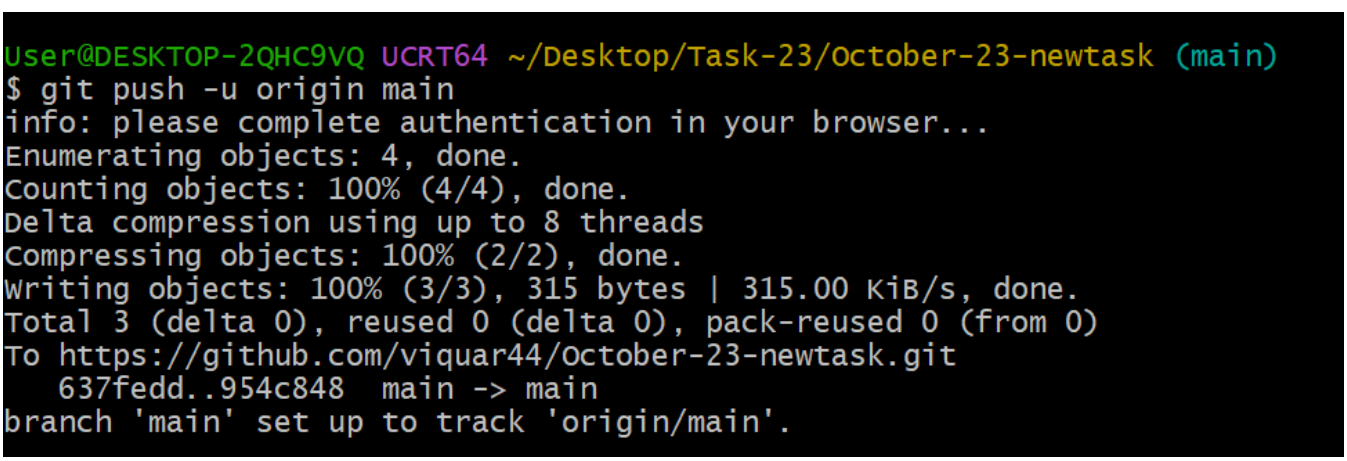

6. Create a branch in local and create a sample file and push to central.

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git branch release

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git branch --list
* main
  release

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git checkout release
Switched to branch 'release'

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ touch ocean sea

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ ls
README.md  ocean  one  sea  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$
```


```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ git status
On branch release
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        ocean
        sea

nothing added to commit but untracked files present (use "git add" to track)

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ git add .


User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ git commit -m "2 new files added to release branch"
[release 752596c] 2 new files added to release branch
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 ocean
 create mode 100644 sea

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (release)
$ git push -u origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 272 bytes | 272.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'release' on GitHub by visiting:
remote:      https://github.com/viquar44/October-23-newtask/pull/new/release
remote:
To https://github.com/viquar44/October-23-newtask.git
 * [new branch]      release -> release
branch 'release' set up to track 'origin/release'.
```

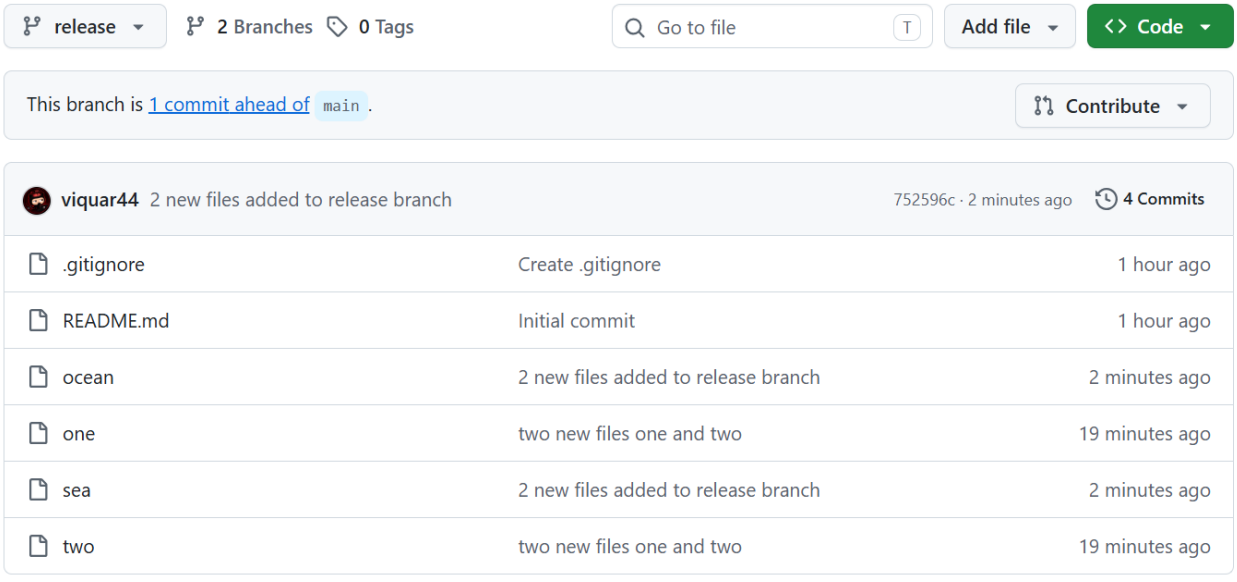

7. Create a branch in github and clone that to local.

Created new branch called Develop in Github
pulled the data from github **(git pull)** and Clone the repo **(git clone -b develop {repo link})**

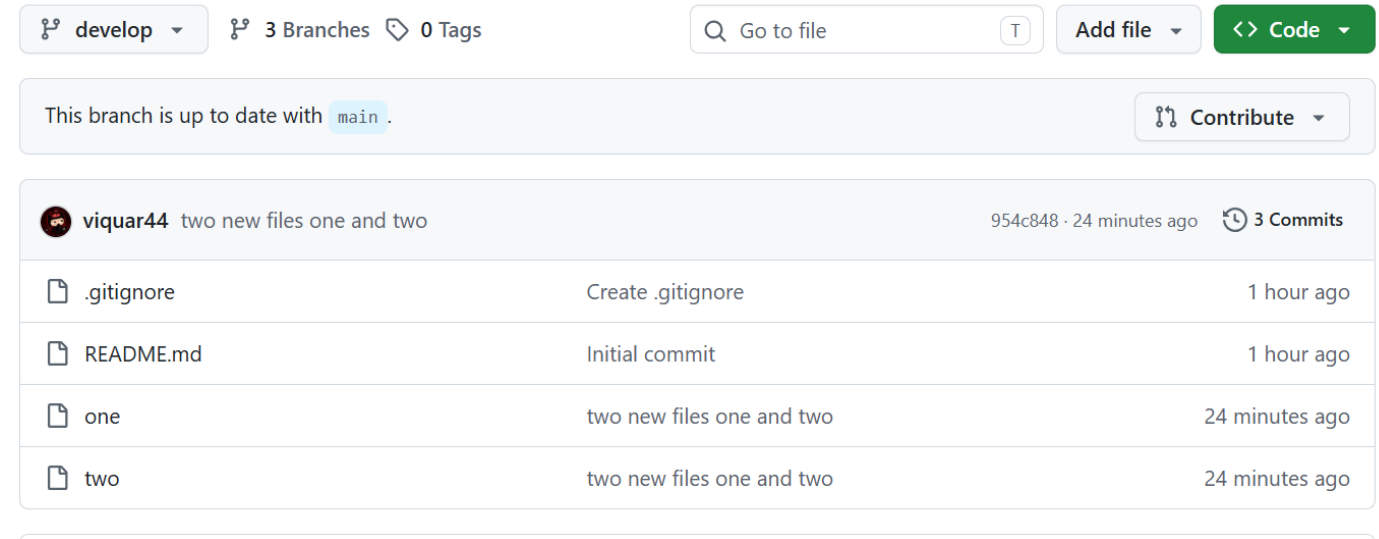


```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git pull
From https://github.com/viquar44/October-23-newtask
 * [new branch]      develop    -> origin/develop
Already up to date.
```

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git branch --list
* main
  release

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git clone -b develop git@github.com:viquar44/October-23-newtask.git
Cloning into 'October-23-newtask'...
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (7/7), done.
remote: Total 11 (delta 2), reused 5 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (11/11), done.
Resolving deltas: 100% (2/2), done.
```


8. Merge the created branch with master in git local.

Merge develop with main using a command **(git merge main)** and push to github **(git push)**

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (develop)
$ git merge main
Updating 67de8db..4d90b6b
Fast-forward
 ocean | 0
 sea   | 0
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 ocean
 create mode 100644 sea

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (develop)
$ git push
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/viquar44/October-23-newtask.git
   954c848..4d90b6b  develop -> develop

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (develop)
$
```

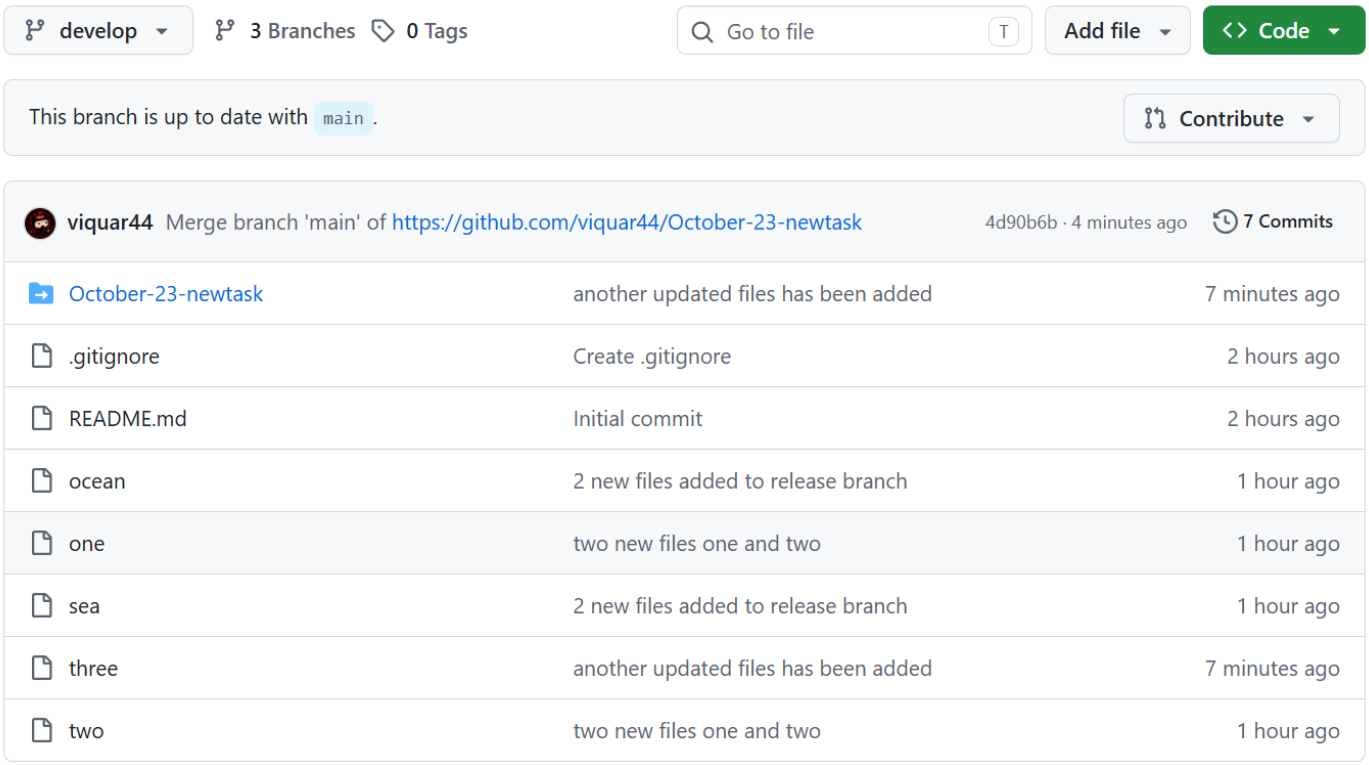

9. Merge the created branch with master in github by sending a pull request.

Created new files and add to track and commit and push to gitbash


open gitbash and make pull request

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ touch four five

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git add .

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git commit -m "new batch of commit"
[main 5627fb1] new batch of commit
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 five
 create mode 100644 four

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git push
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 263 bytes | 263.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/viquar44/October-23-newtask.git
   4d90b6b..5627fb1  main -> main
```

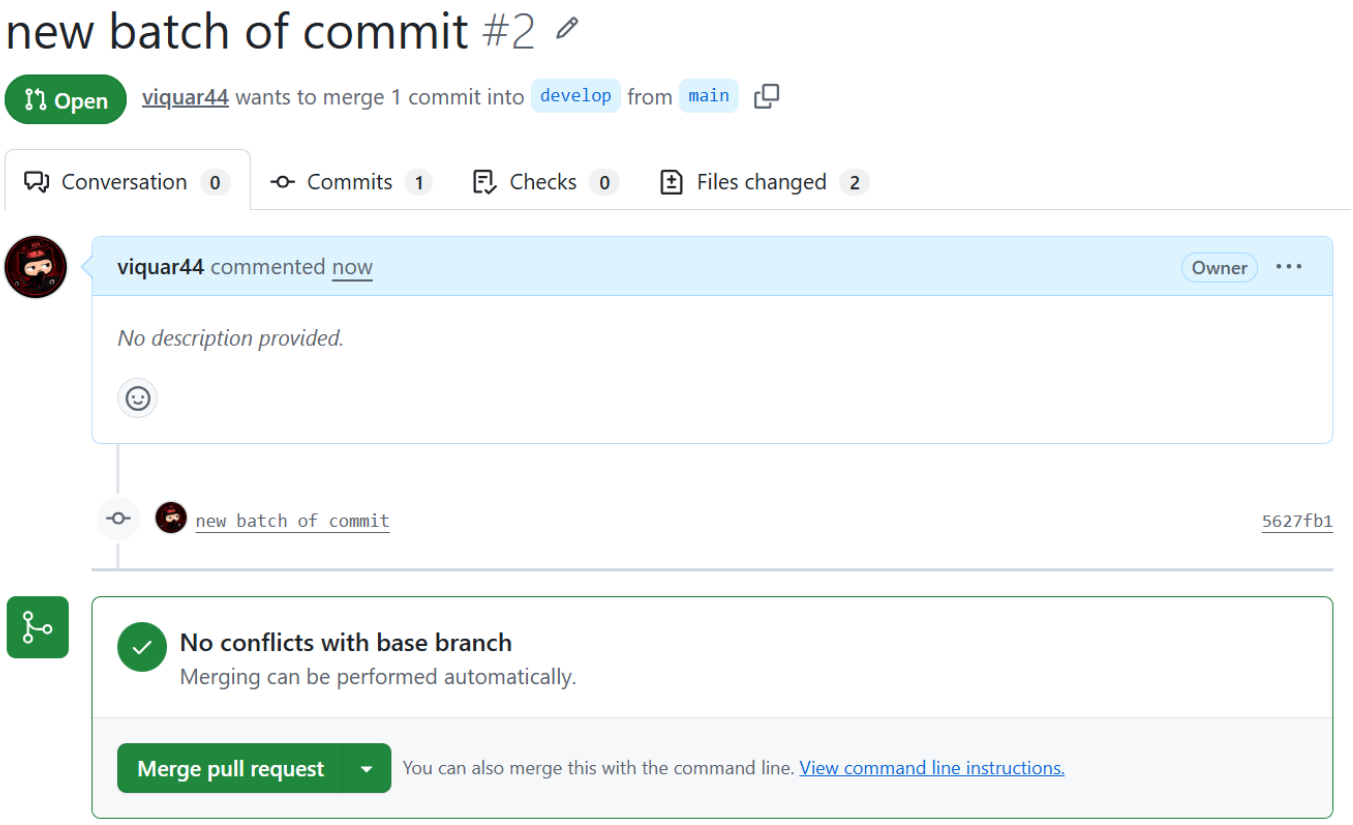



10. Create a file in local and send that to branch in github.


First check the repo in github


In local I created 2 files and add to tracking and commit

Then push to Git hub

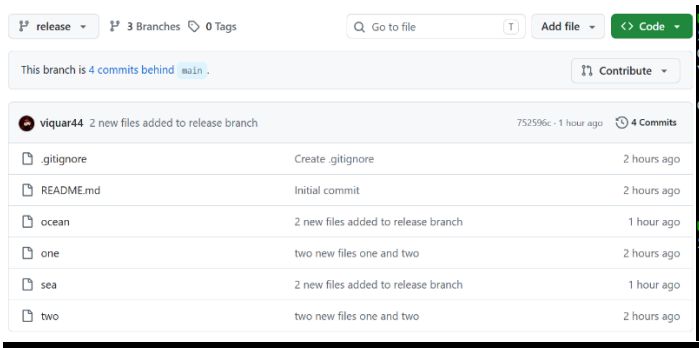

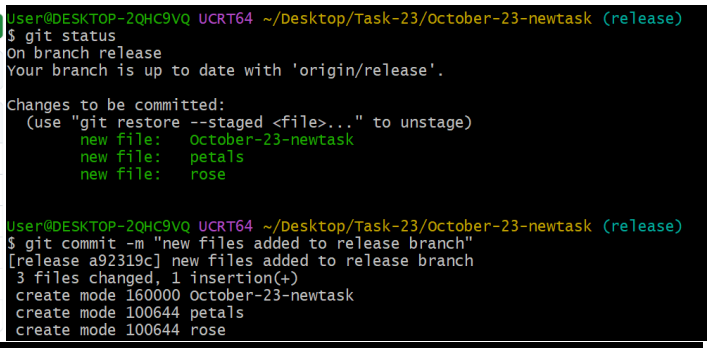

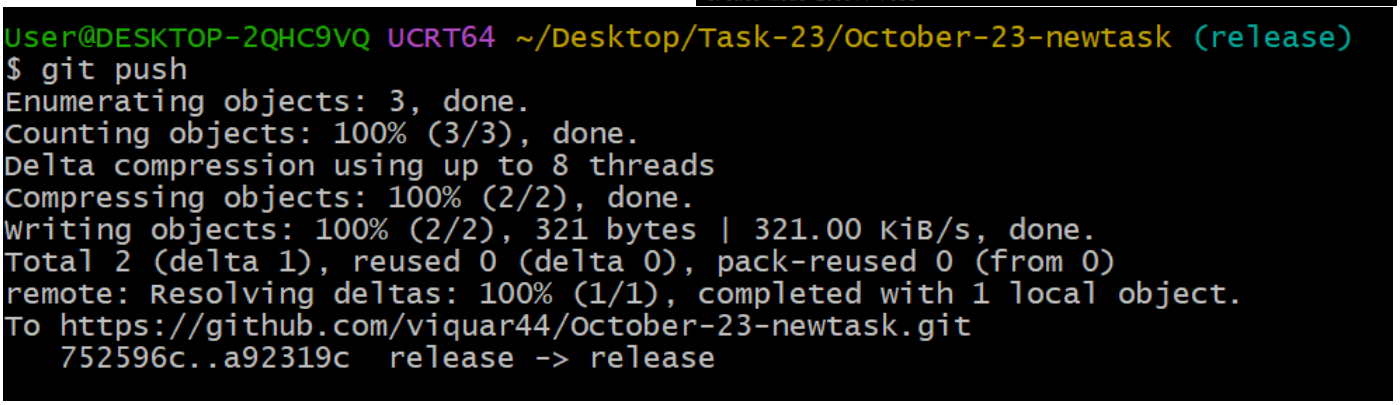

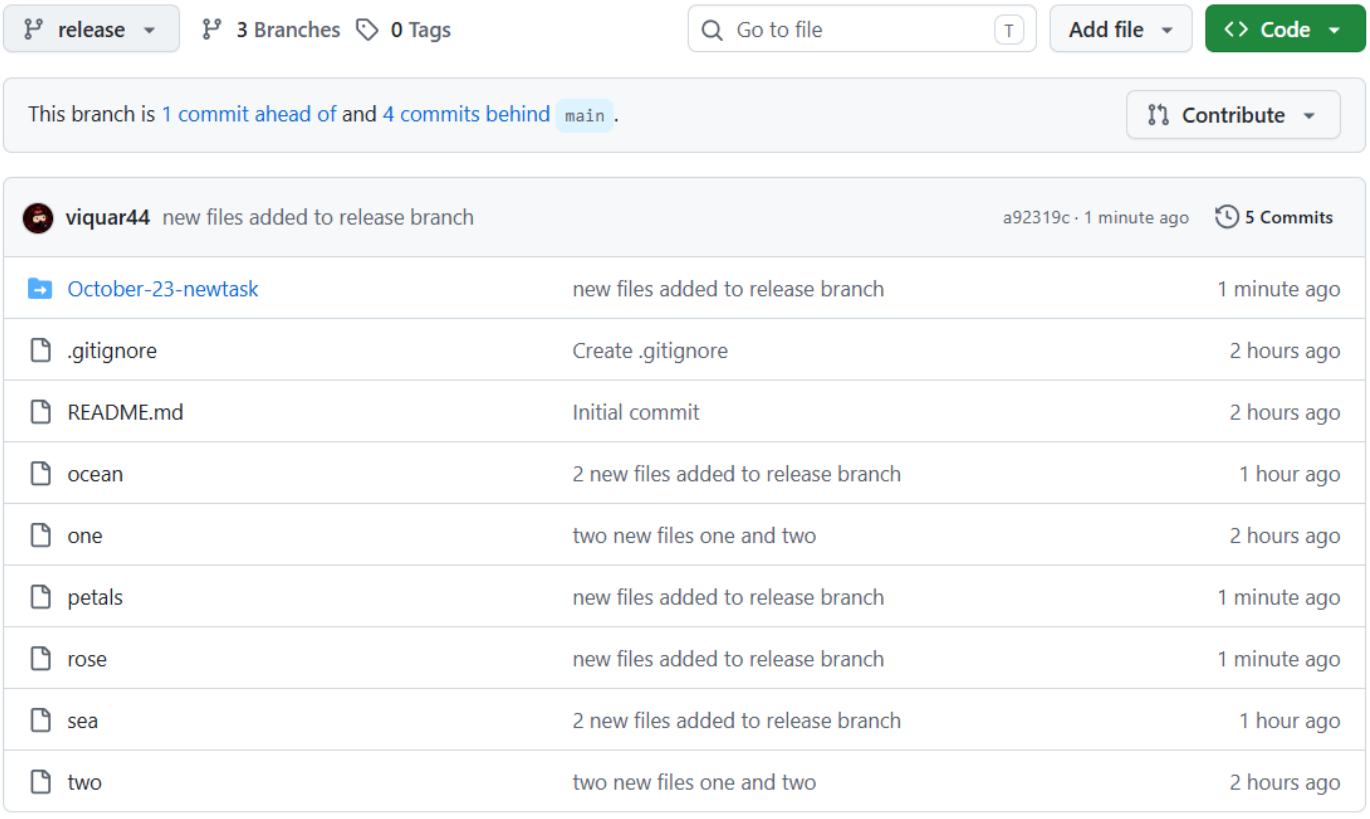

11. Clone only a branch from github to local.

Clone existing branch

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git clone -b release git@github.com:viquar44/October-23-newtask.git
Cloning into 'October-23-newtask'...
remote: Enumerating objects: 24, done.
remote: Counting objects: 100% (24/24), done.
remote: Compressing objects: 100% (18/18), done.
remote: Total 24 (delta 9), reused 8 (delta 3), pack-reused 0 (from 0)
Receiving objects: 100% (24/24), done.
Resolving deltas: 100% (9/9), done.

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  five  four  ocean  one  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

12. Create a file with all passwords and make that untrackable with git.

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ touch password


User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ vi .gitignore

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  five  four  ocean  one  password  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git add .

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git commit -m "new batch for commit 2"
[main 501fa04] new batch for commit 2
 3 files changed, 2 insertions(+), 2 deletions(-)
 create mode 100644 password
```

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git push
Enumerating objects: 9, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 580 bytes | 580.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To https://github.com/viquar44/October-23-newtask.git
   a9845c9..ed0c73b  main -> main
```

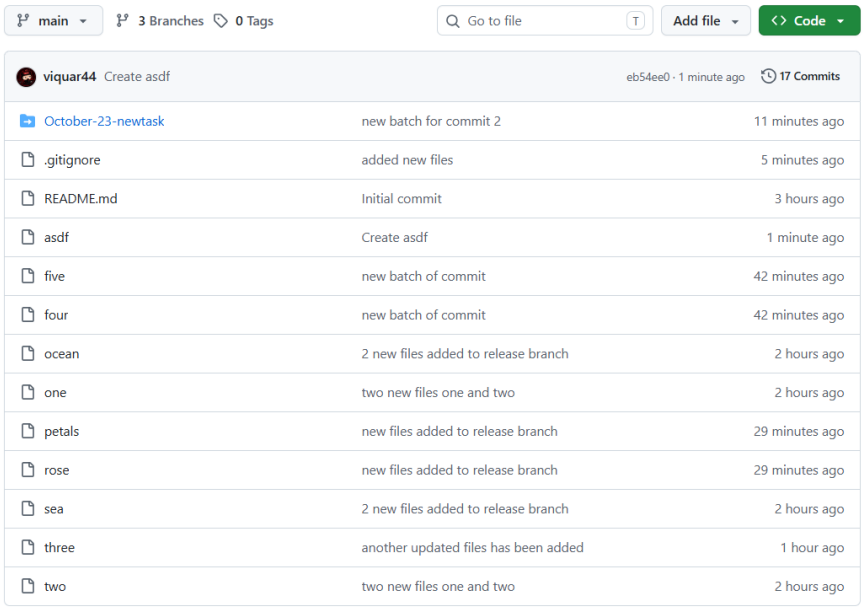

Viquar-23

13. Make a commit and make that commit reset without savings changes.

Step 1: Created a file touch rehan
Step 2: added file to tracking
Step 3: added file to commit
Step 4: reset file by using command **(git reset - -hard HARD~1)**

```
UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ touch rehan

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ status
bash: status: command not found

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        rehan

nothing added to commit but untracked files present (use "git add" to track)

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git add rehan

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git commit -m "rehan added to commit"
[main c868c2c] rehan added to commit
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 rehan

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git reset rehan

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git reset --hard HEAD~1
HEAD is now at eb54ee0 Create asdf

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  asdf  five  four  ocean  one  password  petals  rose  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

14. Revert a commited commit to the older version.

```
UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git log -1
commit eb54ee0d0161d0c7f0e0775b03fd058f55992dd3 (HEAD -> main, origin/main, origin/HEAD)
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 18:50:21 2026 +0530

    Create asdf

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git revert eb54ee
[main b97fc67] Revert "Create asdf"
 1 file changed, 1 deletion(-)
 delete mode 100644 asdf

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  five  four  ocean  one  password  petals  rose  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

Viquar-23

15. Push a file to stash without savings the changes and work on another file.

Created 2 files file1 and file2
added them for tracking
then pushed file1 to stash **(git stash push -m "saved changes to file1" – file1**

UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  file1  file2  five  four  ocean  one  password  petals  rose  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        file1
        file2

nothing added to commit but untracked files present (use "git add" to track)

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git add .

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git stash push -m "Saved changes to file1" -- file1
Saved working directory and index state On main: Saved changes to file1

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git commit -m "new batch again commit"
[main 6f00c0a] new batch again commit
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file2

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

16. Undo the stash file and start working on that again.

Used command **(git stash pop)** to undo the stash file.

UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  file2  five  four  ocean  one  password  petals  rose  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git stash pop
On branch main
Your branch is ahead of 'origin/main' by 2 commits.
  (use "git push" to publish your local commits)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   file1

Dropped refs/stash@{0} (a7508caca0a67569f4cccd52d99a8e0c01767621)

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ ls
October-23-newtask/  README.md  file1  file2  five  four  ocean  one  password  petals  rose  sea  three  two

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$
```

17. Generate a ssh-keygen and configure into github.

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ git --version
git version 2.56.0.windows.2

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ ssh-keygen
Generating public/private ed25519 key pair.
Enter file in which to save the key (/c/Users/User/.ssh/id_ed25519):
Enter passphrase for "/c/Users/User/.ssh/id_ed25519" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/User/.ssh/id_ed25519
Your public key has been saved in /c/Users/User/.ssh/id_ed25519.pub
The key fingerprint is:
SHA256:NqsTpkMZEhzI3p2p72ISJAdVMfpNRMVPFCOplVsa4vM User@DESKTOP-2QHC9VQ
The key's randomart image is:
+--[ED25519 256]--+
|.+oo+ooo.o+=     |
|o.o. o  + * o    |
|..o.. +. = *     |
|.ooo.*  o +      |
|o. .oo. So       |
| . .o o. oE      |
|  ...o ..        |
| . oo...         |
|  o oo..         |
+----[SHA256]-----+

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$ cat /c/Users/User/.ssh/id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIHCUGXHZ5SYtuAX0qImmLYRpQ6T77xr4pycaO8gQ/t0n User@DESKTOP-2QHC9VQ

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23
$
```

Deploy keys / Add new

Title

task

Key

ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIHCUGXHZ5SYtuAX0qImmLYRpQ6T77xr4pycaO8gQ/t0n User@DESKTOP-2QHC9VQ

Begins with 'ssh-rsa', 'ecdsa-sha2-nistp256', 'ecdsa-sha2-nistp384', 'ecdsa-sha2-nistp521', 'ssh-ed25519', 'sk-ecdsa-sha2-nistp256@openssh.com', or 'sk-ssh-ed25519@openssh.com'.


☑ Allow write access

Can this key be used to **push** to this repository? Deploy keys always have pull access.


Add key

18. Configure webhooks to github.

1. On GitHub, navigate to the main page of the repository.
2. Under your repository name, click **Settings**. If you cannot see the "Settings" tab, select the dropdown menu, then click **Settings**.

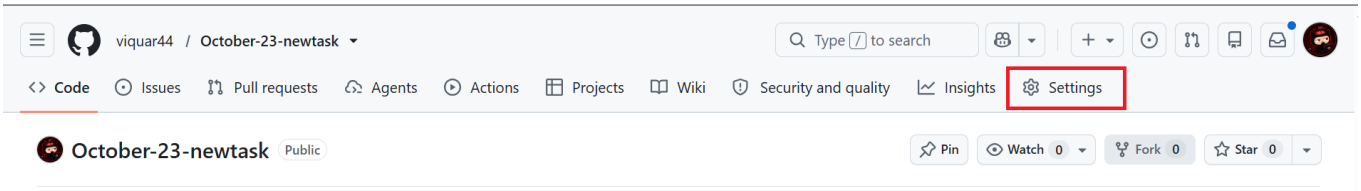

3. In the left sidebar, click **Webhooks**.
4. Click **Add webhook**.

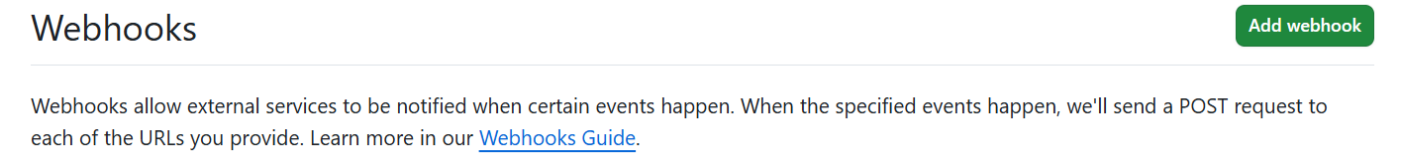


5. Under "Payload URL", type the URL where you'd like to receive payloads.
6. Optionally, select the **Content type** drop-down menu, and click a data format to receive the webhook payload in.
    - **https://nimble-flame-17.webhook.cool** will deliver the JSON payload directly as the body of the POST request.
    - **application/x-www-form-urlencoded** will send the JSON payload as a form parameter called payload.




7. Optionally, under "Secret", type a string to use as a `secret` key. You should choose a random string of text with high entropy. You can use the webhook secret to limit incoming requests to only those originating from GitHub. For more information, see Validating webhook deliveries.
8. Under "Which events would you like to trigger this webhook?", select the webhook events that you want to receive. You should only subscribe to the webhook events that you need.

9. If you chose **Let me select individual events**, select the events that you want to trigger the webhook.

10. To make the webhook active immediately after adding the configuration, select **Active**.

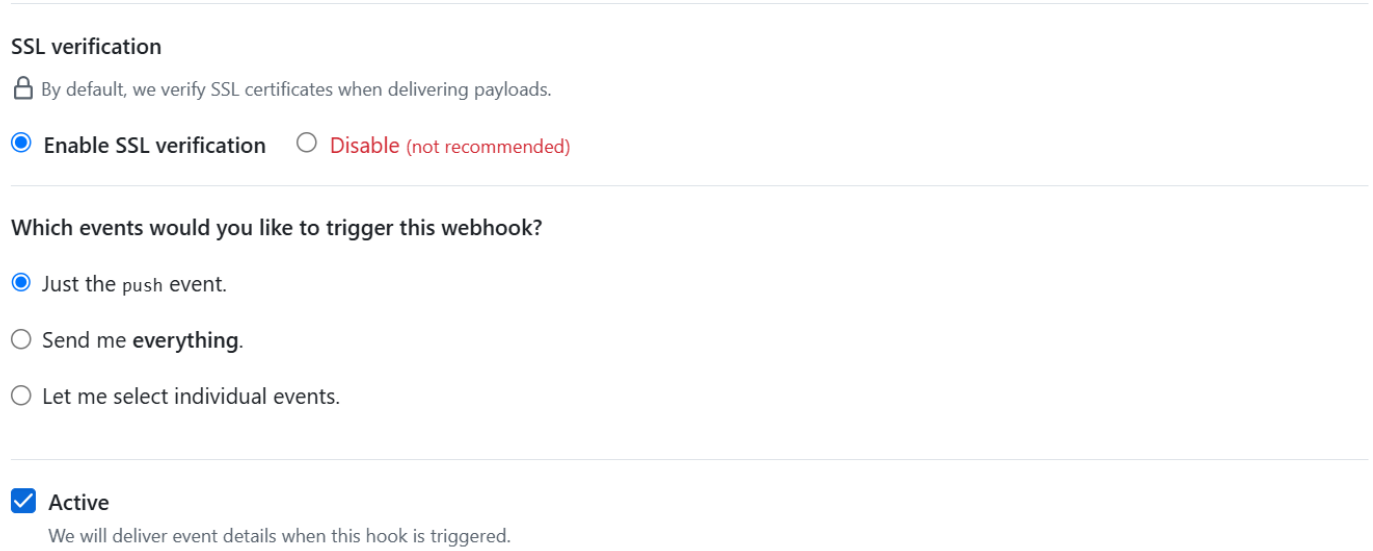

11. Click **Add webhook**.

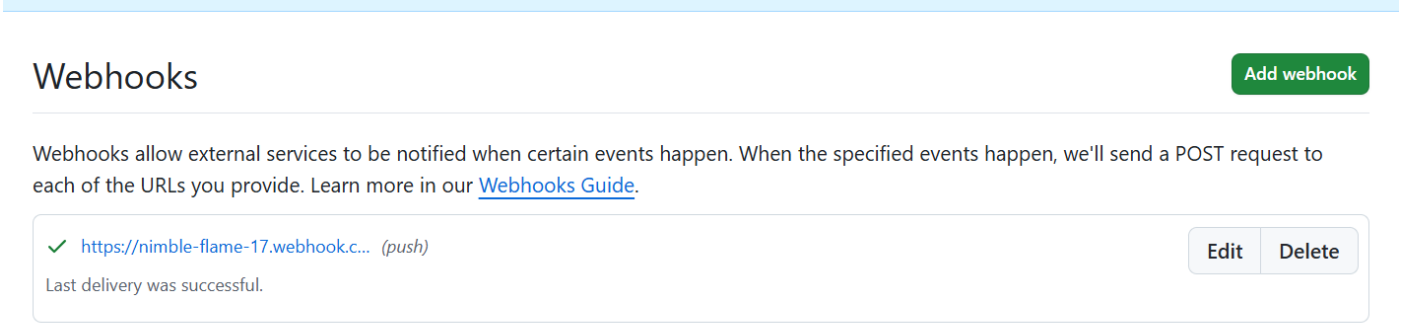

19. Basic understanding of .git file.

Basic Understanding of .git Folder

The .git folder is created when we use the **(git init)** command in a project.
It stores all the information about our project, like commit history, branches, and configuration details.

For example, when I create my website and make some changes, Git keeps track of those changes inside the .git folder.

Some important files inside the .git folder:


HEAD – tells Git which branch we are currently working on.
config – stores the repository settings.
objects – stores the data and history of the project.
refs – stores references to branches and tags.
index – keeps track of files added to the staging area.

Example commands:

```
Bash
git init
git status
git add .
git commit -m "First commit"
```

In simple words, the .git folder helps Git remember the changes we make in our project, so we can check previous versions and manage our code easily.

20. Check all the logs of git.

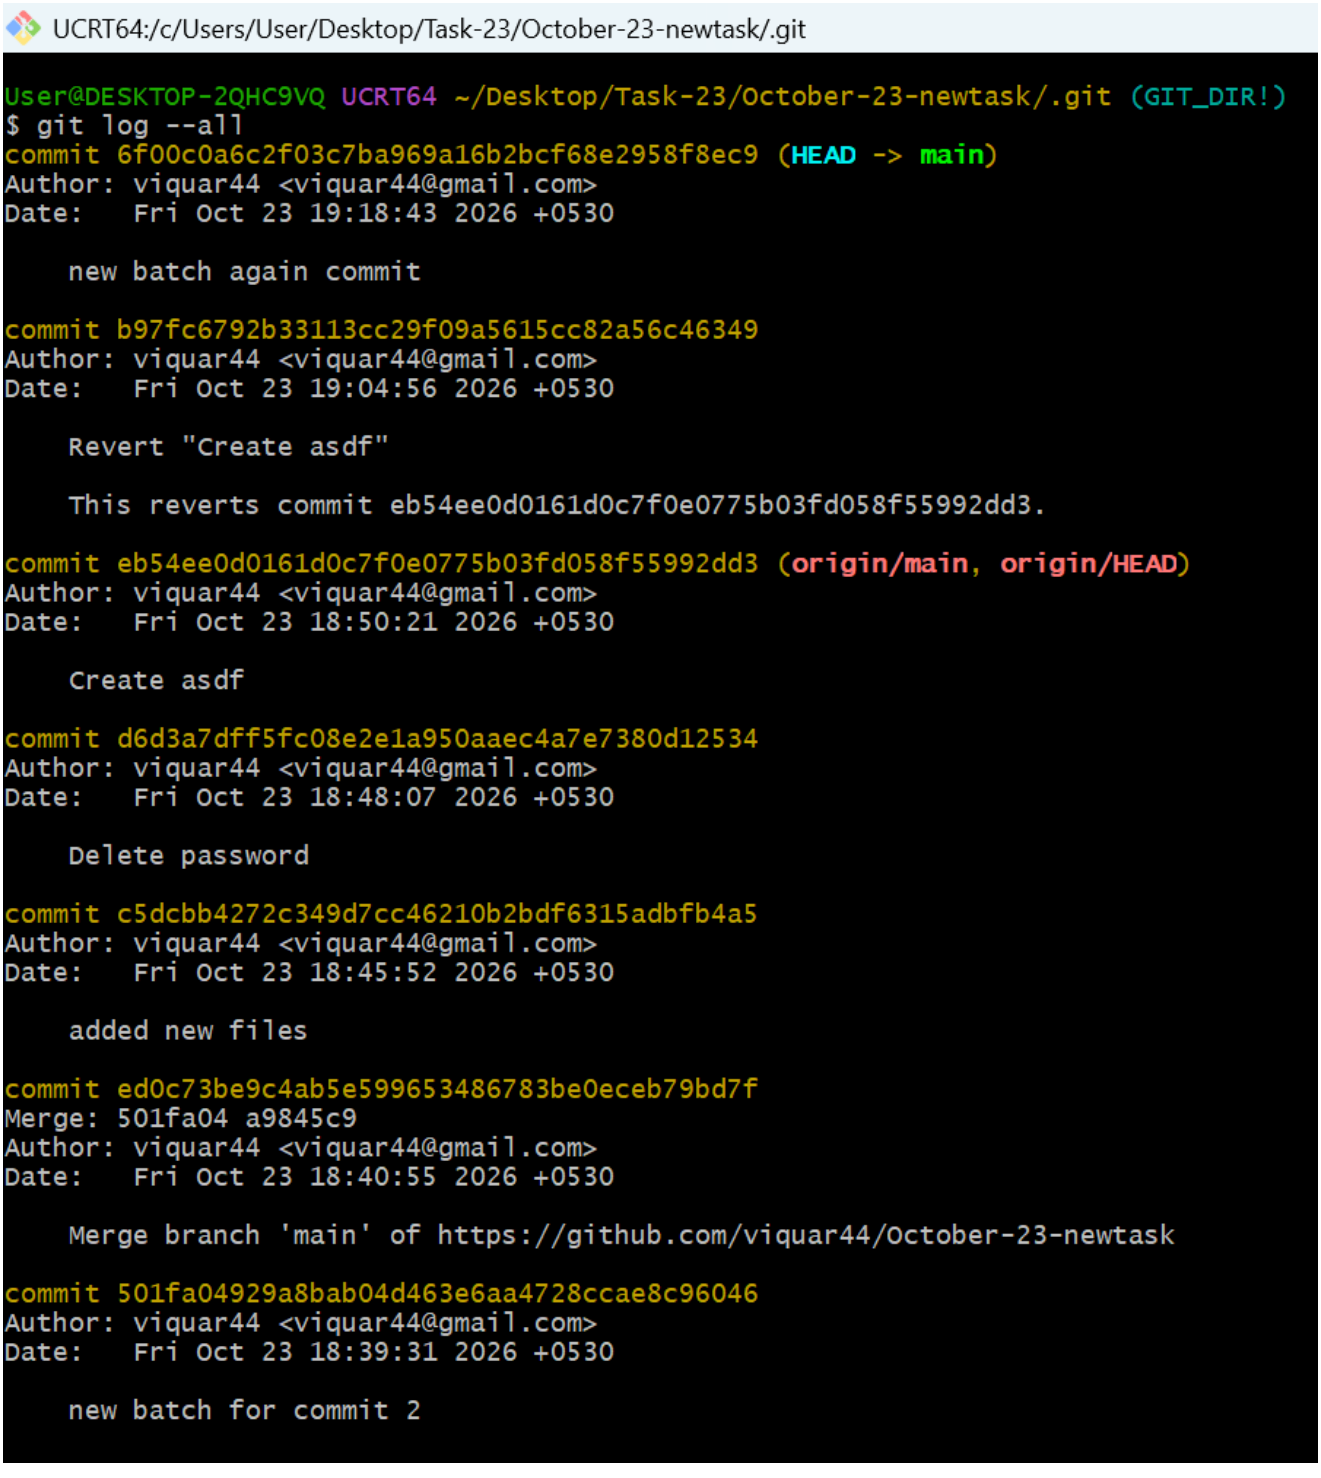

21. Rename the commit message.

First pull-off the last log using a command **(git log-1)** copied the first 6 letters of commit id then amend or rename the commit message by using a command **(git commit - -amend)**

UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask/.git

```
User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask/.git (GIT_DIR!)
$ git log -10
commit 6f00c0a6c2f03c7ba969a16b2bcf68e2958f8ec9 (HEAD -> main)
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 19:18:43 2026 +0530

    new batch again commit
```

UCRT64:/c/Users/User/Desktop/Task-23/October-23-newtask

```
new batch again commit

# Please enter the commit message for your changes. Lines starting
# with '#' will be ignored, and an empty message aborts the commit.
#
# Date:      Fri Oct 23 19:18:43 2026 +0530
#
# On branch main
# Your branch is ahead of 'origin/main' by 2 commits.
#   (use "git push" to publish your local commits)
#
# Changes to be committed:
#       new file:   file1
#       new file:   file2
#
```

```
 create mode 100644 file2

User@DESKTOP-2QHC9VQ UCRT64 ~/Desktop/Task-23/October-23-newtask (main)
$ git log -4
commit d6cfd0ce280a400504a1345785a22b84a2be4e58 (HEAD -> main)
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 19:18:43 2026 +0530

    commit final batch

commit b97fc6792b33113cc29f09a5615cc82a56c46349
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 19:04:56 2026 +0530

    Revert "Create asdf"

    This reverts commit eb54ee0d0161d0c7f0e0775b03fd058f55992dd3.

commit eb54ee0d0161d0c7f0e0775b03fd058f55992dd3 (origin/main, origin/HEAD)
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 18:50:21 2026 +0530

    Create asdf

commit d6d3a7dff5fc08e2e1a950aaec4a7e7380d12534
Author: viquar44 <viquar44@gmail.com>
Date:   Fri Oct 23 18:48:07 2026 +0530

    Delete password
```

22. Merge multiple commits into single commit.

Used command **(git rebase -i HEAD~3)** I have choose last 3 commits to merge

