
RS PRO Aluminium Reduced Head Blind Rivet Nut, M3 x 9mm long

Supplier Part Number: RNARH0320

FEATURES

- **Diameter:** 4.9 mm for precise fitting in pre-drilled holes
- **Fixing Hole Diameter:** 5 mm for compatibility with standard tools
- **Length:** 9 mm for optimal grip and stability
- **Material:** Aluminium for lightweight and corrosion resistance
- **Thread Size:** M3 for standardised fastening solutions

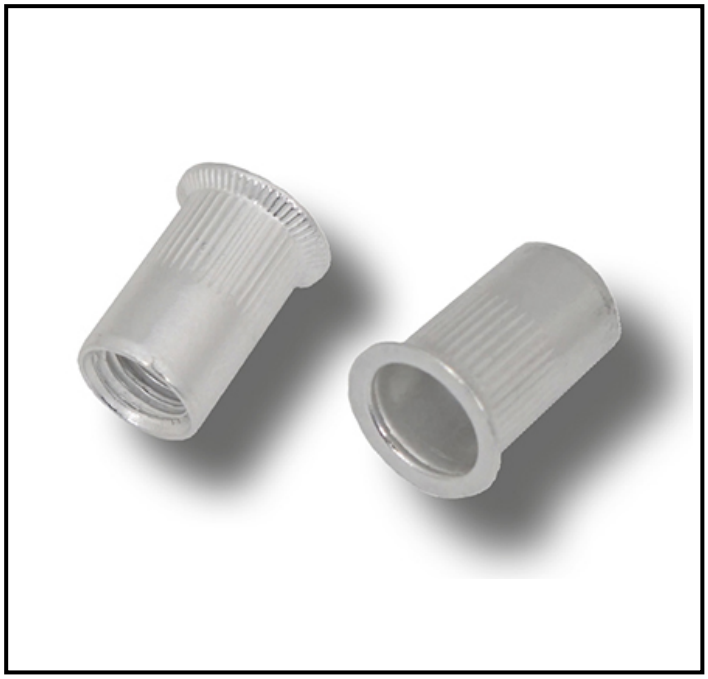

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO M3 Aluminium Rivet Nut is designed for secure fastening in various industrial applications. Its lightweight yet durable aluminium construction ensures reliable performance, making it ideal for use in environments where weight reduction is crucial.


General Specifications


Material	Aluminium
Product Type	Rivet Nut
Sub Type	Nut
Thread Size	M3
Fixing Hole Diameter	5 mm
Head Type	Reduced


Mechanical Specifications

Diameter	4.9 mm
Length	9 mm
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm
Shear Strength	600 N
Tensile Strength	2500 N
Maximum Tightening Torque	0.7 Nm

Technical Diagrams



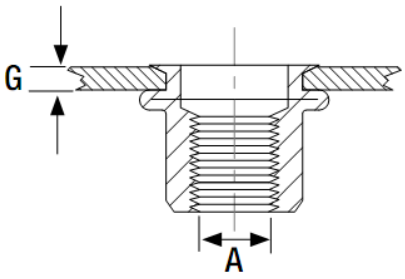



Thread Size mm	Article Number	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Body Diameter mm	Flange Diameter mm	Flange Thickness mm	Body Overall Length mm	Max Tightening Torque Nm	Tensile Strength N	Box Quantity	Price £ Per 1000
A		G	G		B	H	T	L				
M3	RNARH0320	0.5	1.5	5.0	4.9	6.0	0.5	9.0	0.7	2500	2000	£61.22
M4	RNARH0420	0.5	2.0	6.0	5.9	7.0	0.5	10.5	2.0	3600	1500	£74.57
M5	RNARH0520	0.5	2.0	7.0	6.9	8.0	0.6	11.5	4.0	5500	1000	£72.23
M6	RNARH0625	0.5	2.5	9.0	8.9	10.0	0.6	14.0	6.0	8300	500	£79.18
M8	RNARH0825	0.5	2.5	11.0	10.9	12.0	0.6	15.5	15.0	13000	300	£139.26
M10	RNARH1030	1.0	3.0	12.0	11.9	14.0	0.6	17.7	27.0	20000	150	£194.66