TO-DO-LIST

My project name is To-Do List Web Application.

The main aim of my project is to help users manage their daily tasks easily.

I used three technologies: HTML, CSS, and JavaScript.

HTML is used to create the structure of the webpage. CSS is used to design the user interface. JavaScript is used to add, complete, and delete tasks dynamically.

When the user enters a task and clicks the Add Task button, JavaScript reads the input and displays the task on the webpage. Users can also mark tasks as completed or delete them.

This project helped me understand DOM manipulation, event handling, and basic web development.

Thank you.

HTML CODE:

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>To-Do List</title>
   <link rel="stylesheet" href="style.css">
</head>
<body>

   <div class="container">
      <h1>My To-Do List</h1>

      <div class="input-box">
         <input type="text" id="taskInput" placeholder="Enter a task">
         <button onclick="addTask()">Add</button>
      </div>

      <ul id="taskList"></ul>
   </div>

   <script src="script.js"></script>
</body>
</html>
```

CSS CODE:

```
body {
```

```
    font-family: Arial, sans-serif;
    background: #e8eeff;
    display: flex;
    justify-content: center;
    align-items: center;
    min-height: 100vh;
    margin: 0;
}

.container {
    background: white;
    padding: 25px;
    width: 350px;
    max-width: calc(100% - 50px);
    border-radius: 12px;
    box-shadow: 0 4px 12px #cccccc;
}

h1 {
    text-align: center;
    color: #333;
}

.input-box {
    display: flex;
    gap: 8px;
}

input {
    flex: 1;
    min-width: 0;
    padding: 10px;
    border: 1px solid #aaa;
    border-radius: 5px;
}

button {
    padding: 10px 15px;
    background: #4c63e6;
    color: white;
    border: none;
    border-radius: 5px;
    cursor: pointer;
}

li {
    margin-top: 12px;
    padding: 10px;
    background: #f2f2f2;
    border-radius: 5px;
    overflow-wrap: anywhere;
    cursor: pointer;
}

li.completed {
    text-decoration: line-through;
    color: gray;
}

.delete-btn {
```

```
    float: right;
    background: red;
    padding: 5px 8px;
}
```

JAVASCRIPT CODE:

```
function addTask() {
    const input = document.getElementById("taskInput");
    const task = input.value.trim();

    if (task === "") {
        alert("Please enter a task!");
        return;
    }

    const li = document.createElement("li");
    const taskText = document.createElement("span");

    taskText.textContent = task;

    // Mark task as completed
    taskText.onclick = function () {
        li.classList.toggle("completed");
    };

    // Create delete button
    const deleteBtn = document.createElement("button");
    deleteBtn.textContent = "Delete";
    deleteBtn.className = "delete-btn";


    deleteBtn.onclick = function (event) {
        event.stopPropagation();
        li.remove();
    };


    li.appendChild(taskText);
    li.appendChild(deleteBtn);


    document.getElementById("taskList").appendChild(li);


    input.value = "";
}
```

OUTPUT:

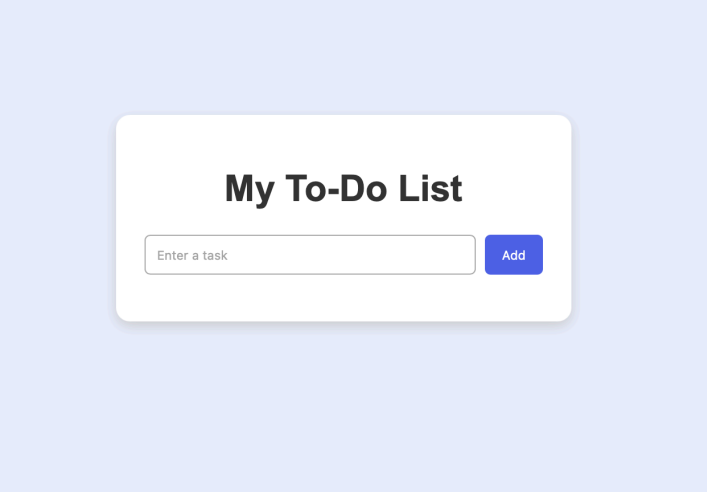

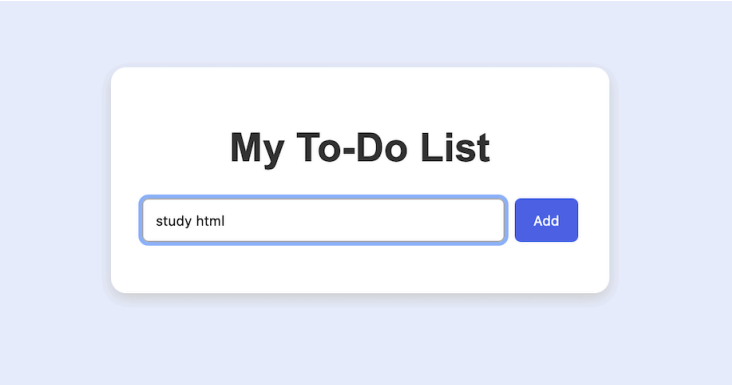

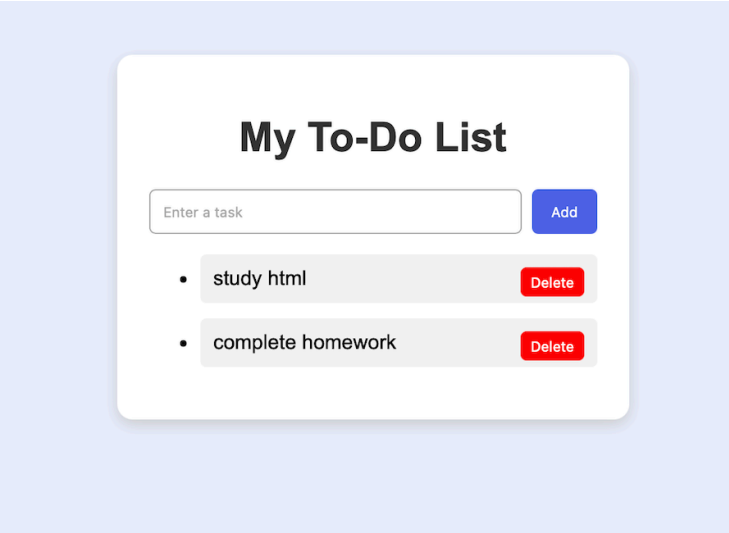

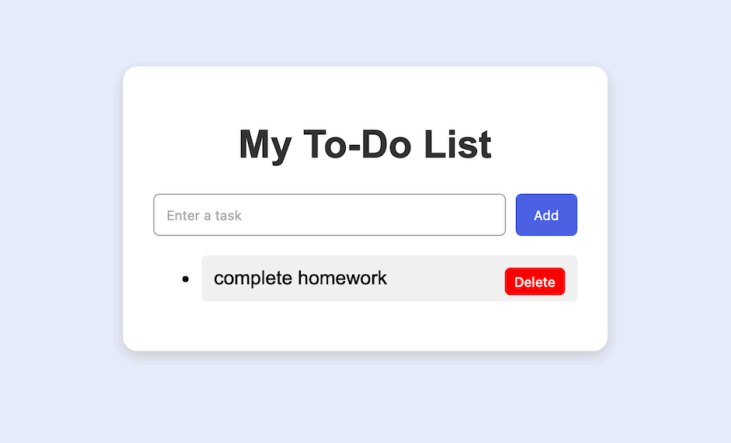

CONCIUSION : If we want means we can add task and after completion we can delete the task