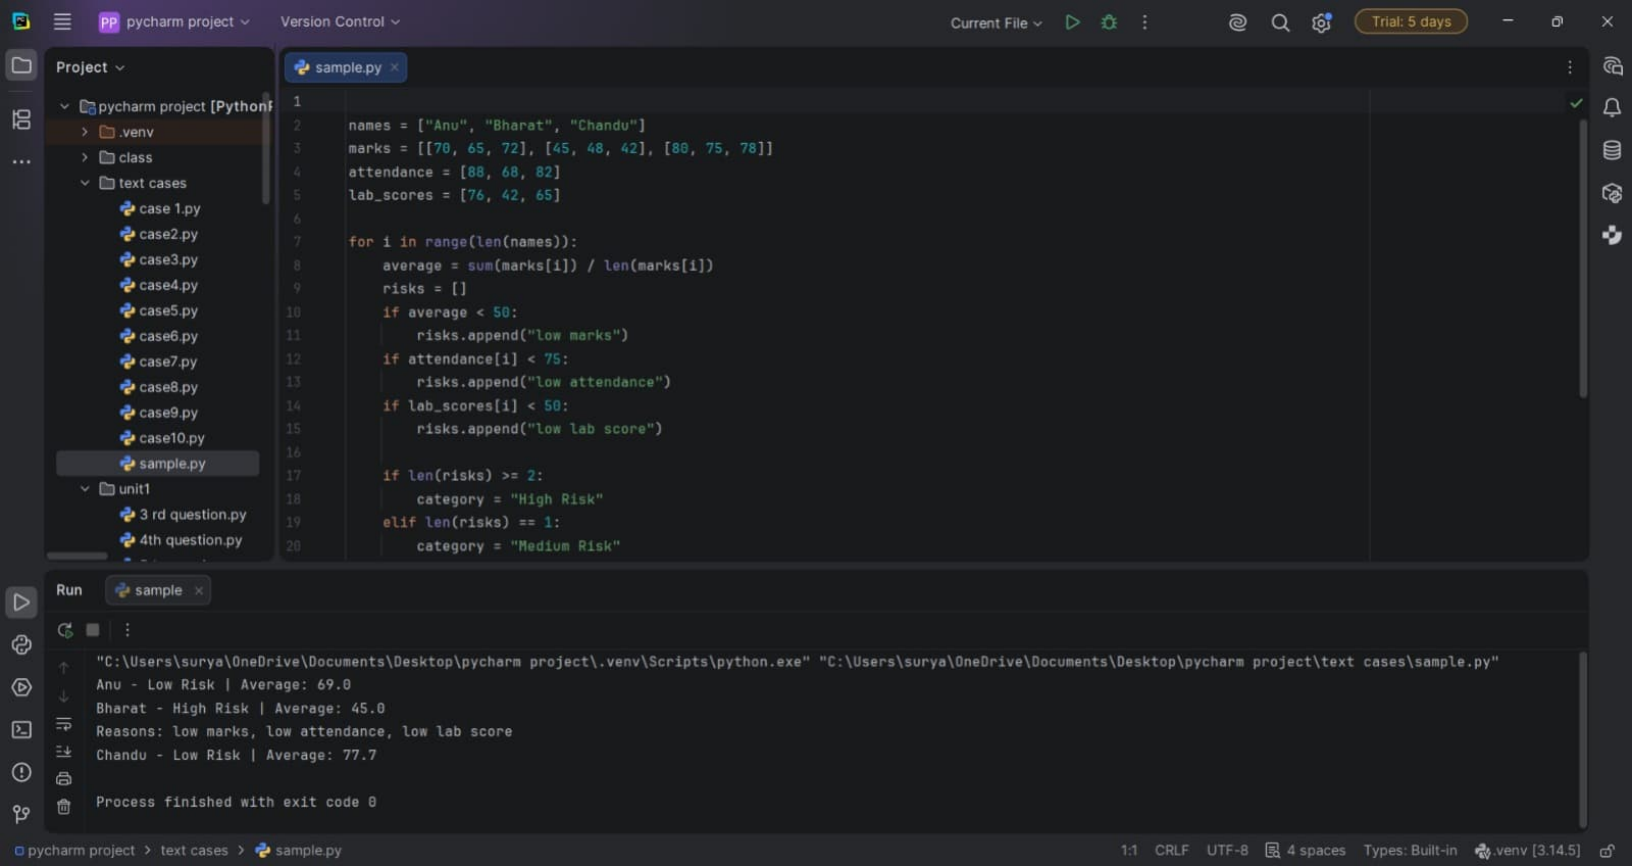
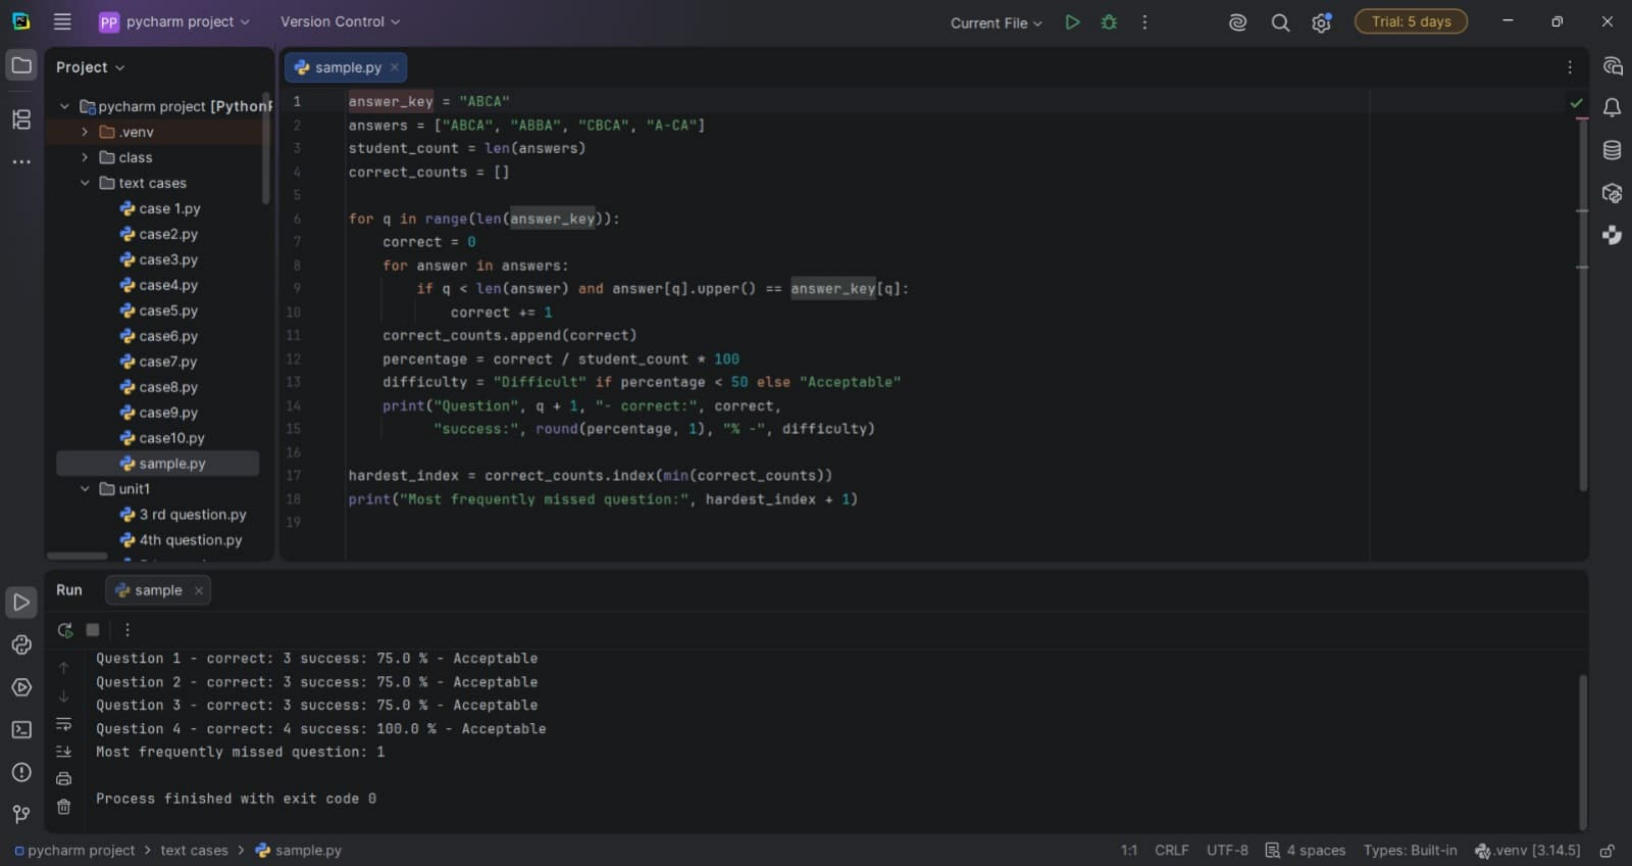
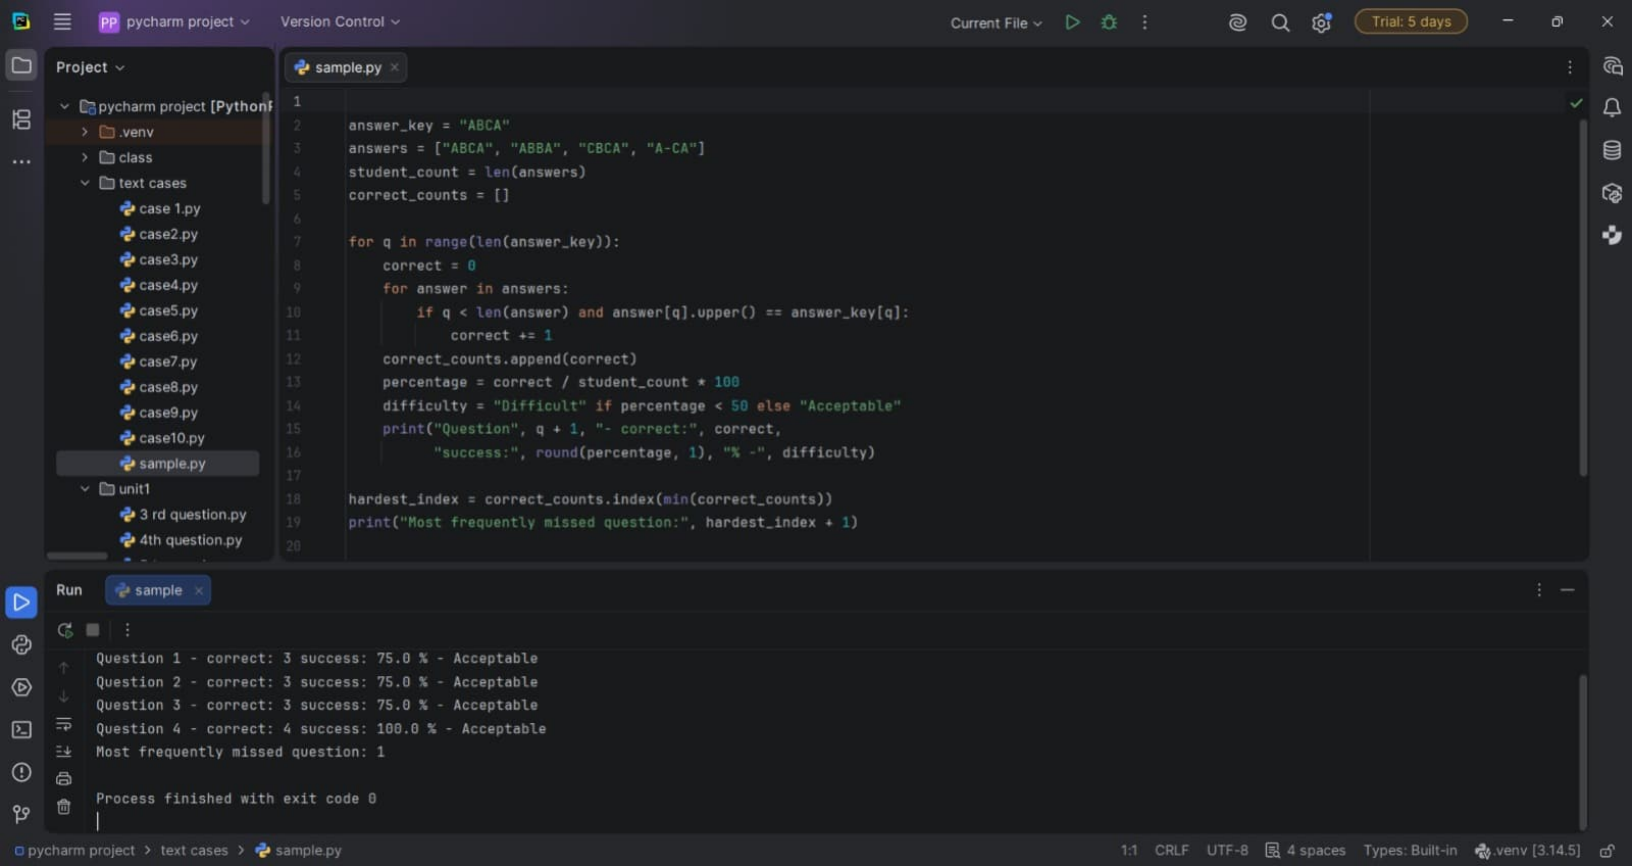
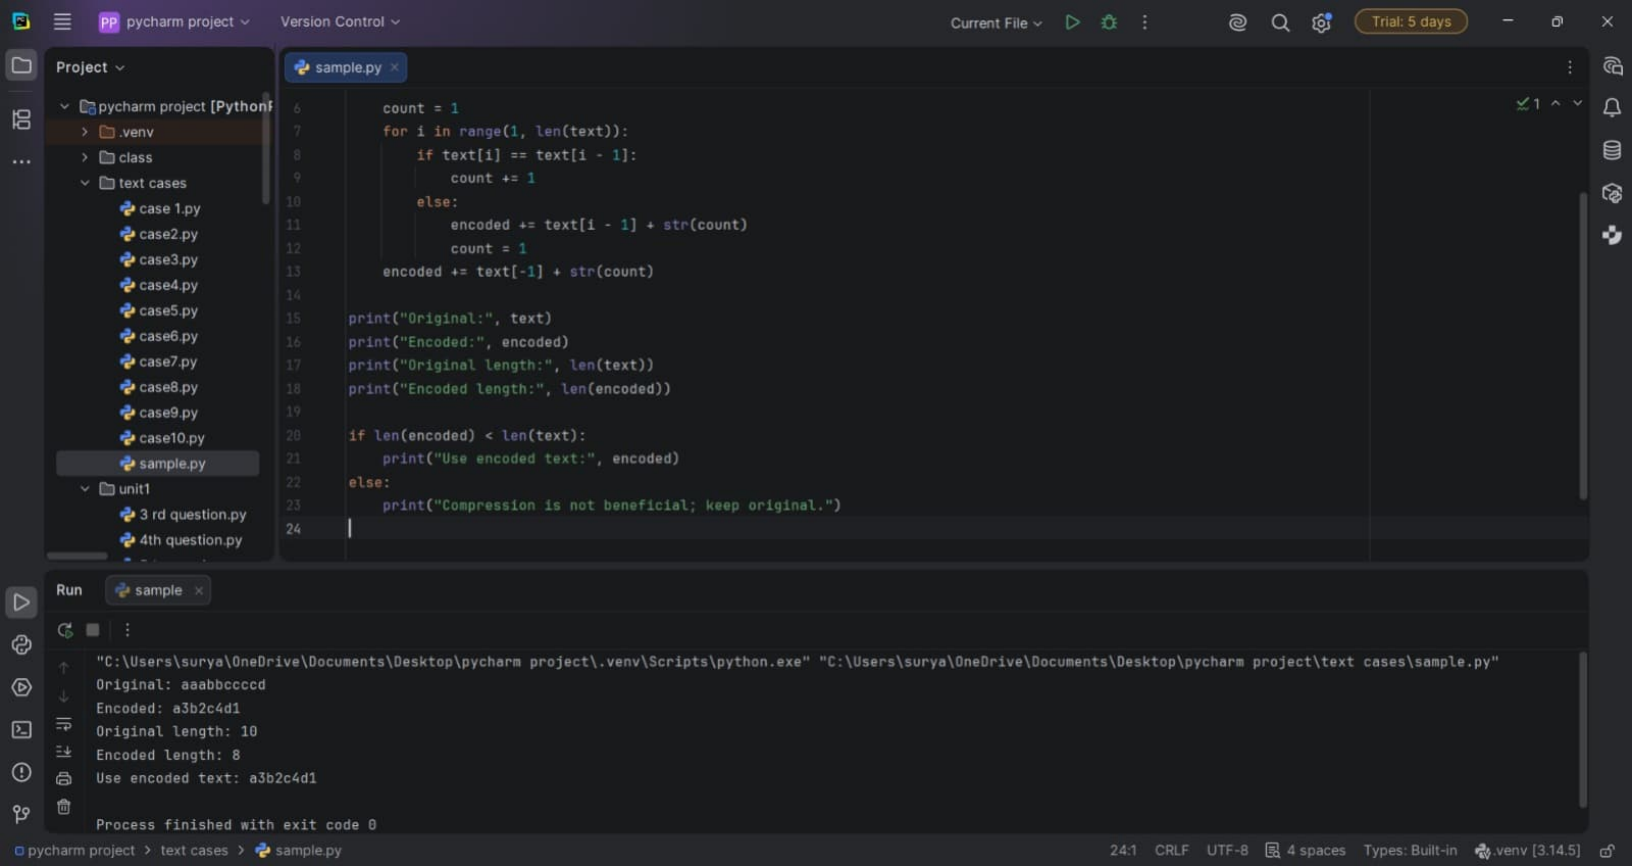
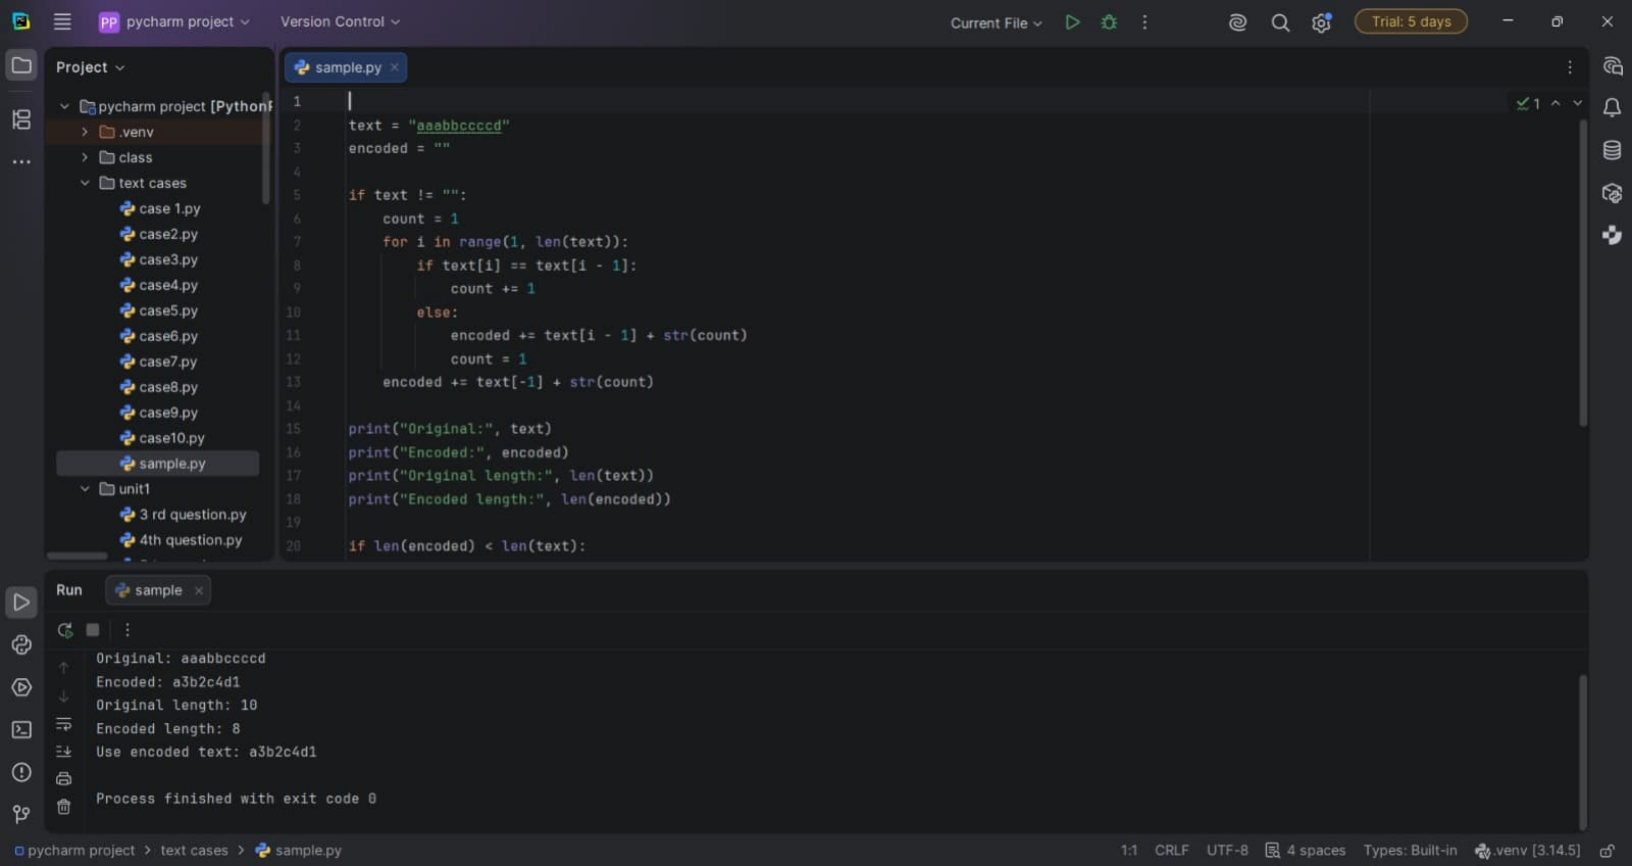
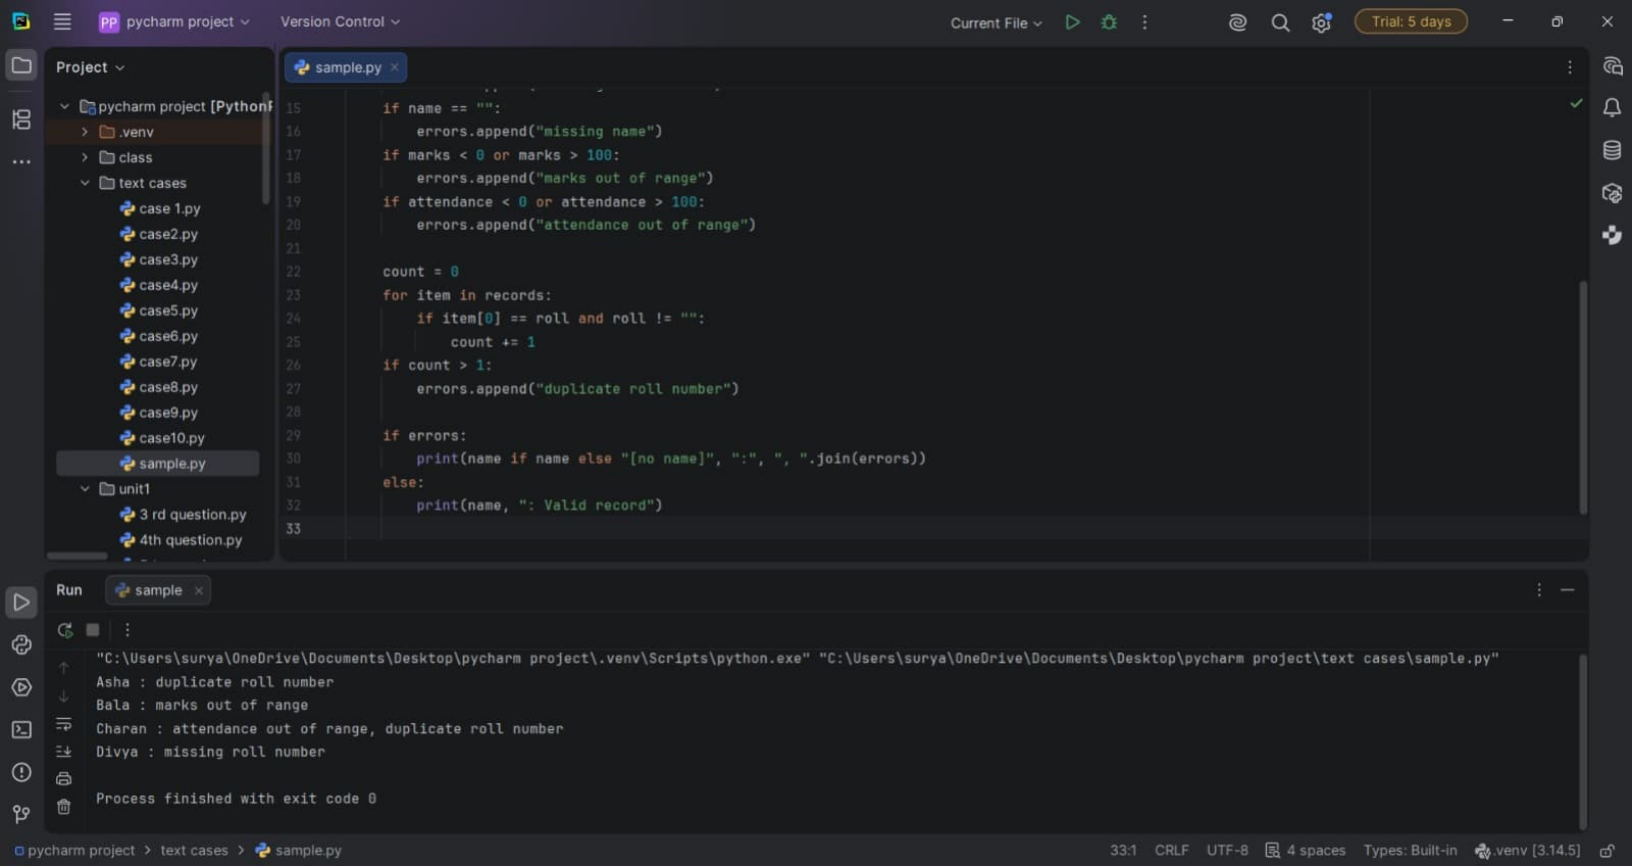

pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
names = ["Anu", "Bharat", "Chandu"]
marks = [[70, 65, 72], [45, 48, 42], [80, 75, 78]]
attendance = [88, 68, 82]
lab_scores = [76, 42, 65]
for i in range(len(names)):
average = sum(marks[i]) / len(marks[i])
risks = []
if average < 50:
risks.append("low marks")
if attendance[i] < 75:
risks.append("low attendance")
if lab_scores[i] < 50:
risks.append("low lab score")
if len(risks) >= 2:
category = "High Risk"
elif len(risks) == 1:
category = "Medium Risk"
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Anu - Low Risk | Average: 69.0
Bharat - High Risk | Average: 45.0
Reasons: low marks, low attendance, low lab score
Chandu - Low Risk | Average: 77.7
Process finished with exit code 0
pycharm project
text cases
sample.py
1:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]

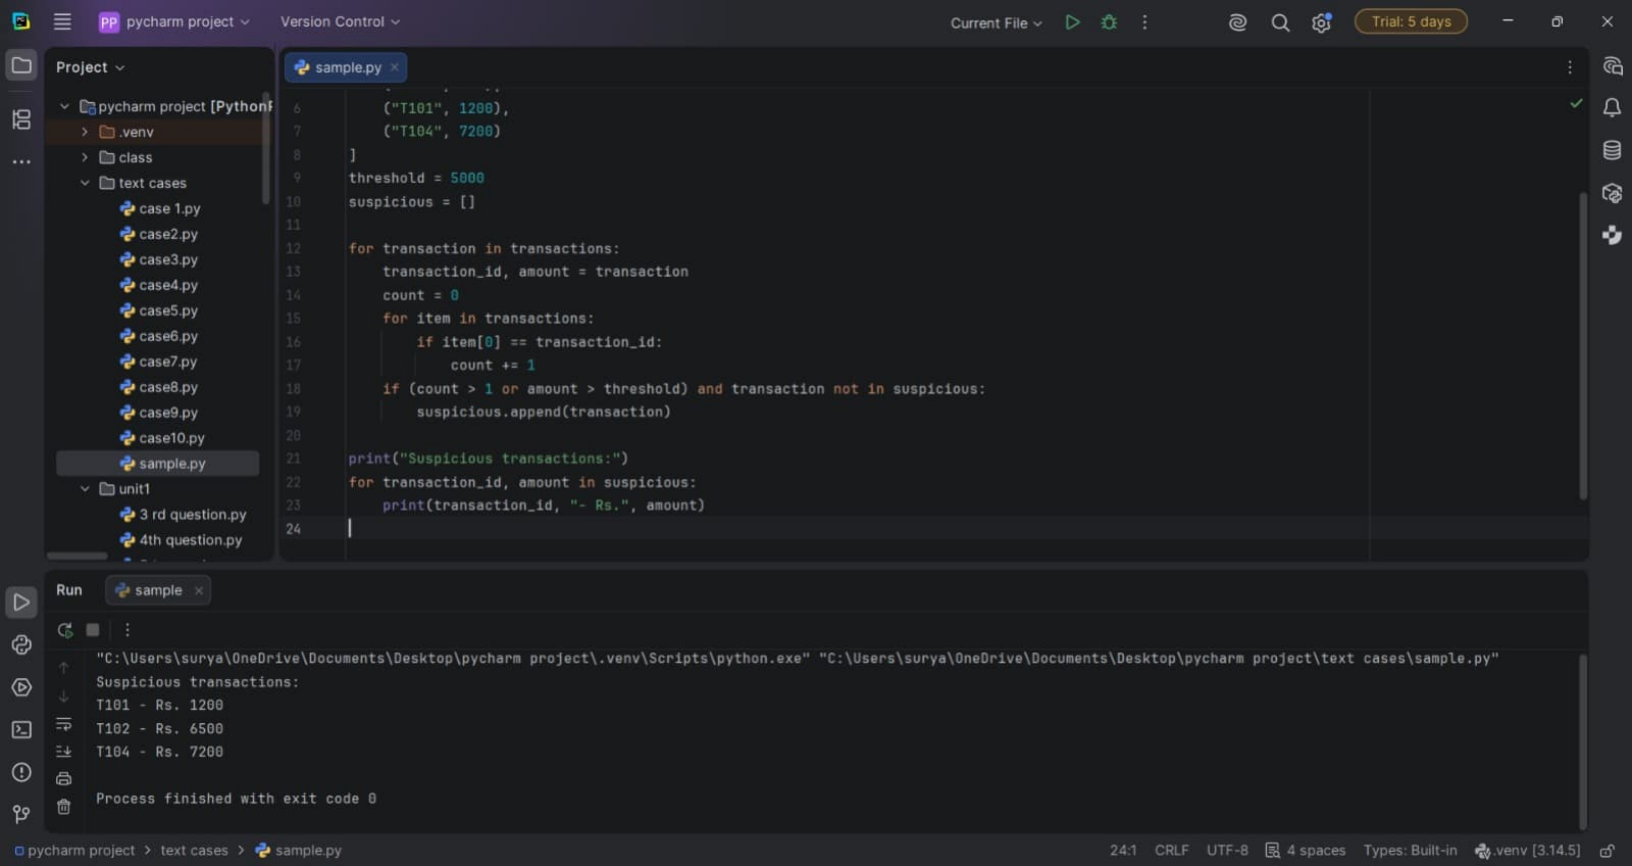

pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
answer_key = "ABCA"
answers = ["ABCA", "ABBA", "CBCA", "A-CA"]
student_count = len(answers)
correct_counts = []
for q in range(len(answer_key)):
correct = 0
for answer in answers:
if q < len(answer) and answer[q].upper() == answer_key[q]:
correct += 1
correct_counts.append(correct)
percentage = correct / student_count * 100
difficulty = "Difficult" if percentage < 50 else "Acceptable"
print("Question", q + 1, "- correct:", correct,
"success:", round(percentage, 1), "% -", difficulty)
hardest_index = correct_counts.index(min(correct_counts))
print("Most frequently missed question:", hardest_index + 1)
Run
sample
Question 1 - correct: 3 success: 75.0 % - Acceptable
Question 2 - correct: 3 success: 75.0 % - Acceptable
Question 3 - correct: 3 success: 75.0 % - Acceptable
Question 4 - correct: 4 success: 100.0 % - Acceptable
Most frequently missed question: 1
Process finished with exit code 0
pycharm project
text cases
sample.py
1:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]

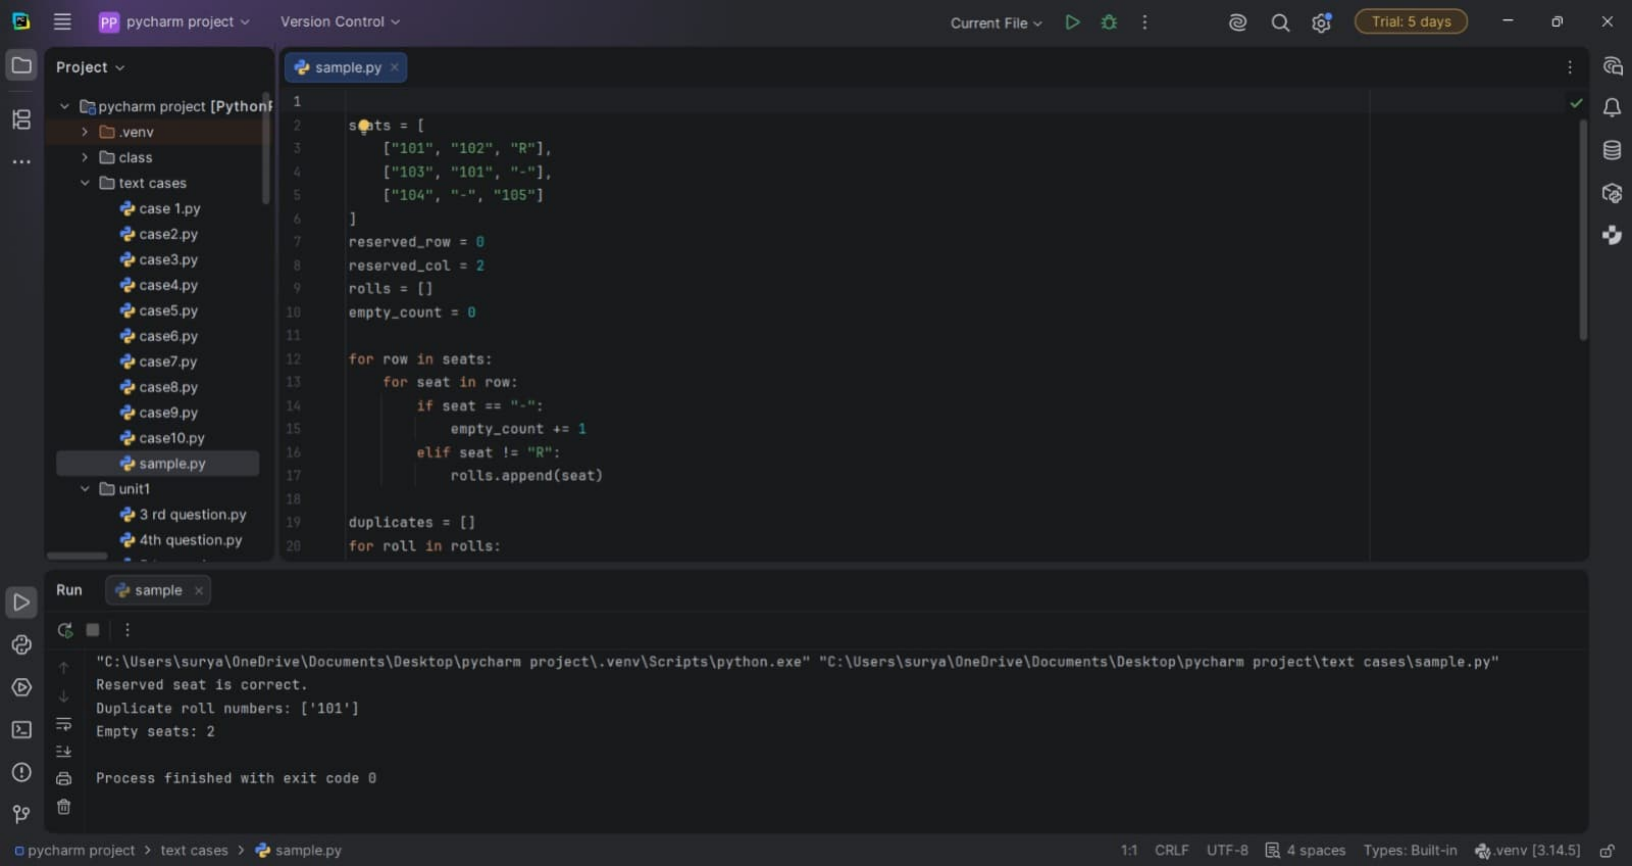

pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
answer_key = "ABCA"
answers = ["ABCA", "ABBA", "CBCA", "A-CA"]
student_count = len(answers)
correct_counts = []
for q in range(len(answer_key)):
correct = 0
for answer in answers:
if q < len(answer) and answer[q].upper() == answer_key[q]:
correct += 1
correct_counts.append(correct)
percentage = correct / student_count * 100
difficulty = "Difficult" if percentage < 50 else "Acceptable"
print("Question", q + 1, "- correct:", correct,
"success:", round(percentage, 1), "% -", difficulty)
hardest_index = correct_counts.index(min(correct_counts))
print("Most frequently missed question:", hardest_index + 1)
Run
sample
Question 1 - correct: 3 success: 75.0 % - Acceptable
Question 2 - correct: 3 success: 75.0 % - Acceptable
Question 3 - correct: 3 success: 75.0 % - Acceptable
Question 4 - correct: 4 success: 100.0 % - Acceptable
Most frequently missed question: 1
Process finished with exit code 0
pycharm project
text cases
sample.py
1:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]

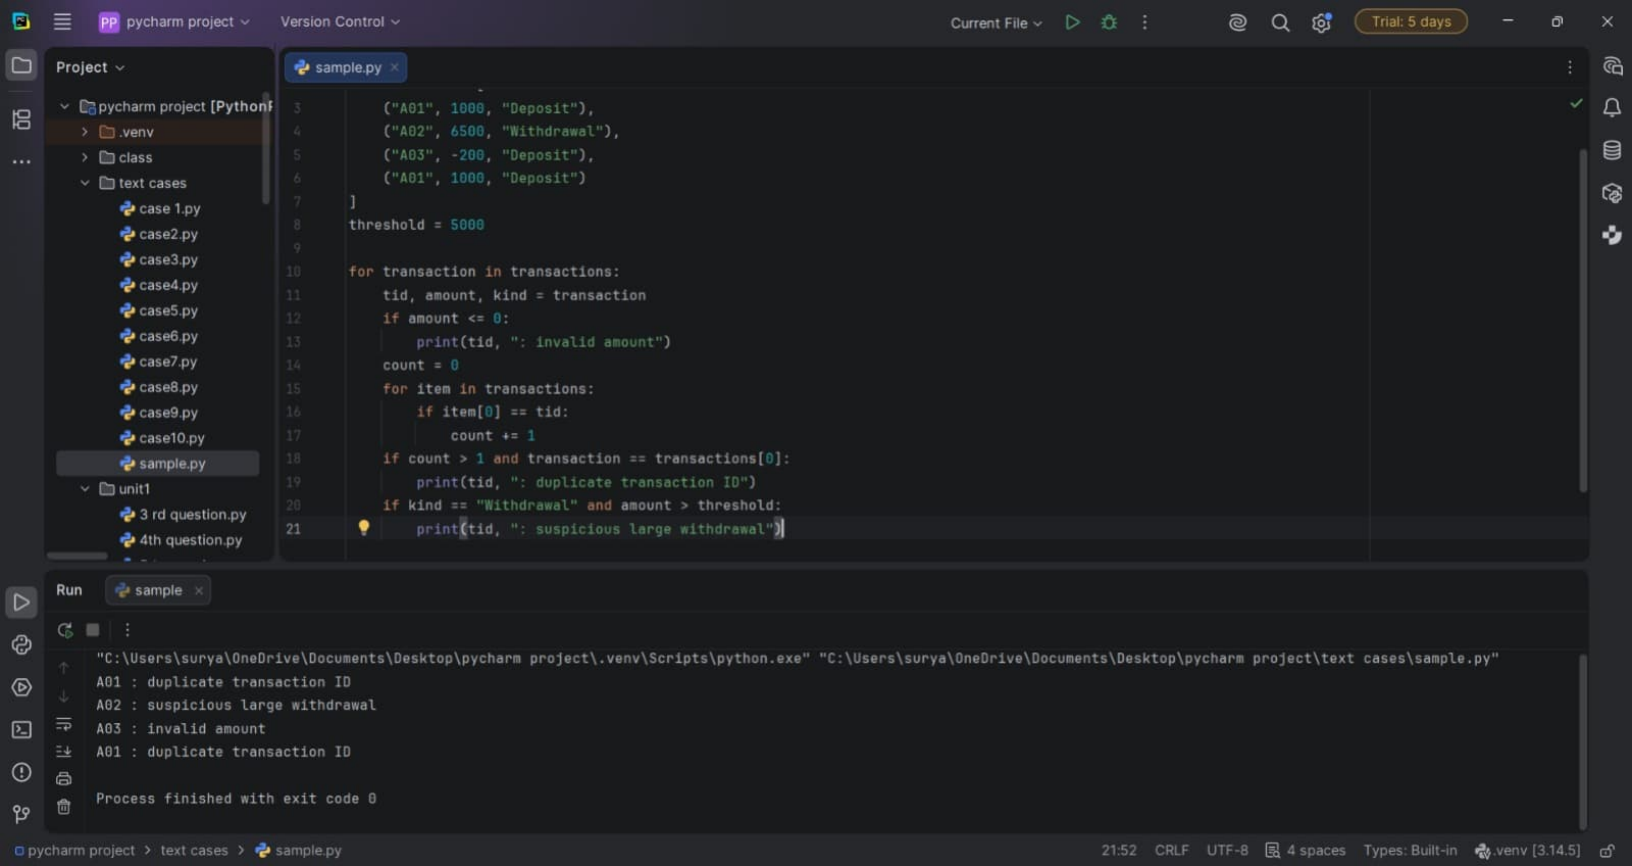

pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
count = 1
for i in range(1, len(text)):
if text[i] == text[i - 1]:
count += 1
else:
encoded += text[i - 1] + str(count)
count = 1
encoded += text[-1] + str(count)
print("Original:", text)
print("Encoded:", encoded)
print("Original length:", len(text))
print("Encoded length:", len(encoded))
if len(encoded) < len(text):
print("Use encoded text:", encoded)
else:
print("Compression is not beneficial; keep original.")
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Original: aaabbccccd
Encoded: a3b2c4d1
Original length: 10
Encoded length: 8
Use encoded text: a3b2c4d1
Process finished with exit code 0
pycharm project > text cases > sample.py
24:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]

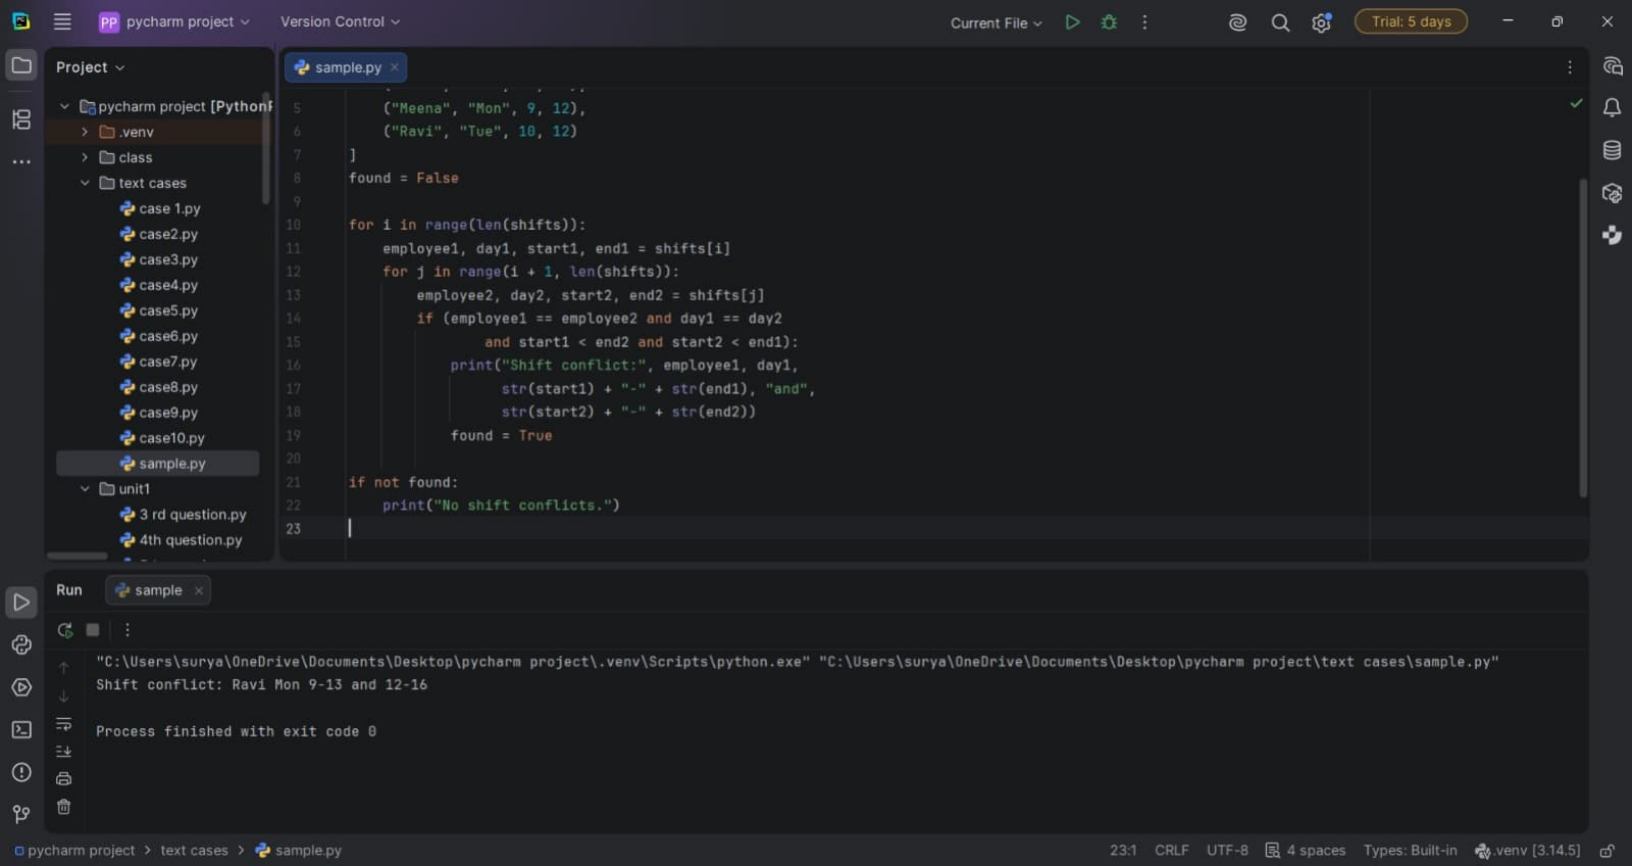

pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
text = "aaabbccccd"
encoded = ""
if text != "":
count = 1
for i in range(1, len(text)):
if text[i] == text[i - 1]:
count += 1
else:
encoded += text[i - 1] + str(count)
count = 1
encoded += text[-1] + str(count)
print("Original:", text)
print("Encoded:", encoded)
print("Original length:", len(text))
print("Encoded length:", len(encoded))
if len(encoded) < len(text):
Run
sample
Original: aaabbccccd
Encoded: a3b2c4d1
Original length: 10
Encoded length: 8
Use encoded text: a3b2c4d1
Process finished with exit code 0
pycharm project
text cases
sample.py
1:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]


pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
if name == "":
errors.append("missing name")
if marks < 0 or marks > 100:
errors.append("marks out of range")
if attendance < 0 or attendance > 100:
errors.append("attendance out of range")
count = 0
for item in records:
if item[0] == roll and roll != "":
count += 1
if count > 1:
errors.append("duplicate roll number")
if errors:
print(name if name else "[no name]", ":", ", ".join(errors))
else:
print(name, ": Valid record")
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Asha : duplicate roll number
Bala : marks out of range
Charan : attendance out of range, duplicate roll number
Divya : missing roll number
Process finished with exit code 0
pycharm project > text cases > sample.py
33:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]


pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
("T101", 1200),
("T104", 7200)
]
threshold = 5000
suspicious = []
for transaction in transactions:
transaction_id, amount = transaction
count = 0
for item in transactions:
if item[0] == transaction_id:
count += 1
if (count > 1 or amount > threshold) and transaction not in suspicious:
suspicious.append(transaction)
print("Suspicious transactions:")
for transaction_id, amount in suspicious:
print(transaction_id, "- Rs.", amount)
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Suspicious transactions:
T101 - Rs. 1200
T102 - Rs. 6500
T104 - Rs. 7200
Process finished with exit code 0
pycharm project > text cases > sample.py
24:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]


pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
seats = [
["101", "102", "R"],
["103", "101", "-"],
["104", "-", "105"]
]
reserved_row = 0
reserved_col = 2
rolls = []
empty_count = 0
for row in seats:
for seat in row:
if seat == "-":
empty_count += 1
elif seat != "R":
rolls.append(seat)
duplicates = []
for roll in rolls:
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Reserved seat is correct.
Duplicate roll numbers: ['101']
Empty seats: 2
Process finished with exit code 0
pycharm project
text cases
sample.py
1:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]


pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
("A01", 1000, "Deposit"),
("A02", 6500, "Withdrawal"),
("A03", -200, "Deposit"),
("A01", 1000, "Deposit")
]
threshold = 5000
for transaction in transactions:
tid, amount, kind = transaction
if amount <= 0:
print(tid, ": invalid amount")
count = 0
for item in transactions:
if item[0] == tid:
count += 1
if count > 1 and transaction == transactions[0]:
print(tid, ": duplicate transaction ID")
if kind == "Withdrawal" and amount > threshold:
print(tid, ": suspicious large withdrawal")
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
A01 : duplicate transaction ID
A02 : suspicious large withdrawal
A03 : invalid amount
A01 : duplicate transaction ID
Process finished with exit code 0
pycharm project > text cases > sample.py
21:52
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]


pycharm project
Version Control
Current File
Trial: 5 days
Project
pycharm project [Python
.venv
class
text cases
case 1.py
case2.py
case3.py
case4.py
case5.py
case6.py
case7.py
case8.py
case9.py
case10.py
sample.py
unit1
3 rd question.py
4th question.py
sample.py
("Meena", "Mon", 9, 12),
("Ravi", "Tue", 10, 12)
]
found = False
for i in range(len(shifts)):
employee1, day1, start1, end1 = shifts[i]
for j in range(i + 1, len(shifts)):
employee2, day2, start2, end2 = shifts[j]
if (employee1 == employee2 and day1 == day2
and start1 < end2 and start2 < end1):
print("Shift conflict:", employee1, day1,
str(start1) + "-" + str(end1), "and",
str(start2) + "-" + str(end2))
found = True
if not found:
print("No shift conflicts.")
Run
sample
"C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\.venv\Scripts\python.exe" "C:\Users\surya\OneDrive\Documents\Desktop\pycharm project\text cases\sample.py"
Shift conflict: Ravi Mon 9-13 and 12-16
Process finished with exit code 0
pycharm project
text cases
sample.py
23:1
CRLF
UTF-8
4 spaces
Types: Built-in
.venv [3.14.5]