



南京工程学院
NANJING INSTITUTE OF TECHNOLOGY



OULUN YLIOPISTO

Programming #4, 2026

Accordion with Bootstrap

What's the return policy How do I contact you? Where's my order?	What's the return policy 30-days full refund. No questions asked. How do I contact you? Where's my order?	What's the return policy How do I contact you? You can contact us by email: example@example.com Where's my order?
--	---	--

Accordion in its normal state


When one of the accordion items is revealed

Another accordion item revealed, and the rest are closed

Accordion with Bootstrap

- An Accordion is a row of "buttons" that reveals some information when clicked, and hides it when clicked again
 - These are always created as a pair: **button - information**
- A typical accordion in Bootstrap will always contain the following components inside the parent class of **accordion**
 - An **accordion-item** class: Every entry pair of **button - information** is a single accordion item
 - An **accordion-header** class inside the **accordion-item** class: This is the heading that contains the accordion button
 - An **accordion-button** inside the **accordion-header** class: This button controls the hiding and revealing of the information, which is stored in the accordion body
 - An **accordion-collapse** class inside the **accordion-item** class: A container that holds the accordion body. This is the part that collapses and shows when the accordion button is clicked
 - An **accordion-body** class inside the **accordion-collapse** class: Contains the information that is revealed upon clicking the accordion button

A single Accordion Item

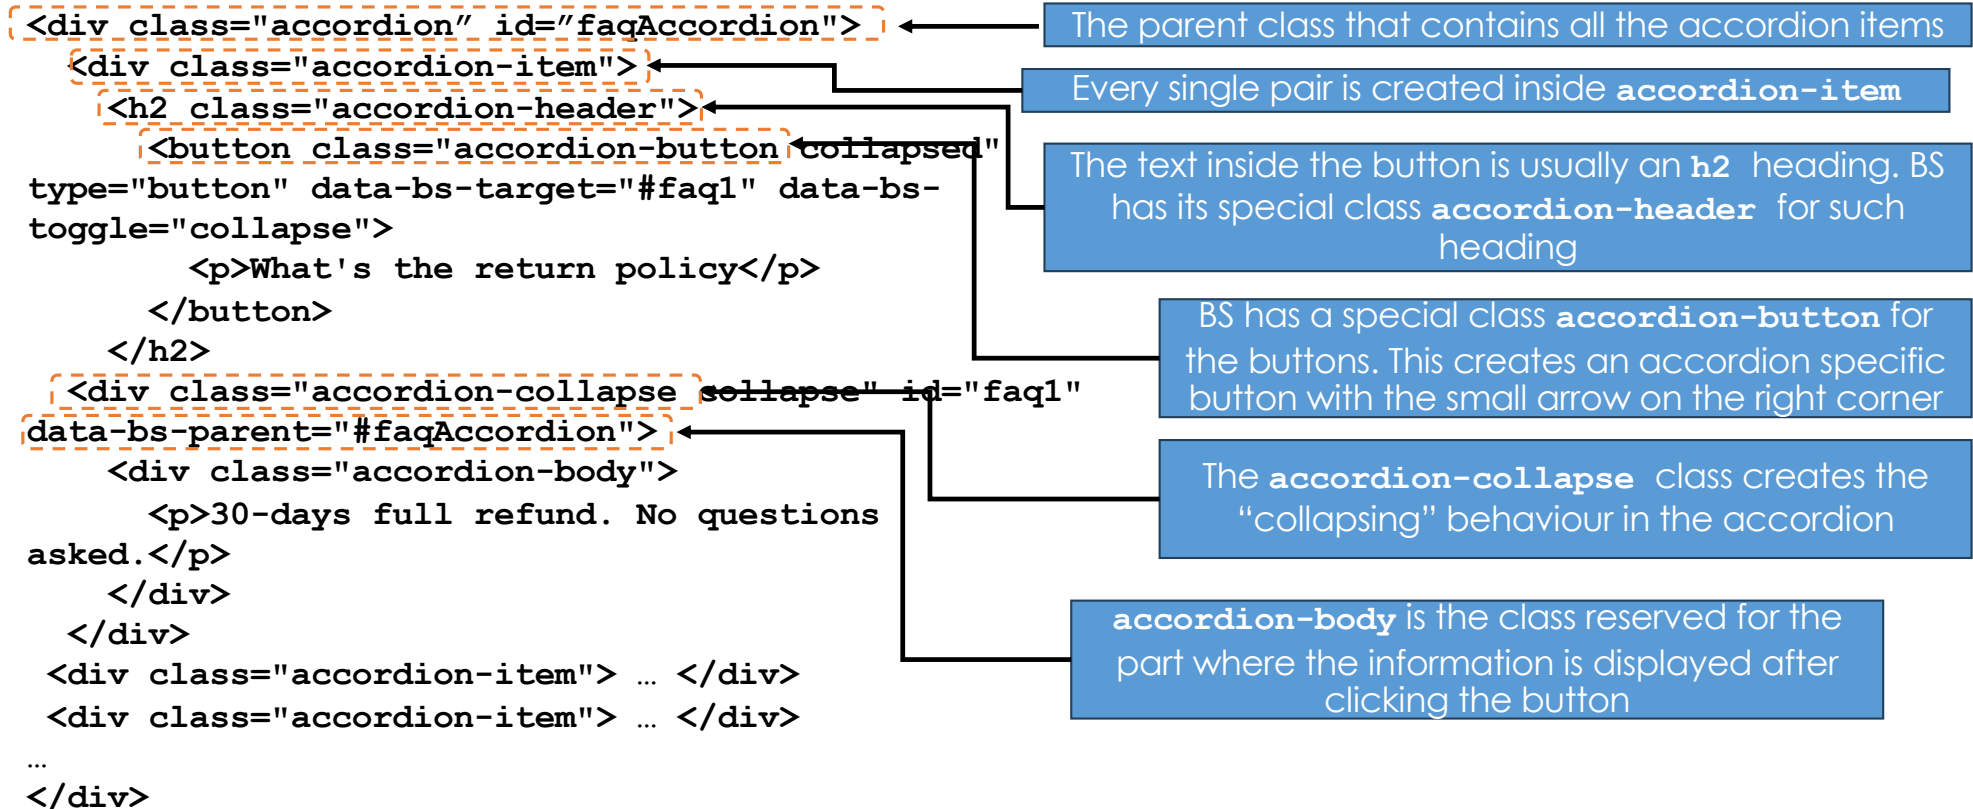

Accordion button

```
<button class="accordion-button collapsed"
        type="button"
        data-bs-target="#faq1"
        data-bs-toggle="collapse">
```

...

Class	Explanation
collapsed	Tells BS that this button should stay closed when the page loads. BS has a special style for “collapsed” buttons
data-bs-target	Links the button to the accordion-header with the matching ID
data-bs-toggle	Used to change the state of the button from “collapsed” to not collapsed when clicked, and vice versa

Accordion collapsible area

```
<div class="accordion-collapse collapse"
      id="faq1"
      data-bs-parent="#faqAccordion">
```

...

Class	Explanation
accordion-collapse	BS has a specific style for the part that shows the information after the accordion button is clicked.
collapse	Indicates that this area is “collapsible” and meaning it can show and hide content when the accordion button is clicked.
data-bs-parent	Links the item to the main accordion container. This makes sure that only one accordion item is open at a time.

Hiding/Showing accordion item

```
<div class="accordion-item">
  <h2 class="accordion-header">
    <button class="accordion-button collapsed"
type="button" data-bs-target="#faq1" data-bs-
toggle="collapse">
      <p>What's the return policy</p>
    </button>
  </h2>
  <div class="accordion-collapse collapse"
id="faq1" data-bs-parent="#faqAccordion">
    <div class="accordion-body">
      <p>30-days full refund. No questions
asked.</p>
    </div>
  </div>
</div>
```

When the page loads, this accordion item will be in “closed state” because of the **collapsed** class and the missing **show** class

```
<div class="accordion-item">
  <h2 class="accordion-header">
    <button class="accordion-button" type="button"
data-bs-target="#faq1" data-bs-toggle="collapse">
      <p>What's the return policy</p>
    </button>
  </h2>
  <div class="accordion-collapse collapse show"
id="faq1" data-bs-parent="#faqAccordion">
    <div class="accordion-body">
      <p>30-days full refund. No questions asked.</p>
    </div>
  </div>
</div>
```

When the page loads, this accordion item will be in “opened state” because of the missing **collapsed** class and the present **show** class

End