DASH Azure VM Access Guide

Input Guide

This section outlines the input parameters required for provisioning Azure Virtual Machines using the DASH Portal. Each parameter includes a description, available options, usage guidance, and notes on valid combinations when applicable.

Input Parameter	Description	Values Provided	Value Guidance	Valid Combinations
Service_name	The name of the service to install on the VM	docker, kubernetes, llavallm, minio, nfs, nginx, postgres, mongodb, none	Choose based on the role the VM will serve (e.g., Docker for container hosts, Postgres for DB)	N/A
region	Azure region where the VM will be deployed	East US, Central US, West US 2, Central India, UK South, Canada Central, East Asia, South Central US	Select the region closest to end users or related services for latency optimization	N/A
os_template	The base image template used for the VM OS	ubuntu1804, ubuntu2004, ubuntu2204, ubuntu2404, windows2019dc, windows2019dc-gensecond, windows2022dc, rhel-7-lvm, rhel-8-lvm-gen2,	Choose an OS based on your workload	N/A
size	Azure VM SKU/size to allocate	e.g., Standard_DS1_v2, Standard_DS2_v3, Standard_D2as_v4 ,Standard_B2s	Choose based on workload requirements (CPU, RAM, disk throughput)	N/A
environment	The DASH environment where the resource will reside	dev, prod	Use dev for testing/staging and prod for live workloads	N/A

name	A unique name to identify the VM	Any alphanumeric string with dashes	Use clear naming conventions for easier resource management	N/A
owner	The team or individual responsible for provisioning, managing, and maintaining the resource.	Specify the team name or individual responsible for maintaining the VM.	Provide correct team/individual name.	N/A
application	Associated service or application name for the resource.	Enter the associated service name linked to the VM.	Provide a service name linked to the VM.	N/A
project	Project or initiative name linked to the resource.	Indicate the project or initiative name related to the resource.	Provide the project name related to the resource.	N/A
deployment	The target environment (e.g., development, testing, prod) where the resource will be provisioned.	Define the deployment environment name (e.g., dev, test, prod)	Choose the environment where the VM has to be deployed.	N/A
user_script_commands	Commands to attach to a VM at the time of provisioning.	Enter command lets you skip manual setup after VM creation.	Enter the commands to run on the VM during provisioning.	N/A

Services expire after 30 days. Create this service now, or schedule for a later date?	VM will be deleted 30 days after creation, or it can be scheduled to be created at a later date.	Create Now (or) Schedule for Later	Choose based on VM requirements.	N/A

Sample Input Selection:

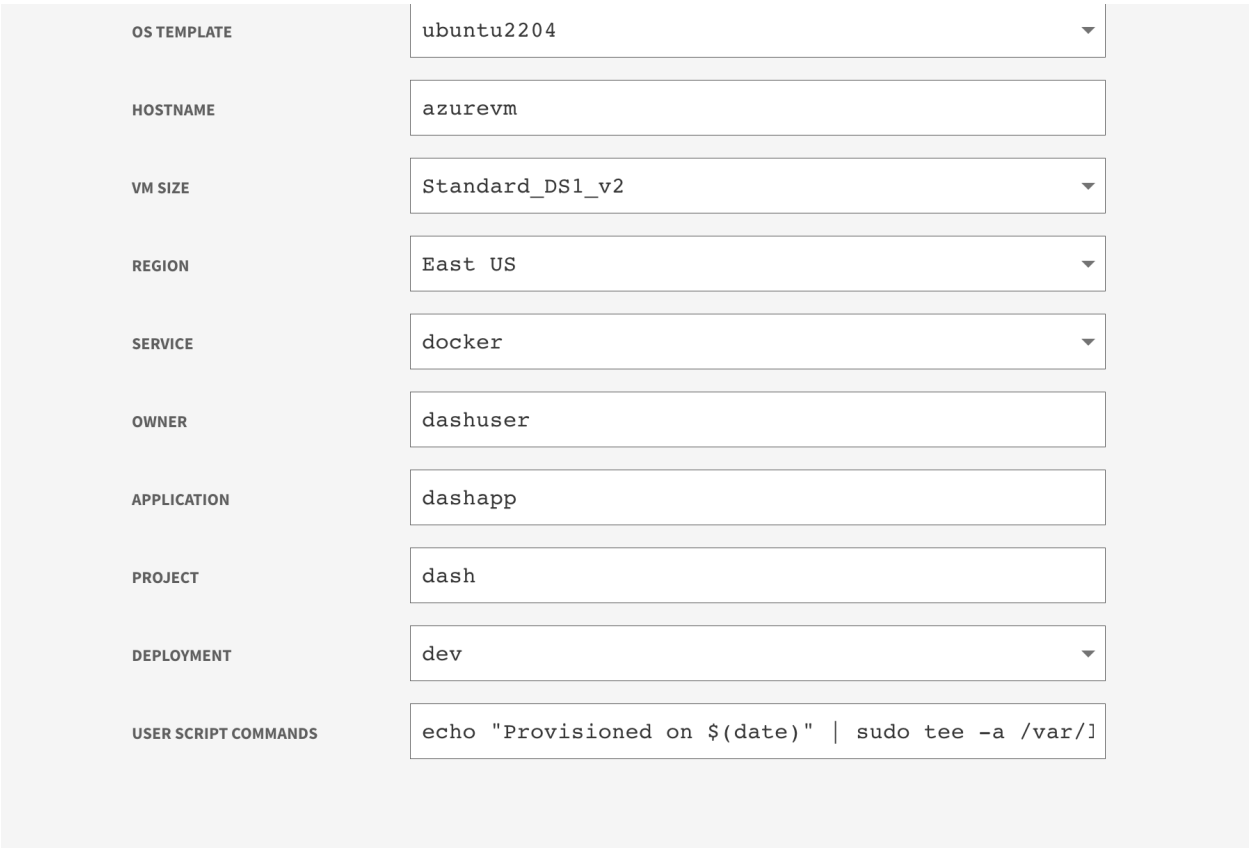

Services expire after 30 days. Create this service now, or schedule for a later date?

Create Now Schedule for Later

Output Guide

This section outlines the output values generated after Azure Virtual Machine provisioning through the DASH Portal. These outputs can be used to access, manage, and connect to your virtual machine.

Outputs	Description	Example Value
vm_name	Name of the virtual machine on the cloud system	dash-check-nIZ5
computer_name	Name of the host	dash-check-nIZ5
ssh_username	Username for the server to log in.	dash
ssh_password	Password to SSH into the host	0l<alU64W
private_ip_address	Private IP Address of the VM	10.0.0.4
public_ip_address	Public IP Address of the VM	40.87.62.174

What You Can Do with These Outputs

Use the following commands to connect to and manage your Azure Virtual Machine. Replace placeholder values like **<public_ip_address>, <ssh_username>**, etc., with the actual outputs provided during provisioning.

1. SSH into the Virtual Machine (Linux-based OS)
Command:
ssh <ssh_username>@<public_ip_address>

Example:
ssh azureuser@20.50.12.101

2. RDP into the Virtual Machine (Windows-based OS)
1. Open Remote Desktop Connection (mstsc on Windows).
2. Enter the Public IP Address (e.g., 20.50.12.101).
3. Use the username (ssh_username) and password (ssh_password) from the outputs.