DASH GCP Cloud Run Access Guide

Input Guide

This section outlines the input parameters required for provisioning GCP Cloud Run using the DASH Portal. Each parameter includes a description, available options, usage guidance, and notes on valid combinations when applicable.

Input Parameter	Description	Values Provided	Value Guidance	Valid Combinations
container_name	Name of the container	Any alphanumeric string.	Use clear naming conventions for effective container management.	N/A
region	GCP region where the container will be deployed	us-central1, us-west1, us-south1, us-east1, asia-south1, europe-west1, europe-north1, me-central1, australia-southeast1, northamerica-northeast1	Choose the region that is geographically closest to your end users or integrated services to minimize latency and improve performance.	N/A
instances	Maximum number of instances required to scale the Cloud Run service	1, 2, 3, 4	Specify the maximum number of instances to handle traffic while controlling costs and resource usage.	N/A
memory	Memory allocation for the container (Mi/Gi).	256Mi, 512Mi, 1Gi, 2Gi, 3Gi, 4Gi	Choose the amount of memory to allocate to the container(Mi/Gi) to ensure reliable performance.	N/A

cpu	CPU allocation for the container	1, 2, 3, 4	Choose the amount of CPU to allocate to the container based on workload requirements.	N/A
port	Port that the containerized application will listen on.	Port number of the container	Define the port number the application listens on.	N/A
image	Public image to be deployed in Cloud Run. This image should be stored in a Docker registry (e.g., Google Container Registry or Docker Hub)	Container image	Use `repoName/imageName:tag` for Docker Hub images, a full URI for other registries, and provide credentials for private registries.	N/A
owner	The team or individual responsible for provisioning, managing, and maintaining the resource.	Specify the team name or individual responsible for maintaining the Cloud Run service.	Provide correct team/individual name.	N/A
application	Name of the application running inside the container.	Enter the application name running as a container.	Provide the application name.	N/A
project	Project to which Cloud Run service is associated.	Indicate the project or initiative name.	Provide the project name.	N/A
deployment	The target environment (e.g., development, testing, prod) where the Cloud Run will be	Define the deployment environment name (e.g., dev, test, prod)	Choose the environment where the Cloud Run service has to be deployed.	N/A

	provisioned.			
Services expire after 30 days. Create this service now, or schedule for a later date?	Cloud Run service will be deleted 30 days after creation, or it can be scheduled to be created at a later date.	Create Now (or) Schedule for Later	Choose based on Cloud Run service requirements.	N/A

Sample Input Selection:

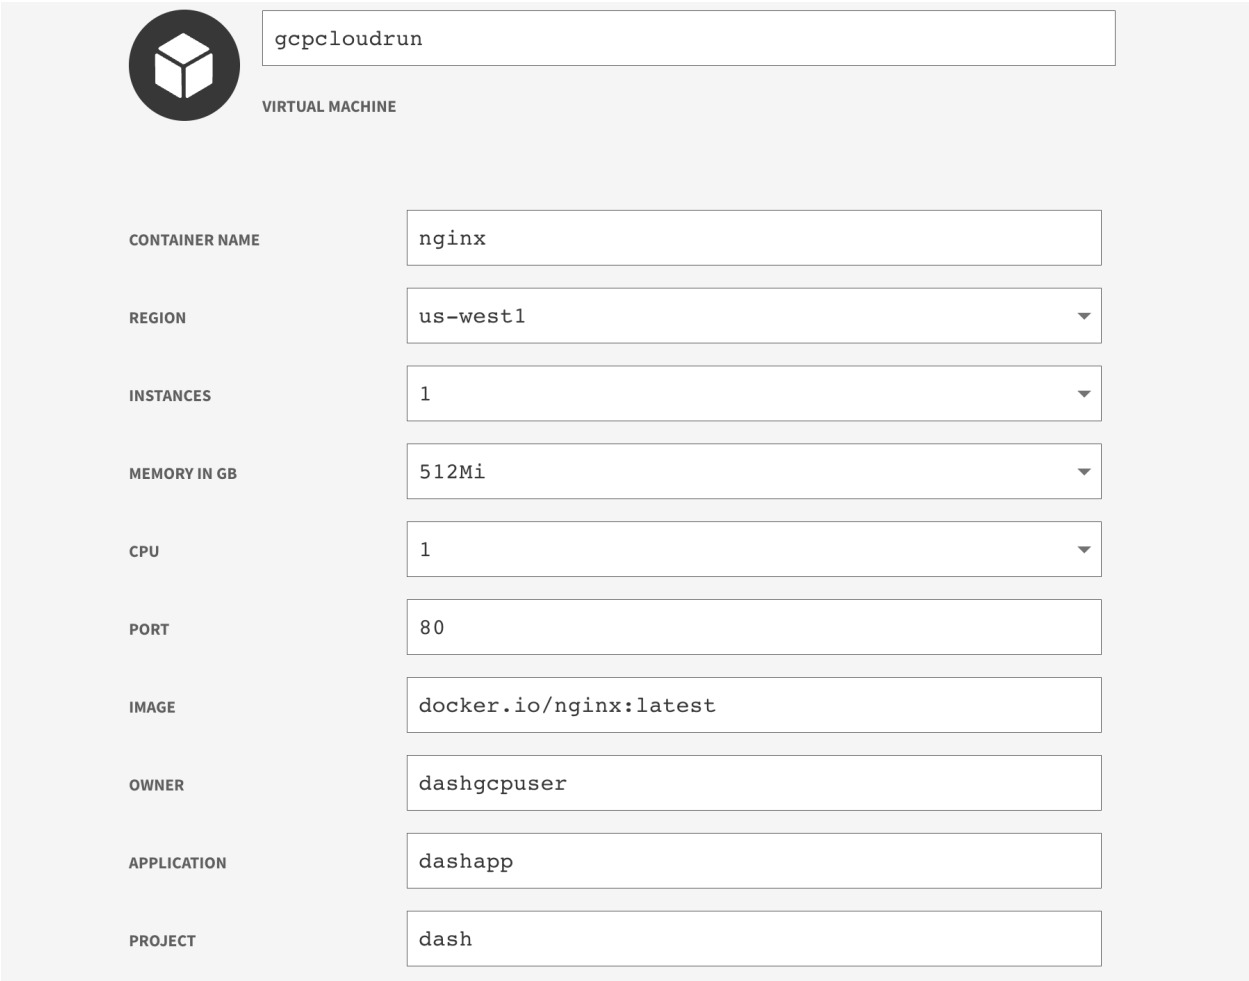

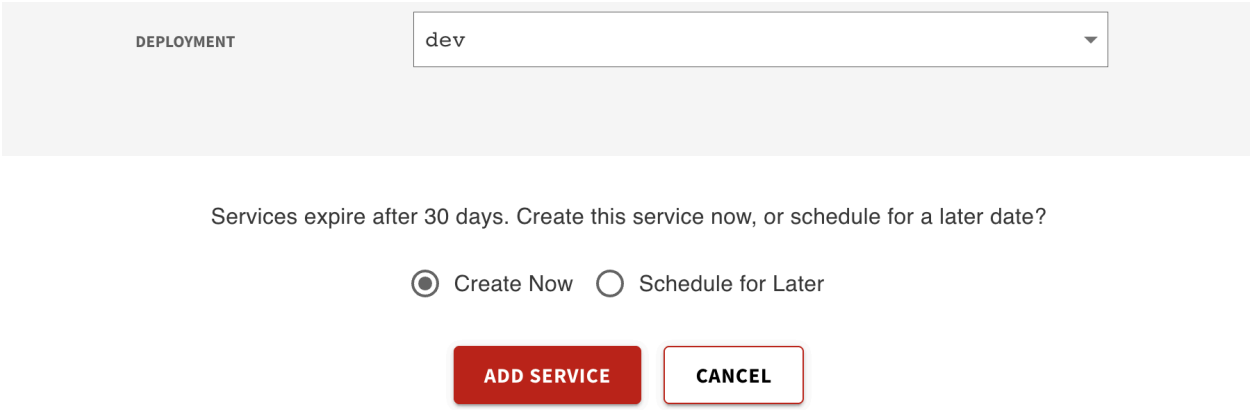

Output Guide

This section outlines the output values generated after GCP Cloud Run provisioning through the DASH Portal. These outputs can be used to access the containerized application.

Output	Description	Example Value
cloud_run_service_url	Https URL to access the application from the browser.	https://dash-nginx-9z1s-yquf2ejseq-uw.a.run.app