DASH vSphere VM Access Guide

Input Guide

This section outlines the input parameters required for provisioning vSphere Virtual Machines using the DASH Portal. Each parameter includes a description, available options, usage guidance, and notes on valid combinations when applicable.

Input Parameter	Description	Values Provided	Value Guidance	Valid Combinations
os_template	The base operating system template or image used to create the virtual machine.	dash_ubuntu_2204_template, dash_ubuntu_2204_desktop_template, dash_ubuntu_2004_template, windows-server-2019-datacenter-core	Choose OS based on workload requirements.	N/A
deployment enclave	The physical hardware vendor where the VM is deployed.	cisco01, cisco02, hpe01, hpe02	Cisco and HPE are the hardware vendors; choose the appropriate one based on your deployment requirements.	N/A
hostname	A unique name for the VM within the cluster	Use clear naming conventions for resource management.	Use clear naming conventions for easier resource management.	N/A
cpu_count	The number of virtual CPUs (vCPUs) to allocate to the VM.	**CPU Count:** 1, 2, 3, 4, 5, 6, 7, 8	Choosing the right vCPU count depends on the application workload, lightweight services may need 1 - 2	N/A

			vCPUs, while compute-intensive applications may need more.	
allocated memory(GBs)	The amount of memory to allocate to the VM.	**Allocated Memory:** 1GB, 2GB, 3GB, 4GB, 5GB, 6GB, 7GB, 8GB	Sufficient memory should be allocated based on workload requirements.	N/A
volume size(GBs)	The size of the virtual disk required for the VM.	**Volume Size:** 20, 30, 40, 50, 60, 80, 100	Storage should be sized according to workload needs.	N/A
Services expire after 30 days. Create this service now, or schedule for a later date?	VM will be deleted 30 days after creation, or it can be scheduled to be created at a later date.	Create Now (or) Schedule for Later	Choose based on VM requirements.	N/A

Sample Input Selection:

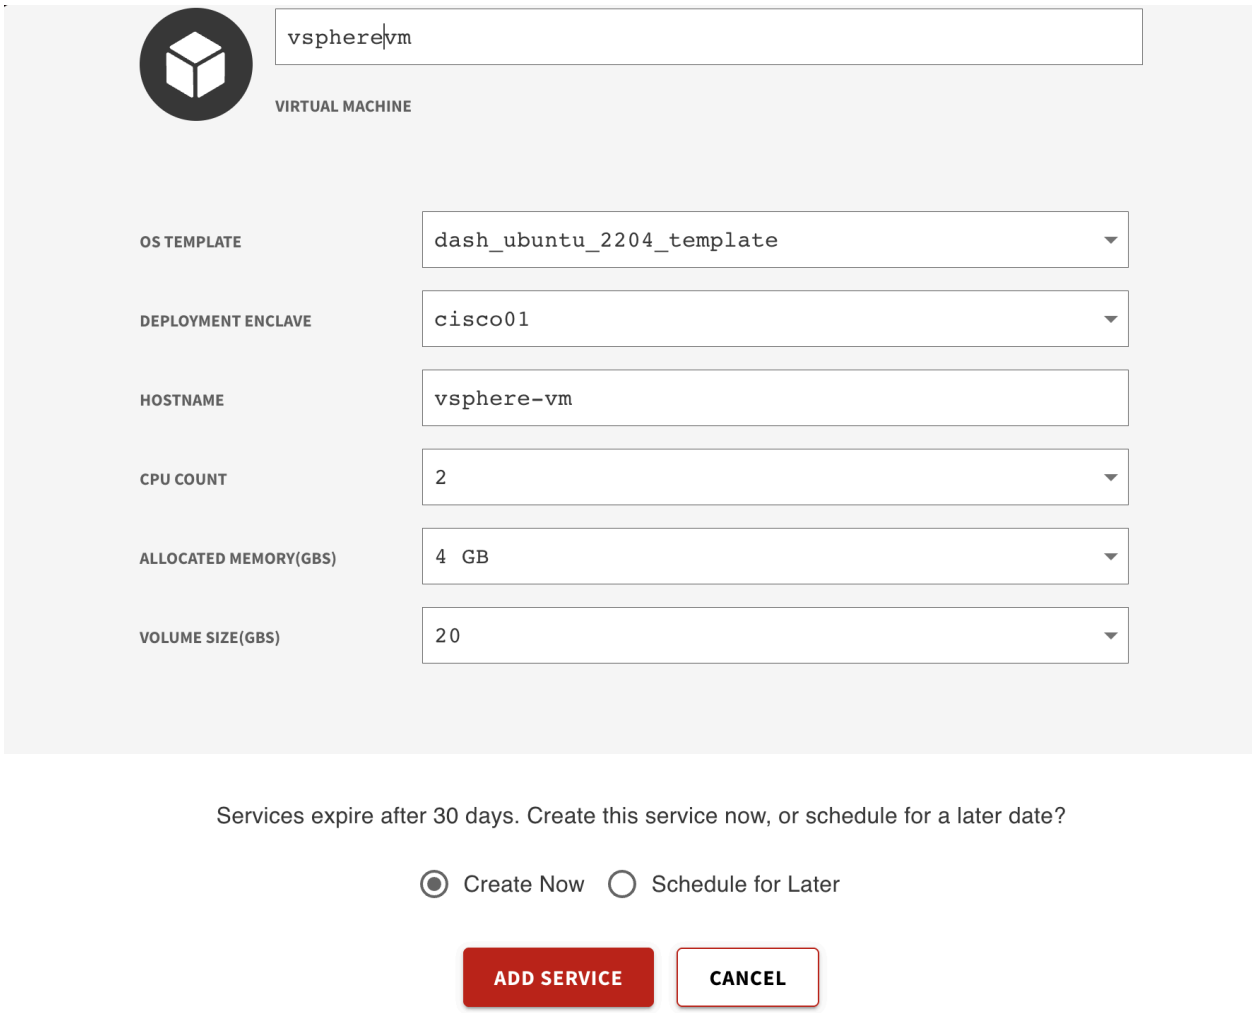

Output Guide

This section outlines the output values generated after vSphere Virtual Machine provisioning through the DASH Portal. These outputs can be used to access, manage, and connect to your virtual machine.

Outputs	Description	Example Value
enclave	Dash enclave where the resource lives.	prj-8WbNLes4W88TJWEL
ip_address	Public IP address of the VM	10.89.154.196

ssh_password	Password to SSH into the host	2l>alH81S
ssh_username	Username for the server to log in.	dash
vm_name	Name of the virtual machine created.	oqamj4sr-WoYB

What you can do with these outputs:

Use the following commands to connect to and manage your vSphere Virtual Machine. Replace placeholder values like **<public_ip_address>, <ssh_username>**, etc., with the actual outputs provided during provisioning.

1. SSH into the Virtual Machine (Linux-based OS)
Command:
ssh <ssh_username>@<public_ip_address>

Example:
ssh dash@10.89.154.196

2. RDP into the Virtual Machine (Windows-based OS)
1. Open Remote Desktop Connection (mstsc on Windows).
2. Enter the Public IP Address (e.g., 10.89.154.196).
3. Use the username (ssh_username) and password (ssh_password) from the outputs.