

Lab 1 - Part B

The following is your first chunk to start with. Remember, you can add chunks using the menu above (Insert -> R) or using the keyboard shortcut Ctrl+Alt+I. A good practice is to use different code chunks to answer different questions. You can delete this comment if you like.

Other useful keyboard shortcuts include Alt- for the assignment operator, and Ctrl+Shift+M for the pipe operator. You can delete these reminders if you don't want them in your report.

```
#setwd("C:/...")

library("tidyverse")

## Warning: package 'tidyverse' was built under R version 3.6.2

## -- Attaching packages -----
-----
tidyverse 1.3.0 --

## v ggplot2 3.2.1      v purrr  0.3.3
## v tibble  2.1.3      v dplyr  0.8.3
## v tidyr   1.0.0      v stringr 1.4.0
## v readr   1.3.1      v forcats 0.4.0

## Warning: package 'ggplot2' was built under R version 3.6.1
## Warning: package 'tibble' was built under R version 3.6.2
## Warning: package 'tidyr' was built under R version 3.6.2
## Warning: package 'readr' was built under R version 3.6.2
## Warning: package 'purrr' was built under R version 3.6.2
## Warning: package 'dplyr' was built under R version 3.6.1
## Warning: package 'forcats' was built under R version 3.6.2

## -- Conflicts -----
-----
tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()

library("tidymodels")

## Warning: package 'tidymodels' was built under R version 3.6.2
```

```

## -- Attaching packages -----
tidymodels 0.0.3 --
## v broom      0.5.4      v recipes  0.1.9
## v dials      0.0.4      v rsample  0.0.5
## v infer      0.5.1      v yardstick 0.0.4
## v parsnip    0.0.5

## Warning: package 'dials' was built under R version 3.6.2
## Warning: package 'infer' was built under R version 3.6.2
## Warning: package 'parsnip' was built under R version 3.6.2
## Warning: package 'recipes' was built under R version 3.6.2
## Warning: package 'rsample' was built under R version 3.6.2
## Warning: package 'yardstick' was built under R version 3.6.2

## -- Conflicts -----
tidymodels_conflicts() --
## x scales::discard() masks purrr::discard()
## x dplyr::filter()    masks stats::filter()
## x recipes::fixed()  masks stringr::fixed()
## x dplyr::lag()       masks stats::lag()
## x dials::margin()   masks ggplot2::margin()
## x yardstick::spec() masks readr::spec()
## x recipes::step()   masks stats::step()

library("plotly")

## Warning: package 'plotly' was built under R version 3.6.2

##
## Attaching package: 'plotly'

## The following object is masked from 'package:ggplot2':
##
##   last_plot

## The following object is masked from 'package:stats':
##
##   filter

## The following object is masked from 'package:graphics':
##
##   layout

library("skimr")

```

```
## Warning: package 'skimr' was built under R version 3.6.2
```

Load the Titanic dataset

```
dfTit <-  
  read_csv("titanic.csv") %>%  
  rename_all(tolower)  
  
## Parsed with column specification:  
## cols(  
##   PassengerId = col_double(),  
##   Survived = col_double(),  
##   Pclass = col_double(),  
##   Name = col_character(),  
##   Sex = col_character(),  
##   Age = col_double(),  
##   SibSp = col_double(),  
##   Parch = col_double(),  
##   Ticket = col_character(),  
##   Fare = col_double(),  
##   Cabin = col_character(),  
##   Embarked = col_character()  
## )
```

What was in the titanic dataset?

Variable	Definition	Key
survived	Survival	0 = No, 1 = Yes
class	Ticket class	1 = 1st, 2 = 2nd, 3 = 3rd
name	Name	
sex	Gender	
age	Age in years	
sibsp	# of siblings / spouses aboard the Titanic	
parch	# of parents / children aboard the Titanic	
ticket	Ticket number	
fare	Passenger fare	
cabin	Cabin number	
embarked	Port of Embarkation C = Cherbourg, Q = Queenstown, S = Southampton	

Practice the Tidyverse functions

Part 1: Arrange

Q&A: Sort the Titanic dataset by age from high to low.

```
dfTit %>%  
  arrange(desc(age))  
  
## # A tibble: 891 x 12  
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare  
cabin  
##           <dbl>     <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>  
<chr>  
## 1         631         1     1 Bark~ male   80      0      0 27042   30  
A23  
## 2         852         0     3 Sven~ male   74      0      0 347060  7.78  
<NA>  
## 3          97         0     1 Gold~ male   71      0      0 PC 17~ 34.7  
A5  
## 4         494         0     1 Arta~ male   71      0      0 PC 17~ 49.5  
<NA>  
## 5         117         0     3 Conn~ male  70.5      0      0 370369  7.75  
<NA>  
## 6         673         0     2 Mitc~ male   70      0      0 C.A. ~ 10.5  
<NA>  
## 7         746         0     1 Cros~ male   70      1      1 WE/P ~ 71  
B22  
## 8          34         0     2 Whea~ male   66      0      0 C.A. ~ 10.5  
<NA>  
## 9          55         0     1 Ostb~ male   65      0      1 113509 62.0  
B30  
## 10        281         0     3 Duan~ male   65      0      0 336439  7.75  
<NA>  
## # ... with 881 more rows, and 1 more variable: embarked <chr>
```

Q1: You're looking for a passenger with a last name "Zimmerman." Sort the data in a way to spot her visually in the table.

```
dfTit %>%  
  arrange(desc(name))  
  
## # A tibble: 891 x 12  
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare  
cabin  
##           <dbl>     <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>  
<chr>  
## 1         423         0     3 "Zim~ male   29      0      0 315082  7.88  
<NA>  
## 2         241         0     3 "Zab~ fema~  NA      1      0 2665   14.5  
<NA>
```

```
## 3      112      0      3 "Zab~ fema~ 14.5      1      0 2665      14.5
<NA>
## 4      200      0      2 "Yro~ fema~ 24      0      0 248747      13
<NA>
## 5      496      0      3 "You~ male  NA      0      0 2627      14.5
<NA>
## 6      355      0      3 "You~ male  NA      0      0 2647      7.22
<NA>
## 7      204      0      3 "You~ male  45.5      0      0 2628      7.22
<NA>
## 8      326      1      1 "You~ fema~ 36      0      0 PC 17~ 136.
C32
## 9      831      1      3 "Yas~ fema~ 15      1      0 2659      14.5
<NA>
## 10     621      0      3 "Yas~ male  27      1      0 2659      14.5
<NA>
## # ... with 881 more rows, and 1 more variable: embarked <chr>
```

Q2: You're looking for the infant twins who boarded the Titanic together. Sort the data in a way to spot them visually in the table.

```
dfTit %>%
  arrange(age) %>% filter(sibsp == 2)

## # A tibble: 28 x 12
##   passengerid survived pclass name    sex    age sibsp parch ticket  fare
cabin
##   <dbl>      <dbl>  <dbl> <chr>  <chr>  <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1      470      1      3 "Bac~ fema~ 0.75      2      1 2666      19.3
<NA>
## 2      645      1      3 "Bac~ fema~ 0.75      2      1 2666      19.3
<NA>
## 3      184      1      2 "Bec~ male  1      2      1 230136      39
F4
## 4      619      1      2 "Bec~ fema~ 4      2      1 230136      39
F4
## 5      449      1      3 "Bac~ fema~ 5      2      1 2666      19.3
<NA>
## 6      148      0      3 "For~ fema~ 9      2      2 W./C.~ 34.4
<NA>
## 7      334      0      3 "Van~ male  16      2      0 345764      18
<NA>
## 8      39      0      3 "Van~ fema~ 18      2      0 345764      18
<NA>
## 9      312      1      1 "Rye~ fema~ 18      2      2 PC 17~ 262.
B57 ~
## 10     121      0      2 "Hic~ male  21      2      0 S.O.C~ 73.5
<NA>
## # ... with 18 more rows, and 1 more variable: embarked <chr>
```

Part 2: Select

Q&A: Select only the name, age, and survived columns.

```
dfTit %>%
  select(name, age, survived)

## # A tibble: 891 x 3
##   name                                age survived
##   <chr>                             <dbl>     <dbl>
## 1 Braund, Mr. Owen Harris             22         0
## 2 Cumings, Mrs. John Bradley (Florence Briggs Thayer) 38         1
## 3 Heikkinen, Miss. Laina              26         1
## 4 Futrelle, Mrs. Jacques Heath (Lily May Peel)        35         1
## 5 Allen, Mr. William Henry            35         0
## 6 Moran, Mr. James                    NA         0
## 7 McCarthy, Mr. Timothy J             54         0
## 8 Palsson, Master. Gosta Leonard        2         0
## 9 Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)   27         1
## 10 Nasser, Mrs. Nicholas (Adele Achem)              14         1
## # ... with 881 more rows
```

Q1: Select all of the columns except the sex column [Hint: Simply use the negative sign!].

```
dfTit %>%
  select(-sex)

## # A tibble: 891 x 11
##   passengerid survived pclass name    age sibsp parch ticket  fare cabin
##   <dbl>     <dbl>   <dbl> <chr>  <dbl> <dbl> <dbl> <chr>  <dbl> <chr>
## 1         1         0     3 Brau~   22     1     0 A/5 2~  7.25 <NA>
## 2         2         1     1 Cumi~   38     1     0 PC 17~ 71.3  C85
## 3         3         1     3 Heik~   26     0     0 STON/~  7.92 <NA>
## 4         4         1     1 Futr~   35     1     0 113803 53.1  C123
## 5         5         0     3 Alle~   35     0     0 373450  8.05 <NA>
## 6         6         0     3 Mora~   NA     0     0 330877  8.46 <NA>
## 7         7         0     1 McCa~   54     0     0 17463  51.9  E46
## 8         8         0     3 Pals~    2     3     1 349909 21.1  <NA>
## 9         9         1     3 John~   27     0     2 347742 11.1  <NA>
## 10        10         1     2 Nass~   14     1     0 237736 30.1  <NA>
## # ... with 881 more rows, and 1 more variable: embarked <chr>
```

Q2: Keep all of the columns but rearrange them so that class and fare are the first two columns [Hint: There is a shortcut for that!].

```
dfTit %>%
  select(3,10, 1:12)

## # A tibble: 891 x 12
##   pclass  fare passengerid survived name  sex    age sibsp parch ticket
##   <dbl> <dbl>         <dbl>     <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>
##   cabin
```

```

<chr>
## 1      3  7.25      1      0 Brau~ male    22    1    0 A/5 2~
<NA>
## 2      1 71.3      2      1 Cumi~ fema~   38    1    0 PC 17~
C85
## 3      3  7.92      3      1 Heik~ fema~   26    0    0 STON/~
<NA>
## 4      1 53.1      4      1 Futr~ fema~   35    1    0 113803
C123
## 5      3  8.05      5      0 Alle~ male    35    0    0 373450
<NA>
## 6      3  8.46      6      0 Mora~ male    NA    0    0 330877
<NA>
## 7      1 51.9      7      0 McCa~ male    54    0    0 17463
E46
## 8      3 21.1      8      0 Pals~ male     2    3    1 349909
<NA>
## 9      3 11.1      9      1 John~ fema~   27    0    2 347742
<NA>
## 10     2 30.1     10      1 Nass~ fema~   14    1    0 237736
<NA>
## # ... with 881 more rows, and 1 more variable: embarked <chr>

```

Part 3: Filter

Q&A: Filter the dataset to the male passengers who have survived.

```

dfTit %>%
  filter(sex == 'male', survived == 1)

## # A tibble: 109 x 12
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
##   <dbl>      <dbl>   <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
##   <chr>
## 1         18         1     2 Will~ male  NA      0      0 244373 13
##   <NA>
## 2         22         1     2 Bees~ male  34      0      0 248698 13
D56
## 3         24         1     1 Slop~ male  28      0      0 113788 35.5
A6
## 4         37         1     3 Mame~ male  NA      0      0 2677   7.23
##   <NA>
## 5         56         1     1 Wool~ male  NA      0      0 19947 35.5
C52
## 6         66         1     3 Moub~ male  NA      1      1 2661  15.2
##   <NA>
## 7         75         1     3 Bing~ male  32      0      0 1601  56.5
##   <NA>
## 8         79         1     2 Cald~ male  0.83    0      2 248738 29
##   <NA>

```

```
## 9      82      1      3 Shee~ male 29      0      0 345779 9.5
<NA>
## 10     98      1      1 Gree~ male 23      0      1 PC 17~ 63.4
D10 ~
## # ... with 99 more rows, and 1 more variable: embarked <chr>
```

Q1: How many of the survived passengers are older than 35? [Hint: Yes, you can see the number of rows at the bottom, but you can also pipe into `nrow()` function]

```
dfTit %>%
  filter(survived == 1, age >35) %>% nrow()

## [1] 83
```

Q2: Remember the twins from Part 1? Can you use the filter function to find their parent?

```
dfTit %>%
  filter( str_detect(name, "Baclini, Mrs. "))

## # A tibble: 1 x 12
##   passengerid survived pclass name    sex    age sibsp parch ticket  fare
cabin
##       <dbl>      <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1         859          1      3 Bacl~ fema~  24     0      3 2666   19.3
<NA>
## # ... with 1 more variable: embarked <chr>
```

Part 4: Filter within groups

Q&A: Filter to the embarkation ports from which at least 100 passengers survived.

```
dfTit %>%
  group_by(embarked) %>%
  filter(sum(survived) >= 100)

## # A tibble: 644 x 12
## # Groups:   embarked [1]
##   passengerid survived pclass name    sex    age sibsp parch ticket  fare
cabin
##       <dbl>      <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1           1          0      3 Brau~ male  22     1     0 A/5 2~  7.25
<NA>
## 2           3          1      3 Heik~ fema~  26     0     0 STON/~  7.92
<NA>
## 3           4          1      1 Futr~ fema~  35     1     0 113803 53.1
C123
## 4           5          0      3 Alle~ male  35     0     0 373450  8.05
<NA>
## 5           7          0      1 McCa~ male  54     0     0 17463  51.9
E46
```



```
## 6      8      0      3 Pals~ male      2      3      1 349909 21.1
<NA>
## 7      9      1      3 John~ fema~    27      0      2 347742 11.1
<NA>
## 8     11      1      3 Sand~ fema~     4      1      1 PP 95~ 16.7
G6
## 9     12      1      1 Bonn~ fema~    58      0      0 113783 26.6
C103
## 10    13      0      3 Saun~ male     20      0      0 A/5. ~ 8.05
<NA>
## # ... with 634 more rows, and 1 more variable: embarked <chr>
```

Q1: Filter to the passenger classes in which the average fare for the tickets is over \$20.

```
dfTit %>% group_by(pclass) %>% filter(mean(fare)> 20)

## # A tibble: 400 x 12
## # Groups:   pclass [2]
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
cabin
##         <dbl>      <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1         2         1      1 Cumi~ fema~    38      1      0 PC 17~  71.3
C85
## 2         4         1      1 Futr~ fema~    35      1      0 113803  53.1
C123
## 3         7         0      1 McCa~ male     54      0      0 17463   51.9
E46
## 4        10         1      2 Nass~ fema~    14      1      0 237736  30.1
<NA>
## 5        12         1      1 Bonn~ fema~    58      0      0 113783  26.6
C103
## 6        16         1      2 Hewl~ fema~    55      0      0 248706   16
<NA>
## 7        18         1      2 Will~ male     NA      0      0 244373   13
<NA>
## 8        21         0      2 Fynn~ male     35      0      0 239865   26
<NA>
## 9        22         1      2 Bees~ male     34      0      0 248698   13
D56
## 10       24         1      1 Slop~ male     28      0      0 113788  35.5
A6
## # ... with 390 more rows, and 1 more variable: embarked <chr>
```

Part 5: Mutate

Q&A: Create a new column ageGroup: Children (under 15 years old), Working-age (15-64 years) and Elderly (65 years and older)

```
dfTit %>%
  mutate(ageGroup = ifelse(age<15, "Children", ifelse(age>=15 & age <=64,
"Working-age", "Elderly"))))

## # A tibble: 891 x 13
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
cabin
##         <dbl>      <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1           1          0      3 Brau~ male    22     1     0 A/5 2~  7.25
<NA>
## 2           2          1      1 Cumi~ fema~   38     1     0 PC 17~ 71.3
C85
## 3           3          1      3 Heik~ fema~   26     0     0 STON/~  7.92
<NA>
## 4           4          1      1 Futr~ fema~   35     1     0 113803 53.1
C123
## 5           5          0      3 Alle~ male    35     0     0 373450  8.05
<NA>
## 6           6          0      3 Mora~ male    NA     0     0 330877  8.46
<NA>
## 7           7          0      1 McCa~ male    54     0     0 17463  51.9
E46
## 8           8          0      3 Pals~ male     2     3     1 349909 21.1
<NA>
## 9           9          1      3 John~ fema~   27     0     2 347742 11.1
<NA>
## 10          10          1      2 Nass~ fema~   14     1     0 237736 30.1
<NA>
## # ... with 881 more rows, and 2 more variables: embarked <chr>, ageGroup
<chr>
```

Q1: Create a new variable called fareCategory which divides the ticket prices into three bins: Low (<20), Medium (20-60), and High (>60)

```
dfTit %>%
  mutate(fareCategory = ifelse(fare<20, "Low", ifelse(fare>=20 & fare <=60,
"Medium", "High"))))

## # A tibble: 891 x 13
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
cabin
##         <dbl>      <dbl> <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
<chr>
## 1           1          0      3 Brau~ male    22     1     0 A/5 2~  7.25
<NA>
## 2           2          1      1 Cumi~ fema~   38     1     0 PC 17~ 71.3
C85
## 3           3          1      3 Heik~ fema~   26     0     0 STON/~  7.92
<NA>
## 4           4          1      1 Futr~ fema~   35     1     0 113803 53.1
```

```

C123
## 5          5          0          3 Alle~ male      35          0          0 373450  8.05
<NA>
## 6          6          0          3 Mora~ male      NA          0          0 330877  8.46
<NA>
## 7          7          0          1 McCa~ male      54          0          0 17463  51.9
E46
## 8          8          0          3 Pals~ male       2          3          1 349909 21.1
<NA>
## 9          9          1          3 John~ fema~     27          0          2 347742 11.1
<NA>
## 10         10          1          2 Nass~ fema~     14          1          0 237736 30.1
<NA>
## # ... with 881 more rows, and 2 more variables: embarked <chr>,
## #   fareCategory <chr>

```

Q2: Add a new variable called familyOnBoard that adds up the number of passengers from one's family including siblings/spouses, parents/children, and oneself. Also sort by your calculated variable in a descending order to find the most crowded family.

```

dfTit %>%
  mutate(familyOnBoard = sibsp + parch + 1) %>% arrange(desc(familyOnBoard))

## # A tibble: 891 x 13
##   passengerid survived pclass name    sex    age sibsp parch ticket  fare
##   <dbl>      <dbl>   <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
##   <chr>
## 1         160          0       3 "Sag~ male    NA     8     2  CA. 2~  69.6
##   <NA>
## 2         181          0       3 "Sag~ fema~   NA     8     2  CA. 2~  69.6
##   <NA>
## 3         202          0       3 "Sag~ male    NA     8     2  CA. 2~  69.6
##   <NA>
## 4         325          0       3 "Sag~ male    NA     8     2  CA. 2~  69.6
##   <NA>
## 5         793          0       3 "Sag~ fema~   NA     8     2  CA. 2~  69.6
##   <NA>
## 6         847          0       3 "Sag~ male    NA     8     2  CA. 2~  69.6
##   <NA>
## 7         864          0       3 "Sag~ fema~   NA     8     2  CA. 2~  69.6
##   <NA>
## 8          60          0       3 "Goo~ male    11     5     2  CA 21~  46.9
##   <NA>
## 9          72          0       3 "Goo~ fema~   16     5     2  CA 21~  46.9
##   <NA>
## 10        387          0       3 "Goo~ male     1     5     2  CA 21~  46.9
##   <NA>
## # ... with 881 more rows, and 2 more variables: embarked <chr>,
## #   familyOnBoard <dbl>

```

Part 6: Mutate with groups

Q&A: Based on whether passengers survived or not, calculate the deviation of the fare from the mean of each group. Save it to fareDeviation variable. Because you are interested in deviation in absolute terms, use take the absolute value.

```
dfTit %>%
  group_by(survived) %>%
  mutate(fareDeviation = abs(fare - mean(fare))) %>%
  ungroup()

## # A tibble: 891 x 13
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
##   <dbl>      <dbl>   <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
##   <chr>
## 1          1          0       3 Brau~ male    22     1     0 A/5 2~  7.25
##   <NA>
## 2          2          1       1 Cumi~ fema~    38     1     0 PC 17~ 71.3
##   C85
## 3          3          1       3 Heik~ fema~    26     0     0 STON/~  7.92
##   <NA>
## 4          4          1       1 Futr~ fema~    35     1     0 113803 53.1
##   C123
## 5          5          0       3 Alle~ male    35     0     0 373450  8.05
##   <NA>
## 6          6          0       3 Mora~ male    NA     0     0 330877  8.46
##   <NA>
## 7          7          0       1 McCa~ male    54     0     0 17463  51.9
##   E46
## 8          8          0       3 Pals~ male     2     3     1 349909 21.1
##   <NA>
## 9          9          1       3 John~ fema~    27     0     2 347742 11.1
##   <NA>
## 10         10          1       2 Nass~ fema~    14     1     0 237736 30.1
##   <NA>
## # ... with 881 more rows, and 2 more variables: embarked <chr>,
## #   fareDeviation <dbl>
```

Q1: Create a new variable indicating the number of people who are on the same ticket [Hint: Group by the ticket number and use n() function to get the counts].

```
dfTit %>%
  group_by(ticket) %>%
  mutate(people_count = n()) %>%
  ungroup()

## # A tibble: 891 x 13
##   passengerid survived pclass name  sex    age sibsp parch ticket  fare
##   <dbl>      <dbl>   <dbl> <chr> <chr> <dbl> <dbl> <dbl> <chr>  <dbl>
```

```

<chr>
## 1      1      0      3 Brau~ male      22      1      0 A/5 2~ 7.25
<NA>
## 2      2      1      1 Cumi~ fema~    38      1      0 PC 17~ 71.3
C85
## 3      3      1      3 Heik~ fema~    26      0      0 STON/~ 7.92
<NA>
## 4      4      1      1 Futr~ fema~    35      1      0 113803 53.1
C123
## 5      5      0      3 Alle~ male     35      0      0 373450 8.05
<NA>
## 6      6      0      3 Mora~ male     NA      0      0 330877 8.46
<NA>
## 7      7      0      1 McCa~ male     54      0      0 17463 51.9
E46
## 8      8      0      3 Pals~ male      2      3      1 349909 21.1
<NA>
## 9      9      1      3 John~ fema~    27      0      2 347742 11.1
<NA>
## 10     10     1      2 Nass~ fema~    14      1      0 237736 30.1
<NA>
## # ... with 881 more rows, and 2 more variables: embarked <chr>,
## #   people_count <int>

```

Part 7: Summarize

Q&A: Use the summarize command to find the mean age for all passengers.

```

dfTit %>%
  summarize(meanAge = mean(age, na.rm=TRUE)) # na.rm=TRUE is there to exclude
missing values; try removing it and see what happens!

## # A tibble: 1 x 1
##   meanAge
##   <dbl>
## 1    29.7

```

Q1: Determine the mean fare a passenger paid to get on board the Titanic.

```

dfTit %>%
  summarize(meanFare = mean(fare, na.rm=TRUE))

## # A tibble: 1 x 1
##   meanFare
##   <dbl>
## 1    32.2

```

Part 8: Summarize with groups

Q&A: Determine the mean fare of the passengers who survived. Compare it with the ones who did not survive.

```
dfTit %>%
  group_by(survived) %>%
  summarize(ageBySurvival = mean(age, na.rm=TRUE)) %>%
  ungroup()
```

```
## # A tibble: 2 x 2
##   survived ageBySurvival
##   <dbl>      <dbl>
## 1      0          30.6
## 2      1          28.3
```

Q1: What is the minimum and maximum age of the passengers based on whether they survived or not?

```
dfTit %>%
  group_by(survived) %>%
  summarize( minAge = min(age, na.rm=TRUE), maxAge = max(age, na.rm=TRUE))
%>%
  ungroup()
```

```
## # A tibble: 2 x 3
##   survived minAge maxAge
##   <dbl>   <dbl>   <dbl>
## 1      0     1      74
## 2      1    0.42    80
```

Q2: What is the minimum, maximum, and average fare that passengers of each class paid to get on the ship, based on whether they survived or not?

```
dfTit %>%
  group_by(survived, pclass) %>%
  summarise(minFare = min(fare, na.rm=TRUE), maxFare = max(fare, na.rm=TRUE),
    avgFare = mean(fare, na.rm=TRUE)) %>%
  ungroup()
```

```
## # A tibble: 6 x 5
##   survived pclass minFare maxFare avgFare
##   <dbl>   <dbl>   <dbl>   <dbl>   <dbl>
## 1      0     1      0      263    64.7
## 2      0     2      0      73.5   19.4
## 3      0     3      0      69.6   13.7
## 4      1     1    25.9    512.   95.6
## 5      1     2    10.5     65   22.1
## 6      1     3      0     56.5   13.7
```

Part 9: Combining verbs

Q&A: For the survived passengers who were on a first class ticket, find the mean age and fare by gender.

```
dfTit %>%
  filter(survived == 1 & pclass == 1) %>%
```

```

group_by(sex) %>%
  summarize(avgAge = mean(age, na.rm=TRUE), avgFare = mean(fare, na.rm=TRUE))
%>%
  ungroup()

## # A tibble: 2 x 3
##   sex      avgAge avgFare
##   <chr>    <dbl> <dbl>
## 1 female   34.9   106.
## 2 male    36.2    74.6

```

Q1: After excluding individual passengers, calculate (i) the total cost per family (based on whether they are on the same ticket), (ii) the number of family members on the same ticket, and (iii) how many of these family members survived. Then, keep only the ticket number and the three variables you calculated, sort by the total cost descending, and remove the repetitions in the table [Hint: Use the `distinct()` function with “`.keep_all = TRUE`” option to display the details for each unique ticket].

```

dfTit %>%
  filter(sibsp != 0 | parch != 0) %>%
  group_by(ticket) %>%
  summarise( totalCost= sum(fare, na.rm=TRUE), familyMembers= n(), survived=
sum(survived, na.rm=TRUE)) %>%
  ungroup()

## # A tibble: 198 x 4
##   ticket totalCost familyMembers survived
##   <chr>    <dbl>         <int>    <dbl>
## 1 110413    239.             3         2
## 2 110813    75.2             1         1
## 3 111361   116.             2         2
## 4 113503   212.             1         0
## 5 113505   110.             2         2
## 6 113509    62.0             1         0
## 7 113760   480.             4         4
## 8 113773    53.1             1         0
## 9 113776   133.             2         1
## 10 113781   455.             3         1
## # ... with 188 more rows

```

Part 10: Visualizations

Q&A: Create a plot showing the relationship between age and median fare by age group, and fit a smoothed curve on it (no need to set any parameters, just use the defaults).

```

ageAvgFare <-
  dfTit %>%
  group_by(age) %>%
  summarize(avgFare = mean(fare)) %>%
  ungroup() %>%
  ggplot(aes(x=age,y=avgFare)) + geom_point() + geom_smooth()


```

ageAvgFare

```
## `geom_smooth()` using method = 'loess' and formula 'y ~ x'
```

```
## Warning: Removed 1 rows containing non-finite values (stat_smooth).
```

```
## Warning: Removed 1 rows containing missing values (geom_point).
```

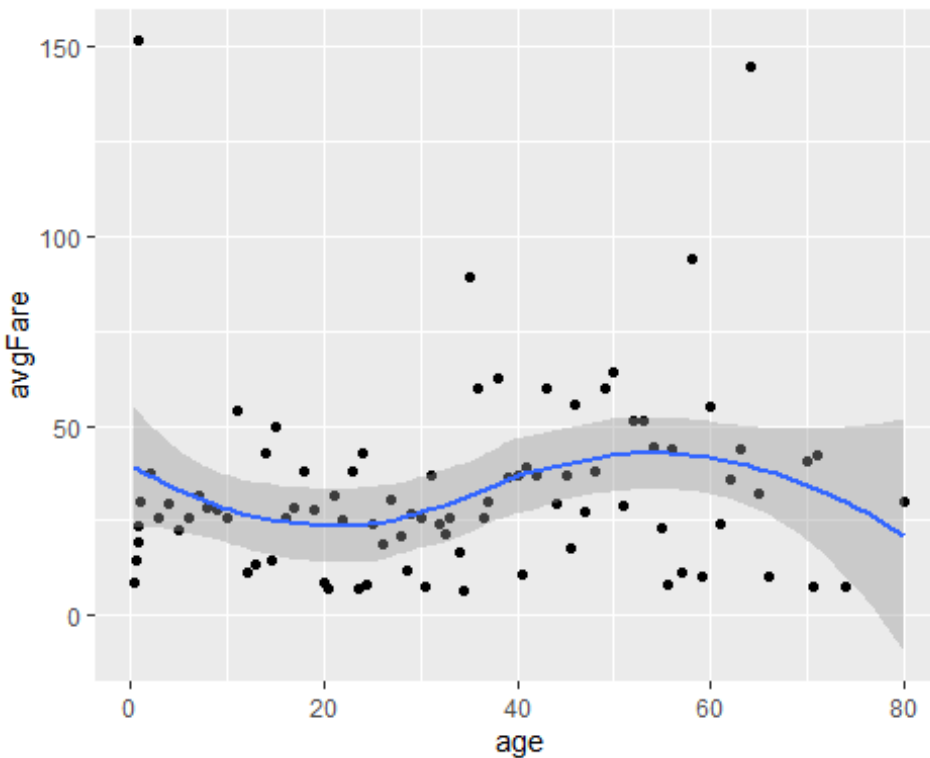

Q1: Create a box-plot showing the distribution of fare across genders, and coloring it based on whether a passenger survived or not [Hint: Color will go into the aesthetics of the box plot].

```
distFare <-  
  dfTit %>%  
  ggplot(aes(x=sex,y=fare, color= factor(survived))) + geom_boxplot()
```

distFare

