



HTTPD USING JENKINS

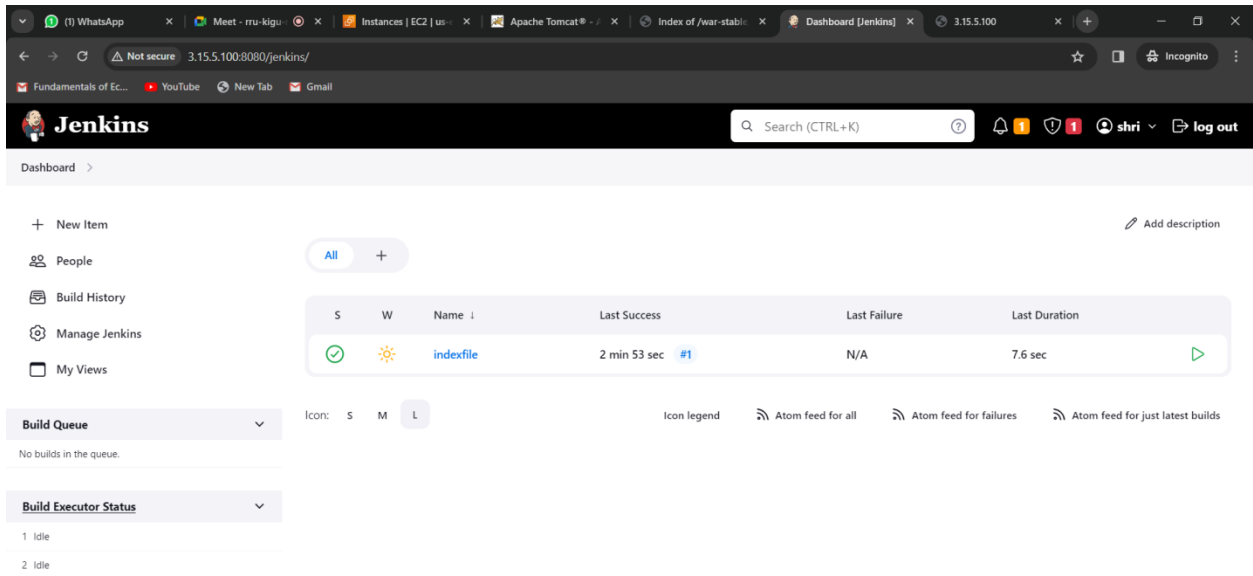

The screenshot shows the Jenkins Dashboard interface. The top navigation bar includes the Jenkins logo, a search bar, and user information. The left sidebar contains links to 'New Item', 'People', 'Build History', 'Manage Jenkins', and 'My Views'. The main content area displays a table of build history for the 'indexfile' job. The table has columns for status (S), warnings (W), name, last success, last failure, and last duration. A single build is shown with a green status icon, a warning icon, and a duration of 7.6 sec. Below the table, there are sections for 'Build Queue' (showing no builds) and 'Build Executor Status' (showing two idle executors).

S	W	Name	Last Success	Last Failure	Last Duration
✓	⚠	indexfile	2 min 53 sec #1	N/A	7.6 sec

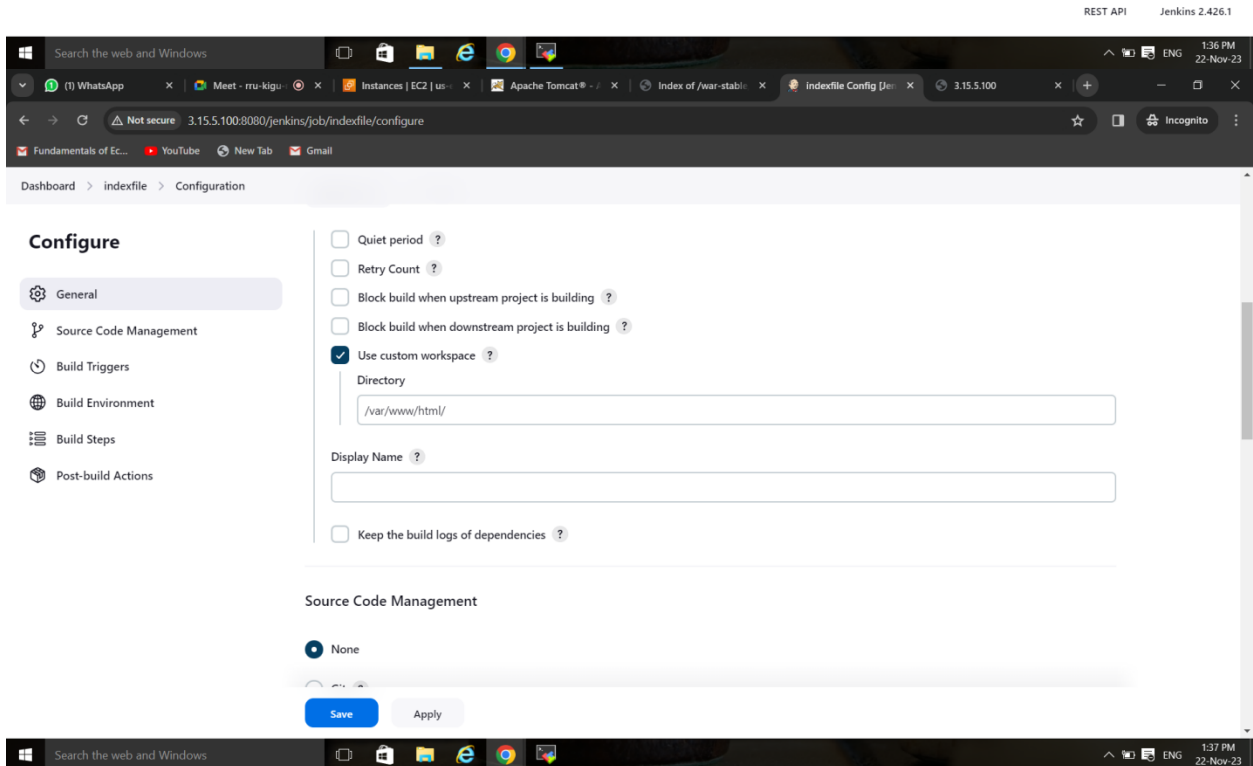

The screenshot shows the Jenkins Configuration page for the 'indexfile' job. The left sidebar contains links to 'General', 'Source Code Management', 'Build Triggers', 'Build Environment', 'Build Steps', and 'Post-build Actions'. The main content area is titled 'Configure' and contains several sections. The 'General' section includes checkboxes for 'Quiet period', 'Retry Count', 'Block build when upstream project is building', 'Block build when downstream project is building', 'Use custom workspace' (checked), and 'Keep the build logs of dependencies'. The 'Use custom workspace' section has a text input for 'Directory' with the value '/var/www/html/'. The 'Source Code Management' section has a radio button for 'None'. At the bottom, there are 'Save' and 'Apply' buttons.

Configure

- ☐ Quiet period ?
- ☐ Retry Count ?
- ☐ Block build when upstream project is building ?
- ☐ Block build when downstream project is building ?
- ☒ Use custom workspace ?
 - Directory: /var/www/html/
- ☐ Keep the build logs of dependencies ?

Source Code Management

- ☒ None

Save Apply

HTTPD USING JENKINS

The screenshot shows the Jenkins web interface in a browser. The URL is `3.15.5.100:8080/jenkins/job/indexfile/configure`. The page is titled 'Configure' and shows the configuration for the 'indexfile' job. On the left, there is a sidebar with navigation links: General, Source Code Management, Build Triggers, Build Environment, Build Steps (selected), and Post-build Actions. The main content area is titled 'Build Steps' and shows a single build step named 'Execute shell'. The command for this step is:

```
yum install httpd -y
service httpd start
echo "hello everyone" >> /var/www/html/index.html
chkconfig httpd on
chmod -R 777 /var/www/html/
```

Below the command field, there is an 'Advanced' dropdown menu and an 'Add build step' button. At the bottom of the configuration page, there are 'Save' and 'Apply' buttons. The browser's address bar shows the IP address '3.15.5.100' and the page is marked as 'Not secure'.

hello everyone

This screenshot shows the bottom of the Windows desktop. It includes the Windows taskbar with several open applications: File Explorer, Microsoft Edge, and Google Chrome. The system tray on the right shows the date and time as '1:35 PM 22-Nov-23' and the language set to 'ENG'.