

Data Ingestion using HTTP Connector By Parameterizing the Services, data can be ingested with minimum components.

Use-case 1: Ingesting Retail-db datasets from Source and loading to Target

Follow below steps:


1. Create a Resource Group and pin it to the dashboard.

Create a Dashboard and a Resource Group for the project to organize the resources related to the project at one place.

To create dashboard: Click on Dashboard => Create => Custom =>

Dashboard >

Create a dashboard ...

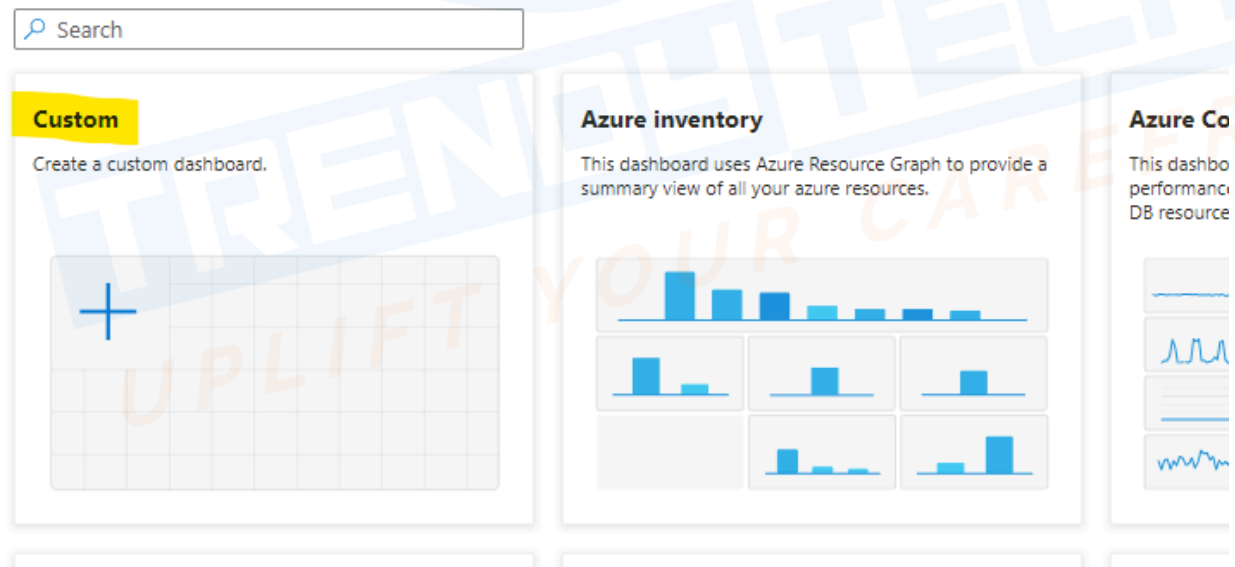

To create Resource group :

[Home](#) > [Resource groups](#) >

Create a resource group ...

[Basics](#) [Tags](#) [Review + create](#)

Resource group - A container that holds related resources for an Azure solution. The resource group can include all the resources for the solution, or only those resources that you want to manage as a group. You decide how you want to allocate resources to resource groups based on what makes the most sense for your organization. [Learn more](#)

Project details

Subscription * ⓘ

Pay-As-You-Go (136f20b5-00f7-4eb5-a52e-0843e7ad1034)



Resource group * ⓘ

Trendytech-rg

Resource details

Region * ⓘ

(Asia Pacific) Central India

[Review + create](#)

[< Previous](#)

[Next : Tags >](#)

[Home](#) > [Resource groups](#) >

Create a resource group ...

✓ Validation passed.

[Basics](#) [Tags](#) [Review + create](#)

Basics

Subscription

Pay-As-You-Go

Resource group

Trendytech-rg

Region

Central India

Tags

None

[Create](#)

[< Previous](#)

[Next >](#)

[Download a template for automation](#)

2. Create a Storage Account resource - Blob storage and upload the datasets (products.csv, order.csv, order_item.csv, departments.csv, customers.csv and categories.csv from the retail-db.zip provided in the downloadable section). Please ensure to enable the Blob anonymous access under configurations after the storage account is deployed.

Note:

https://files.cdn.thinkific.com/file_uploads/349536/attachments/e8e/2f1/eca/departments.csv

https://files.cdn.thinkific.com/file_uploads/349536/attachments/5f1/f7c/44a/customers.csv

https://files.cdn.thinkific.com/file_uploads/349536/attachments/8ad/0ec/cdf/categories.csv

As you will face the below error while accessing the above links, you can upload all the 6 datasets in the source blob storage retail-raw instead of using these links use the http links that will be created once you upload the data in your blob storage account.

Also then we will create only one linked service for this http links

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
<?xml version="1.0" encoding="utf-8" ?>
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>8G7BQ7YHX89EBJ4M</RequestId>
  <HostId>QZ3/gUpjhdtkDxvHWH7FVYfhJzeiyzdN3/VDfCIcsMRbj/h1/6b9v+m7nE7uKjB70U6M6ua99iI=</HostId>
</Error>
```

To create a Blob Storage Account:Storage accounts => Create a storage account

Create a storage account ...

Tables. The cost of your storage account depends on the usage and the options you choose below. [Learn more about Azure storage accounts](#)

Project details

Select the subscription in which to create the new storage account. Choose a new or existing resource group to organize and manage your storage account together with other resources.

Subscription *

Resource group * [Create new](#)

Instance details

Storage account name *

Region * [Deploy to an Azure Extended Zone](#)

Performance * ☒ Standard: Recommended for most scenarios (general-purpose v2 account)
☐ Premium: Recommended for scenarios that require low latency.

Redundancy *

[Previous](#) [Next](#) [Review + create](#)

Then click on “create”.

3. Change the access level of the container to - anonymous read access to containers and blobs.

First go to Setting => Configuration=> And enable “Allow Blob anonymous access” => Click on “save”.

Home > trendytechretailsa1_1715249538733 | Overview > trendytechretailsa1

trendytechretailsa1 | Configuration

Storage account

Search

Save Discard Refresh Give feedback

- Access keys
- Shared access signature
- Encryption
- Microsoft Defender for Cloud
- Data management
- Settings
 - Configuration**
 - Data Lake Gen2 upgrade
 - Resource sharing (CORS)
 - Advisor recommendations
 - Endpoints
 - Locks

The cost of your storage account depends on the usage and the options you choose below. [Learn more about storage](#)

Account kind
StorageV2 (general purpose v2)

Performance ⓘ
☒ Standard ☐ Premium

ⓘ This setting cannot be changed after the storage account is created.

Secure transfer required ⓘ
☐ Disabled ☒ Enabled

Allow Blob anonymous access ⓘ
☐ Disabled ☒ Enabled

ⓘ Some blobs may become anonymously readable.

Allow storage account key access ⓘ
☐ Disabled ☒ Enabled

Allow recommended upper limit for shared access signature (SAS) expiry interval ⓘ
☒ Disabled ☐ Enabled

Now we will create container retail-raw as shown below and will upload all the 6 datasets in it.

Home > trendytechretailsa1

trendytechretailsa1 | Containers

Storage account

Search

+ Container Change access level Restore containers Refresh Delete Give feedback

Search containers by prefix

Name	Last modified
☐ \$logs	5/9/2024, 3:43:09 PM

New container

Name *
retail-raw ✓

Anonymous access level ⓘ
Container (anonymous read access for containers and blobs) ✓

⚠ All container and blob data can be read by anonymous request. Clients can enumerate blobs within the container by anonymous request, but cannot enumerate containers within the storage account.

Advanced

Create Give feedback

retail-raw
Container

Search

Overview
Diagnose and solve problems
Access Control (IAM)
Settings

Authentication method: Access key (Switch to Microsoft Entra user account)
Location: retail-raw

Search blobs by prefix (case-sensitive)

Add filter

Name	Modified	Access tier	Archive status
☐ categories.csv	5/9/2024, 3:57:32 PM	Hot (Inferred)	
☐ customers.csv	5/9/2024, 3:57:33 PM	Hot (Inferred)	
☐ departments.csv	5/9/2024, 3:57:32 PM	Hot (Inferred)	
☐ order_items.csv	5/9/2024, 3:57:36 PM	Hot (Inferred)	
☐ orders.csv	5/9/2024, 3:57:35 PM	Hot (Inferred)	
☐ products.csv	5/9/2024, 3:57:33 PM	Hot (Inferred)	

4. You can use the respective URLs associated with the datasets as a link to download the datasets from the storage account.

retail-raw
Container

Search

Overview
Diagnose and solve problems
Access Control (IAM)
Settings

Authentication method: Access key (Switch to Microsoft Entra user account)
Location: retail-raw

Search blobs by prefix (cas...)
Show deleted blobs

Add filter

categories.csv

Blob

Save Discard Download Refresh Delete Change tier

Overview Versions Snapshots Edit Generate SAS

Properties

URL <https://trendytechretail...>

LAST MODIFIED	5/9/2024, 3:57:32 PM
CREATION TIME	5/9/2024, 3:57:32 PM
VERSION ID	-
TYPE	Block blob
SIZE	1 KiB
ACCESS TIER	Hot (Inferred)
ACCESS TIER LAST MODIFIED	N/A
ARCHIVE STATUS	-
REHYDRATE PRIORITY	-
SERVER ENCRYPTED	true

5. Now we will create a Data Factory.

All services > Data factories >

Create Data Factory

Basics Git configuration Networking Advanced Tags Review + create

One-click to create data factory with sample pipeline and datasets. [Try it](#)

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription * ⓘ Pay-As-You-Go (136f20b5-00f7-4eb5-a52e-0843e7ad1034) ▼

Resource group * ⓘ Trendytech-rg ▼

[Create new](#)

Instance details

Name * ⓘ trendytech-retail-df ✓

Region * ⓘ East US ▼


[Previous](#) [Next](#) [Review + create](#)

6. Create a Linked Service pointing to HTTP with base URL (Source).

Note: We will create only one linked service as we have stored the data in retail-raw storage.

Check below screenshot for **creating linked service** for our source i.e http source files

Go to Monitor => Linked Service => New => HTTP => Continue

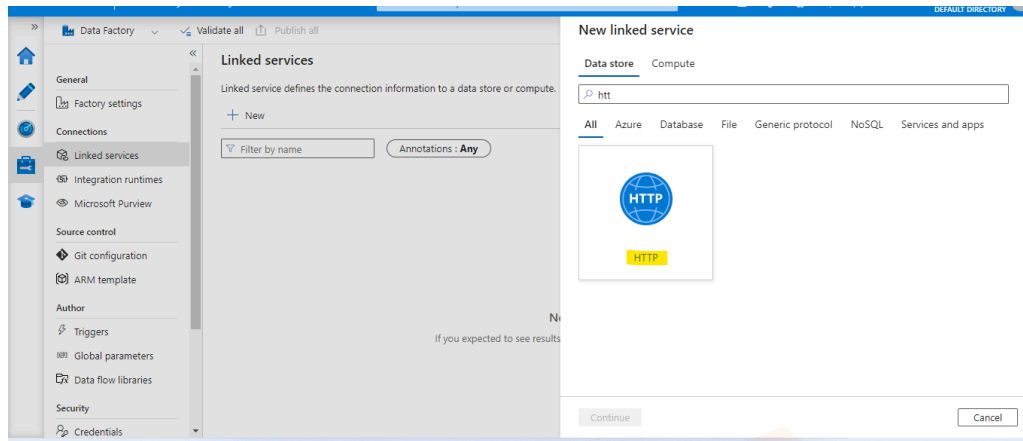

Note: <https://trendytechretailsa1.blob.core.windows.net/retail-raw/categories.csv>
 For this link the base URL will be : <https://trendytechretailsa1.blob.core.windows.net>

New linked service

HTTP

Learn more

Name *

is_http_retail_source

Description

Connect via integration runtime *

AutoResolveIntegrationRuntime

Base URL *

https://trendytechretailsa1.blob.core.windows.net

Information will be sent to the URL specified. Please ensure you trust the URL entered.

Server certificate validation

Enable

Disable

Authentication type *

Anonymous

Auth headers

New

Annotations

New

Parameters

Advanced

Create

Back

Test connection

Cancel

Then publish these changes.

Publish all

You are about to publish all pending changes to the live environment. [Learn more](#)

Pending changes (1)

NAME	CHANGE	EXISTING
▼ Linked services		
ls_http_retail_source	(New)	-

Publish **Cancel**

7. Create a Linked Service pointing to ADLS Gen2 (Sink)

First we will create one ADLS gen2 storage account for and then we will create a linked service for it.

Instance details

Storage account name * ⓘ

trendytechretaild1

Region * ⓘ

(Asia Pacific) Central India

Deploy to an Azure Extended Zone

Performance * ⓘ

☒ Standard: Recommended for most scenarios (general-purpose v2 account)

☐ Premium: Recommended for scenarios that require low latency.

Redundancy * ⓘ

Locally-redundant storage (LRS)

Previous

Next

Review + create

Also in the Advance section click on “Enable hierarchical namespace” to create a ADLS gen2 storage account.

Create a storage account

Hierarchical Namespace

Hierarchical namespace, complemented by Data Lake Storage Gen2 endpoint, enables file and directory semantics, accelerates big data analytics workloads, and enables access control lists (ACLs) [Learn more](#)

Enable hierarchical namespace ☒

Access protocols

Blob and Data Lake Gen2 endpoints are provisioned by default [Learn more](#)

Enable SFTP ☐

Enable network file system v3 ☐

Blob storage

Allow cross-tenant replication ☐

i Cross-tenant replication and hierarchical namespace cannot be enabled simultaneously.

Previous

Next

Review + create

Change the access level of the container to - anonymous read access to containers and blobs.

trendytechretaild1 | Configuration

Storage account

Search

Save Discard Refresh Give feedback

Identities

Security + networking

Networking

Access keys

Shared access signature

Encryption

Microsoft Defender for Cloud

Data management

Settings

Configuration

Resource sharing (CORS)

SFTP

Advisor

Performance

Standard Premium

i This setting cannot be changed after the storage account is created.

Secure transfer required

Disabled Enabled

Allow Blob anonymous access

Disabled Enabled

i Some blobs may become anonymously readable.

Allow storage account key access

Disabled Enabled

Allow recommended upper limit for shared access signature (SAS) expiry interval

Disabled Enabled

Default to Microsoft Entra authorization in the Azure portal

Disabled Enabled

Minimum TLS version

Create the container “retaildatasets” in our target storage and add directory “raw”

Home > trendytechretaildl1_1715252590296 | Overview > trendytechretaildl1 | Containers >

retaildatasets

Container

Search

Upload Add Directory Refresh Rename Delete Change tier Acquire lease Break

Overview

- Diagnose and solve problems
- Access Control (IAM)
- Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Location: retaildatasets

Search blobs by prefix (case-sensitive)

Name	Modified	Access tier	Archive status	Blob type
☐ raw				

New linked service

Azure Data Lake Storage Gen2 [Learn more](#)

Name *

ls_adlsgen2_trendytechretaildl1

Description

Connect via integration runtime *

AutoResolveIntegrationRuntime

Authentication type

Account key

Account selection method

☒ From Azure subscription ☐ Enter manually

Azure subscription

Select all

Storage account name *

trendytechretaildl1

Test connection

☒ To linked service ☐ To file path

Annotations

+ New

> Parameters

> Advanced

✓ Connection successful

Create



Back

Test connection

Cancel

8. Create a Source Dataset to fetch data from HTTP and mention the relative URL and select the source http linked service.
Now we will create dataset for all the 6 datasets

To create dataset click on Author => Datasets => New datasets

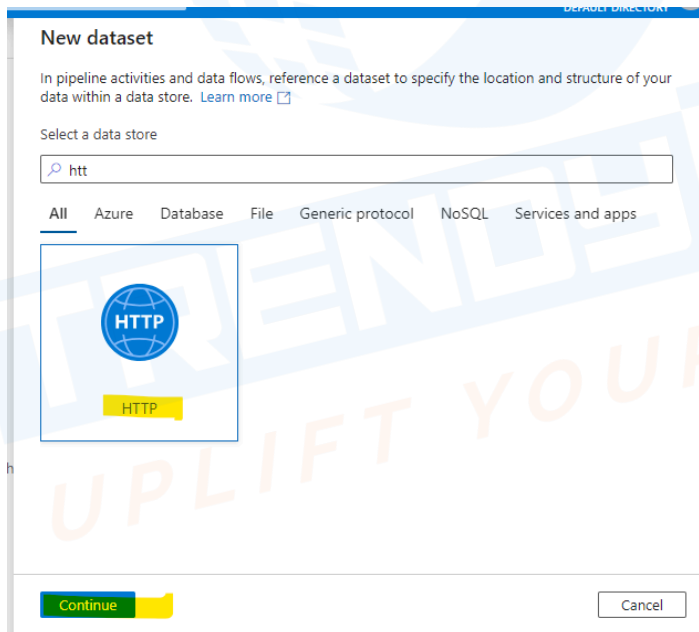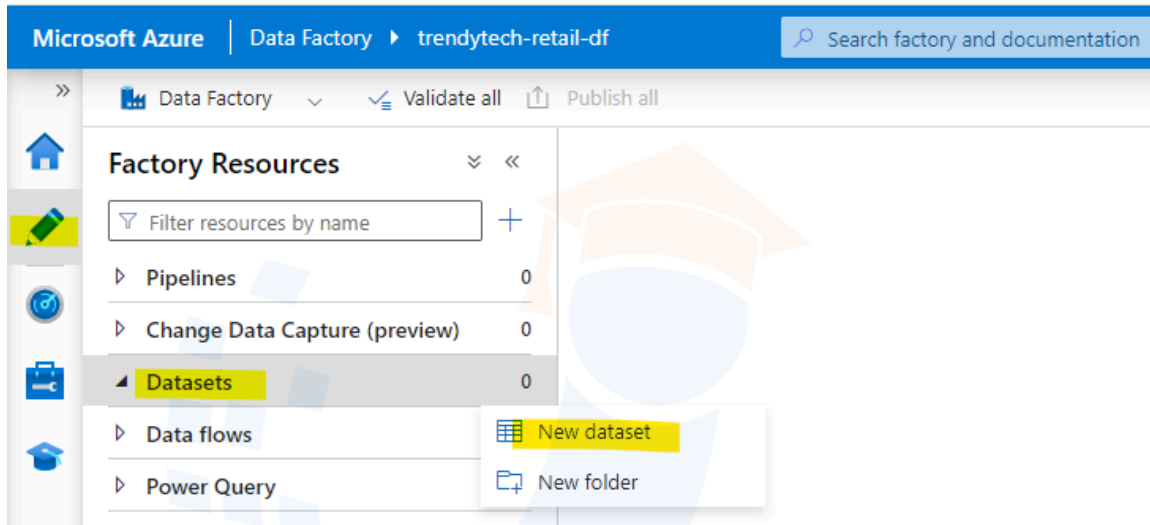

Select format

Choose the format type of your data

 Avro	 Binary	 DelimitedText
 Excel	 JSON	 ORC

Continue Back Cancel

Mention relative url as [retail-raw/products.csv](#)

Set properties

Name
ds_retail_raw_http

Linked service *
ls_http_retail_source

Relative URL
retail-raw/products.csv

First row as header ☒

Import schema
☐ From connection/store
 ☐ From sample file
 ☒ None

OK Back Cancel

9. Create a Target Dataset - Choose the format and the file path (target) where the data needs to be copied.

New dataset

In pipeline activities and data flows, reference a dataset to specify the location and structure of your data within a data store. [Learn more](#)

Select a data store

 data lake

All Azure Database File Generic protocol NoSQL Services and apps



Azure Data Lake Storage
Gen2

Continue

Cancel

Select format

Choose the format type of your data



Avro



Binary



Delimited Text



Excel



JSON



ORC

Continue

Back

Cancel

Set properties

Name


Linked service *

File path
 / /


First row as header ☒

Import schema
☒ From connection/store ☐ From sample file ☐ None


10. Create a pipeline and a copy activity in the Data Factory and Debug the pipeline.

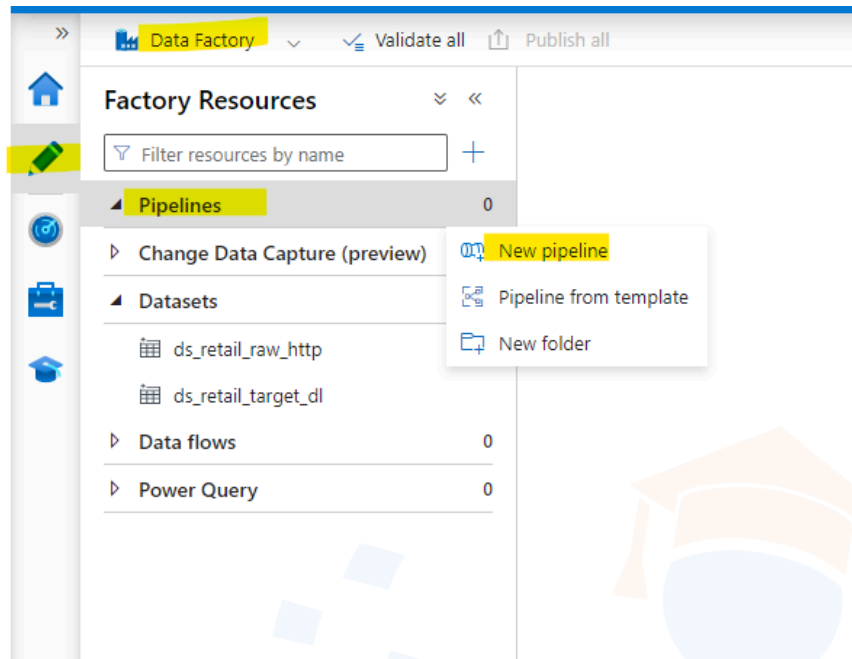


We will add the “copy data activity”.

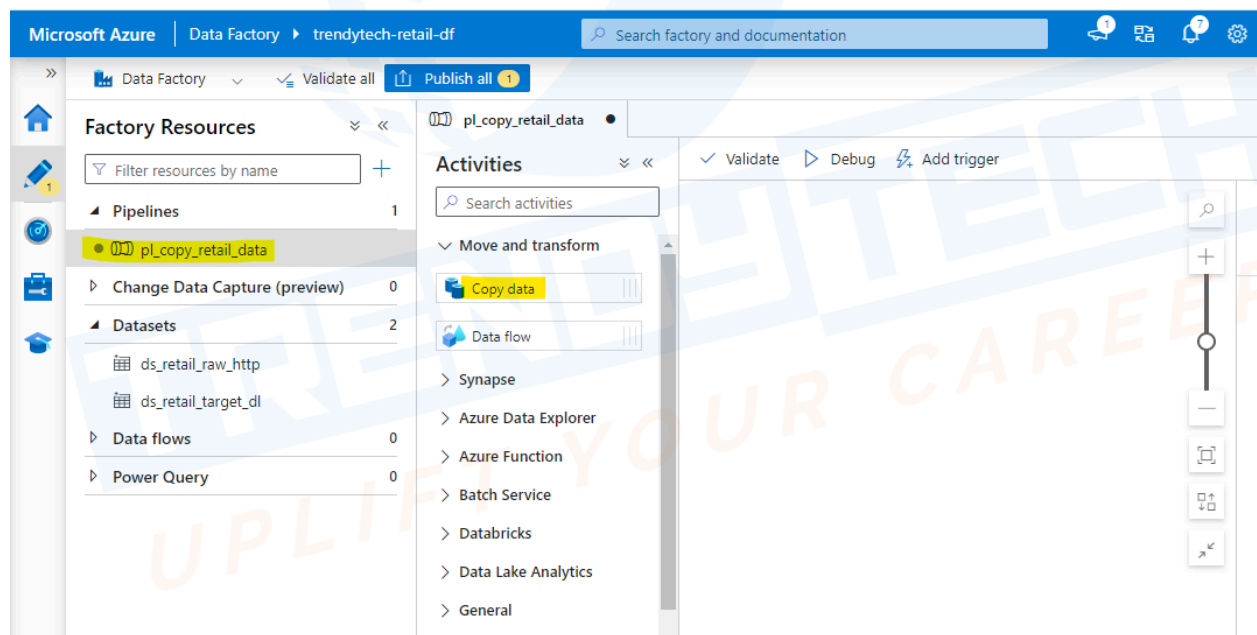

Also add the source dataset.

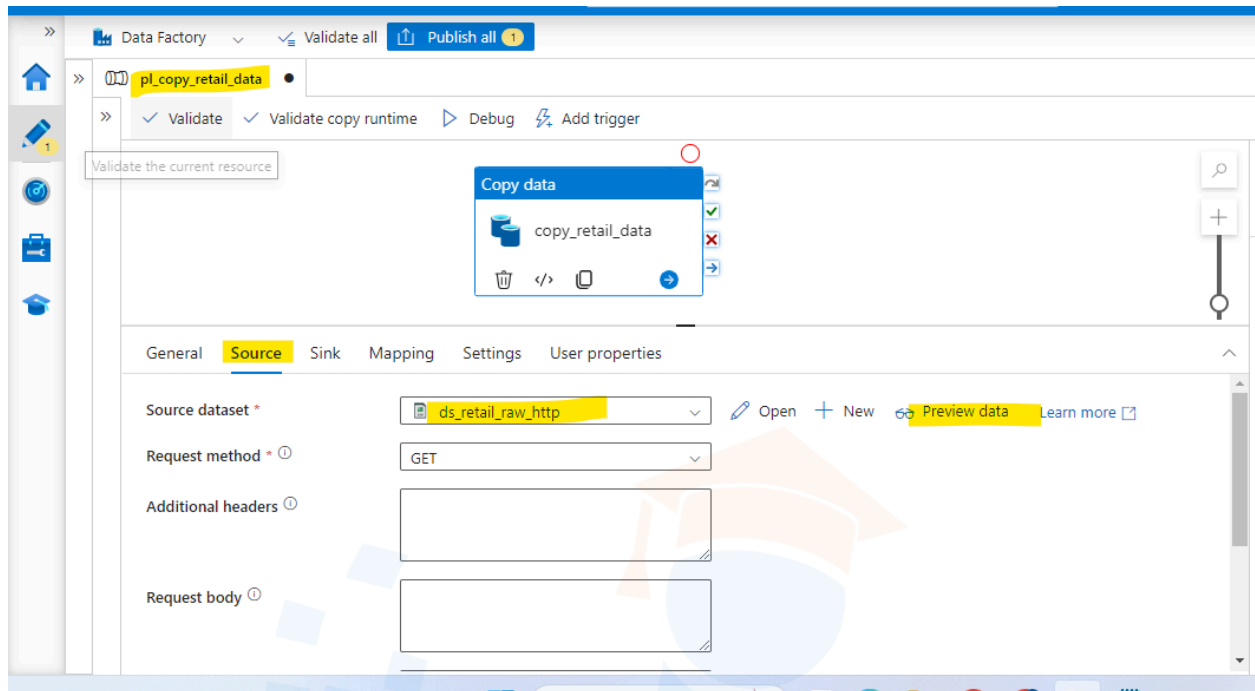

Also will add the sink dataset.

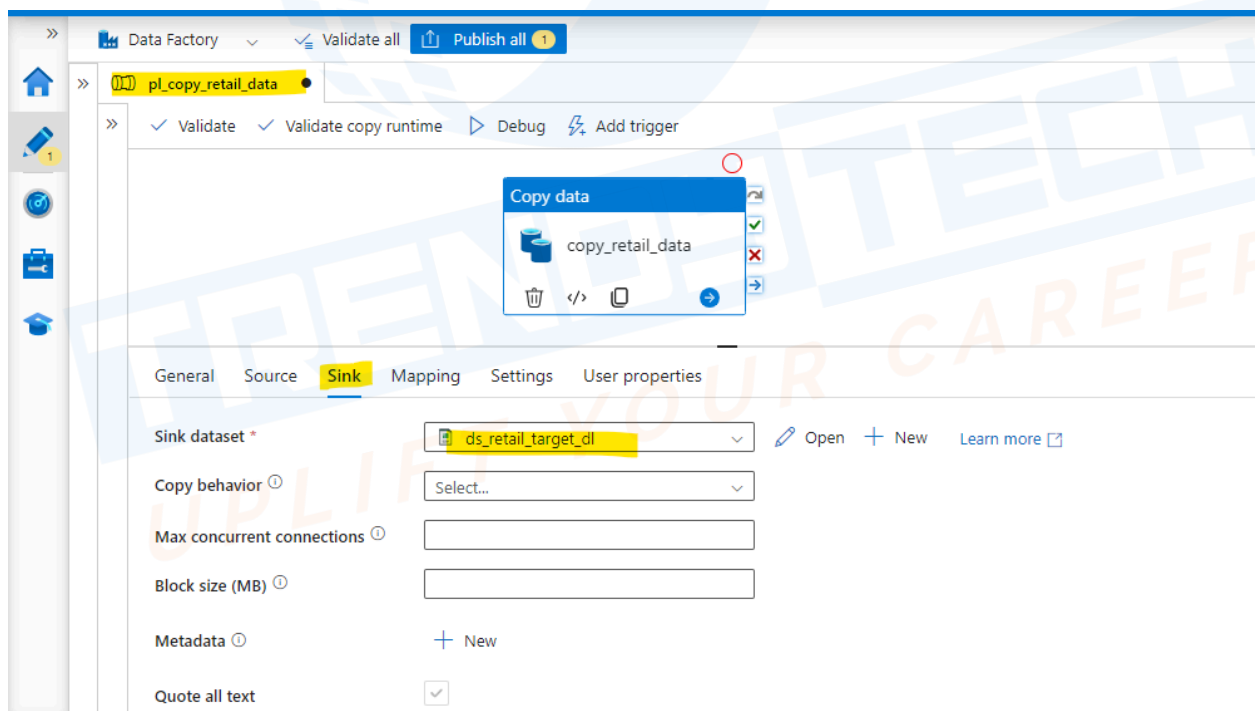

We will click on debug to check whether it's working or not.

Microsoft Azure | Data Factory | trendytech-retail-df

Search factory and documentation

Data Factory | Validate all | Publish all

pl_copy_retail_data

Validate | Debug | Add trigger

Copy data

copy_retail_data

Parameters | Variables | Settings | **Output**

Pipeline run ID: b9d14da7-69f6-4a33-bb07-4aaa85b78507 | Pipeline status: **Succeeded** | View debug run consumption

All status

Showing 1 - 1 of 1 items

Activity name	Activity status	Activity type	Run start	Duration	Integration runtime
copy_retail_data	Succeeded	Copy data	5/9/2024, 6:09:26 PM	15s	AutoResolveIntegration

Once the pipeline runs successfully, the data will be copied from source http URL to the target path in the ADLS Gen2..

Home > trendytechretaild1 | Containers >

retaildatasets

Container

Search

Upload | Add Directory | Refresh | Rename | Delete | Change tier | Acquire lease | Break lease

Overview

Diagnose and solve problems

Access Control (IAM)

Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Location: retaildatasets / raw

Search blobs by prefix (case-sensitive)

Name	Modified	Access tier	Archive status	Blob type	Size
[.]					
products.csv	5/9/2024, 6:09:39 PM	Hot (Inferred)		Block blob	184

Note: There is a drawback in this process that, say you have to copy 6 different files from different HTTP links, then, all of the above steps have to be repeated eventually this would lead to the creation of a huge number of components.


To find a better solution we will parameterize the pipeline.

Pipeline Parametrization helps in avoiding unnecessary creation of multiple components. The Base URL provided while creating the Source Linked Service and the Sink target-path filename can be parametrized in place of hard-coding. Likewise, the Relative URL provided during the Dataset creation can be parametrized rather than hard-coding. This will allow for providing the URLs dynamically at a later point in time.

Parameterizing the Source Linked Service:

- Parametrize the source linked service by adding a new parameter in the linked service by providing a name to the parameter (Ex: baseUrl).

Select the linked service for our source http link=> click on “Add parameter” (Add parameter ‘baseUrl’)

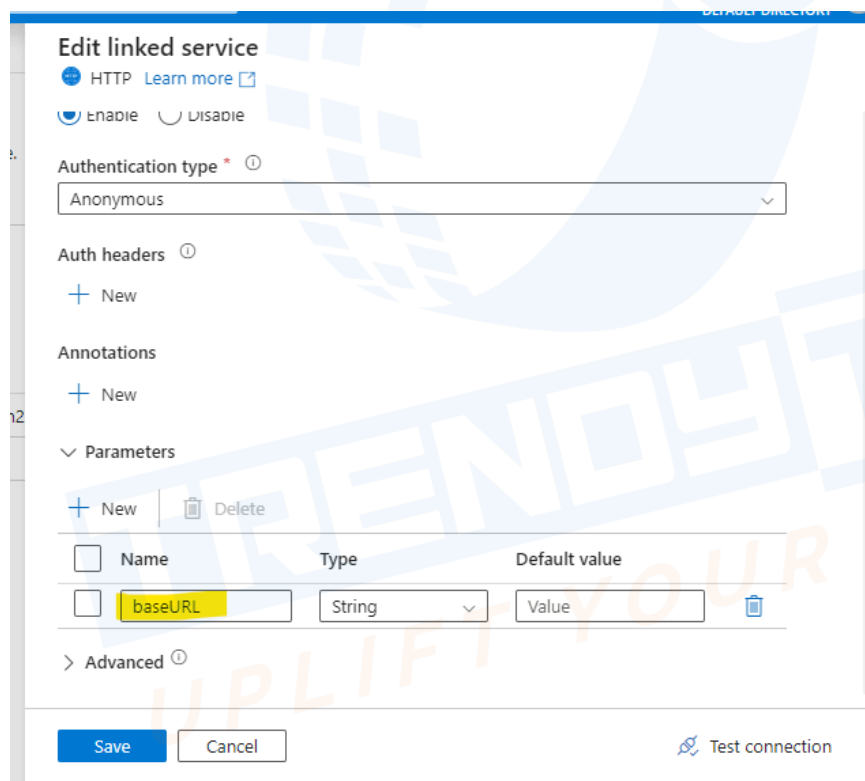


The screenshot shows the 'Edit linked service' window for an HTTP service. The 'Parameters' section is expanded, showing a table with one parameter:

Name	Type	Default value
baseUrl	String	Value


At the bottom of the window, there are 'Save' and 'Cancel' buttons, and a 'Test connection' link.

In the Base URL field, choose the “**Add Dynamic Content**” option and select the newly created parameter baseUrl.

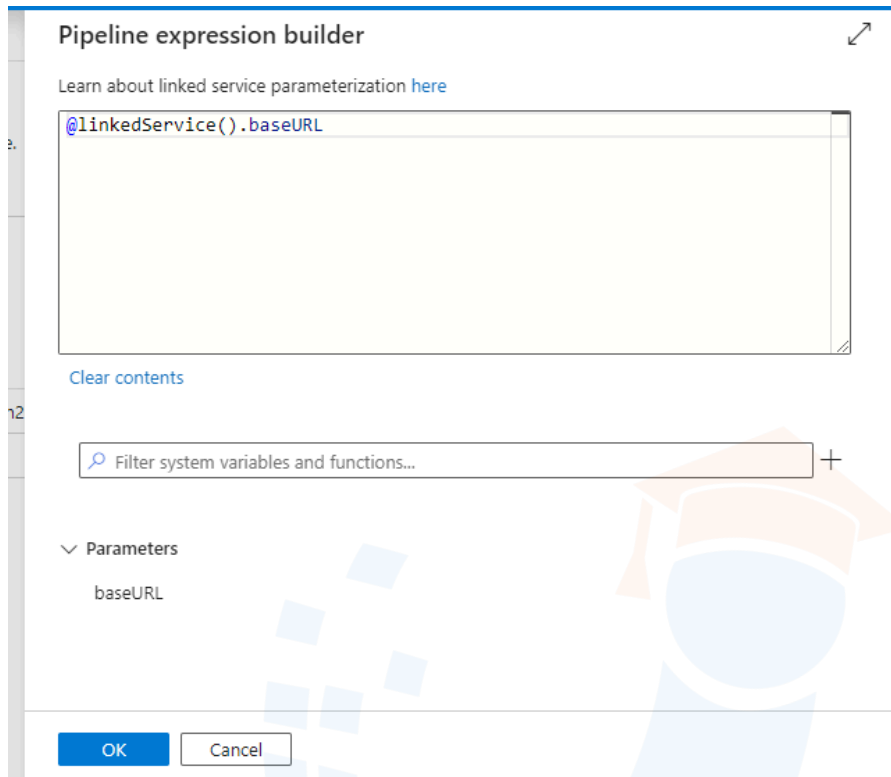


Now we will parameterize relative URL and base URL for datasets.


We will create the parameters baseUrl and relativeURL as shown below.


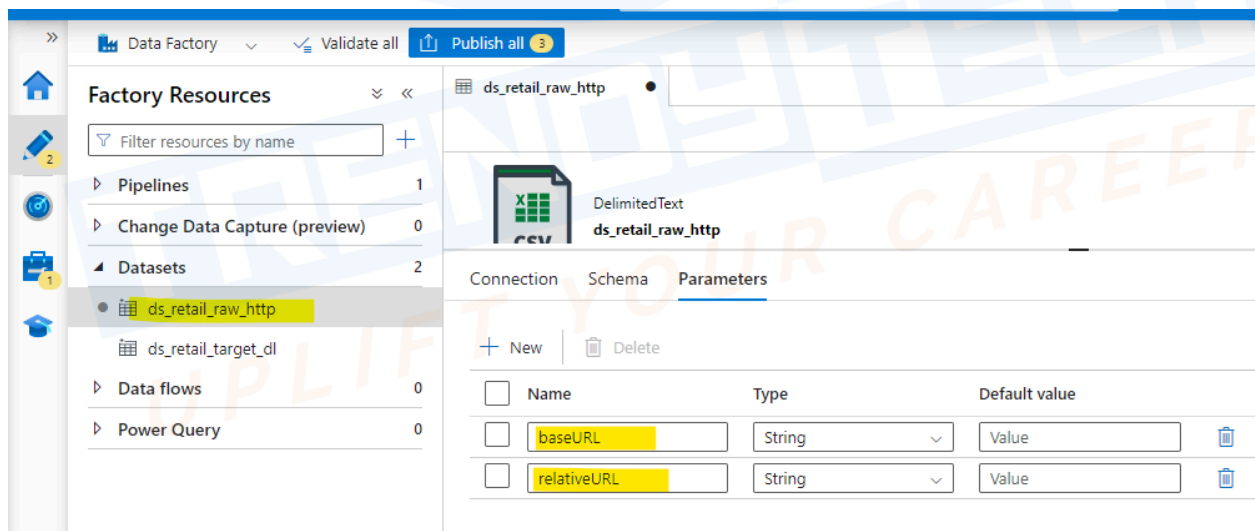


For source dataset we will provide this baseUrl parameter using option Add dynamic content.

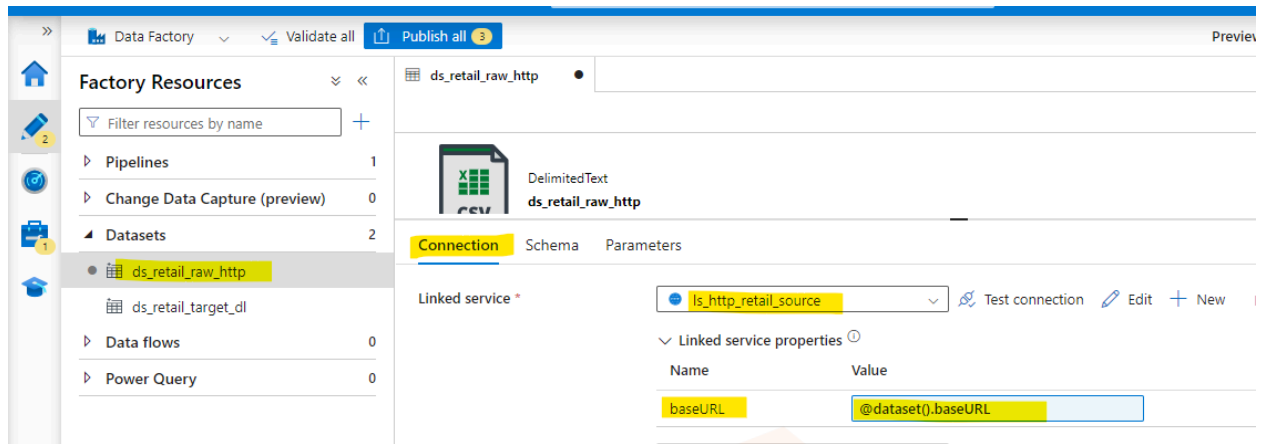

Also we will provide this relativeURL parameter using the option Add dynamic content.


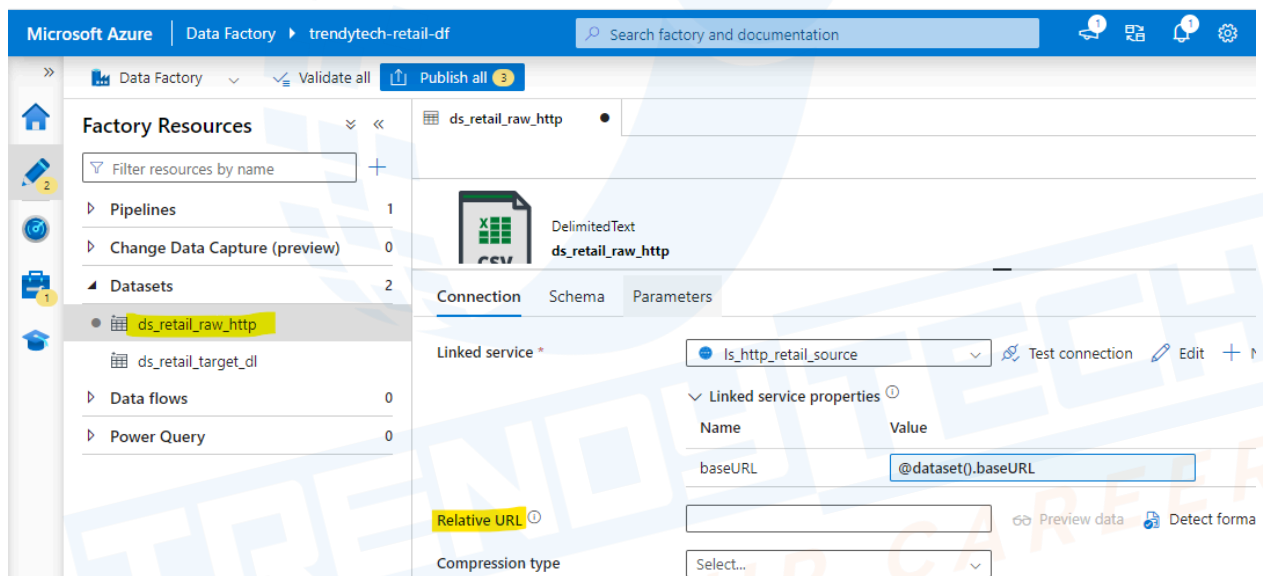


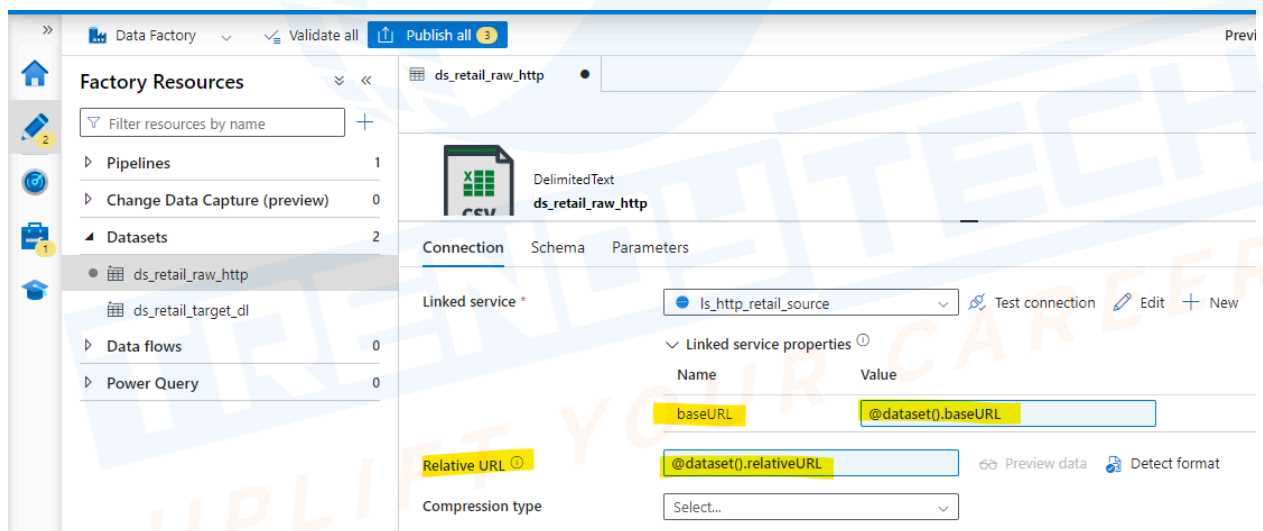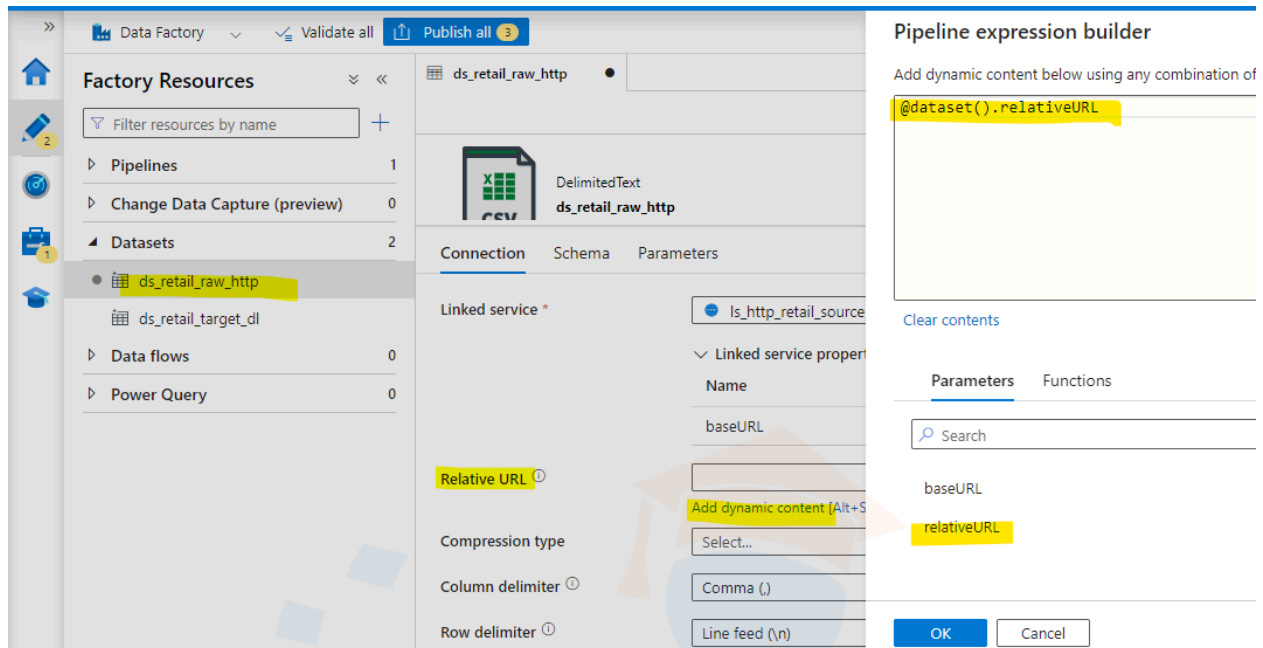

Parameterizing the Sink Linked Service:

We have to parametrize the Dataset where the target filename is present.


We will provide parameter for fileName using option Add dynamic content as shown below.

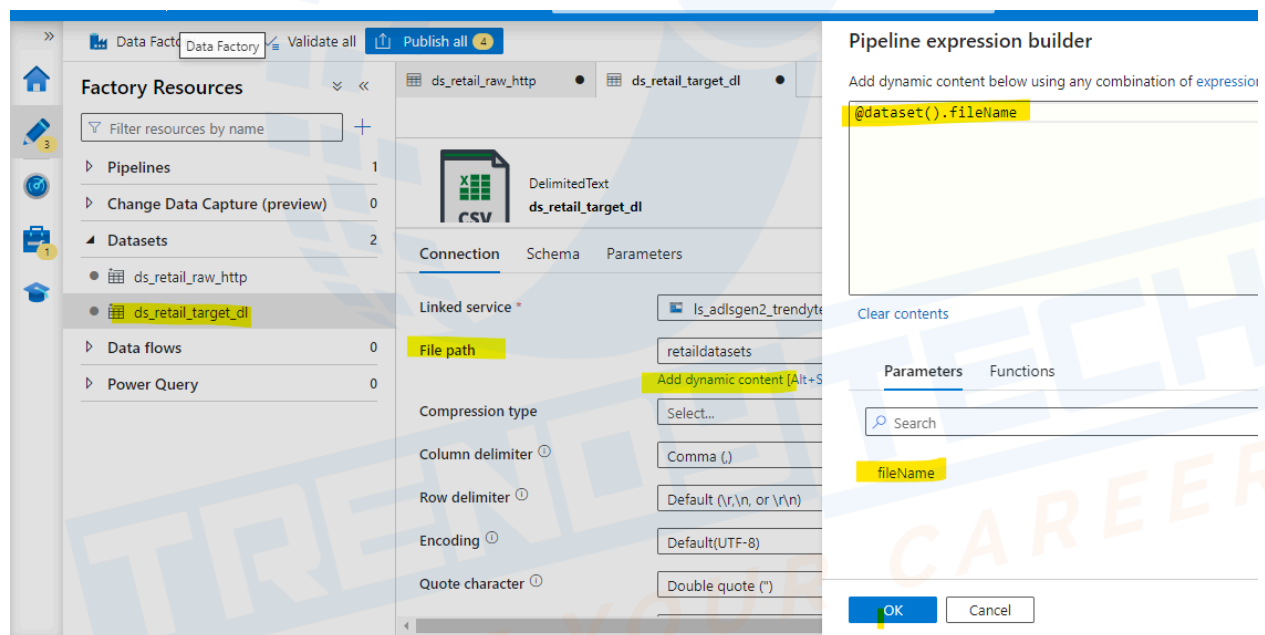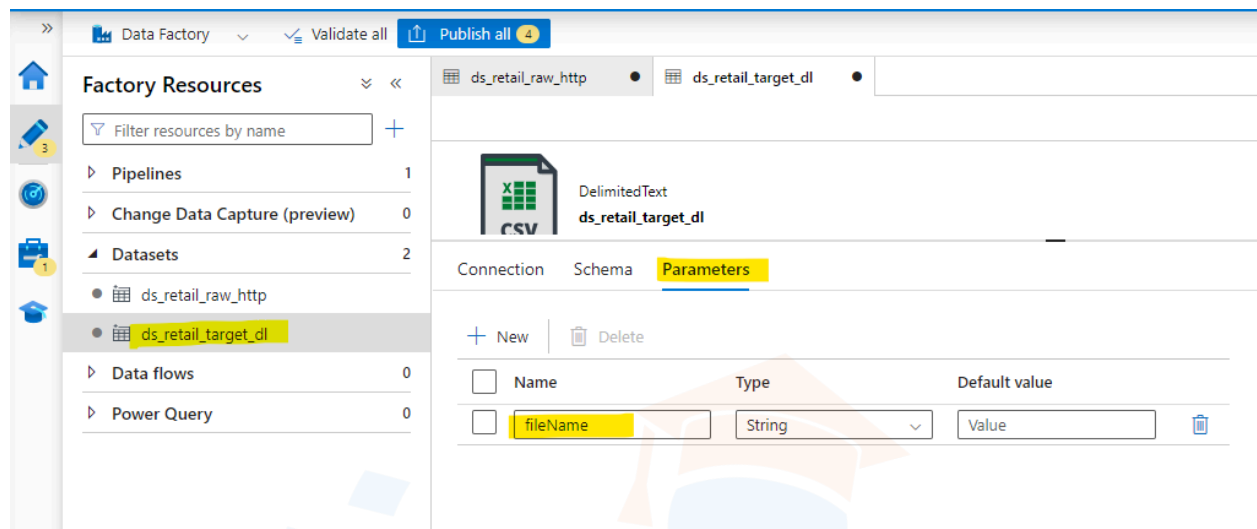

Parameterizing the Pipeline:


- While executing the pipeline, the parameters provided will be used by the underneath functionalities - Copy activity, Dataset, and Linked Service.
- With this, passing the parameters is pushed to the pipeline level from the copy activity level. On clicking on Debug Pipeline, it prompts for the URL values.

First we will define 3 parameters for the pipeline as shown below.

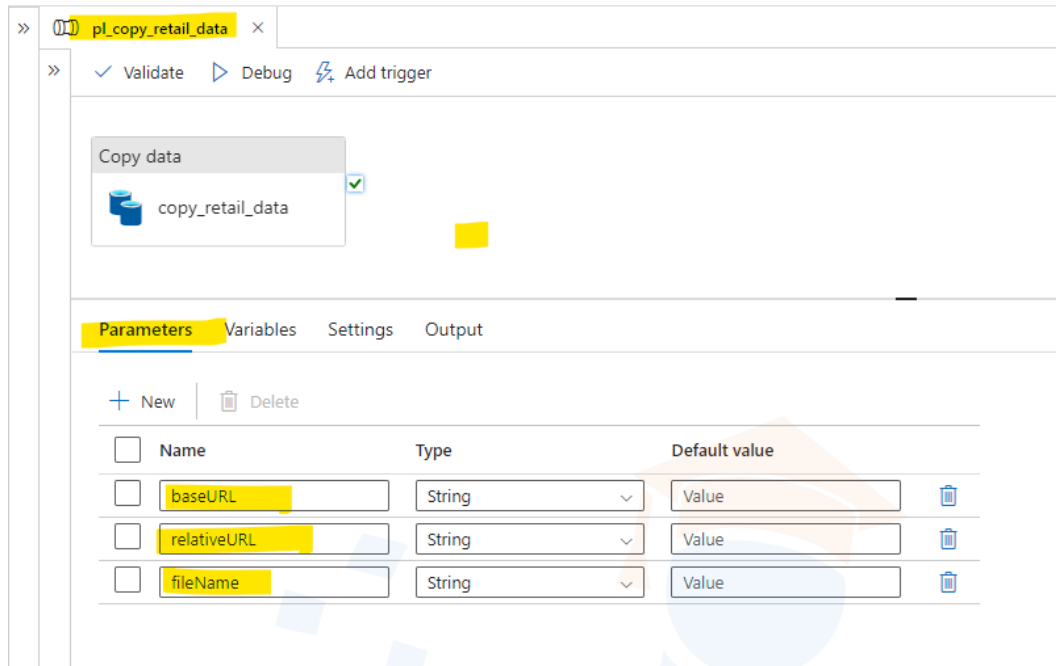


Now we will click on “Copy_retail_data” activity and in source we will add baseUrl.

Click on Source => baseUrl (click on value) => Add dynamic content => select “BaseUrl”

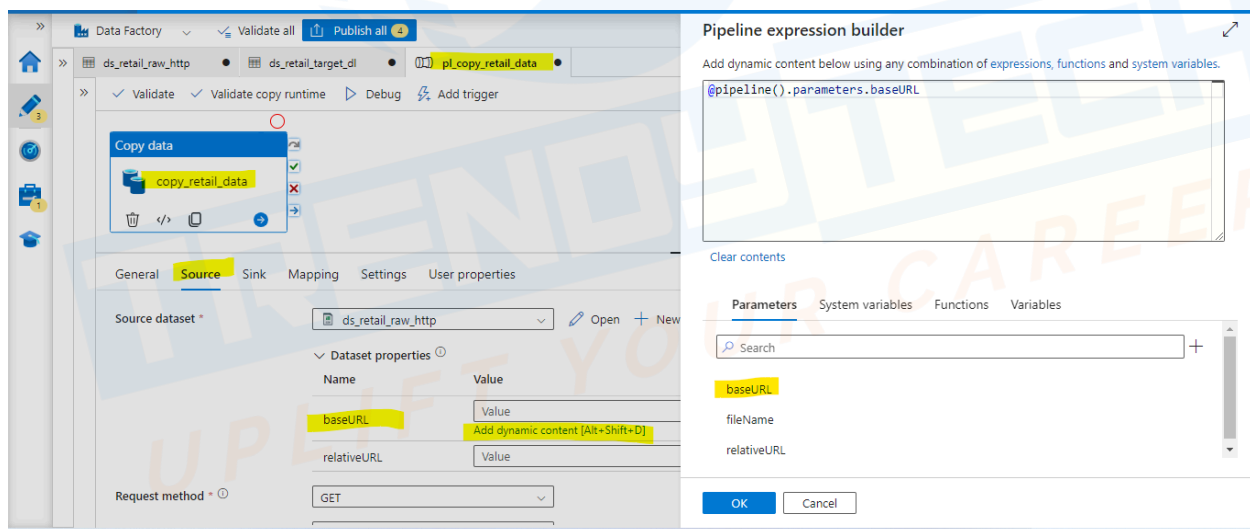


Similarly we will add a relative URL also.



Click on Source => relativeURL (click on value) => Add dynamic content => select “relativeURL”

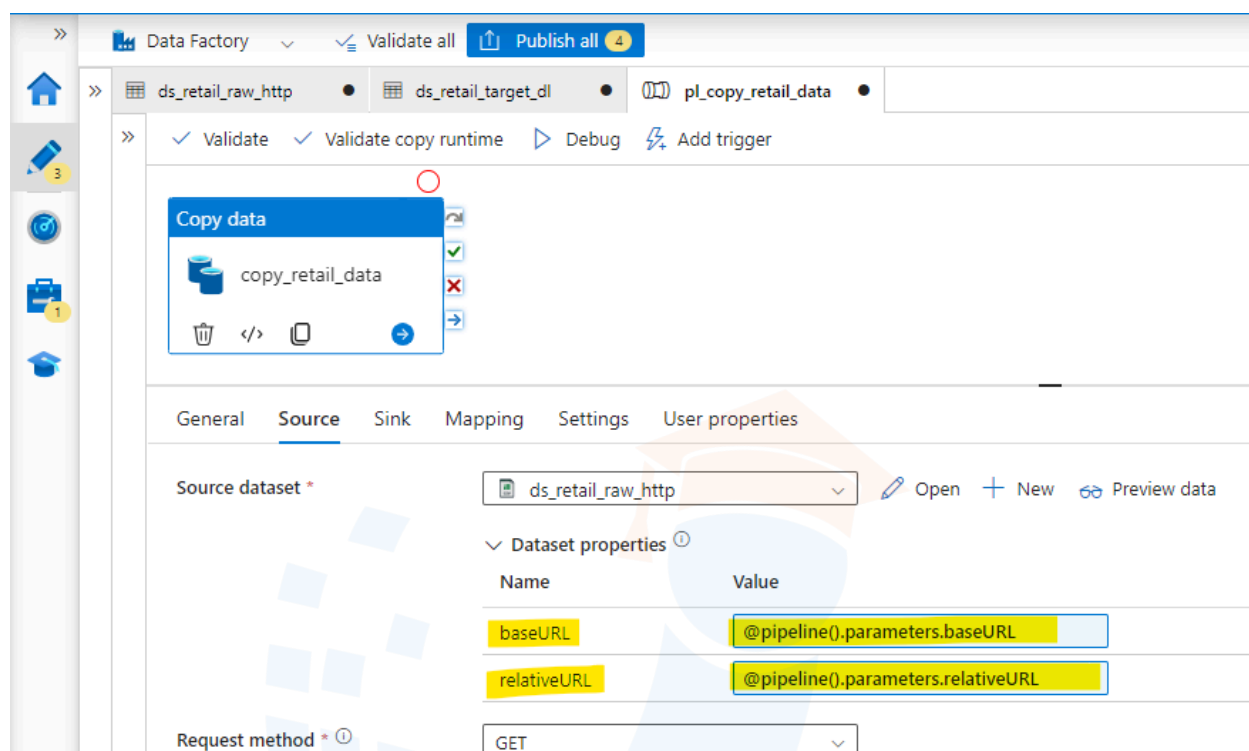

To add parameter for filename in sink:


Click on Sink=> fileName(click on value) => Add dynamic content => select "fileName"

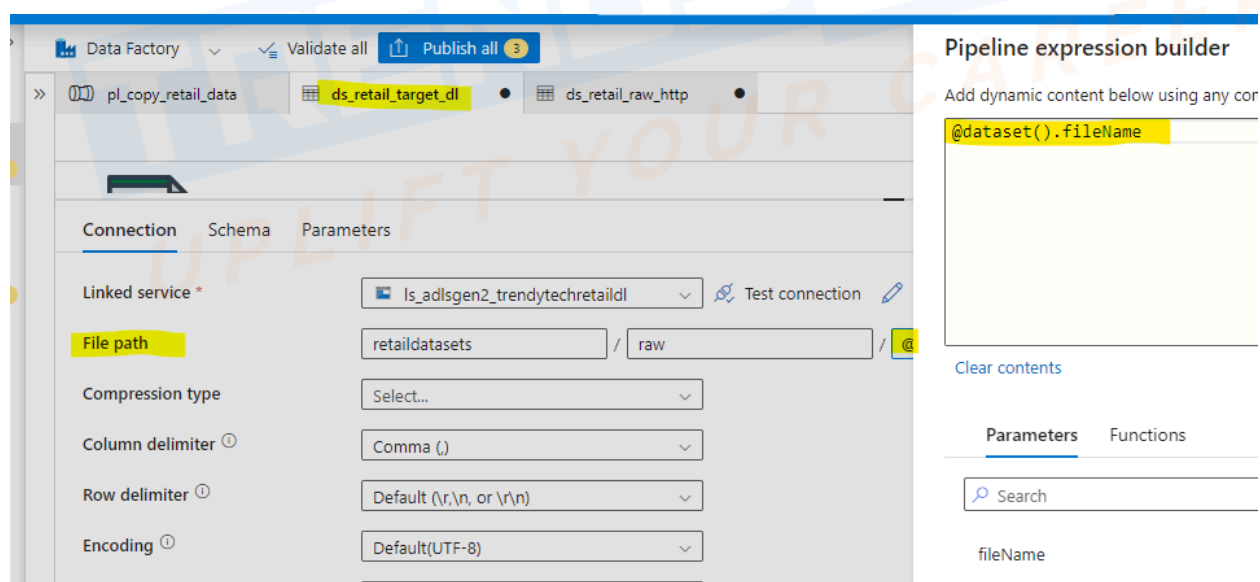

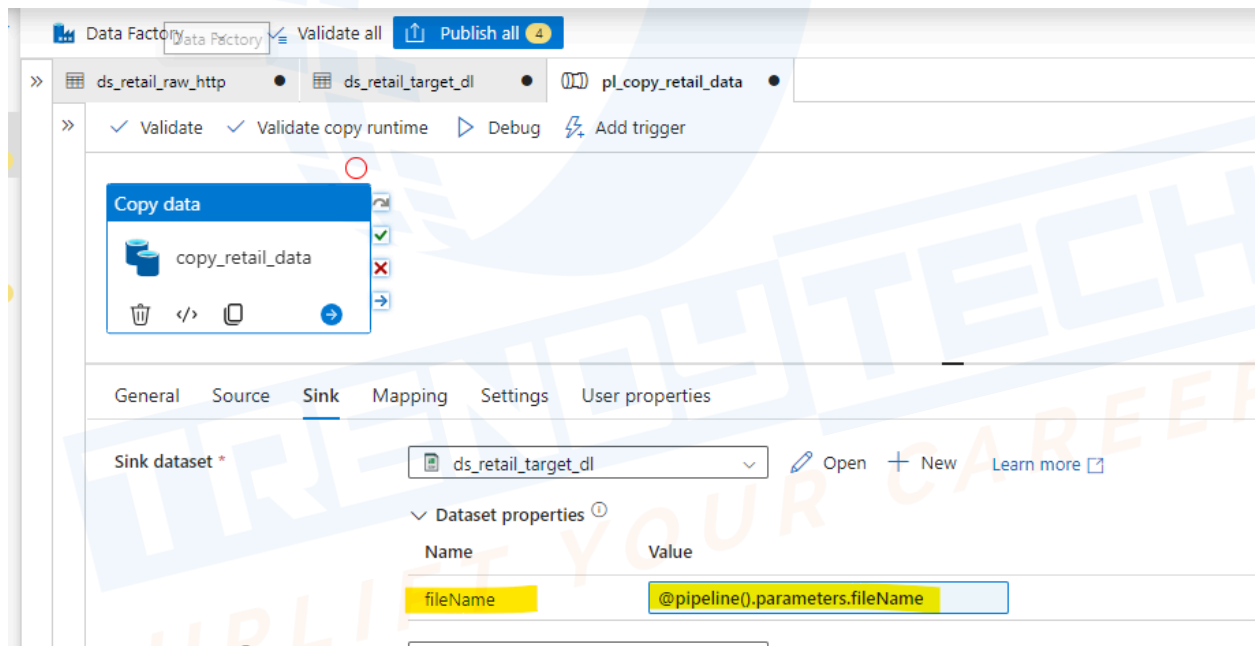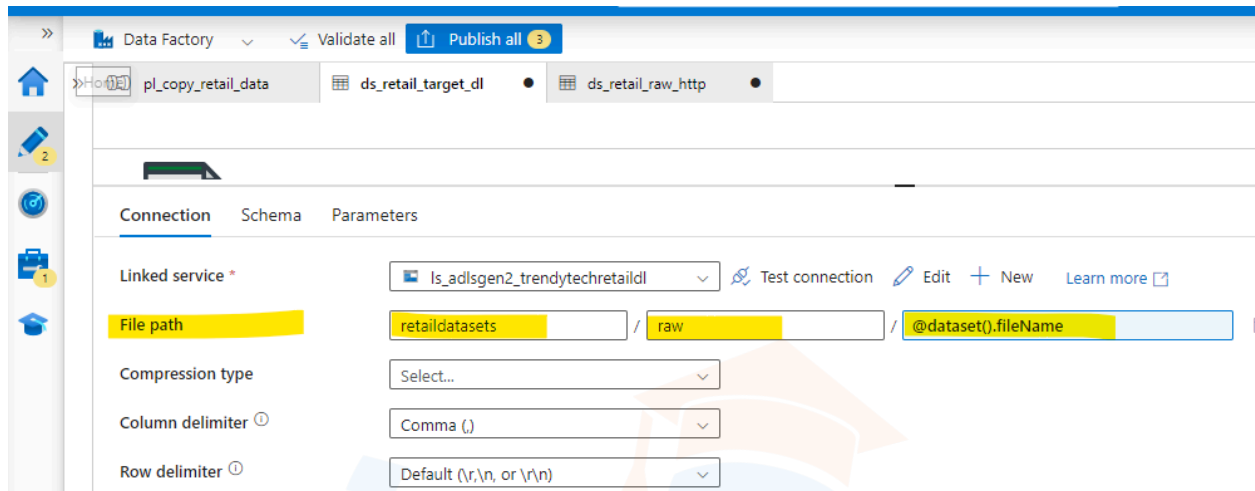

Now publish all the changes.

Now we will try to debug this pipeline, now it will ask for URL

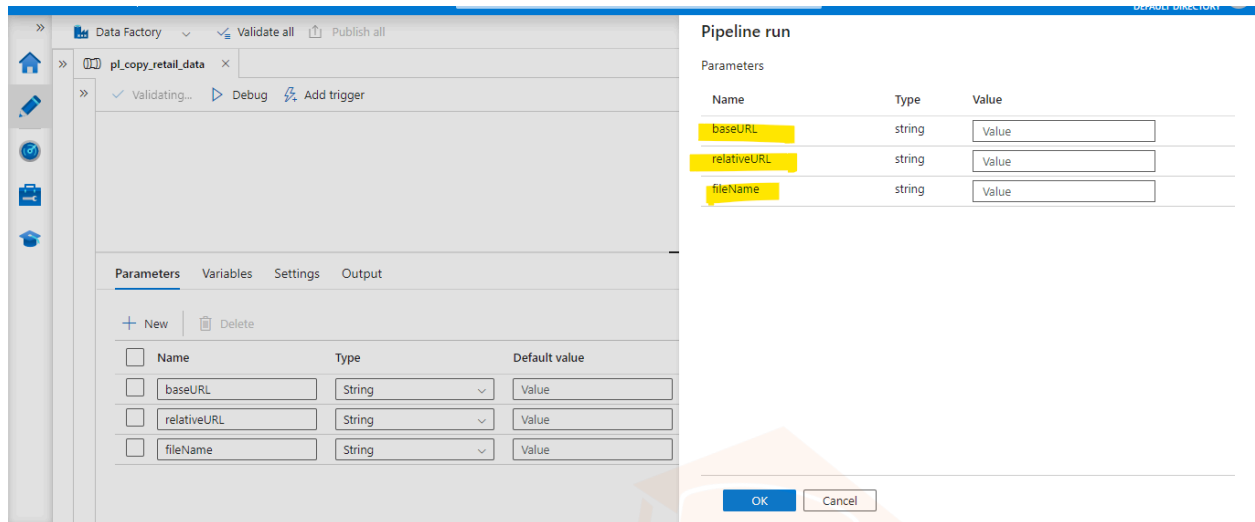

Now we will try giving parameter values:

Ex: <https://trendytechretailsa1.blob.core.windows.net/retail-raw/orders.csv>

<https://trendytechretailsa1.blob.core.windows.net/retail-raw/orders.csv>

baseURL- <https://trendytechretailsa1.blob.core.windows.net>

relativeURL - retail-raw/orders.csv

fileName - orders.csv

Pipeline run

Parameters

Name	Type	Value
baseUrl	string	https://trendytechretailsa1.bl...
relativeURL	string	retail-raw/orders.csv
fileName	string	orders.csv

OK

Cancel

Microsoft Azure | Data Factory > trendytech-retail-df

Search factory and documentation

>> Data Factory > Validate all > Publish all

>> pl.copy_retail_data

Activities

Search activities

- > Move and transform
- > Synapse
- > Azure Data Explorer
- > Azure Function
- > Batch Service
- > Databricks
- > Data Lake Analytics
- > General
- > HDInsight
- > Iteration & conditionals

Validate Debug Add trigger

Copy data

copy_retail_data

Parameters Variables Settings Output

Pipeline run ID: 4f3e9a0b-9b06-40b0-bd29-1b60275b03be

Pipeline status: Succeeded

All status

Showing 1 - 1 of 1 items

Activity name	Activity status	Activity type	Run start	Duration
copy_retail_data	Succeeded	Copy data	5/9/2024, 8:21:51 PM	16s

Here you can provide different URL values to download different datasets without creating a large number of components. But in this we have to pass parameters manually during run time.

We can make the above solution better i.e we can automate the complete pipeline for which we will make use of Lookup Activity.

For this we will first create the filelist_lookup.csv which will be having BaseURL, RelativeURL and fileName

Ex:

BaseURL,RelativeURL,fileName

<https://trendytechretailsa1.blob.core.windows.net,retail-raw/orders.csv,orders.csv>

<https://trendytechretailsa1.blob.core.windows.net,retail-raw/customers.csv,customers.csv>


https://trendytechretailsa1.blob.core.windows.net,retail-raw/order_items.csv,order_items.csv

<https://trendytechretailsa1.blob.core.windows.net,retail-raw/departments.csv,departments.csv>

<https://trendytechretailsa1.blob.core.windows.net,retail-raw/categories.csv,categories.csv>

<https://trendytechretailsa1.blob.core.windows.net,retail-raw/products.csv,products.csv>

Now, in our source blob storage we will create the container “configurations” to store this filelist_lookup.csv file.

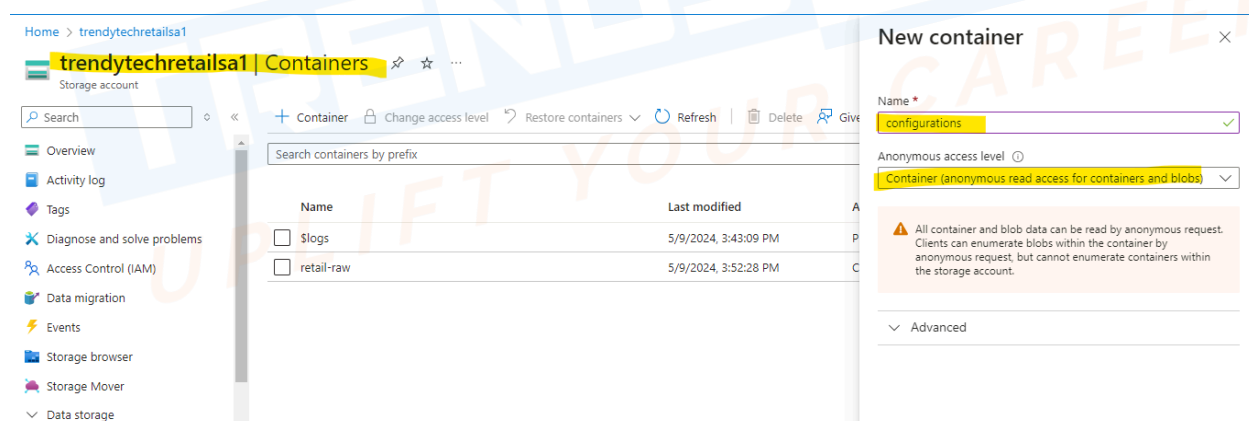

Also we will upload the file in it.

Home > trendytechretailsa1 | Containers >

configurations

Container

Search

Upload Change access level Refresh Delete Change tier Acquire lease Break lease

Overview

- Diagnose and solve problems
- Access Control (IAM)
- Settings

Authentication method: Access key (Switch to Microsoft Entra user account)

Location: configurations

Search blobs by prefix (case-sensitive)

Add filter

Name	Modified	Access tier	Archive status	Blob type
☐ filelist_lookup.csv	5/9/2024, 8:46:42 PM	Hot (Inferred)		Block blob

Now we will create a linked service for blob storage having this configuration file.

New linked service

Data store Compute

blo

All Azure Database File Generic protocol NoSQL Services and apps

Azure Blob Storage

Continue Cancel

New linked service

Azure Blob Storage Learn more

Name *

ls_blob_config_filelist

Description

Connect via integration runtime * ⓘ

AutoResolveIntegrationRuntime

Authentication type

Account key

Connection string Azure Key Vault

Account selection method ⓘ

☒ From Azure subscription ☐ Enter manually

Account selection method ⓘ

☒ From Azure subscription ☐ Enter manually tion

Azure subscription ⓘ

Select all ▼

Storage account name *

trendytechretailsa1 ▼ ↻

Additional connection properties

+ New

Test connection ⓘ

☒ To linked service ☐ To file path

Annotations

+ New

Annotations

+ New

> Parameters



Advanced ⓘ

✓ Connection successful


Create Back Test connection Cancel

After this we will create the dataset for this file


Now we will edit our existing pipeline. First we will add Lookup Activity and we will provide a source dataset to it.

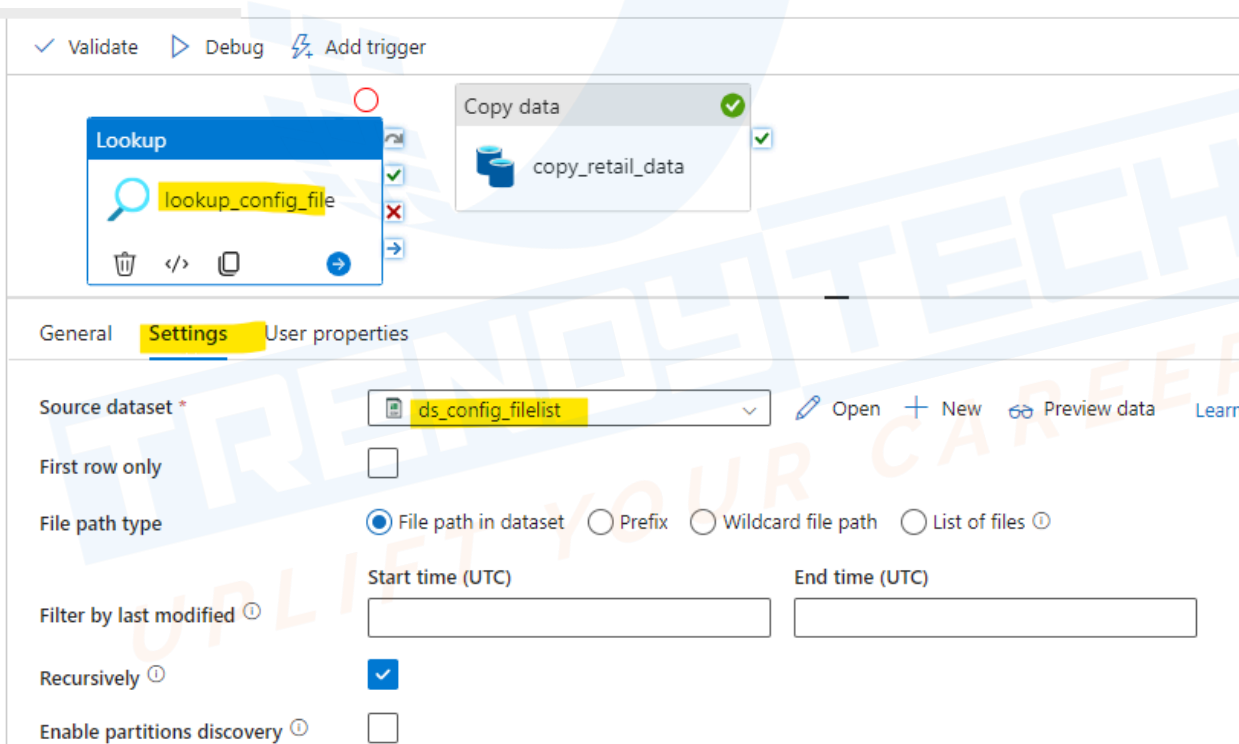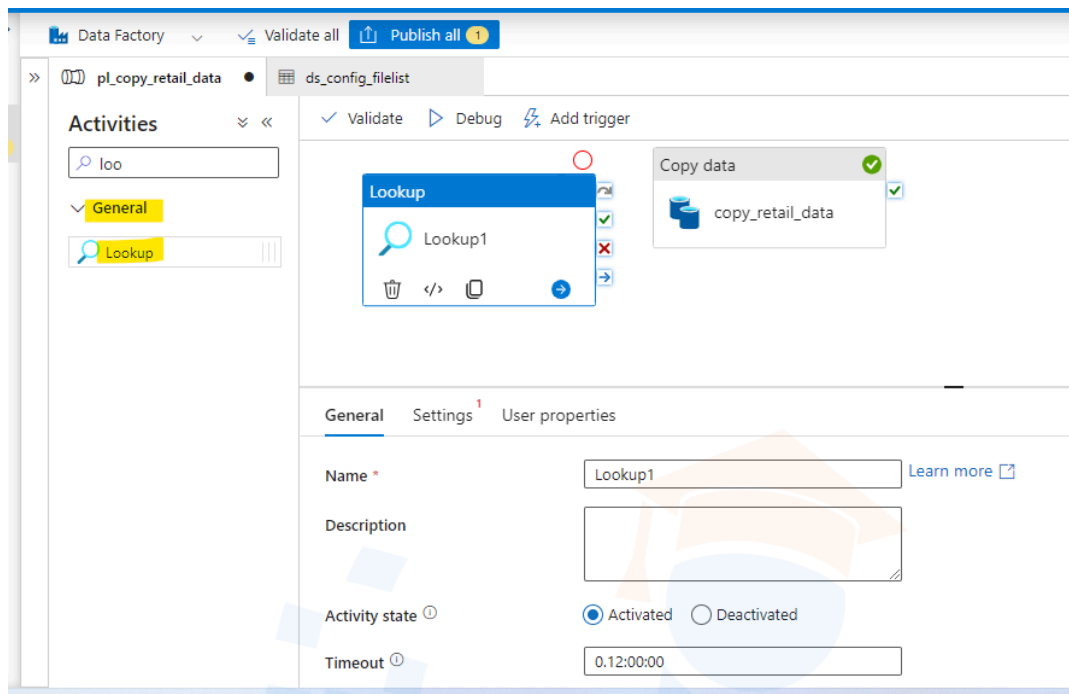

Then we will add for each Activity:

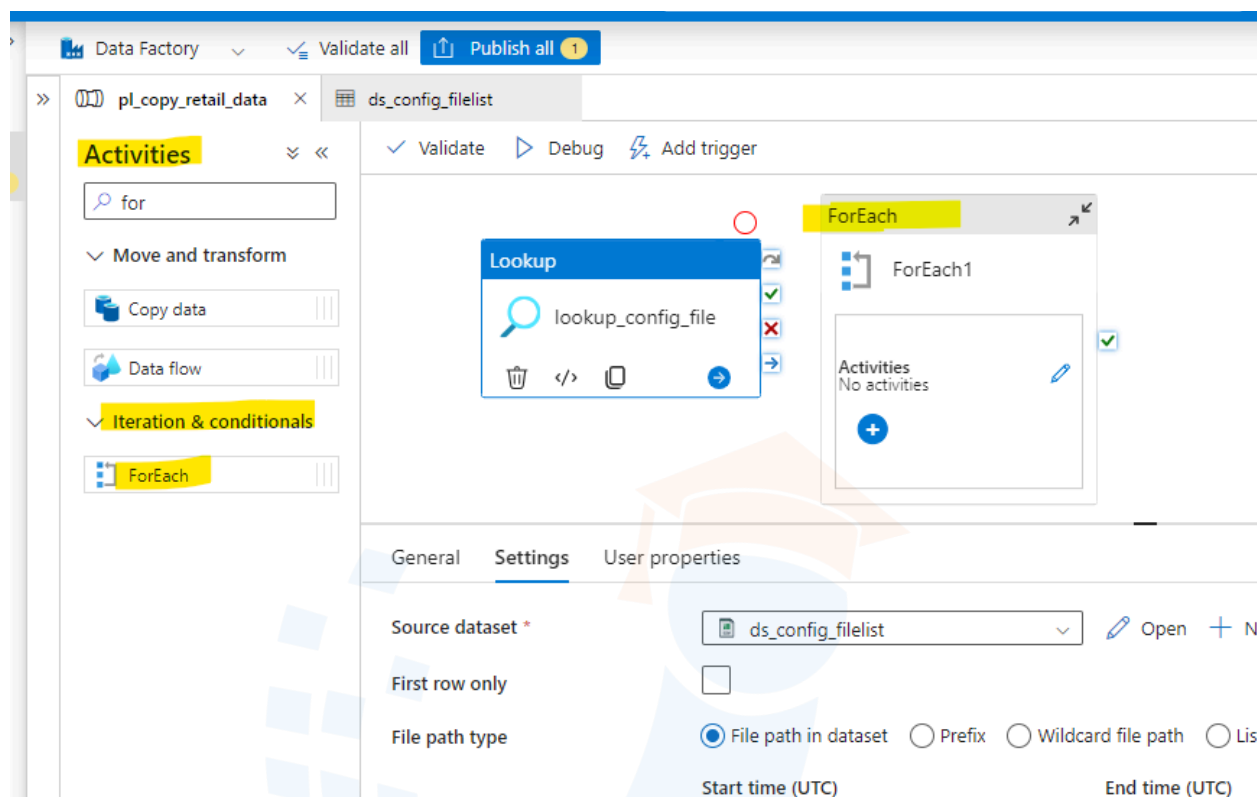

Note: Before proceeding ahead delete the parameters that we have created for this pipeline.

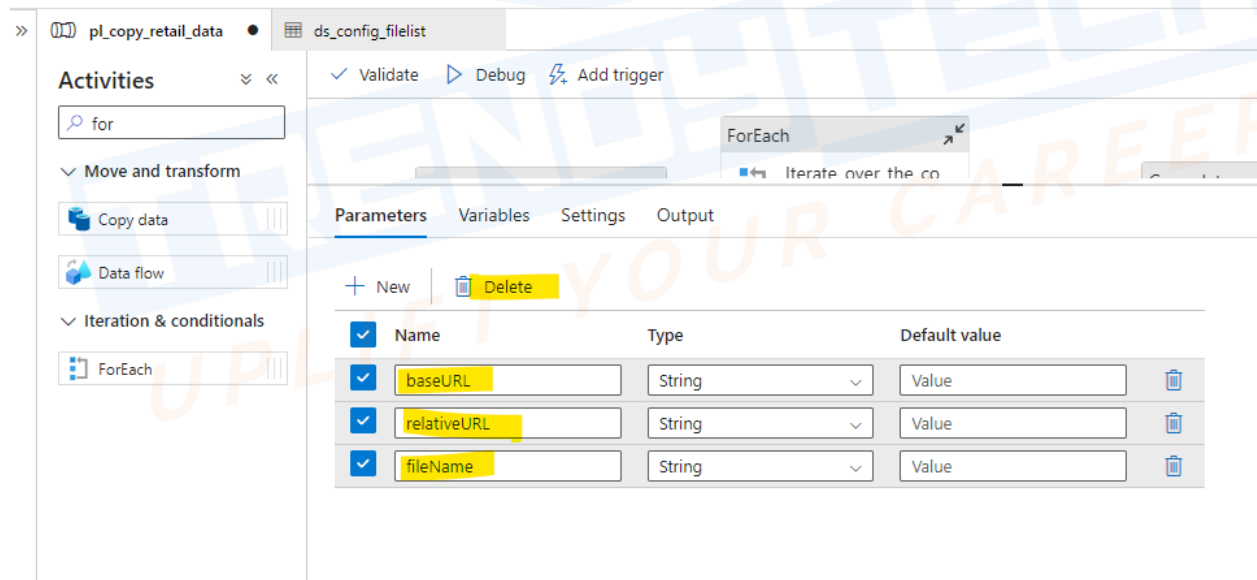

Now we will add the items using “Add Dynamic Content”

The screenshot shows the Data Factory pipeline editor for a pipeline named 'pl_copy_retail_data'. The 'Activities' pane on the left shows the 'ForEach' activity selected. The 'Settings' tab of the 'ForEach' activity is open, showing the 'Items' property set to '@activity('lookup_config_file').output.value'. The 'Pipeline expression builder' dialog is open, showing the expression '@activity('lookup_config_file').output.value'. The 'Settings' tab of the 'ForEach' activity is selected, showing the 'Items' property. A message box says 'This property should be parameterized.'

Pipeline expression builder

Add dynamic content below using any combination of expressions, function

@activity('lookup_config_file').output.value

Clear contents

Activity outputs Parameters System variables Functions

lookup_config_file
lookup_config_file activity output

lookup_config_file
lookup_config_file pipeline return value

OK Cancel

ds_config_filelist

Validate Debug Add trigger

Lookup
lookup_config_file

ForEach
Iterate_over_the_co
nfig_file

Copy data
copy_i


General Settings Activities (0) User properties

Sequential ☐


Batch count

Items

Now cut/copy the “copy data” activity “copy_retail_data” and paste in the for each loop

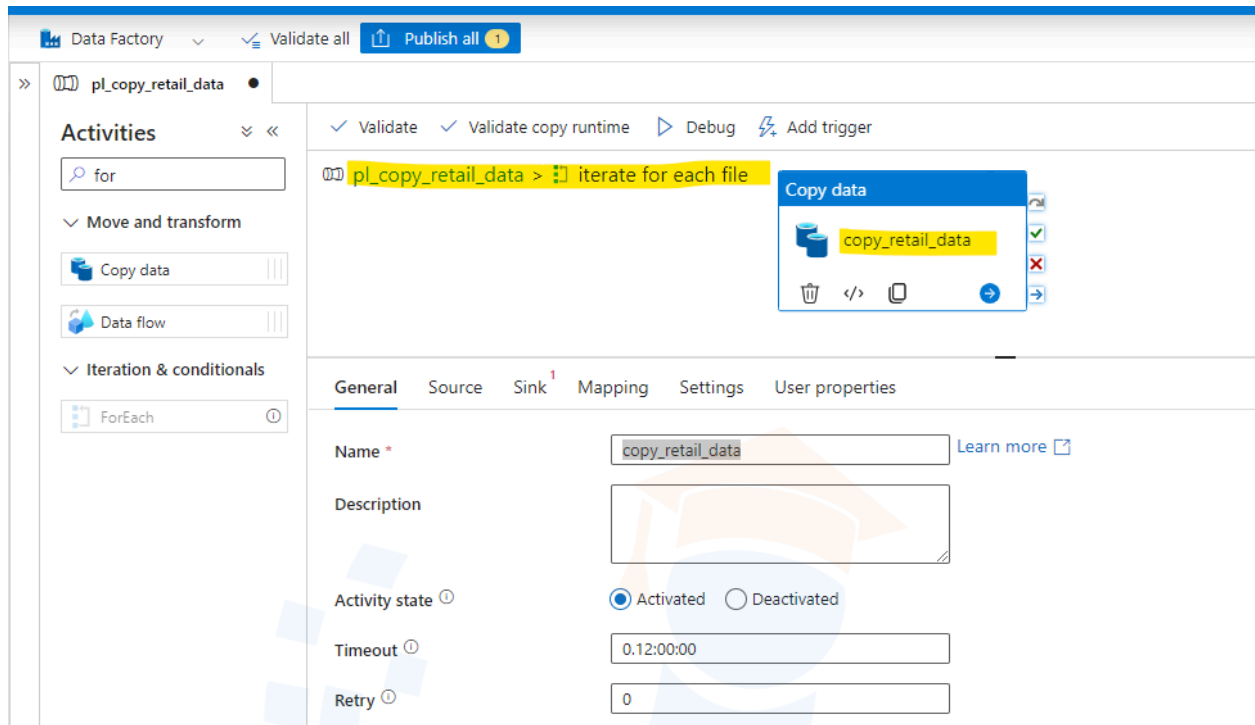

Now we will add the baseURL as shown below.

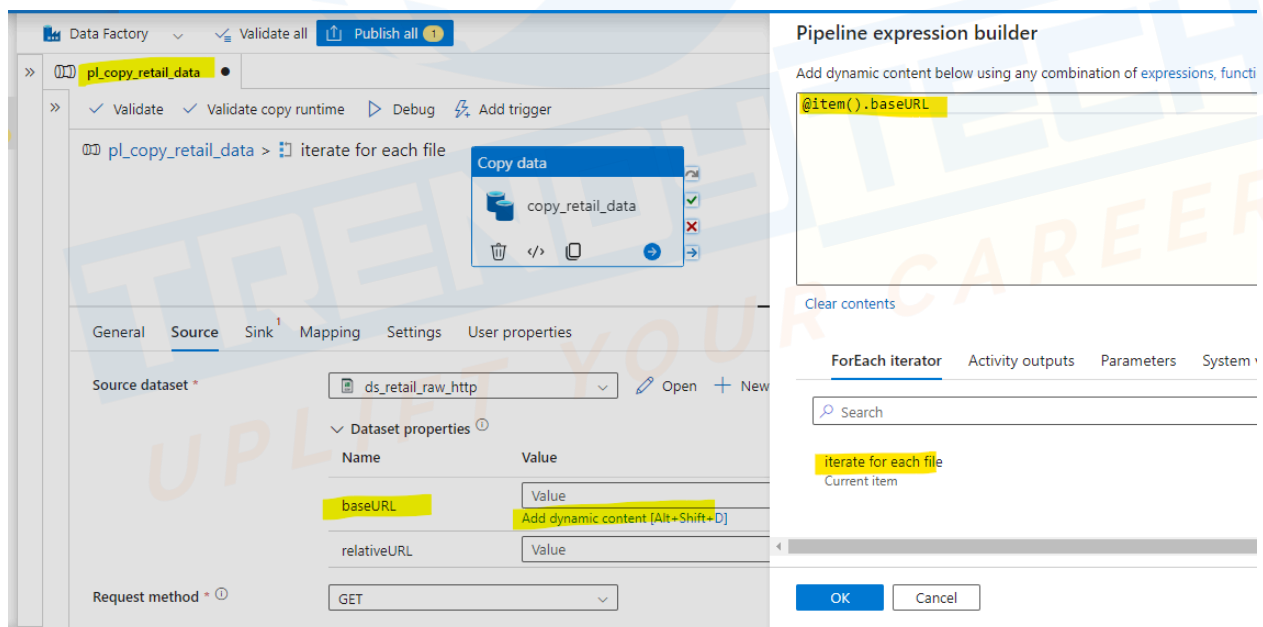

Source

Source dataset * ds_retail_raw_http Open + New

Dataset properties

Name	Value
baseUrl	@item().baseUrl
relativeURL	Value

Request method * GET

Pipeline expression builder

Add dynamic content below using any combination

@item().relativeURL

Clear contents

ForEach iterator Activity outputs P

iterate for each file
Current item

OK Cancel

Sink

Sink dataset * ds_retail_target_dl Open + New

Dataset properties

Name	Value
fileName	@item().fileName

Copy behavior Select...

Max concurrent connections

Pipeline expression builder

Add dynamic content below using any combination

@item().fileName

Clear contents

ForEach iterator Activity outputs Par

iterate for each file
Current item


OK Cancel

And publish all the changes.

Note: Now delete if any file is present at target ADLS Gen2 location.

We will trigger this pipeline using the Schedules trigger option.

We will add the trigger to this pipeline.

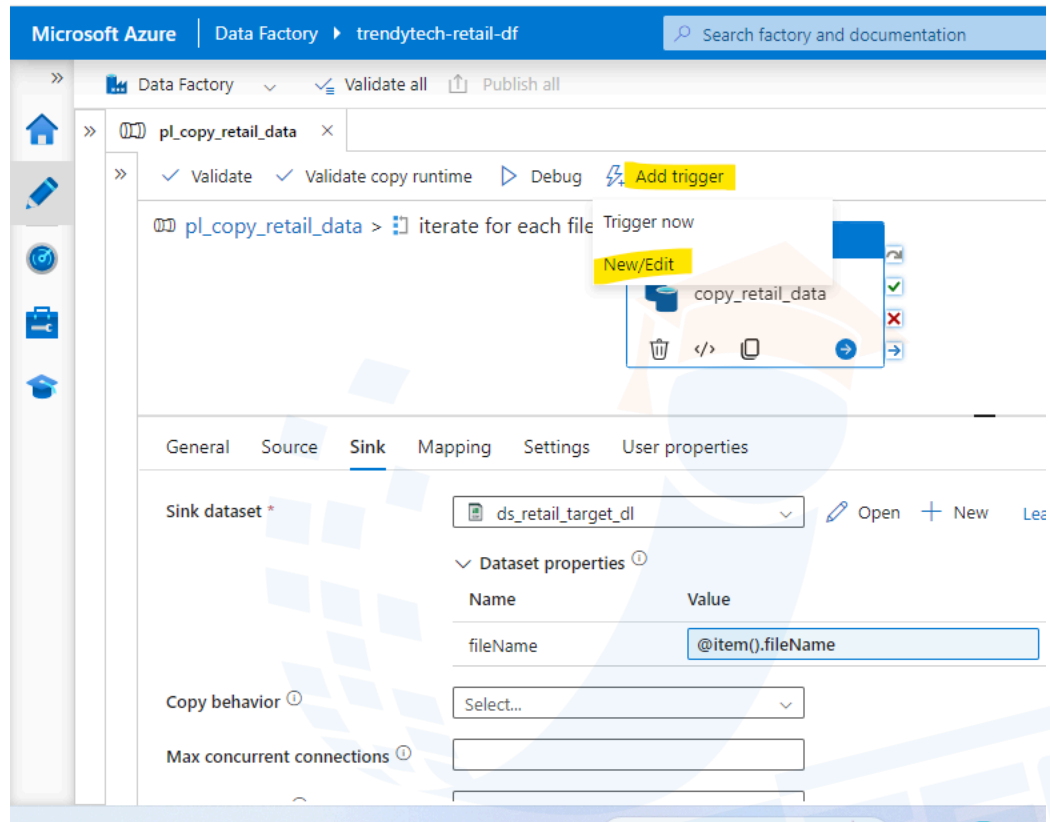

When the pipeline is triggered it will be reflected in the monitor tab. And once it is completed it will be reflected in pipeline runs and trigger runs as shown below.

Expand <<

Home Dashboards

Runs

Pipeline runs

Trigger runs

Change Data Capture (previ...

Runtimes & sessions

Integration runtimes

Data flow debug

Notifications

Alerts & metrics

Trigger runs

All **Schedule** Tumbling window Storage events Custom events Refresh Edit columns

Chennai, Kolkata, Mu... : **Last 24 hours** Trigger name : **All** Status : **All** X

Showing 1 - 1 items

Trigger name ↑↓	Scheduled time	Trigger time ↑↓	Status ↑↓	Pipelines
tr_retail_pl	5/9/2024, 10:31:00 PM	5/9/2024, 10:31:00 PM	✓ Succeeded	1

Expand <<

Home Dashboards

Runs

Pipeline runs

Trigger runs

Change Data Capture (previ...

Runtimes & sessions

Integration runtimes

Data flow debug

Notifications

Pipeline runs

Triggered Debug Rerun Cancel options Refresh Edit columns List Gantt

Filter by run ID or name Chennai, Kolkata, Mu... : **Last 24 hours** Pipeline name : **All** Status : **All** Copy filters Export to CSV

Runs : Latest runs Triggered by : **All** Add filter X

Showing 1 - 1 items Last refreshed 0 minutes ago

☐ Pipeline name ↑↓	Run start ↑↓	Run end ↑↓	Duration	Triggered by	Status ↑↓	Run
☐ pl_copy_retail_data	5/9/2024, 10:31:00 PM	5/9/2024, 10:33:26 PM	2m 26s	tr_retail_pl	✓ Succeeded	Origina