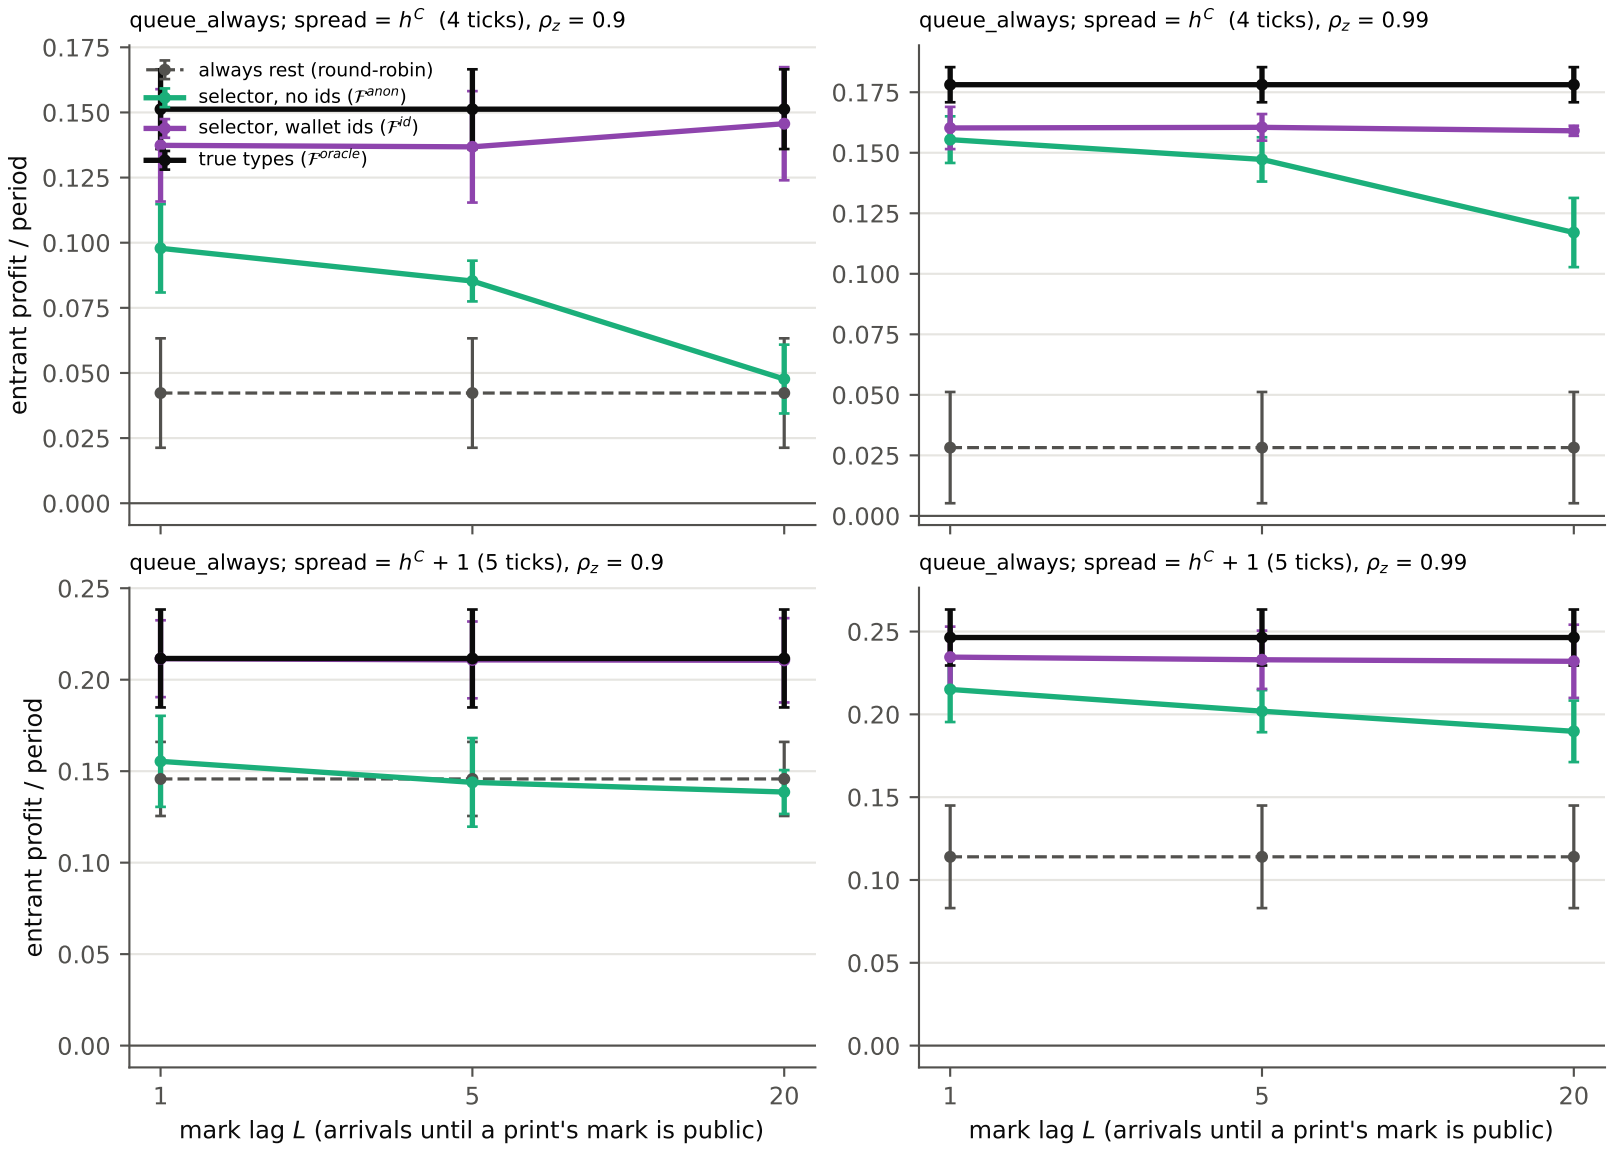
queue_always; spread = $h^C$ (4 ticks), $\rho_z$ = 0.9
queue_always; spread = $h^C$ (4 ticks), $\rho_z$ = 0.99
queue_always; spread = $h^C$ + 1 (5 ticks), $\rho_z$ = 0.9
queue_always; spread = $h^C$ + 1 (5 ticks), $\rho_z$ = 0.99
always rest (round-robin)
selector, no ids ($\mathcal{F}^{anon}$)
selector, wallet ids ($\mathcal{F}^{id}$)
true types ($\mathcal{F}^{oracle}$)
entrant profit / period
mark lag $L$ (arrivals until a print's mark is public)