


ECS and ECR

ECS: containerization service offered by aws

ECR: like dockerhub

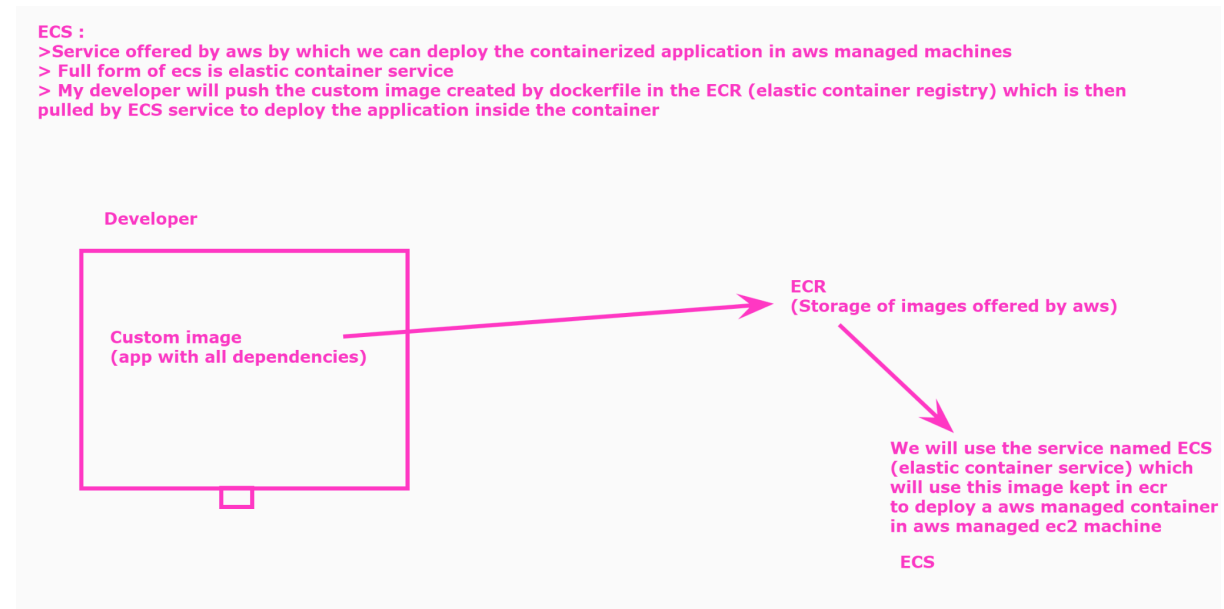

PROJECT : <https://github.com/akshu20791/ECS-AWS-LAB>

Go in your docker ec2 ubuntu machine

```
# sudo su
```

```
git clone https://github.com/akshu20791/ECS-AWS-LAB
```

```
root@ip-172-31-90-15:/home/ubuntu# git clone https://github.com/akshu20791/ECS-AWS-LAB
Cloning into 'ECS-AWS-LAB'...
remote: Enumerating objects: 31, done.
remote: Counting objects: 100% (31/31), done.
remote: Compressing objects: 100% (20/20), done.
remote: Total 31 (delta 5), reused 30 (delta 5), pack-reused 0 (from 0)
Receiving objects: 100% (31/31), 989.14 KiB | 39.57 MiB/s, done.
Resolving deltas: 100% (5/5), done.
root@ip-172-31-90-15:/home/ubuntu# ls
Dockerfile  ECS-AWS-LAB  myfile
```


```
# cd ECS-AWS-LAB (to enter inside the repo which we created)
```

```
# ls
```


```
root@ip-172-31-90-15:/home/ubuntu# cd ECS-AWS-LAB
root@ip-172-31-90-15:/home/ubuntu/ECS-AWS-LAB# ls
Dockerfile  Jenkinsfile  README.md  docker-compose.yml  index.html  mysql-dump  pom.xml  src  target
root@ip-172-31-90-15:/home/ubuntu/ECS-AWS-LAB#
```

In above all the project file is present

WE WILL NOW CREATE ECR (ELASTIC CONTAINER REGISTRY)

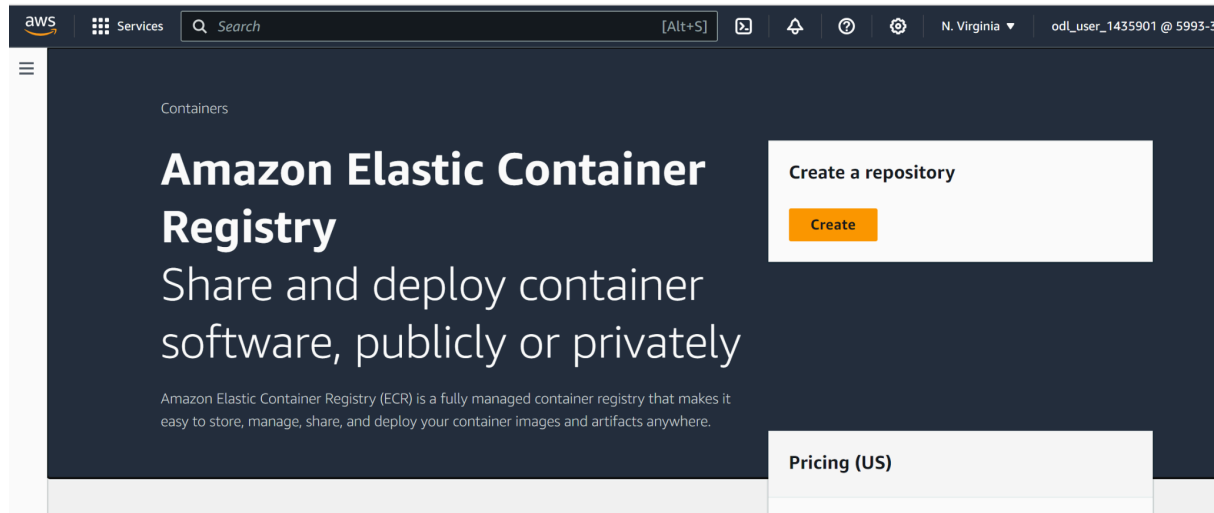

Create

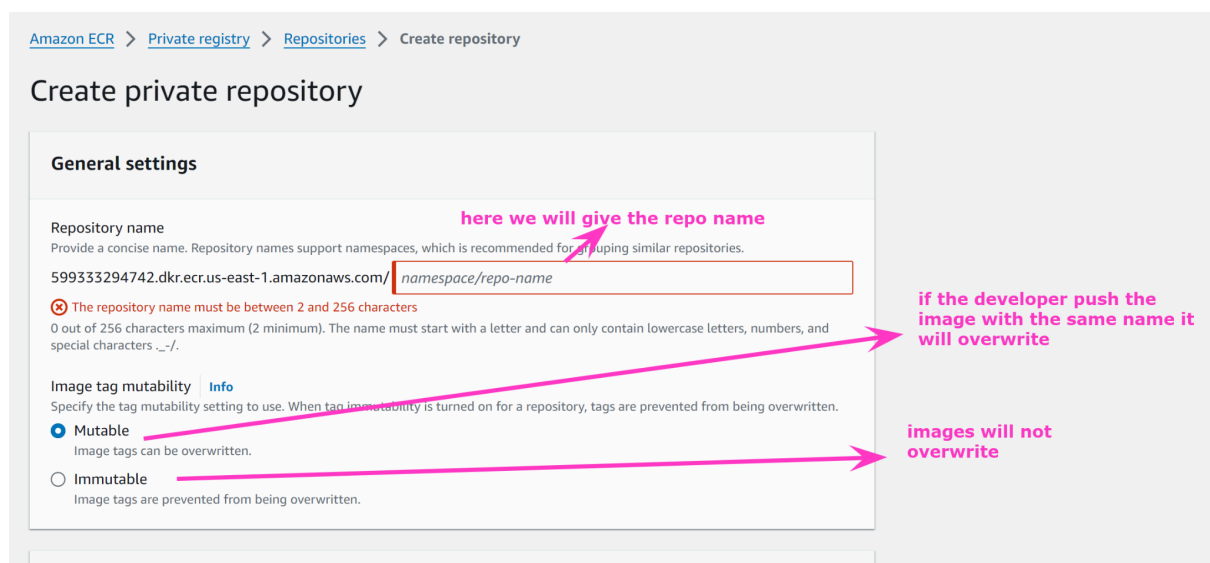

Create private repository

General settings

Repository name

Provide a concise name. Repository names support namespaces, which is recommended for grouping similar repositories.

599333294742.dkr.ecr.us-east-1.amazonaws.com/

6 out of 256 characters maximum (2 minimum). The name must start with a letter and can only contain lowercase letters, numbers, and special characters ._-/.

Image tag mutability [Info](#)

Specify the tag mutability setting to use. When tag immutability is turned on for a repository, tags are prevented from being overwritten.

☒ Mutable

Image tags can be overwritten.

☐ Immutable

Image tags are prevented from being overwritten.

Create

Private repositories

Create repository

Repositories (1)



View push commands

Delete

Actions ▼

	Repository name ▲	URI	Created at ▼	Tag immutability	Encryption type
☒	myrepo	599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo	August 24, 2024, 21:21:37 (UTC+05.5)	Mutable	AES-256

Push commands for myrepo

[macOS / Linux](#) | [Windows](#)

Make sure that you have the latest version of the AWS CLI and Docker installed. For more information, see [Getting Started with Amazon ECR](#).

Use the following steps to authenticate and push an image to your repository. For additional registry authentication methods, including the Amazon ECR credential helper, see [Registry Authentication](#).

1. Retrieve an authentication token and authenticate your Docker client to your registry. Use the AWS CLI:

```
aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin 599333294742.dkr.ecr.us-east-1.amazonaws.com
```

Note: If you receive an error using the AWS CLI, make sure that you have the latest version of the AWS CLI and Docker installed.
2. Build your Docker image using the following command. For information on building a Docker file from scratch see the instructions [here](#). You can skip this step if your image is already built:

```
docker build -t myrepo .
```
3. After the build completes, tag your image so you can push the image to this repository:

But before entering these commands in the machine we need to use secret key and access secret key to get access of aws account from the machine

To generate access key and secret access key 👍

Go to iam -> go to user which is already created for you

Identity and Access Management (IAM)

[IAM](#) > [Users](#)

Users (2) [Info](#)

An IAM user is an identity with long-term credentials that is used to interact with AWS in an account.

[Search](#)

	User name	Path	Group	Last activity	MFA
☐	dev-admin	/		Access denied	Access denied
☐	odl_user_1435901	/	1	1 hour ago	-

SSM)

Summary

ARN

arn:aws:iam::599333294742:user/odl_user_1435901

Console access

Enabled without MFA

Access key 1

Create access key

Created

August 24, 2024, 19:49 (UTC+05:30)

Last console sign-in

Today

Permissions

Groups (1)

Tags

Security credentials

Access Advisor

Permissions policies (1)

Remove

Add permissions

Permissions are defined by policies attached to the user directly or through groups.

Search

Filter by Type

All types

< 1 >

Use MFA to increase the security of your AWS environment. Signing in with MFA requires an authentication code from an MFA device. Each user can have a maximum of 8 MFA devices assigned. [Learn more](#)

Type

Identifier

Certifications

Created on

No MFA devices. Assign an MFA device to improve the security of your AWS environment

Assign MFA device

Access keys (0)

Create access key

Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. [Learn more](#)

No access keys. As a best practice, avoid using long-term credentials like access keys. Instead, use tools which provide short term credentials. [Learn more](#)

Create access key

SSH public keys for AWS CodeCommit (0)

Actions

Upload SSH public key

User SSH public keys to authenticate access to AWS CodeCommit repositories. You can have a maximum of five SSH public keys (active or inactive) at a time. [Learn more](#)

Users > odl_user_1435901 > Create access key

Access key best practices & alternatives [Info](#)

Avoid using long-term credentials like access keys to improve your security. Consider the following use cases and alternatives.

Use case

- ☒ **Command Line Interface (CLI)**
You plan to use this access key to enable the AWS CLI to access your AWS account.
- ☐ **Local code**
You plan to use this access key to enable application code in a local development environment to access your AWS account.
- ☐ **Application running on an AWS compute service**
You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.
- ☐ **Third-party service**
You plan to use this access key to enable access for a third-party application or service that

Next

Create access keys

Users > odl_user_1435901 > Create access key

Retrieve access keys [Info](#)

Access key
If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.

Access key	Secret access key
AKIAIYXCYMKKLKYZSENO	9Jj9L+vvXcmUJEAh0qkrQU8zrJ1L9/+AB476cUT Hide

Access key best practices

Now copy the access key

Go to your ec2 machine

```
curl "https://awscli.amazonaws.com/awscli-exe-linux-x86_64.zip" -o "awscliv2.zip"
apt install unzip -y
unzip awscliv2.zip
```

```
sudo ./aws/install
```

```
aws configure
```

it will ask for accesskey and secret access key which we can copy


```
root@ip-172-31-90-15:/home/ubuntu/ECS-AWS-LAB# aws configure
AWS Access Key ID [None]: AKIAYXCYMKKLKYZYSENO
AWS Secret Access Key [None]: 9Jj9L+vvXcmUJEAh0qkrQU8zrJ1L9/+AB476cUT
Default region name [None]:
Default output format [None]:
root@ip-172-31-90-15:/home/ubuntu/ECS-AWS-LAB#
```

Installing docker

```
# apt update
```

```
# apt install docker.io -y
```

Now we will go to ECR

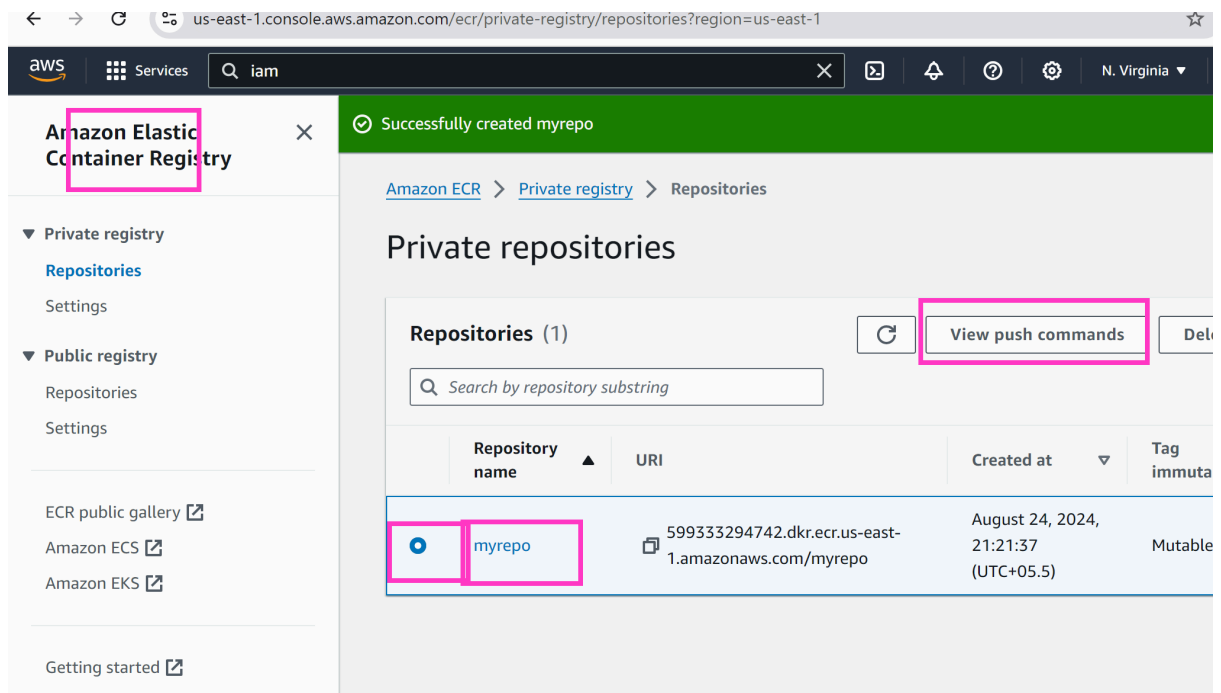

Copy the below commands one by one in your machine

es

Q

iat

tic
gistry

y

Make sure that you have the latest version of the AWS CLI and Docker installed. For more information, see [Getting Started with Amazon ECR](#).

Use the following steps to authenticate and push an image to your repository. For additional registry authentication methods, including the Amazon ECR credential helper, see [Registry Authentication](#).

- Retrieve an authentication token and authenticate your Docker client to your registry. Use the AWS CLI:

```
aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin 599333294742.dkr.ecr.us-east-1.amazonaws.com
```

Note: If you receive an error using the AWS CLI, make sure that you have the latest version of the AWS CLI and Docker installed.
- Build your Docker image using the following command. For information on building a Docker file from scratch see the instructions [here](#). You can skip this step if your image is already built:

```
docker build -t myrepo .
```
- After the build completes, tag your image so you can push the image to this repository:


```
docker tag myrepo:latest 599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo:latest
```
- Run the following command to push this image to your newly created AWS repository:

```
docker push 599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo:latest
```


```
21 sudo -i /aws/install
22 aws configure
23 aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin 599333294742.dkr.ecr.us-east-1.
naws.com
24 docker build -t myrepo .
25 docker tag myrepo:latest 599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo:latest
26 docker push 599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo:latest
27 history
root@ip-172-31-90-15:/home/ubuntu/ECS-AWS-LAB#


i-0637373abe007244f (docker)
PublicIPv: 44 211 177 132   PrivateIPv: 172 31 90 15
```

#####

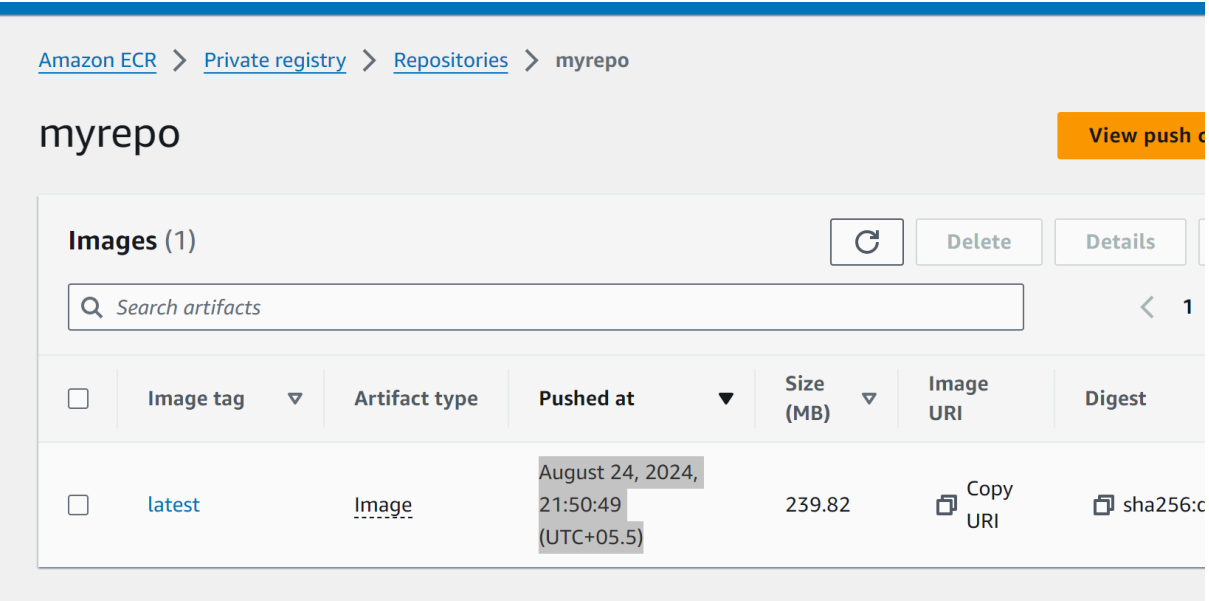

We have pushed the image on ecr which should be used by ecs to create a container with custom image

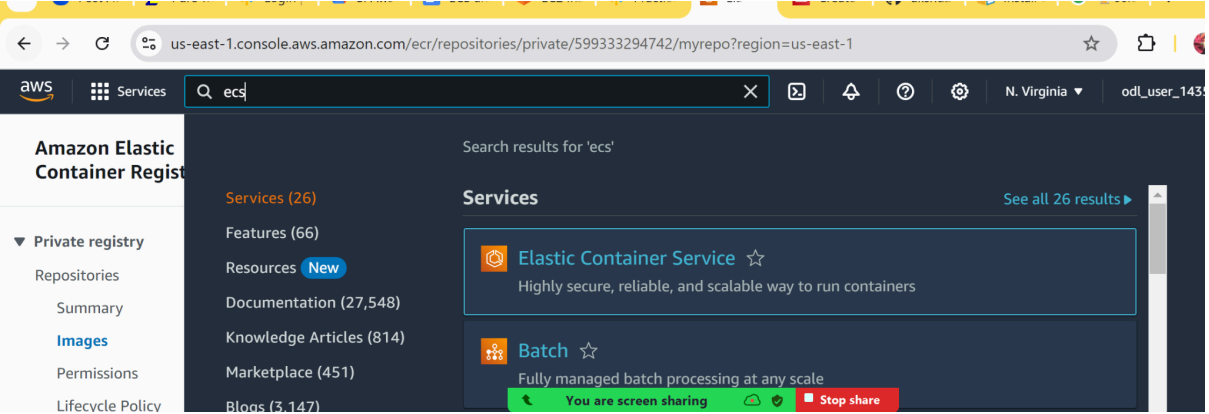

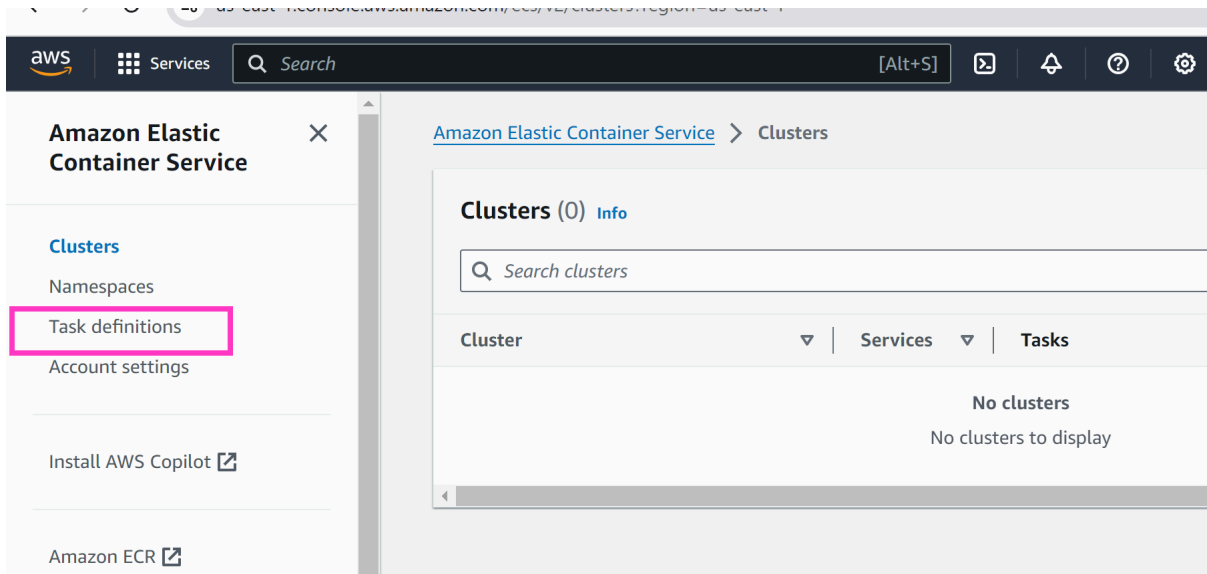

Create a new task definition

Task definition configuration

Task definition family

Info

Specify a unique task definition family name.

mynewtask

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

▼ Infrastructure requirements

Specify the infrastructure requirements for the task definition.

Launch type

Info

Specify the infrastructure requirements for the task definition.

Launch type [Info](#)
Selection of the launch type will change task definition parameters.

☒ **AWS Fargate**
Serverless compute for containers.

☐ **Amazon EC2 instances**
Self-managed infrastructure using Amazon EC2 instances.

OS, Architecture, Network mode
Network mode is used for tasks and is dependent on the compute type selected.

Operating system/Architecture [Info](#) **Network mode** [Info](#)

Linux/X86_64 awsvpc

Task size [Info](#)
Specify the amount of CPU and memory to reserve for your task.

CPU **Memory**

1 vCPU 3 GB

▼ **Task roles - conditional**

Task role [Info](#)

▼ **Container - 1** [Info](#) Essential container Remove

Container details
Specify a name, container image, and whether the container should be marked as essential. Each task definition must have at least one essential container.

Name **Image URI** **Essential container**

mycon repository-uri/image:tag Yes

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed. Up to 255 letters (uppercase and lowercase), numbers, hyphens, underscores, colons, periods, forward slashes, and number signs are allowed.


Private registry [Info](#)
Store credentials in Secrets Manager, and then use the credentials to reference images in private registries.

☐ Private registry authentication

here we will put the ECR image uri

Put port as 8080

Open ecr in new tab and copy the image

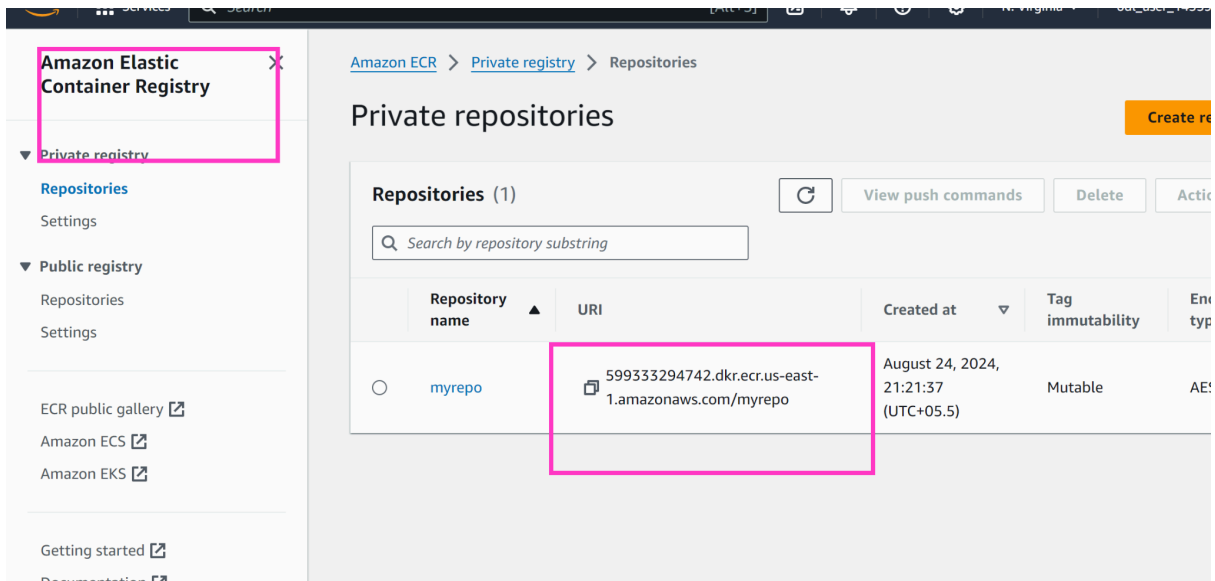

Go back to ecs task definition

And paste the image uri

Container - 1 Info

Essential container

Re

Container details

Specify a name, container image, and whether the container should be marked as essential. Each task definition must have at least one essential container.

Name	Image URI	Essential container
mycon	599333294742.dkr.ecr.us-east-1.amazonaws.com/myrepo	Yes

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

Up to 255 letters (uppercase and lowercase), numbers, hyphens, underscores, colons, periods, forward slashes, and number signs are allowed.

Select container port as 8080

Scroll down and create task definition

Services ecr

Task definition successfully created
mynewtask:1 has been successfully created. You can use this task definition to deploy a service or run a task. View

Amazon Elastic Container Service > Task definitions > mynewtask > Revision 1 > Containers

mynewtask:1

Deploy Actions Create

Overview Info

ARN arn:aws:ecs:us-east-1:59333294742:task-definition/mynewtask:1	Status ACTIVE	Time created August 24, 2024 at 22:22 (UTC+5:30)	App environment Fargate
Task role -	Task execution role ecsTaskExecutionRole	Operating system/Architecture Linux/X86_64	Network mode awsvpc

Containers JSON Task placement Volumes (0) Requires attributes Tags

Now we will do and create the ECS cluster

Services ecr

Task definition successfully created
mynewtask:1 has been successfully created. You can use this task definition to deploy a service or run a task. View task definition

Amazon Elastic Container Service > Clusters

Clusters (0) Info

Create cluster

Search clusters

Cluster	Services	Tasks	Container instances	Cloud
No clusters No clusters to display				

Create cluster [Info](#)

An Amazon ECS cluster groups together tasks, and services, and allows for shared capacity. Your tasks, services, and capacity must belong to a cluster.

Cluster configuration

Cluster name

myfirstcluster

Cluster name must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores.

Default namespace - *optional*

Select the namespace to specify a group of services that make up your application. You can overwrite the default namespace.

🔍 myfirstcluster

▼ Infrastructure [Info](#)



Your cluster is automatically configured for AWS Fargate (serverless) with two capacity providers.

☒ AWS Fargate (serverless)

Pay as you go. Use if you have tiny, batch, or burst workloads or for zero maintenance overhead. Spot capacity providers by default.

Create

if error comes up create cluster again with different name

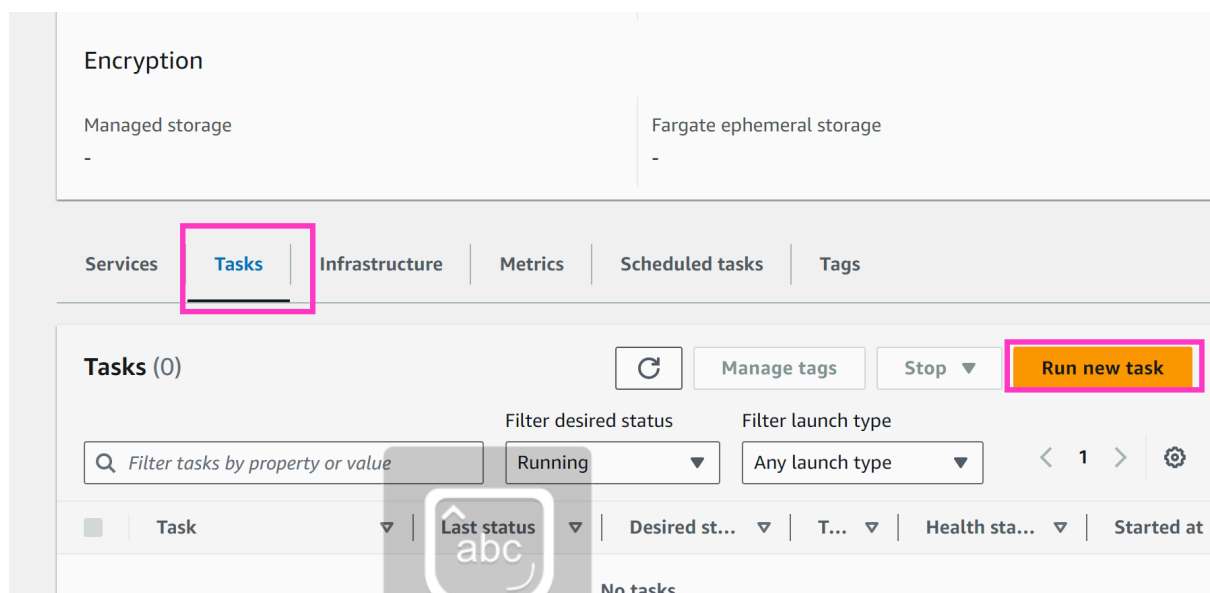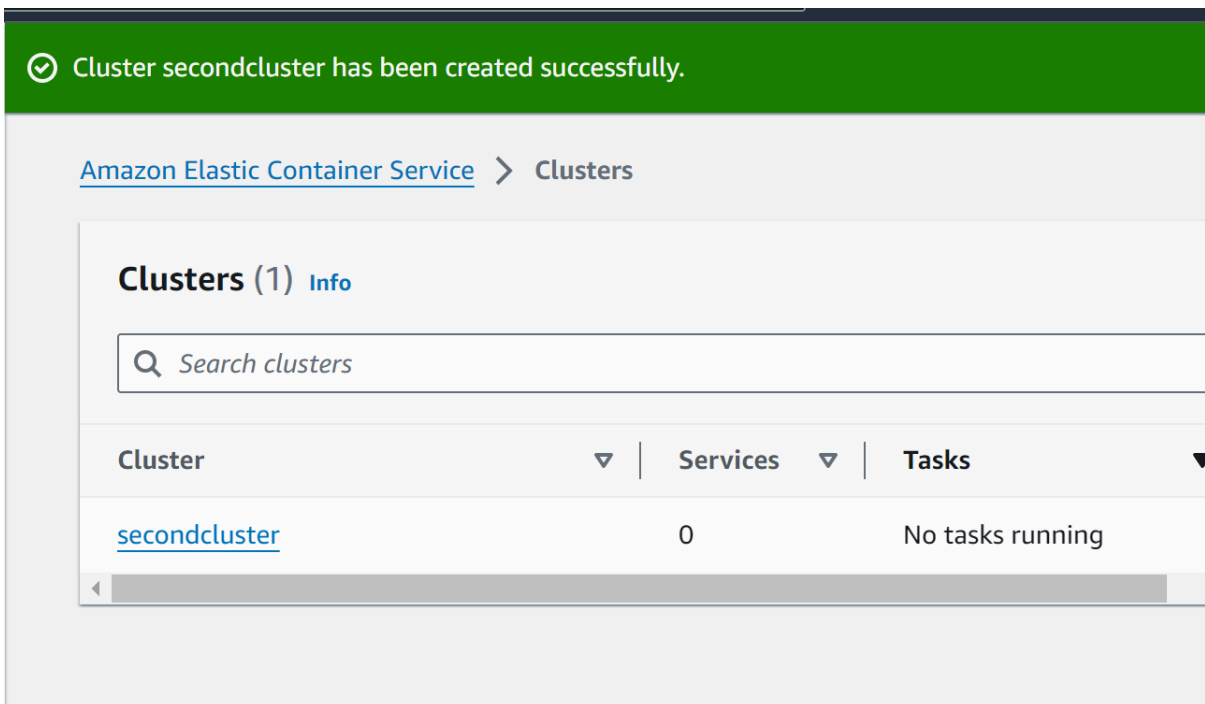

Task : inside infra we want to deploy the container

▼ Compute configuration (advanced)

Compute options [Info](#)

To ensure task distribution across your compute types, use appropriate compute options.

☐ **Capacity provider strategy**
Specify a launch strategy to distribute your tasks across one or more capacity providers.

☒ **Launch type**
Launch tasks directly without the use of a capacity provider strategy.

Launch type [Info](#)

Select either managed capacity (Fargate), or custom capacity (EC2 or user-managed, External instances). External instances are registered using the ECS Anywhere capability.

FARGATE ▼

Platform version [Info](#)

Specify the platform version on which to run your service.

LATEST ▼

Deployment configuration

Application type [Info](#)

Specify what type of application you want to run.

☐ **Service**
Launch a group of tasks handling a long-running computing work that can be stopped and restarted. For example, a web application.

☒ **Task**
Launch a standalone task that runs and terminates. For example, a batch job.

Task definition

Select an existing task definition. To create a new task definition, go to [Task definitions](#) [↗](#).

☐ **Specify the revision manually**
Manually input the revision instead of choosing from the 100 most recent revisions for the selected task definition family.

Family

Revision

☐ Specify the revision manually

Manually input the revision instead of choosing from the 100 most recent revisions for the selected task definition family.

Family Revision

mynewtask 1 (LATEST)

Desired tasks

Specify the number of tasks to launch.

1

Task group

All tasks with the same task group name are considered as a set when performing spread placement.

Click on networking

US-east-1 172.31.16.0/20 US-east-1 172.31.48.0/20

Security group Info

Choose an existing security group or create a new security group.

☐ Use an existing security group

☒ Create a new security group

Security group details

Specify the configuration to use when creating the new security group.

Security group name Security group description

ecs-wmwqz01z Created in ECS Console

Security group name must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, underscores (_), hyphens (-), colons (:), forward slashes (/), parentheses (()), hashtags (#), commas (,), at signs (@), brackets ([]), plus signs (+), equal signs (=), ampersands (&), semicolons (;), brackets ({}), exclamation points (!), dollar signs (\$), asterisks (*).

Security group description must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, underscores (_), hyphens (-), colons (:), forward slashes (/), parentheses (()), hashtags (#), commas (,), at signs (@), brackets ([]), plus signs (+), equal signs (=), ampersands (&), semicolons (;), brackets ({}), exclamation points (!), dollar signs (\$), asterisks (*).

Inbound rules for security groups

Add one or more ingress rules for your security group.

Type	Protocol	Port range	Source	Values	
All traffic	ALL	All	Custom	0.0.0.0/0	Delete

Create

Tasks (1)

Filter tasks by property or value

Filter desired status

Running

Filter launch type

Any launch type

Task

Last status

Desired st...

T...

0e41d0a5019742ca...

Provisioning

Running

my...

Services

Tasks

Infrastructure

Metrics

Scheduled tasks

Tags

Tasks (1)

Filter tasks by property or value

Filter desired status

Running

Filter launch type

Any launch type

Task

Last status

Desired st...

T...

0e41d0a5019742ca...

Running

Running

my...

Tasks (1)

Filter tasks by property or value

Filter desired status

Running

Filter launch type

Any launch type

Task

Last status

Desired st...

T...

Health s

0e41d0a5019742ca...

Running

Running

my...

Unkn

odl_user_1435901 @ 5993-33			
ARN	Last status	Desired status	Started/created at
 arn:aws:ecs:us-east-1:5933294742:task/secondcluster/0e41d0a5019742ca807f7ce161e49af2	 Running	 Running	August 24, 2024 at 22:49 (UTC+5:30) August 24, 2024 at 22:48 (UTC+5:30)
Fargate ephemeral storage			
Encryption Info		Size (GiB)	
Default AWS Fargate encryption		20	

Configuration

Operating system/Architecture Linux/X86_64	Capacity provider -	ENI ID eni-016e50a5734c34727 	Public IP  54.208.188.102 open address 
CPU Memory 1 vCPU 3 GB	Launch type FARGATE	Network mode awsvpc	Private IP  172.31.94.79
Platform version	Container instance ID	Subnet ID subnet-	MAC address

Secure 54.208.188.102:8080/LoginWebApp-1/

Login Page

Username

Password

New User [Register Here](#)

<http://54.208.188.102:8080/LoginWebApp-1/>


So delete the tasks

And lets create a service(we will create after loadblancer)service creates and manages n number of tasks together


But the all the tasks will have its own ip address and if the tasks is stopped or restarted or scaling happen a ip address is assigned....if need a fixed endpoint ...here we will create a loadbalancer

Go to ec2

Go to load balancer -> Create target group

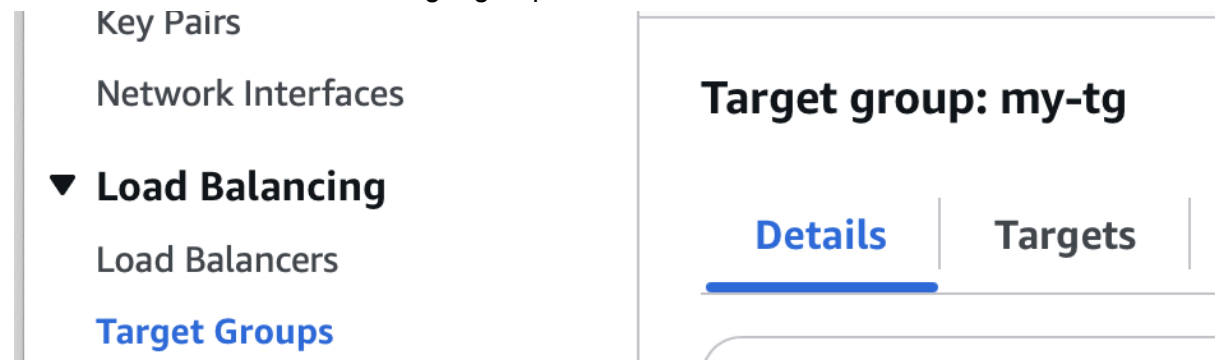


Select ip addresses

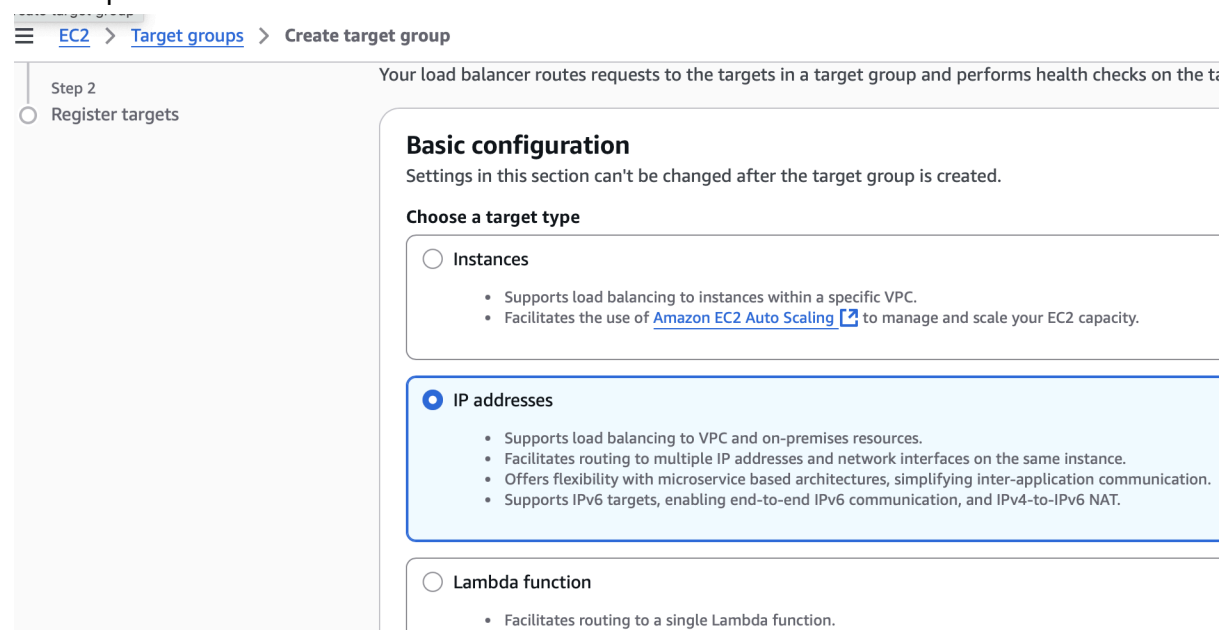

Give target group some name

Port : 8080

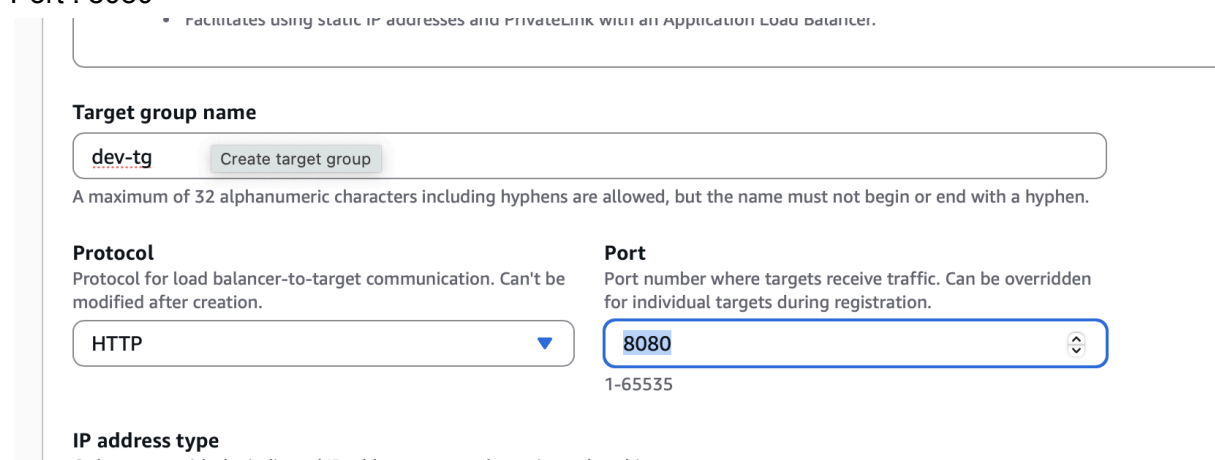

In health check put /LoginWebApp-1/

Health checks

The associated load balancer periodically sends requests, per the settings below, to the registered

Health check protocol

HTTP

Health check path

Use the default path of "/" to perform health checks on the root, or specify a custom path if preferred.

/LoginWebApp-1/

Up to 1024 characters allowed.

► Advanced health check settings

Next

Do not add anything as pending below
Create a target group

NOW LETS CREATE A LOAD BALANCER

Go to loadbalancer -> create application lb

BASIC CONFIGURATION

Load balancer name

Name must be unique within your AWS account and can't be changed after the load balancer is created.

dev-lb

A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

Scheme [Info](#)

Scheme can't be changed after the load balancer is created.

☒ Internet-facing

- Serves internet-facing traffic.
- Has public IP addresses. [Create application load balancer](#)
- DNS name resolves to public IPs.
- Requires a public subnet.

☐ Internal

- Serves internal traffic.
- Has private IP addresses.
- DNS name resolves to private IPs.
- Compatible with the **IPv4** and **Dualstack** IP ad

Load balancer IP address type [Info](#)

Select the front-end IP address type to assign to the load balancer. The VPC and subnets mapped to this load balancer must include the se

☒ IPv4

Includes only IPv4 addresses.

☐ Dualstack

Includes IPv4 and IPv6 addresses.

☐ Dualstack without public IPv4

Includes a public IPv6 address, and private IPv4 and IPv6 addresses. Compatible with **internet-facing** load balancers only.

Availability Zones and subnets | [Info](#)

Select at least two Availability Zones and a subnet for each
Create application load balancer

☒ **us-east-1a (use1-az2)**

Subnet

Only CIDR blocks corresponding to the load balancer

subnet-098de7c3c84864276

IPv4 subnet CIDR: 172.31.80.0/20

☒ **us-east-1b (use1-az4)**

Subnet

Only CIDR blocks corresponding to the load balancer

subnet-086d646a506d45404

IPv4 subnet CIDR: 172.31.16.0/20

☒ **us-east-1c (use1-az6)**

Subnet

Only CIDR blocks corresponding to the load balancer

subnet-08e254f2f6285fa66

IPv4 subnet CIDR: 172.31.32.0/20

☒ **us-east-1d (use1-az1)**

Subnet

Only CIDR blocks corresponding to the load balancer

subnet-00f11c-00051-0001

Create a new security group with all traffic enabled

☐ us-east-1f (use1-az5)

Security groups [Info](#)

A security group is a set of firewall rules that control the traffic to your load balancer. Select an existing security group, or you can [create a new security group](#)

[Create application load balancer](#)

Security groups

Select up to 5 security groups



10oct2025

sg-0c0ee3d1eea4fe8c1 VPC: vpc-0f33bbb78fcb03791

X

Although my container is working on port 8080
I am configuring the loadbalancer to listen on port 80
Lets say traffic will come on 80 of lb and will be pointed to 8080 of the container

Listner : 80

▼ Listener HTTP:80

Protocol

HTTP

Port

80

Create application load balancer

1-65535

Default action

Info

The default action is used if no other rules apply. Choose the default action for traffic on this listener.

Routing action

☒ Forward to target groups

☐ Redirect to URL

Forward to target group

Info

Choose a target group and specify routing weight or [create target group](#)

Target group

dev-tg

Target type: IP, IPv4 | Target stickiness: Off

HTTP

Weight

1

0-999

P

1

Create lb

Go to ecs - cluster
Create service

Cluster overview

ARN

arn:aws:ecs:us-east-1:43011883:4478:cluster/DevCluster

Status

Active

CloudWatch monitoring

Default

Registered container instances

-

Services

Draining

-

Active

1

Tasks

Pending

-

Running

3

Talking:

< Services Tasks Infrastructure Updated Metrics Scheduled tasks Configuration Updated Event history

Services (0) Info

Last updated October 10, 2025, 08:49 (UTC+5:30)

Manage tags

Update

Delete service

Create

Filter services by value

Filter launch type Any launch type

Filter scheduling strategy Any scheduling strategy

< 1 >

⚙

☐ Service name

▲

ARN

Status ▼

Schedu... ▼

L... ▼

Task de... ▼

Deployments and t

Create service

Select task definition

Environment

Existing cluster

DevCluster

▼ Compute configuration - *advanced*

Compute options | Info

To ensure task distribution across your compute types, use appropriate compute options.

☐ Capacity provider strategy
Specify a launch strategy to distribute your tasks across one or more capacity providers.

☒ Launch type
Launch tasks directly without the use of a capacity provider strategy.

Launch type | Info

Select either managed capacity (Fargate), or custom capacity (EC2 or user-managed, External instances). External instances are regi

FARGATE

Platform version | Info

Specify the platform version on which to run your service.

LATEST

► Troubleshooting configuration - *recommended*

Deployment configuration

Scheduling strategy | [Info](#)



Replica

Place and maintain a desired number of tasks across your cluster.



Daemon

Place an

contain

Desired tasks

Specify the number of tasks to launch.

4

Availability Zone rebalancing | [Info](#)

In networking

Select the sg with all traffic enabled

Security group | [Info](#)

Choose an existing security group or create a new security group.



Use an existing security group



Create a new security group

Security group name

Choose an existing security group.

Choose security groups

sg-0c0ee3d1eea4fe8c1 

10oct2025

In load balancing

Tick use load balancer

Load balancer type | [Info](#)

Specify the load balancer type to distribute incoming traffic across the tasks running in your service.

☒ Application Load Balancer

An Application Load Balancer makes routing decisions at the application layer (HTTP/HTTPS), supports path-based routing, and can route requests to one or more ports.

☐ Network Load Balancer

A Network Load Balancer makes routing decisions at the transport layer (TCP/UDP).

Container

The container and port to load balance the incoming traffic to

mycontainer 8080:8080

Host port:Container port

Application Load Balancer

Specify whether to create a new load balancer or choose an existing one.

- ☐ Create a new load balancer
- ☒ Use an existing load balancer

Load balancer

Choose an existing load balancer to distribute traffic. View existing load balancers and create new one in [EC2 Console](#).

dev-lb

dev-lb-272570430.us-east-1.elb.amazonaws.com

internet-facing



Since my lb will listen to port 80

Listener | [Info](#)

Specify the port and protocol that the load balancer will listen for connection requests on.

- ☐ Create new listener
- ☒ Use an existing listener

Listener

HTTP:80



Listener rules for 80:HTTP (1)

Traffic received by the listener is routed according to its rules. Rules are evaluated in priority order, from the lowest value to the highest value. The default rule is evaluated last.

< 1 >

Priority



Rule path



Target group



Target group | [Info](#)

Specify whether to create a new target group or choose an existing one that the load balancer will use to route requests to the tasks in your service.

- ☐ Create new target group
- ☒ Use an existing target group

Target group name

dev-tg

Health check path

/LoginWebApp-1/

Health check protocol | [Info](#)

HTTP

Create

Services

Tasks

Infrastructure

Updated

Metrics

Scheduled tasks

Configuration

Updated

Events

services (1)

Info

Last updated
October 10, 2025, 09:06 (UTC+5:30)

Manage tags

Update

Delete service

Filter services by value

Filter launch type
Any launch type

Filter scheduling strategy
Any scheduling strategy

☐	Service name	ARN	Status	Schedu...	L...	Task de...
☐	project-app-service-vr6q2qdx	arn:aws:ecs:us-e	Active	REPLICA	FAR...	project-ap...

<

Services

Tasks

Infrastructure

Updated

Metrics

Scheduled tasks

Tasks (13)

Last updated
October 10, 2025, 09:07 (UTC+5:30)

Filter tasks by property or value

Filter desired status
Any desired status

☐	Task	Last status	Desired st...
☐	0ba1c0d785b8433fa313a...	Pending	Running
☐	6ee8c7115dbb46f1b8afd...	Pending	Running
☐	922c58983f8143f78c815...	Pending	Running
☐	93af959e6a3c427381866...	Pending	Running

Wait for them to run

Go to load balancer and copy the dns

Load balancers

balancers (1/1)


Actions

Create

Elastic Load Balancing scales your load balancer capacity automatically in response to changes in incoming traffic.

Filter load balancers

☒	Name	Availability Zones	Security groups	DNS name	
☒	dev-lb	3fcb03791	4 Availability Zones	sg-0c0ee3d1eea4fe8c1	dev-lb-272570430.us-east-...

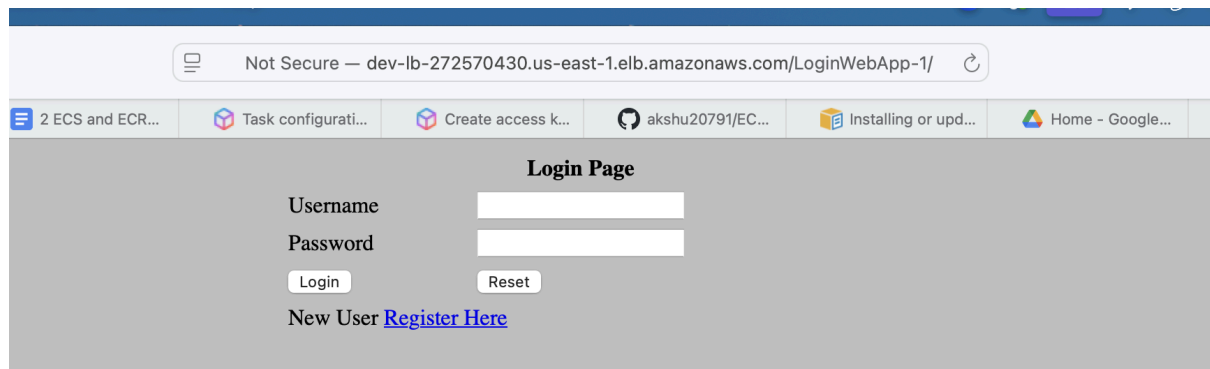

Sample example link:

<http://dev-lb-272570430.us-east-1.elb.amazonaws.com/LoginWebApp-1/>