



SHODWE
Pizza Resto

[Home](#)

[About](#)

[Contact](#)



WELCOM TO PIZZA SALES PROJECT

ABOUT THIS PROJECT

Contact



The Pizza Sales Analysis Project (MySQL) is a data analytics project focused on analyzing sales data from a pizza restaurant using structured query language. The database includes four relational tables: orders, order_details, pizzas, and pizza_types. Using SQL concepts such as JOIN, GROUP BY, aggregate functions, and date-time functions, key business metrics are calculated including total revenue, total orders, best-selling pizzas, revenue by category, and peak sales hours. The project demonstrates data cleaning, relational database management, KPI calculation, and business insight generation. It helps develop strong SQL skills and showcases analytical thinking for entry-level Data Analyst roles.



SHODWE

Pizza Resto

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

Contact



```
SELECT  
    ROUND(SUM(order_details.quantity * pizzas.price),  
          2) AS Total_Revenue  
FROM  
    order_details  
    JOIN  
    pizzas ON pizzas.pizza_id = order_details.pizza_id
```

Total_Revenue

817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

[About](#)

[Contact](#)



```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

	name	price
▶	The Greek Pizza	35.95



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS Common_Pizza_Size
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY Common_Pizza_Size DESC
LIMIT 1;
```

	size	Common_Pizza_Size
▶	L	18526



SHODWE

Pizza Resto

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.



```
select order_date,  
sum(revenue) over(order by order_date) as cum_revenue  
from  
(select orders.order_date,  
sum(order_details.quantity * pizzas.price) as revenue  
from order_details  
join pizzas  
on order_details.pizza_id = pizzas.pizza_id  
join orders  
on orders.order_id = order_details.order_id  
group by orders.order_date) as sales;
```


DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

A cluster of green tomato leaves with serrated edges is positioned on the left side of the slide.

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```




SHODWE

Pizza Resto

Calculate the percentage contribution of each pizza type to total revenue.

Home

About

Contact

```
SELECT
    pizza_types.category,
    ROUND((SUM(order_details.quantity * pizzas.price) / (SELECT
        ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS Total_Revenue
    FROM
        order_details
    JOIN
        pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100,
    2) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```




SHODWE

Pizza Resto

Group the orders by date and calculate the average number of pizzas ordered per day.

```
SELECT
    ROUND(AVG(quantity), 0) as avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```


RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```
SELECT  
    COUNT(order_id) AS Total_Order  
FROM  
    orders;
```






SHODWE
Pizza Resto

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

```
SELECT
    HOUR(order_time) AS Hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

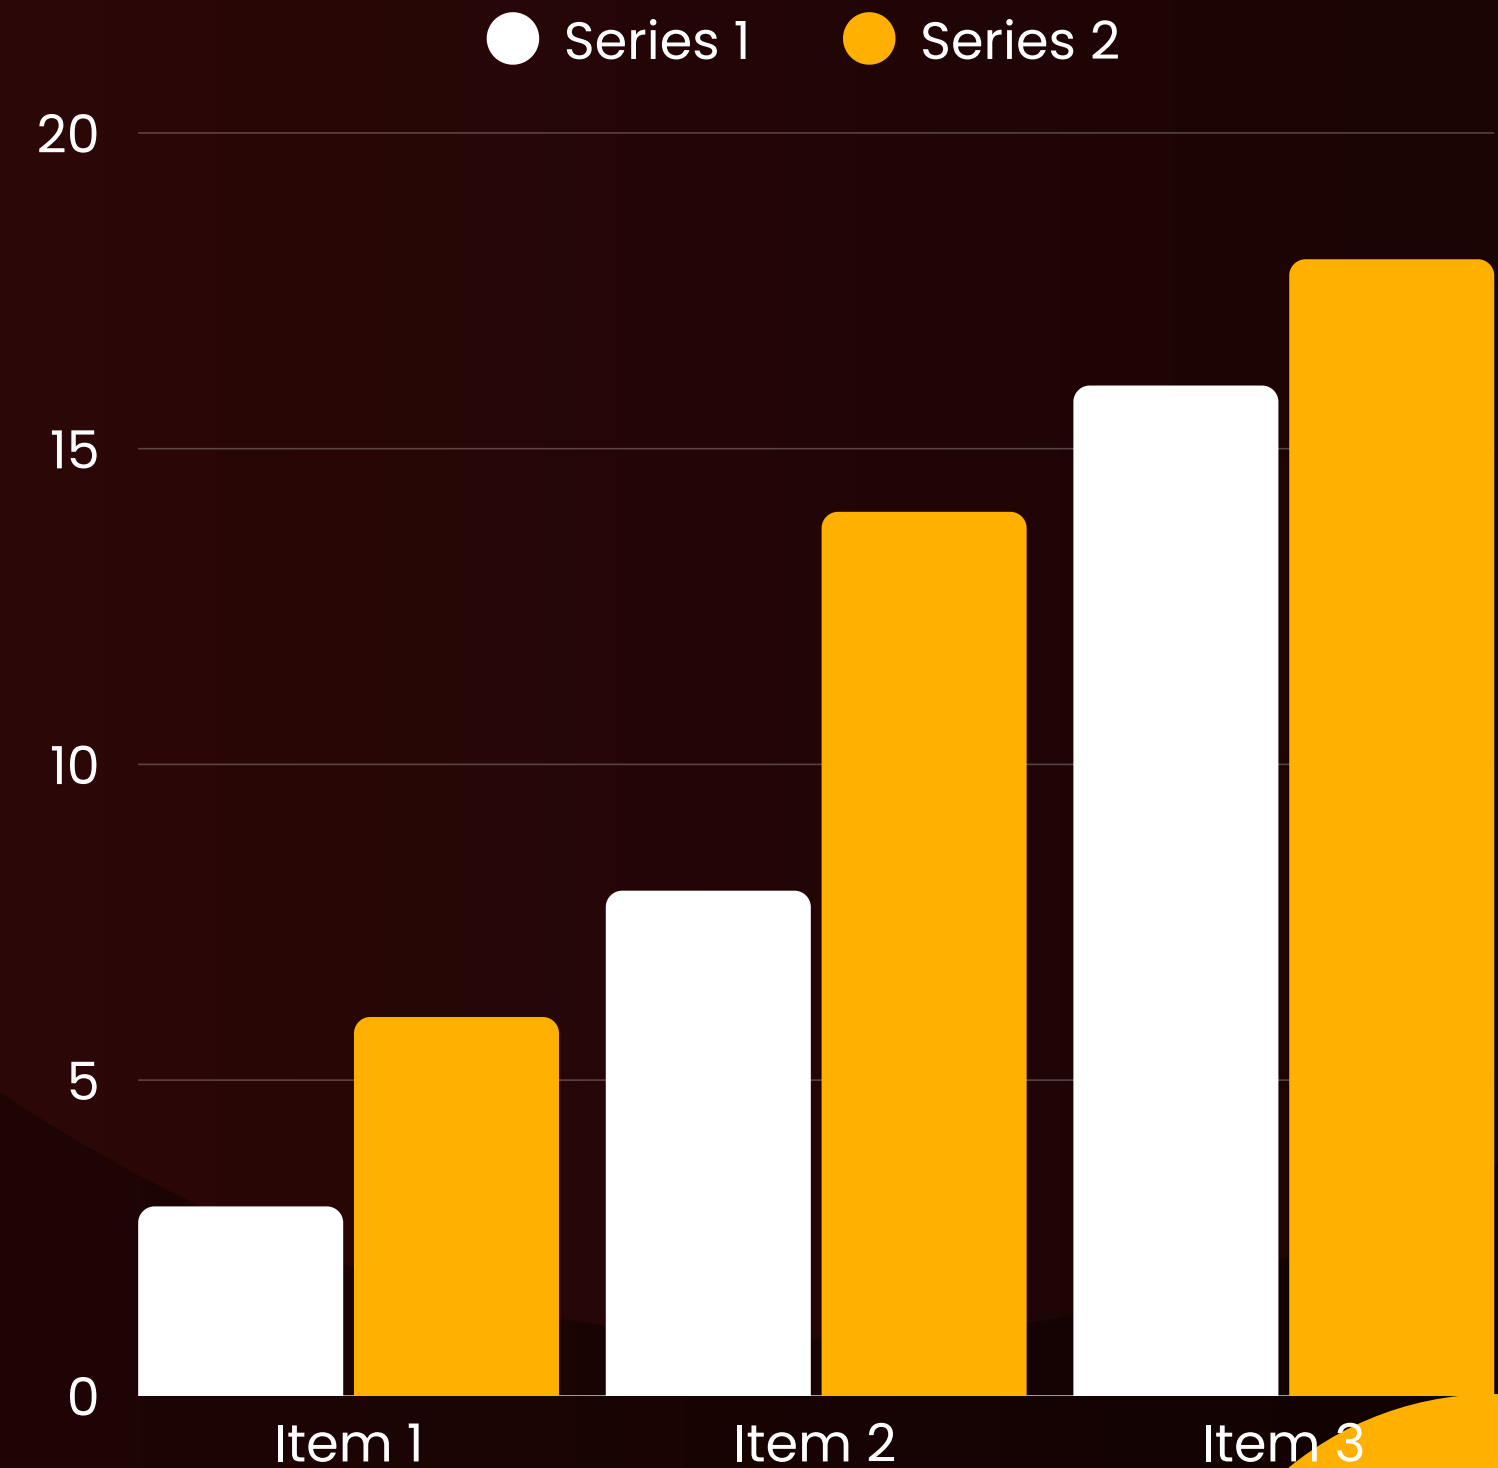

List the top 5 most ordered pizza types along with their quantities.

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Determine the top 3 most ordered pizza types based on revenue for each pizza category. [Contact](#)

```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3;
```




SHODWE

Pizza Resto

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```





SHODWE

Pizza Resto

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```





SHODWE
Pizza Resto

[Home](#)

[About](#)

[Contact](#)

THANK YOU

