print the nodes in reverse

To print the nodes in reverse there are 3 methods.

1) Using Recursion
2) Using Loops
3) Using Array of pointers

print the nodes in reverse

print the nodes in reverse

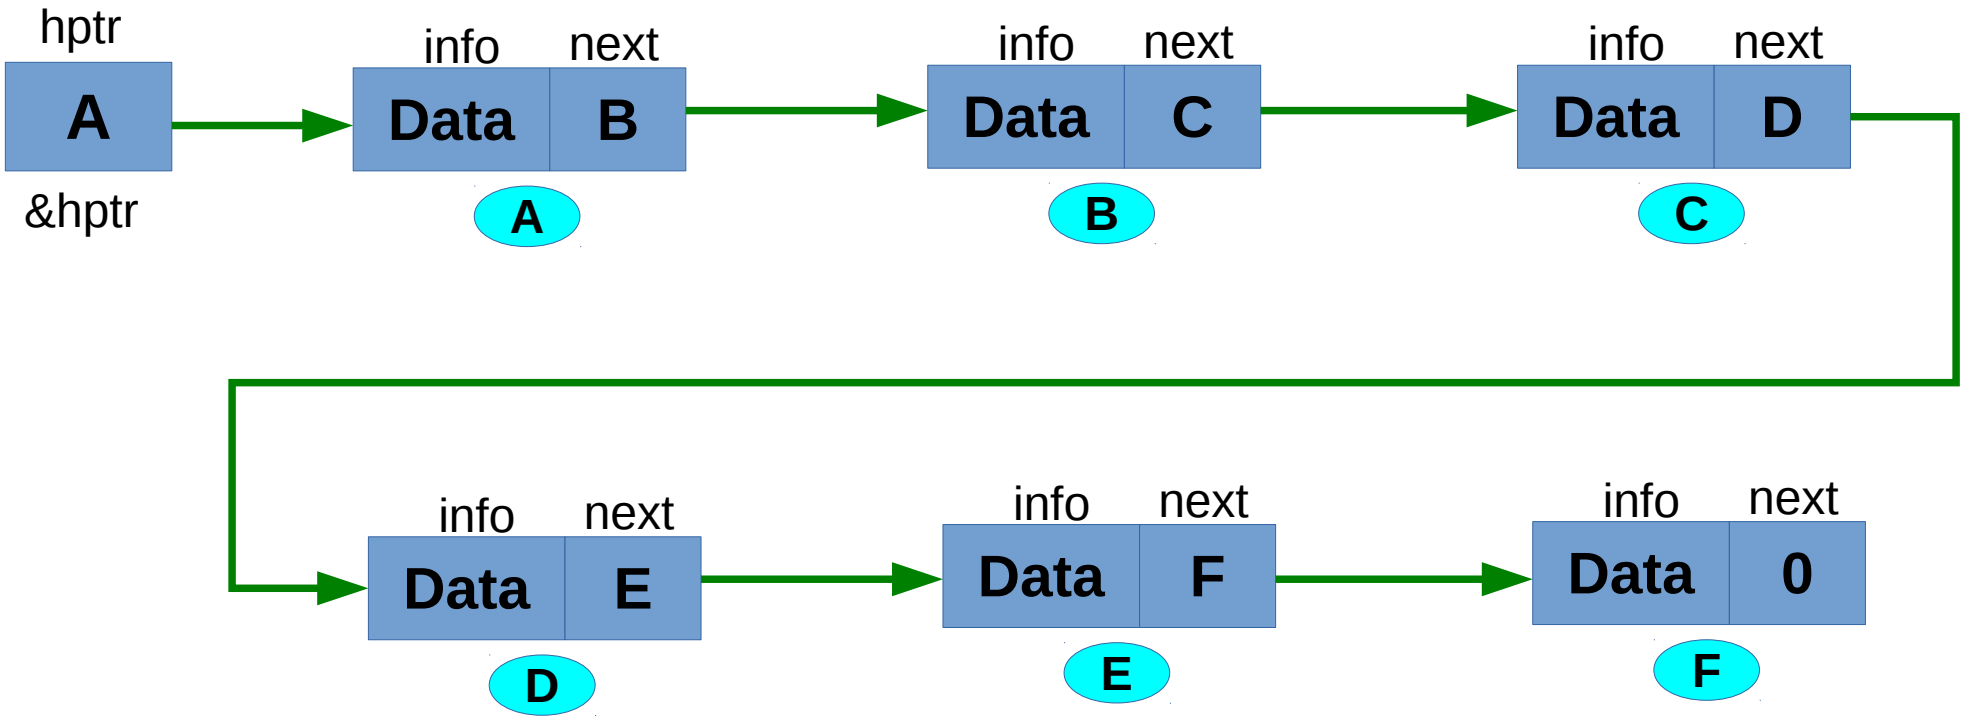

print the nodes in reverse

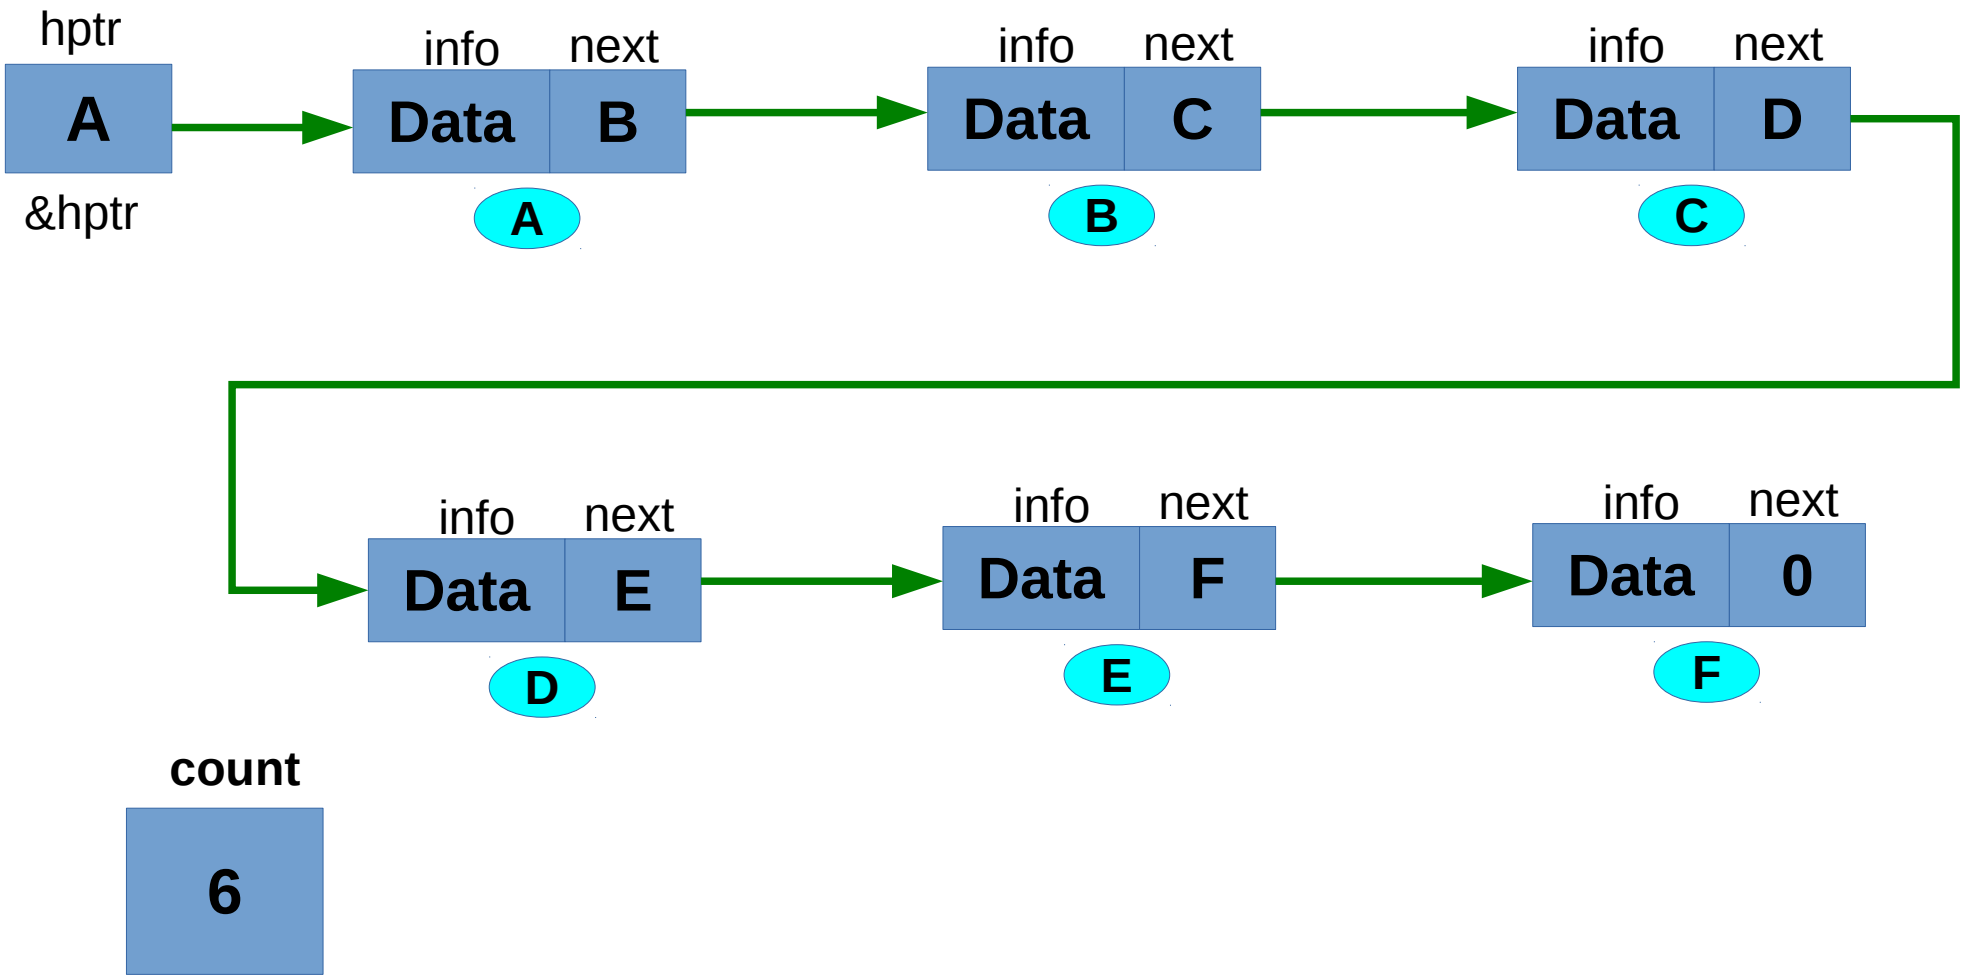

print the nodes in reverse

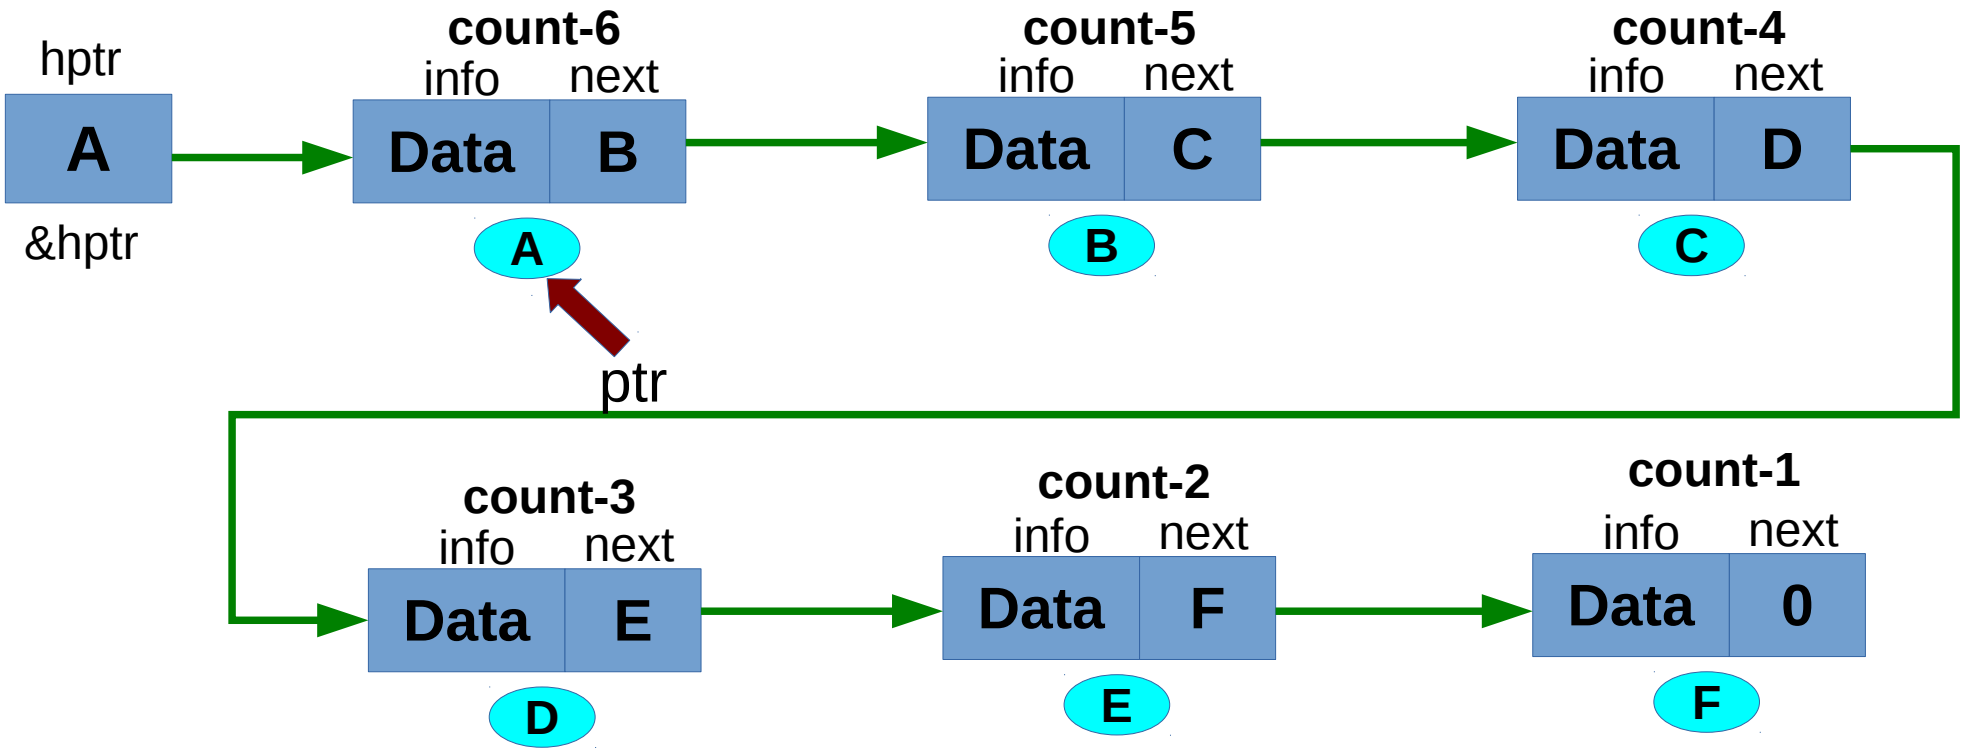

print the nodes in reverse

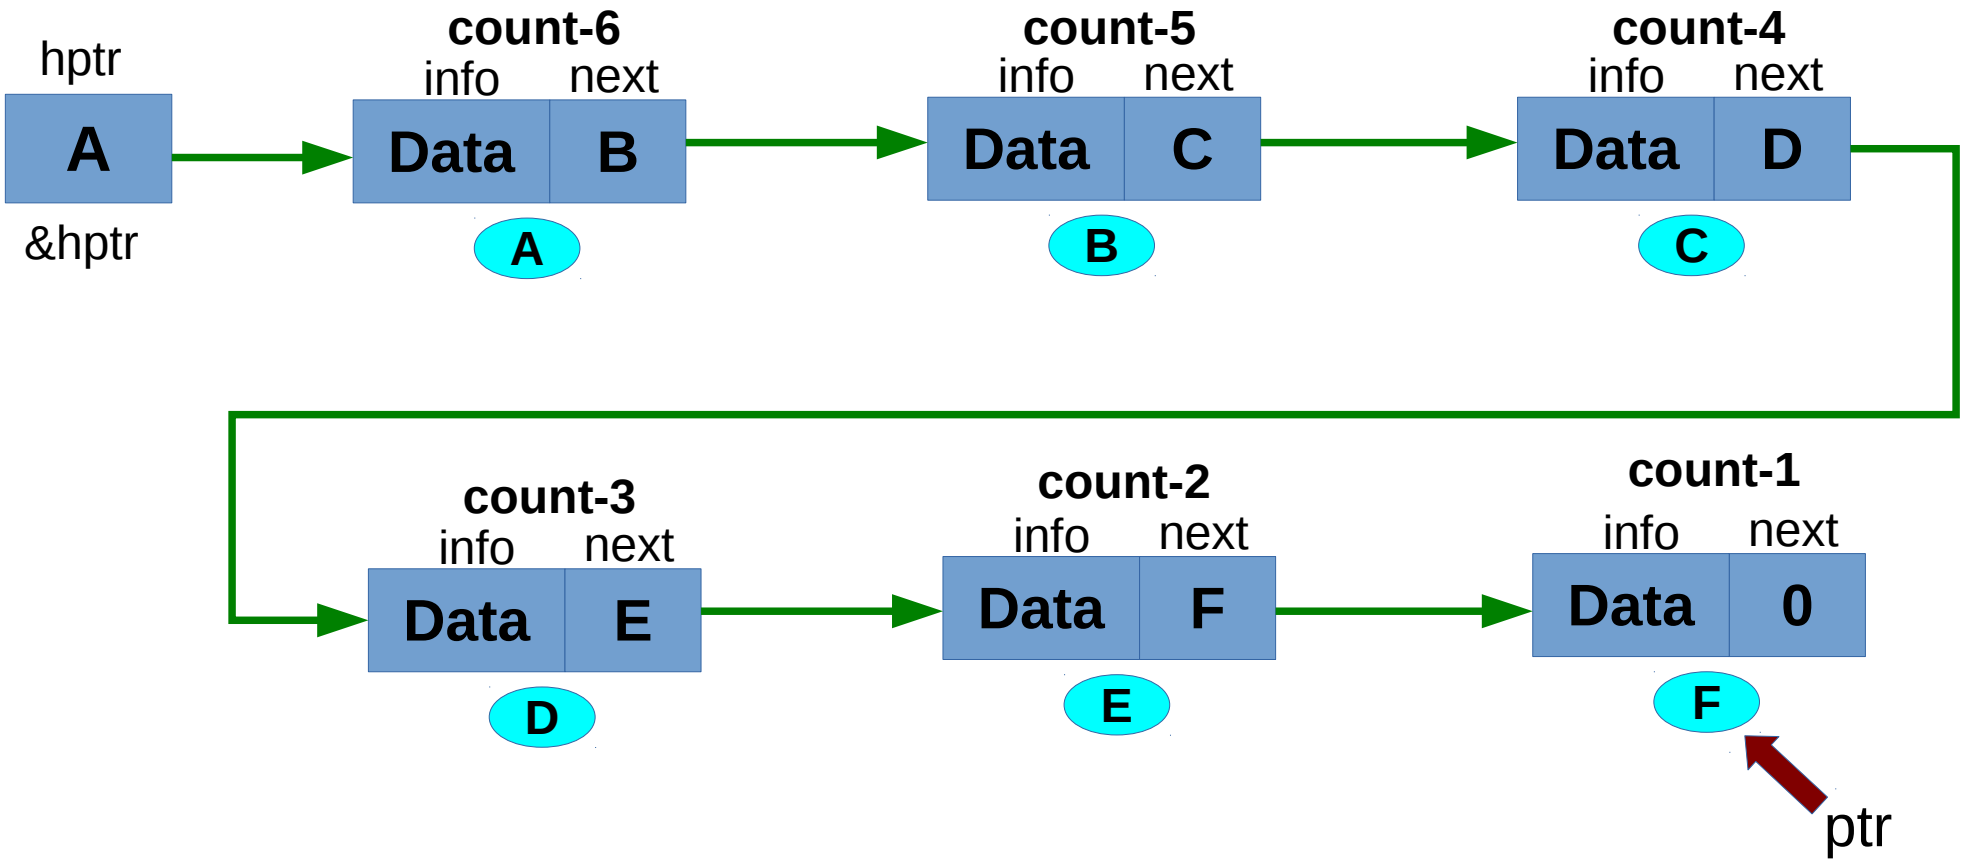

print the nodes in reverse

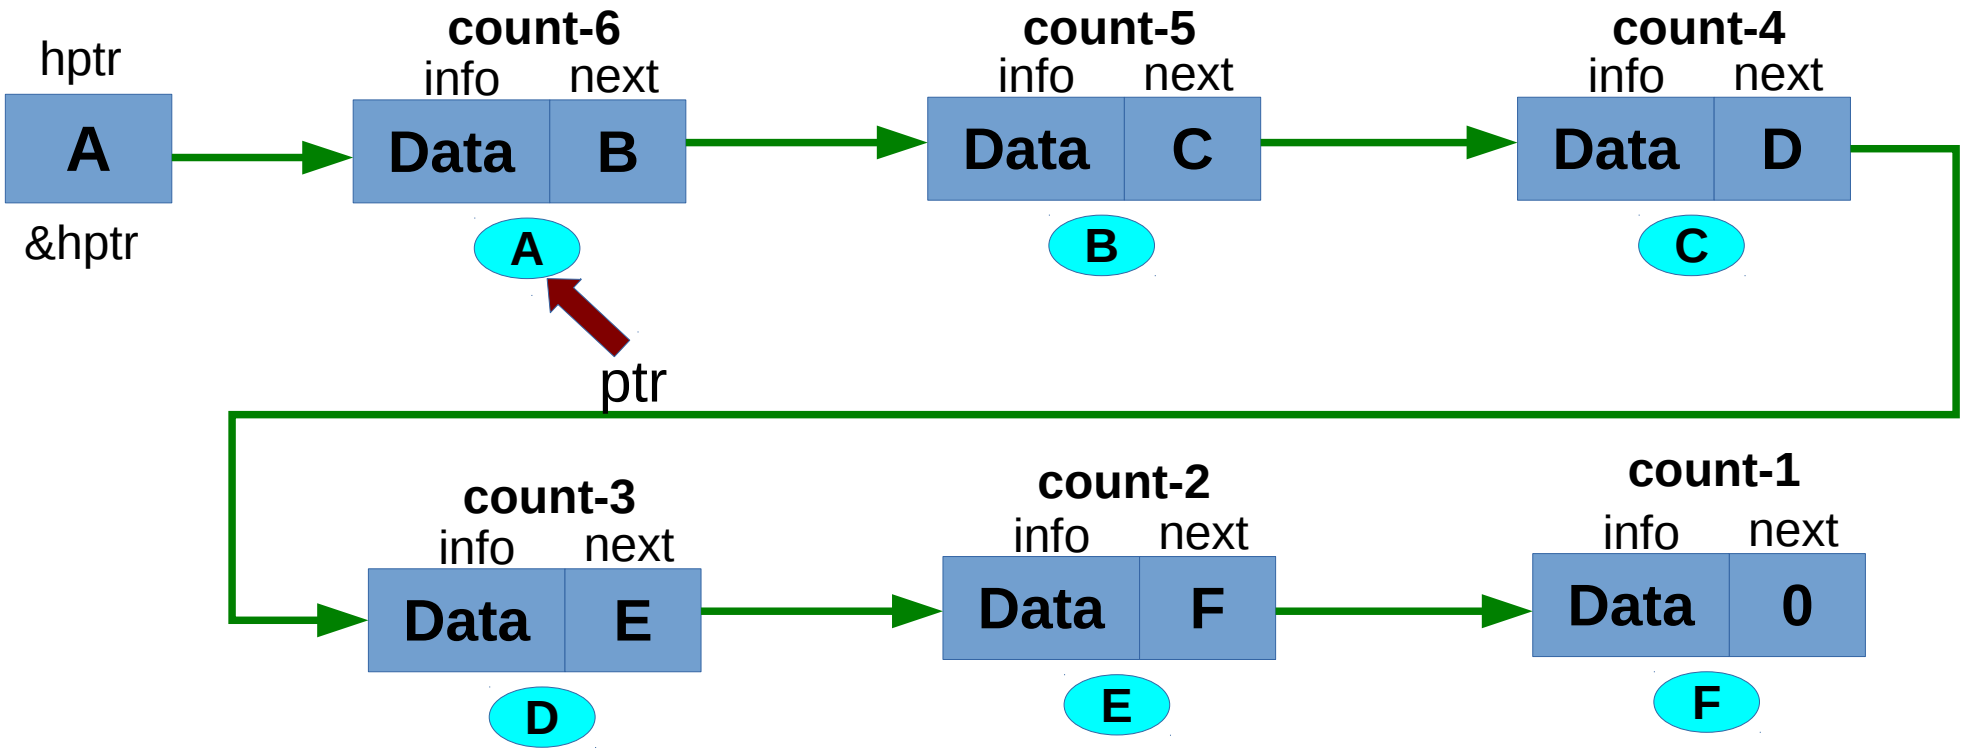

print the nodes in reverse

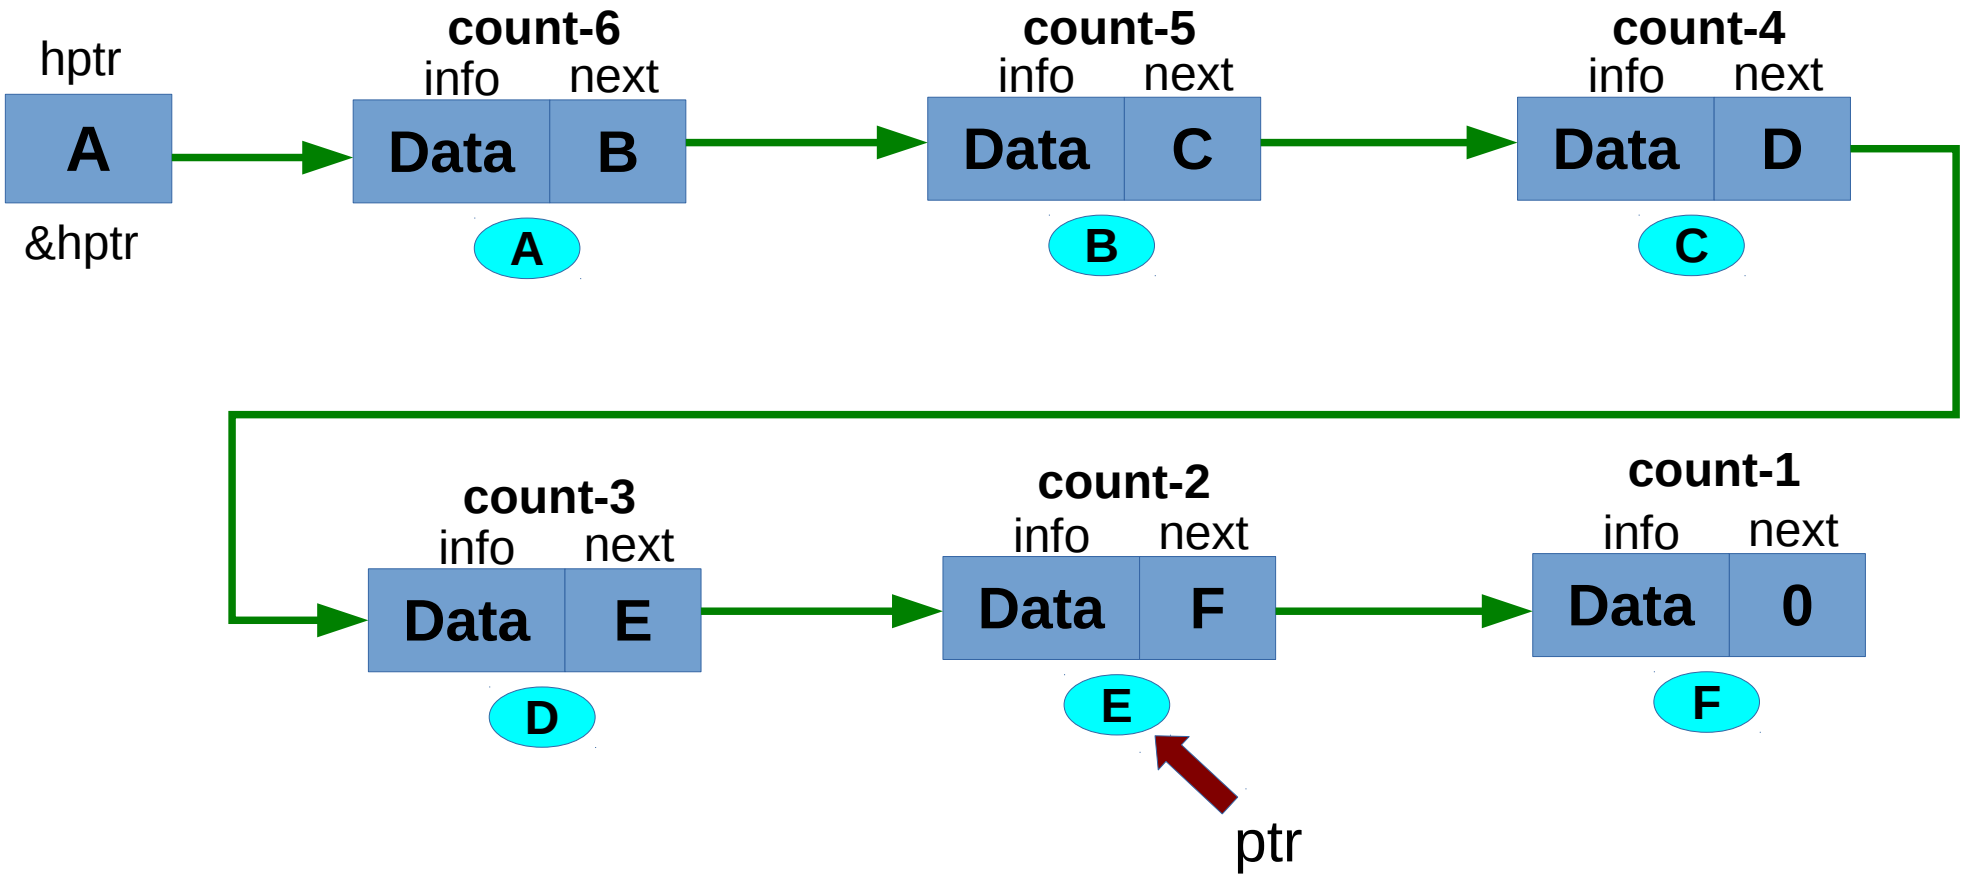

print the nodes in reverse

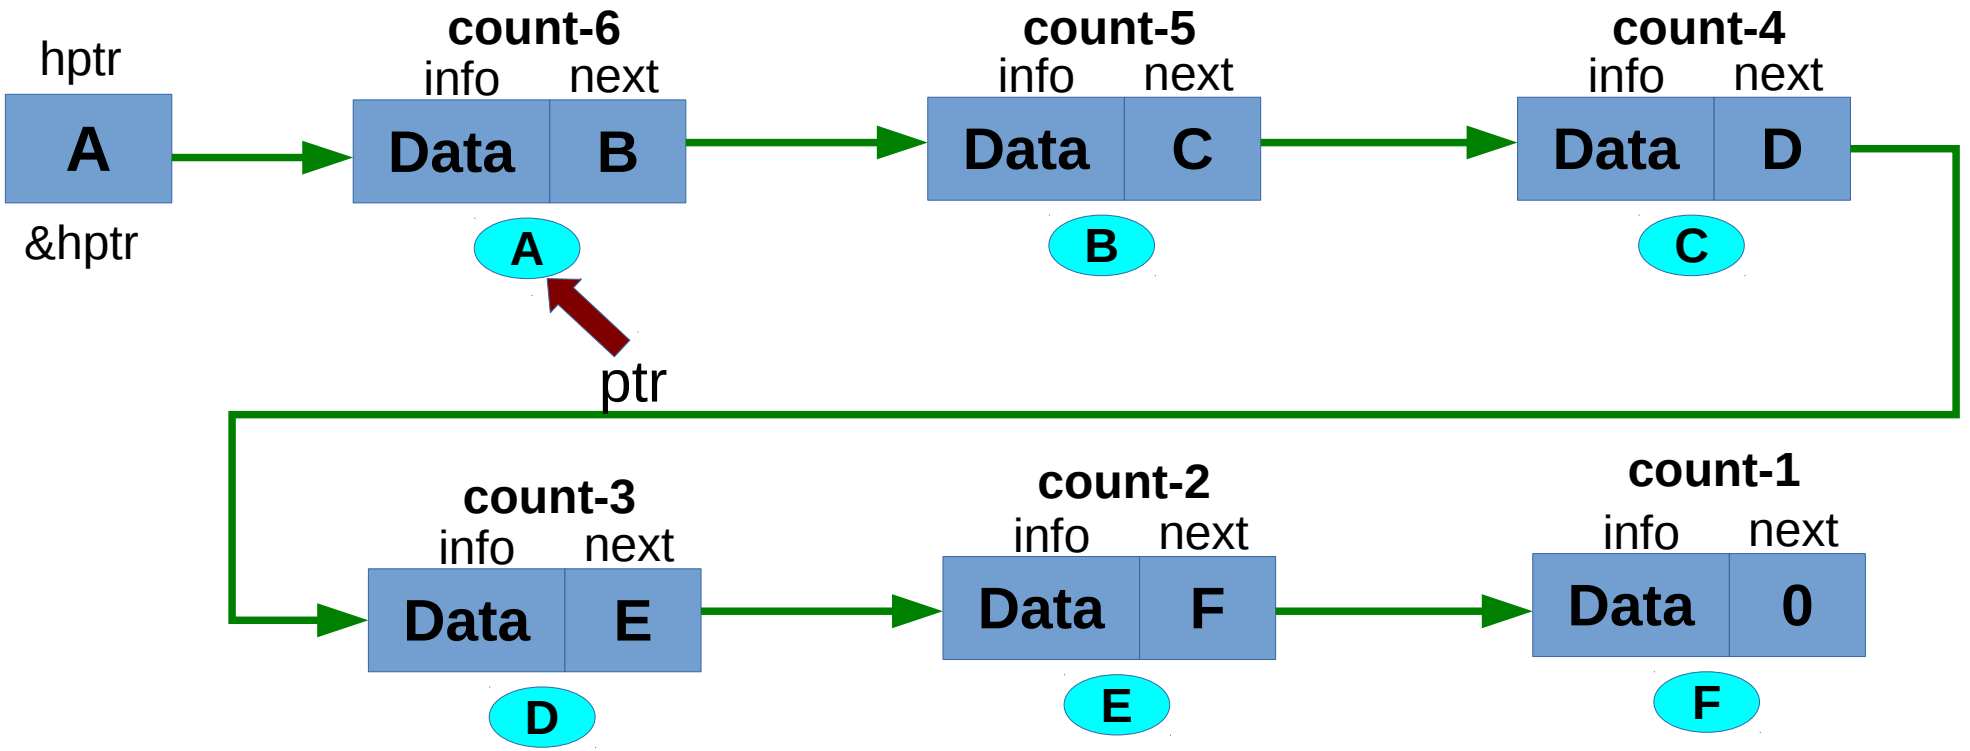

print the nodes in reverse

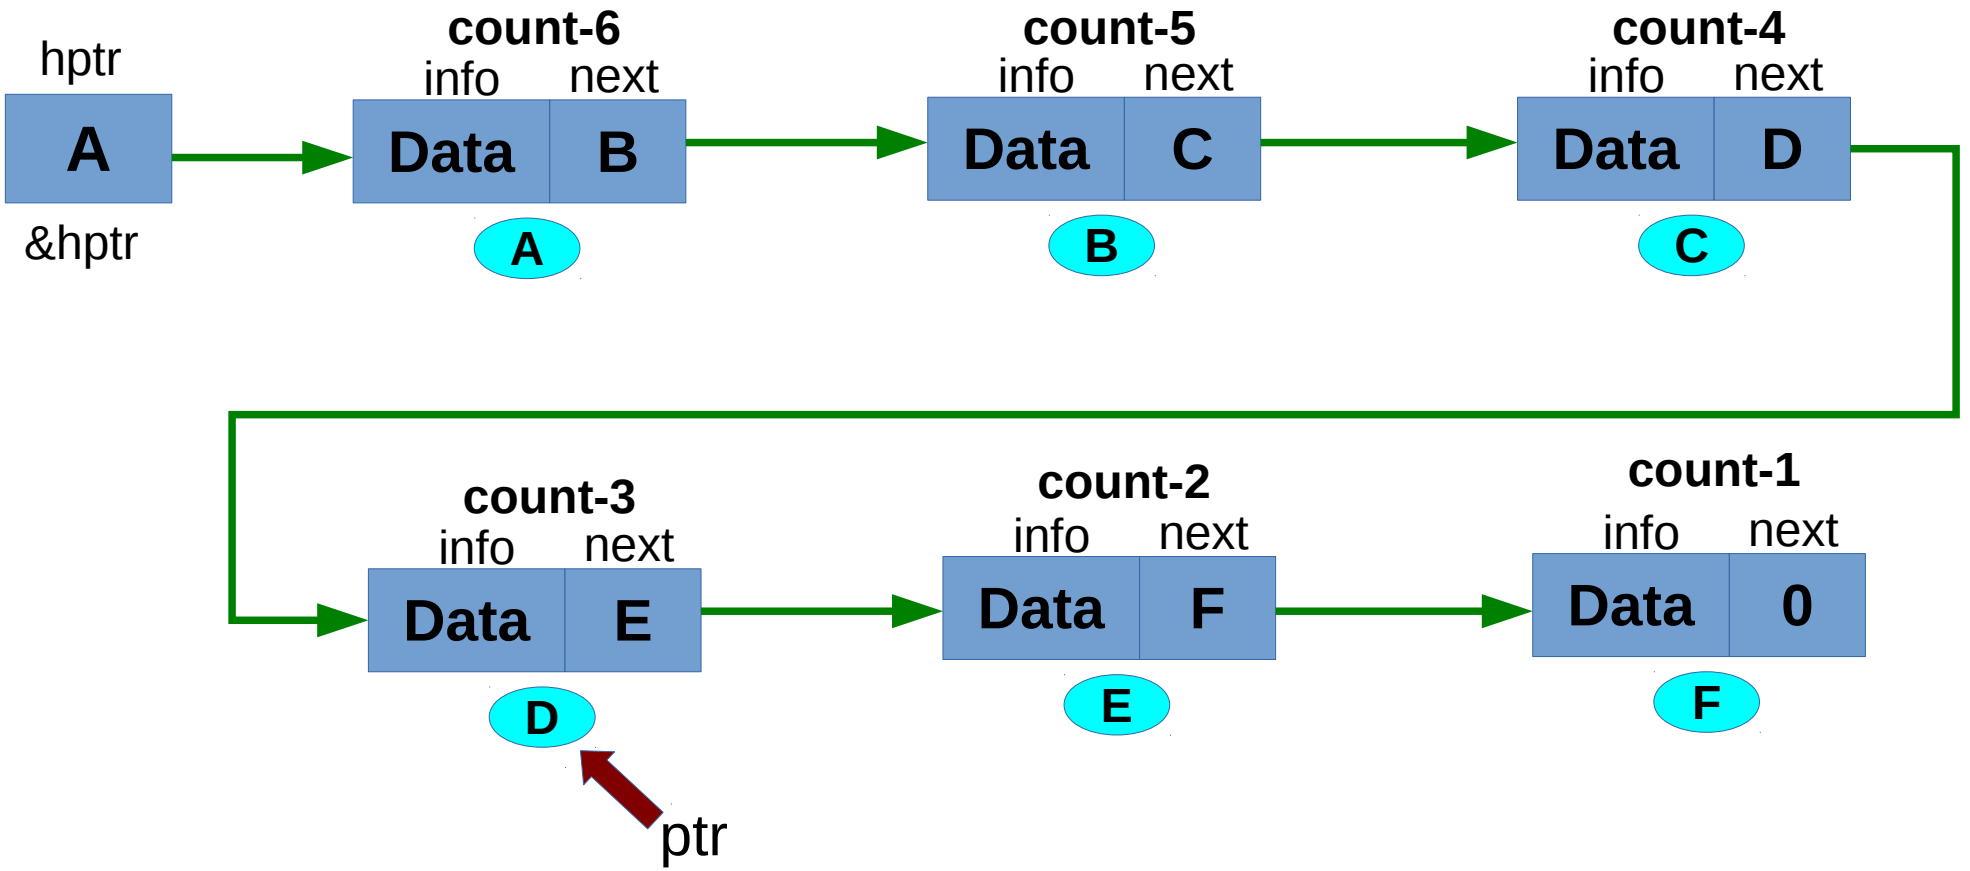

print the nodes in reverse

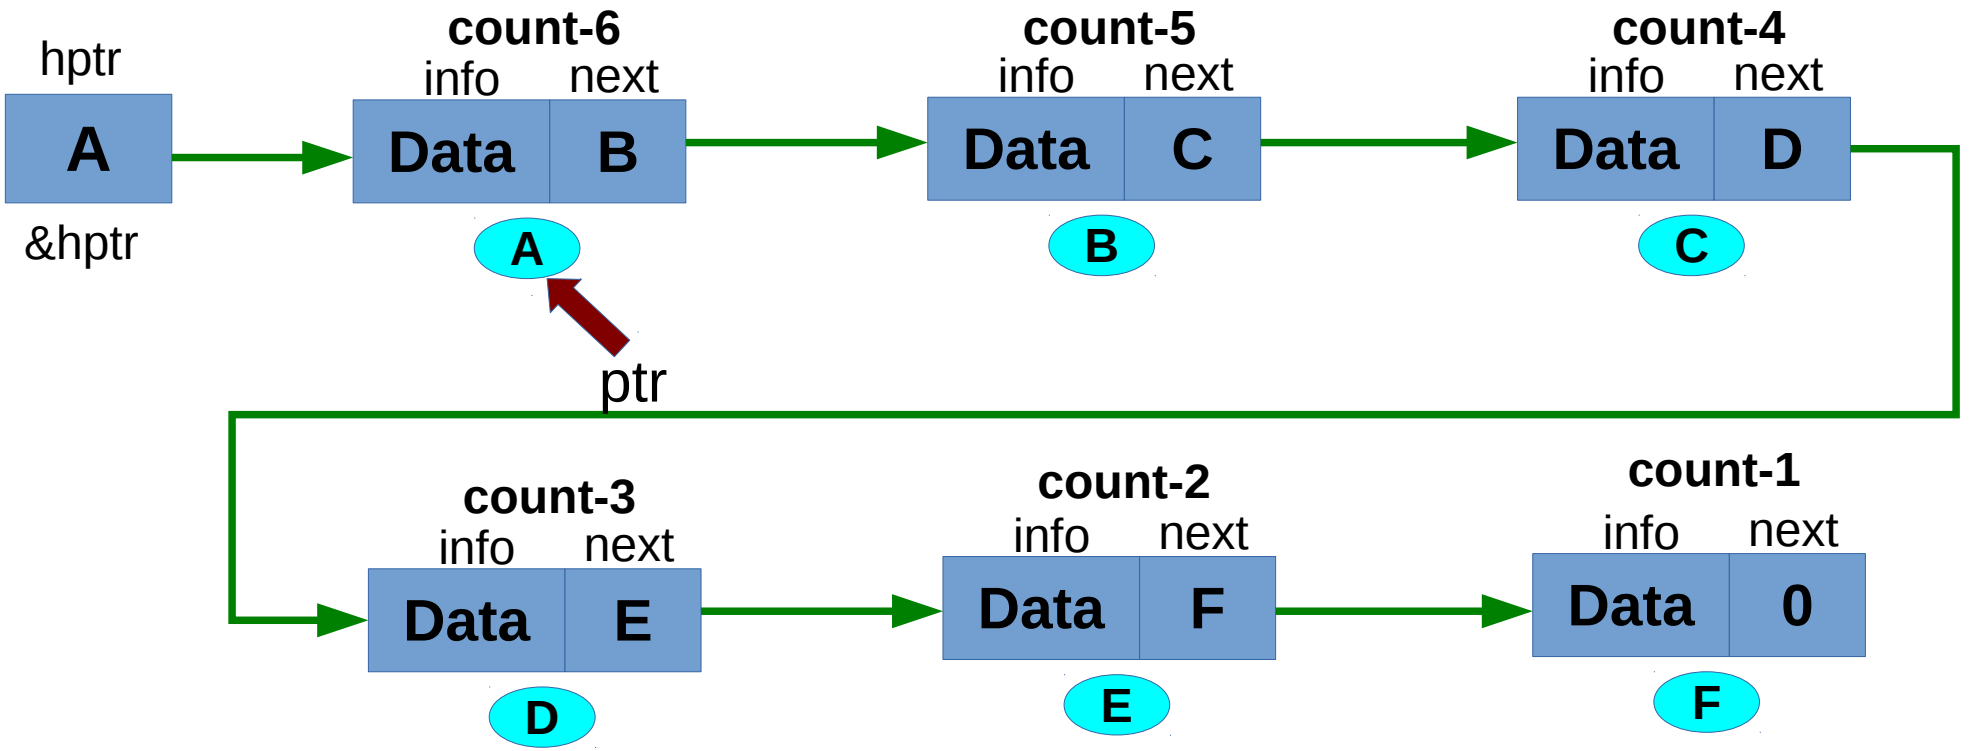

print the nodes in reverse

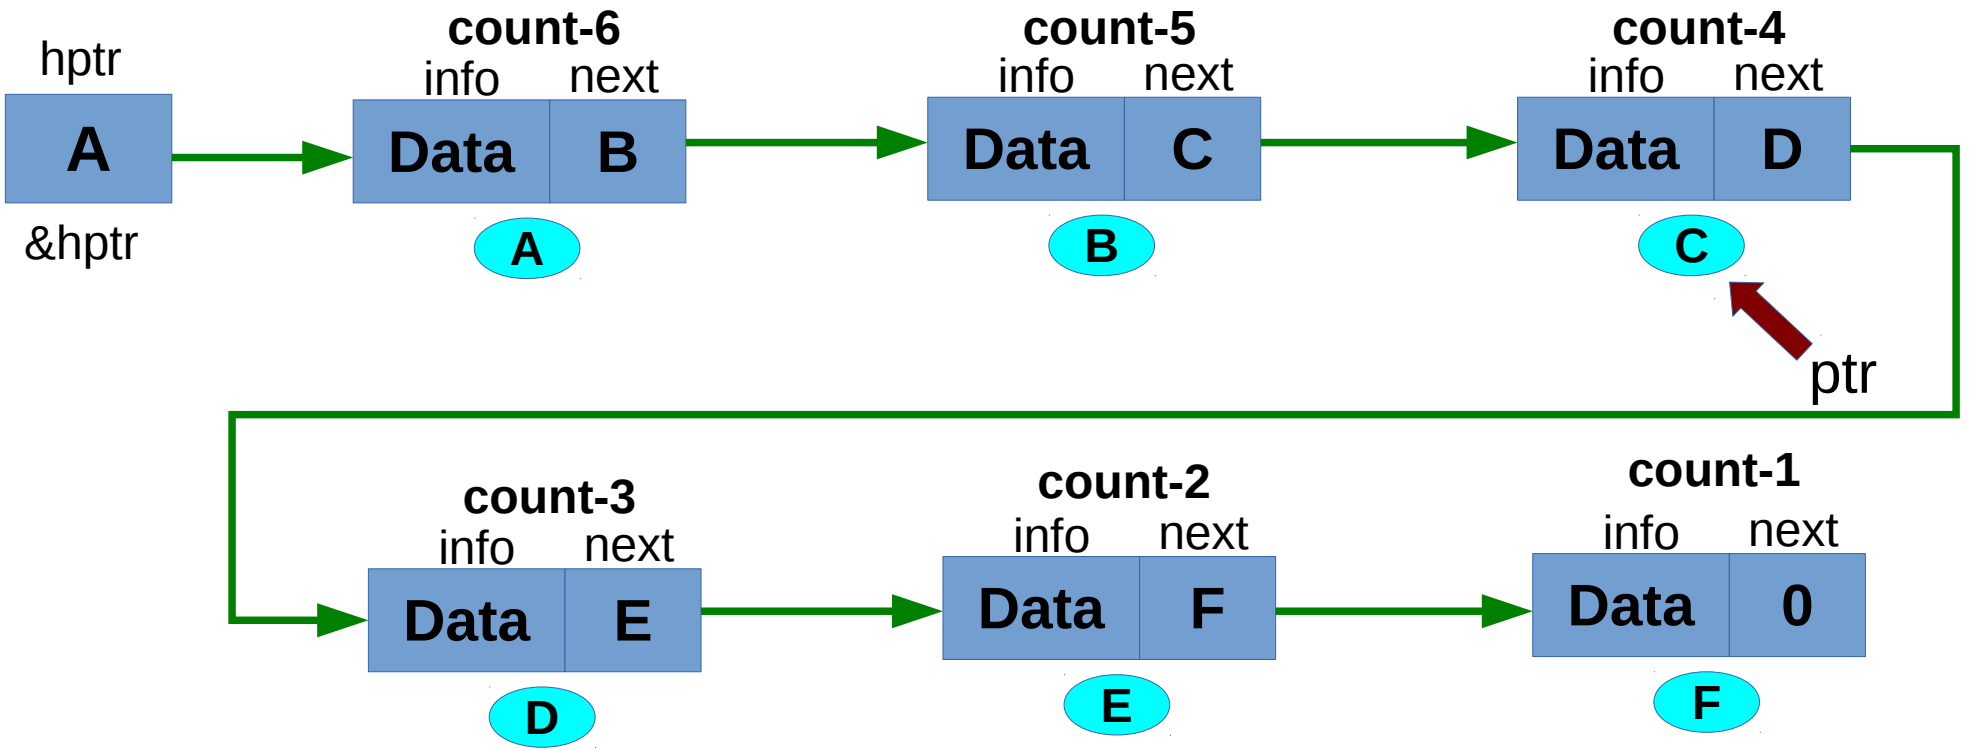

print the nodes in reverse

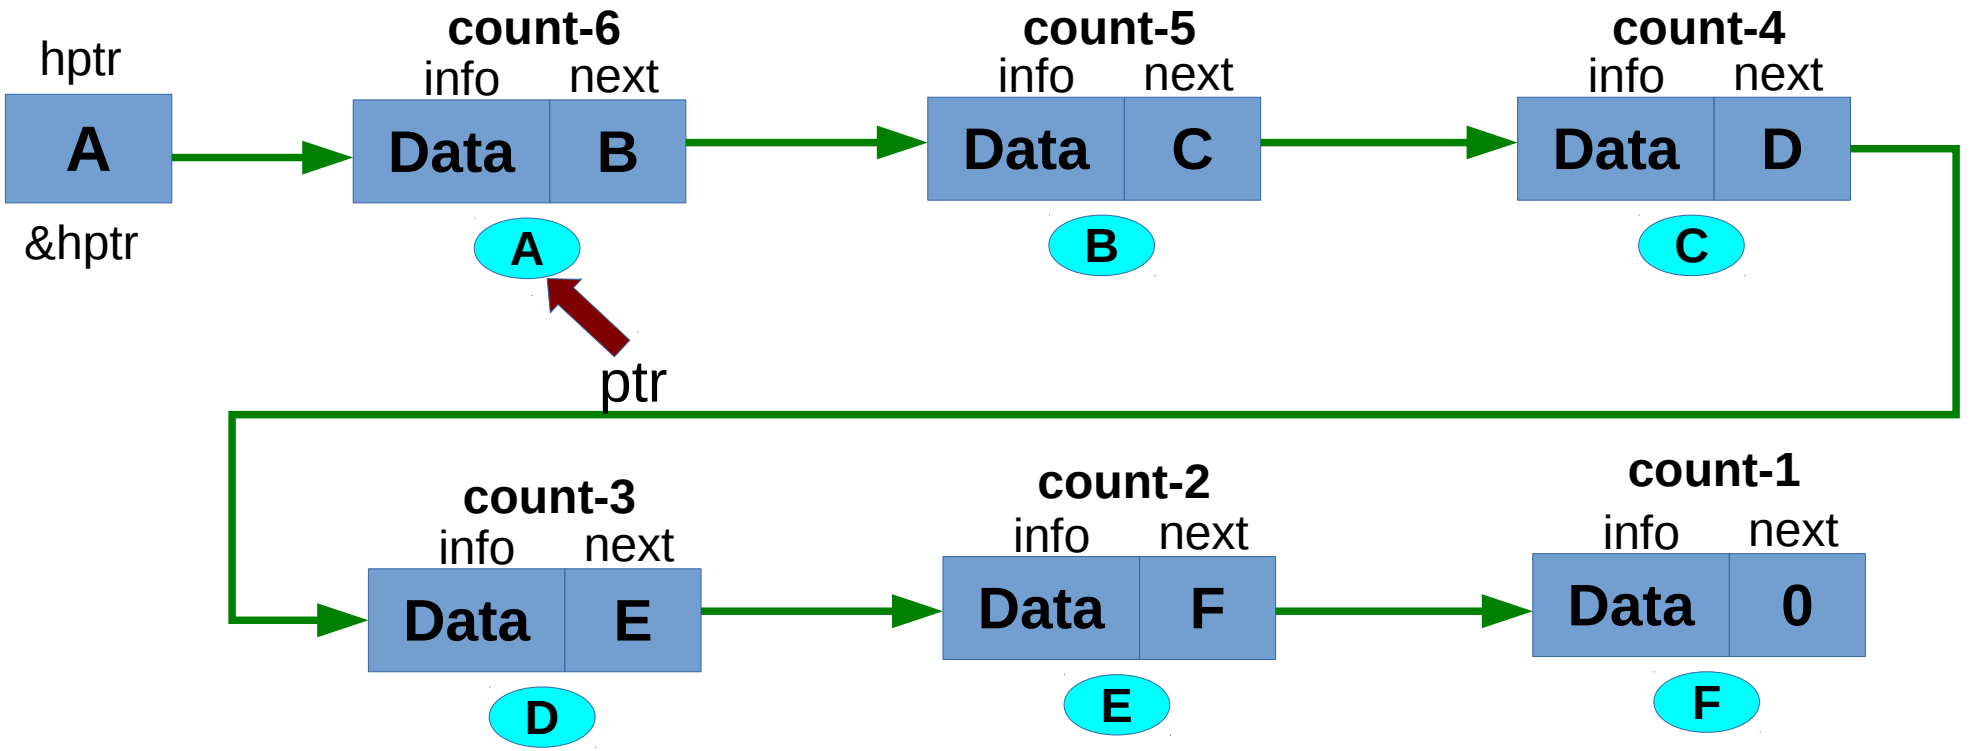

print the nodes in reverse

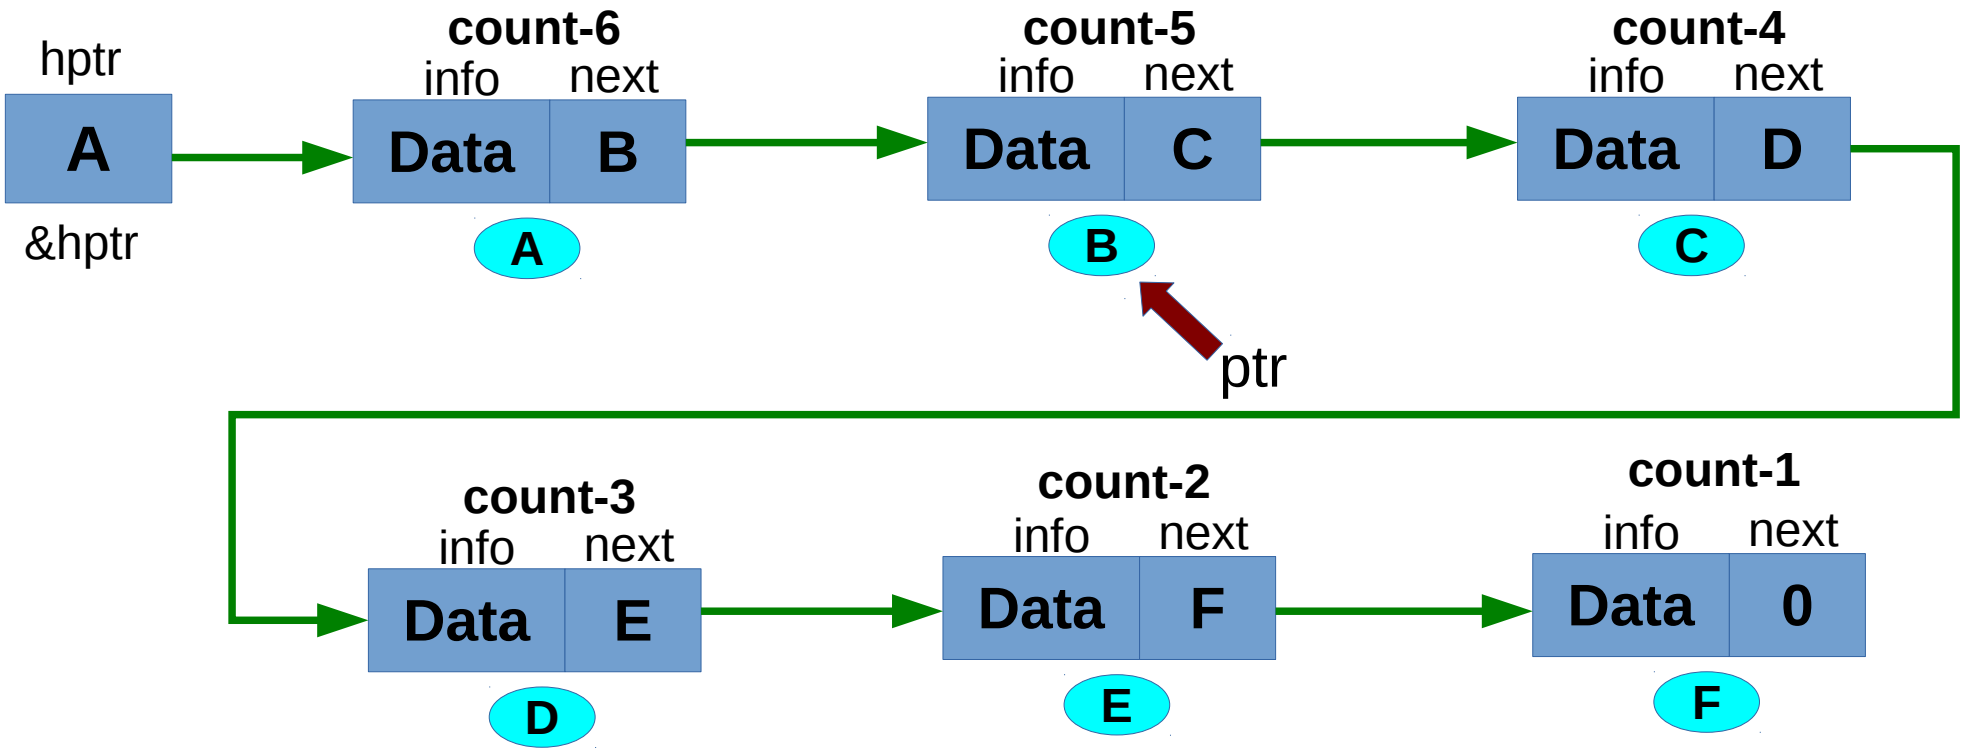

print the nodes in reverse

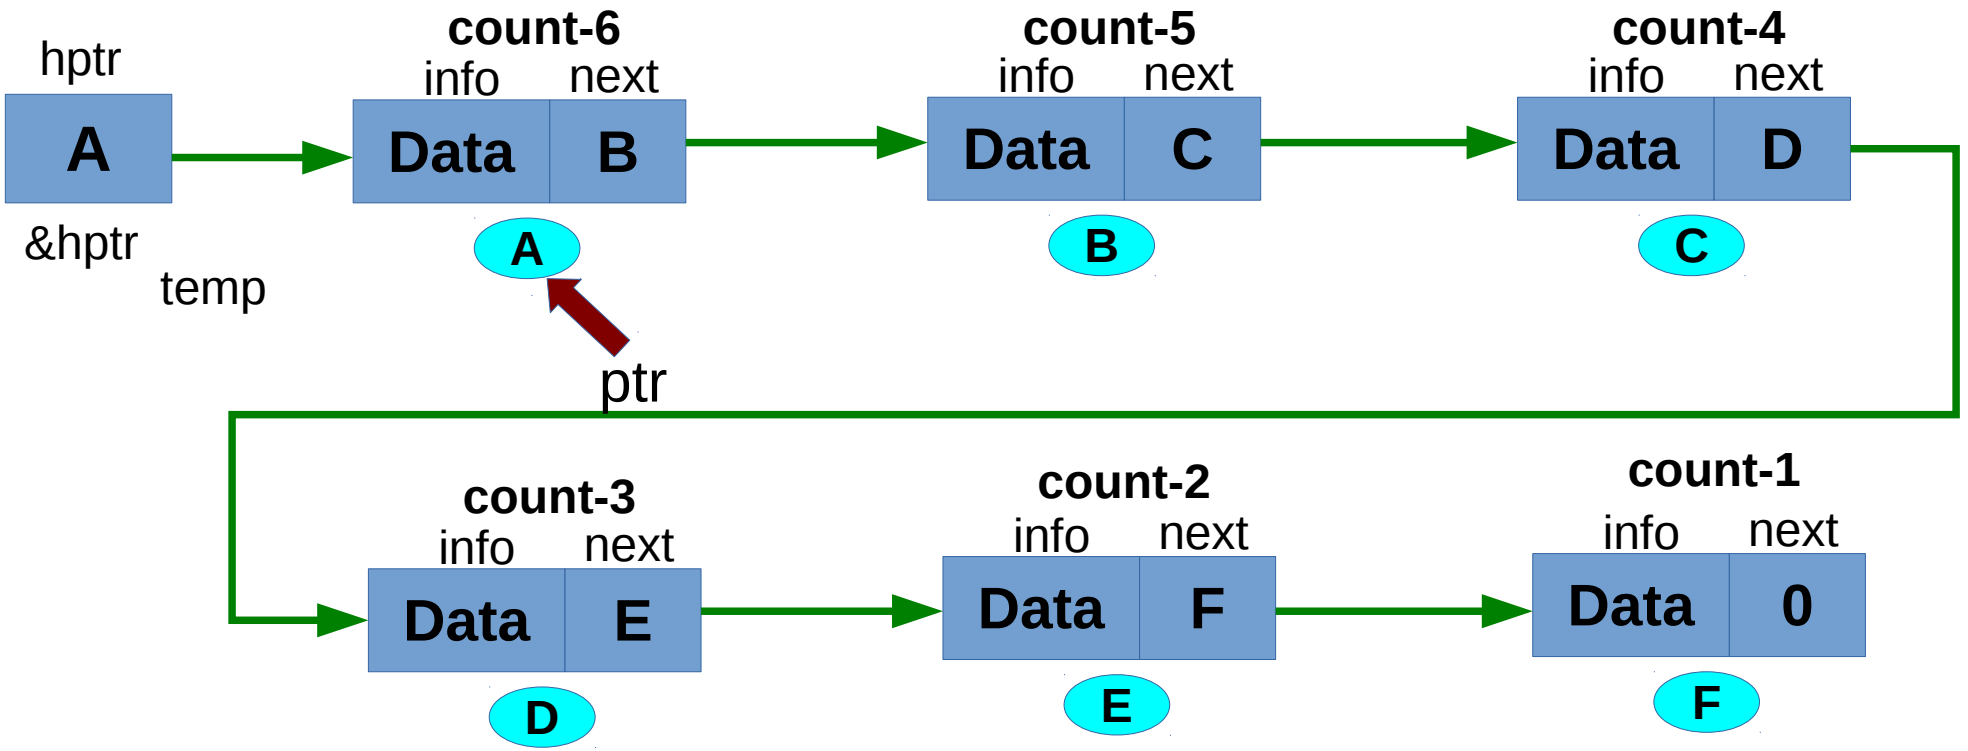

Using Array of pointers

print the nodes in reverse

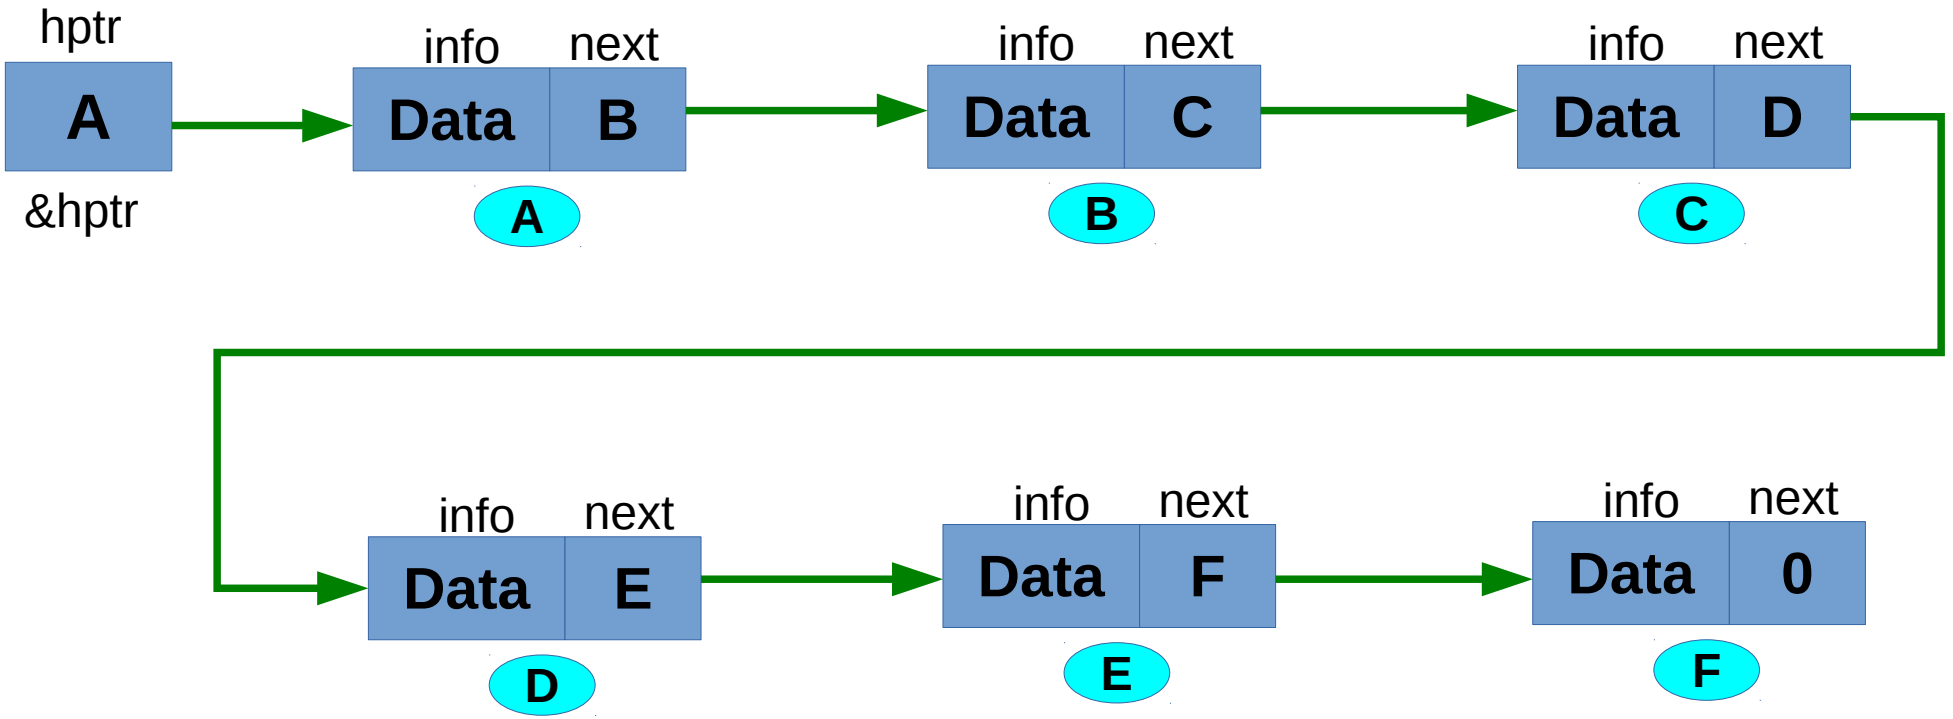

print the nodes in reverse

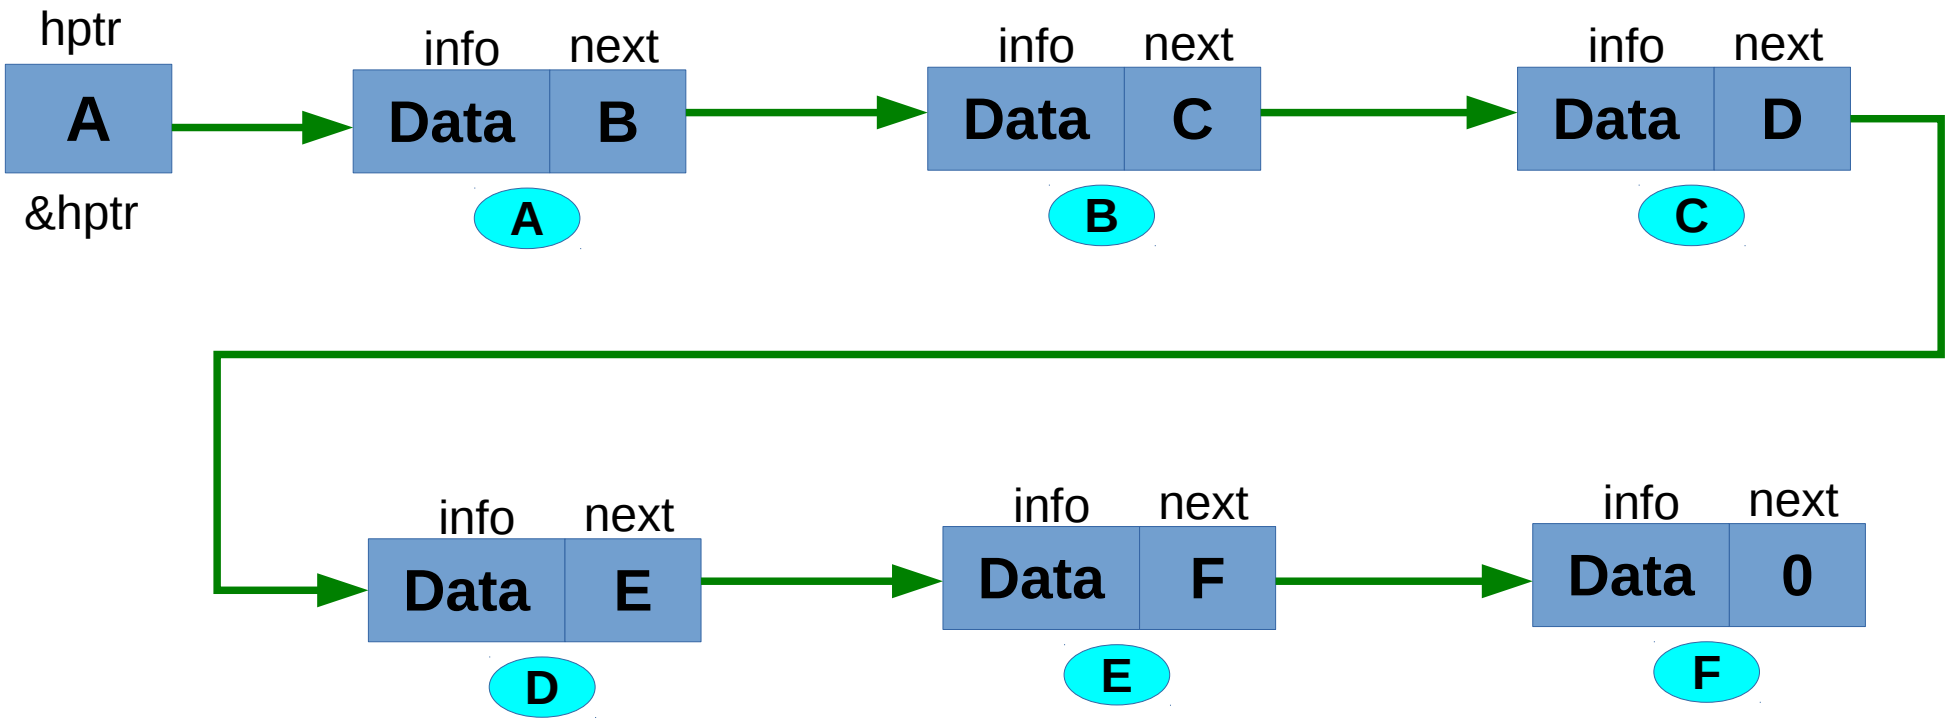

count

1 . **6**

print the nodes in reverse

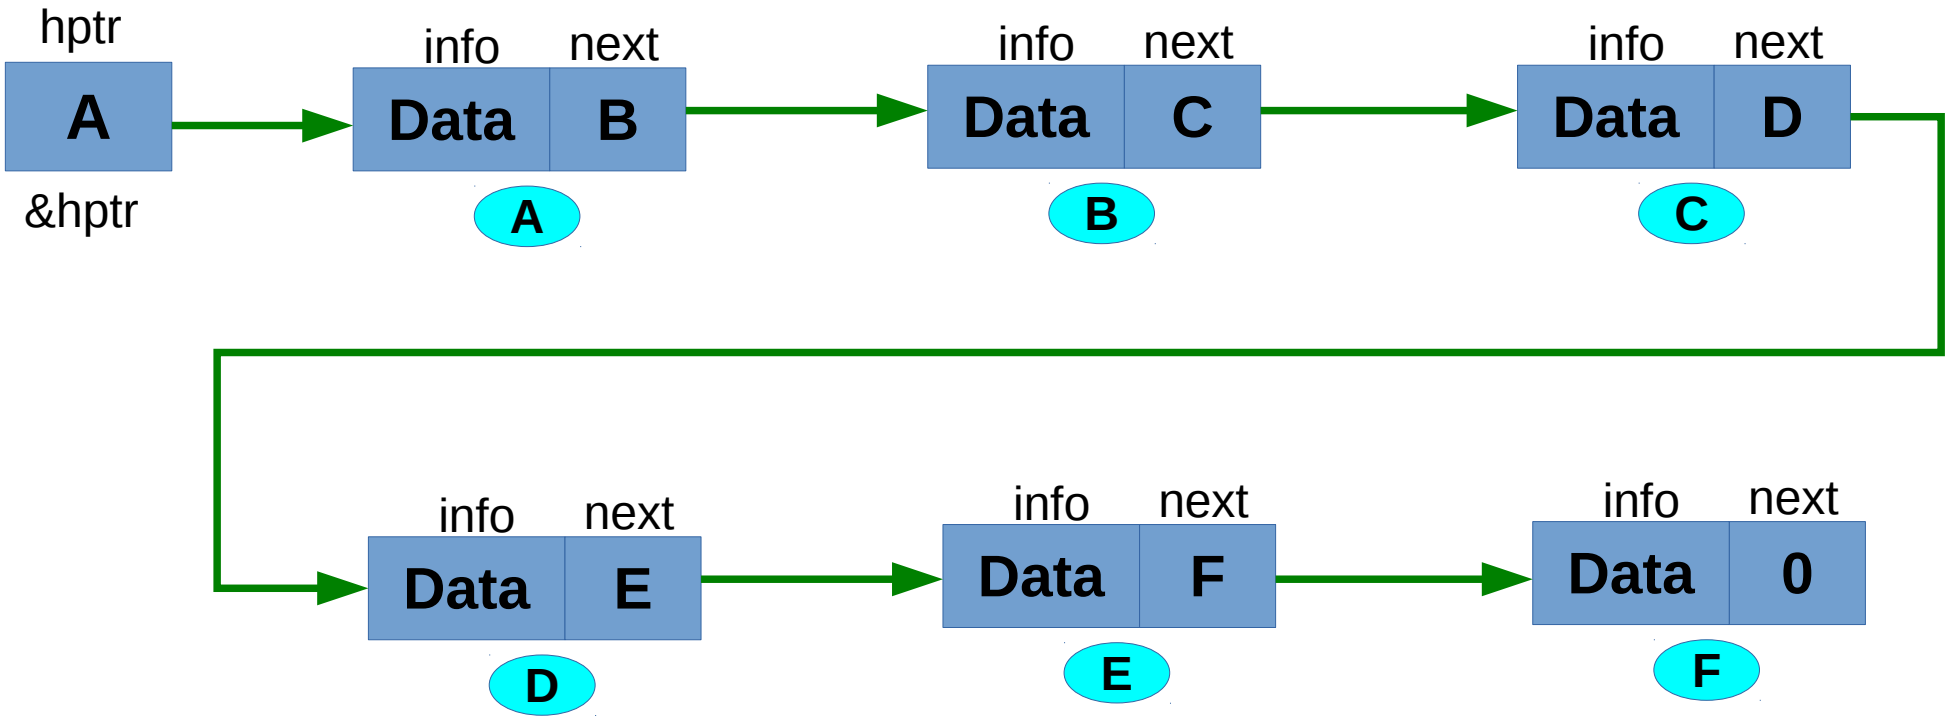

1 .

count

6

2 .

Array of Pointers memory (P)

[0] [1] [2] [3] [4] [5]

print the nodes in reverse

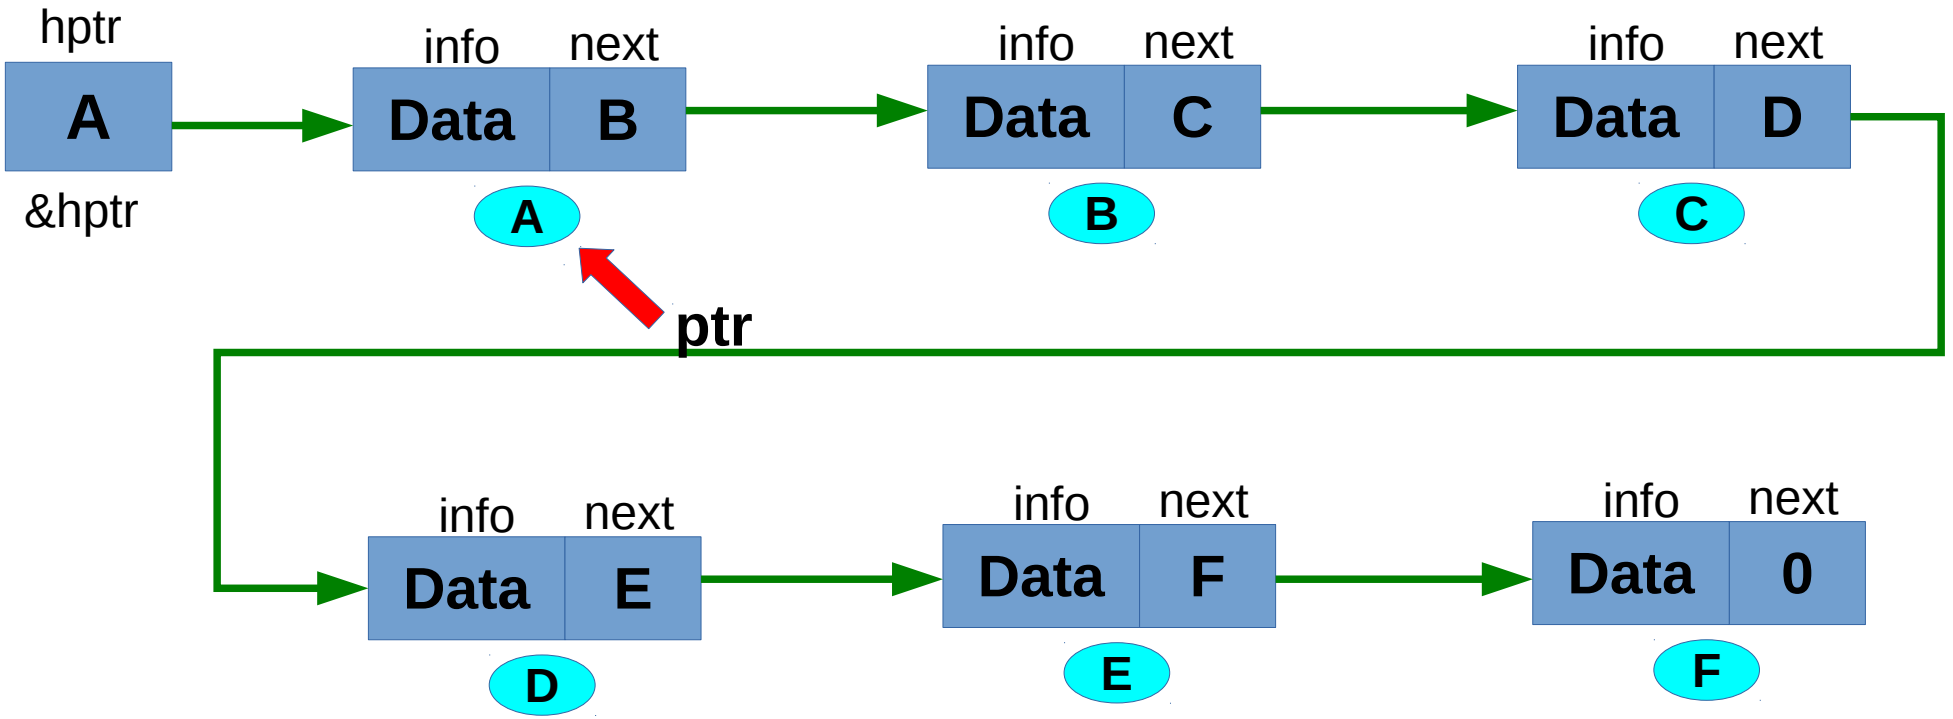

1 .

count

6

2 .

Array of Pointers memory (P)

[0]	[1]	[2]	[3]	[4]	[5]
A					

print the nodes in reverse

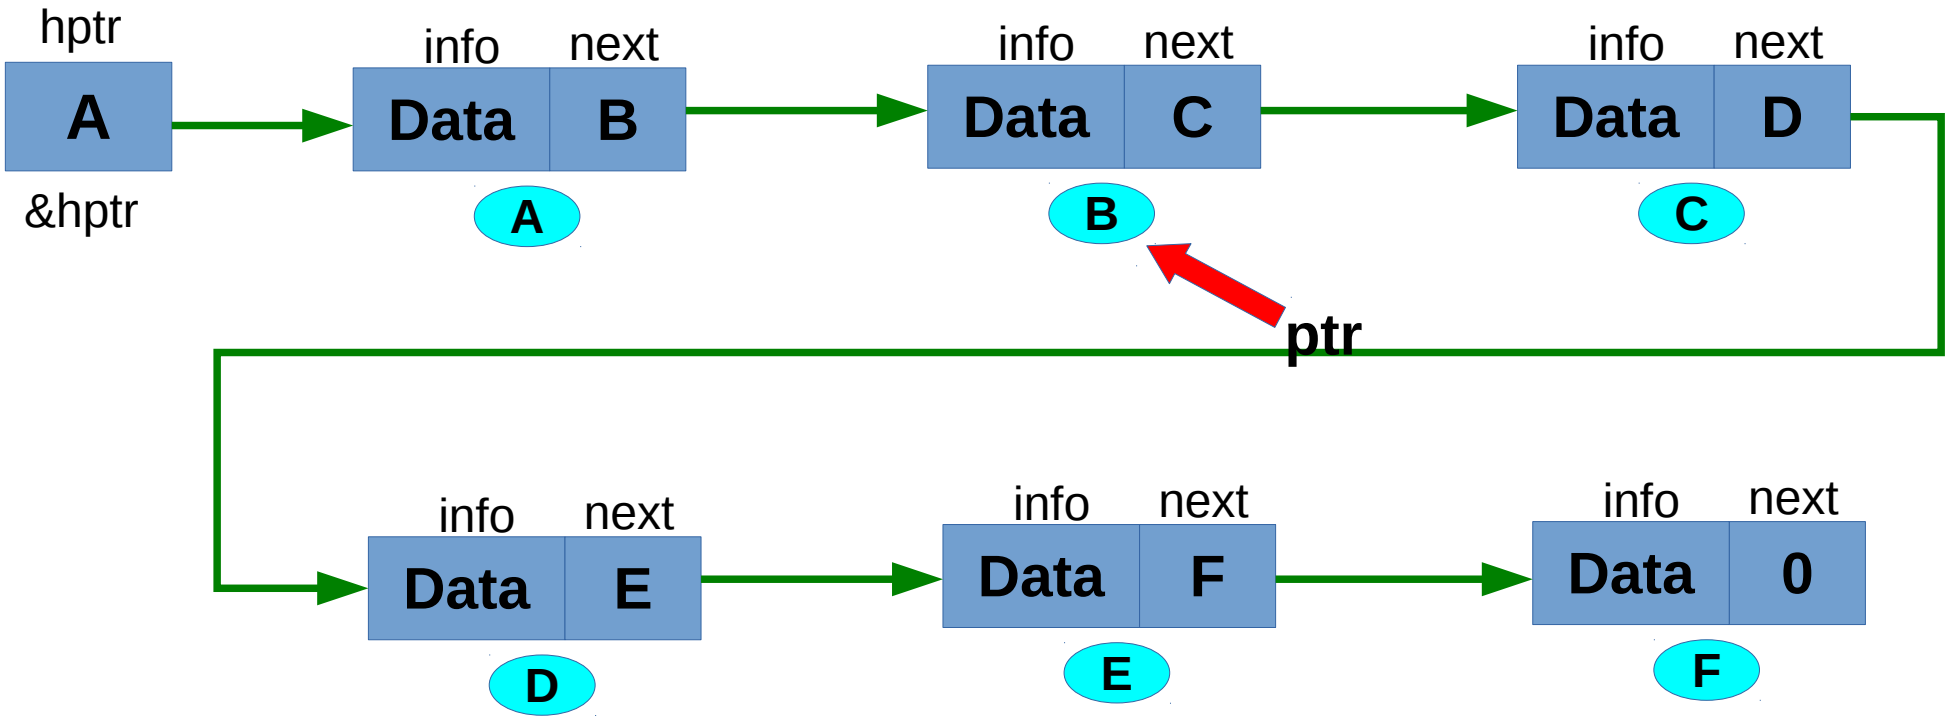

1 .

count

6

2 .

Array of Pointers memory (P)

[0]	[1]	[2]	[3]	[4]	[5]
A	B				

print the nodes in reverse

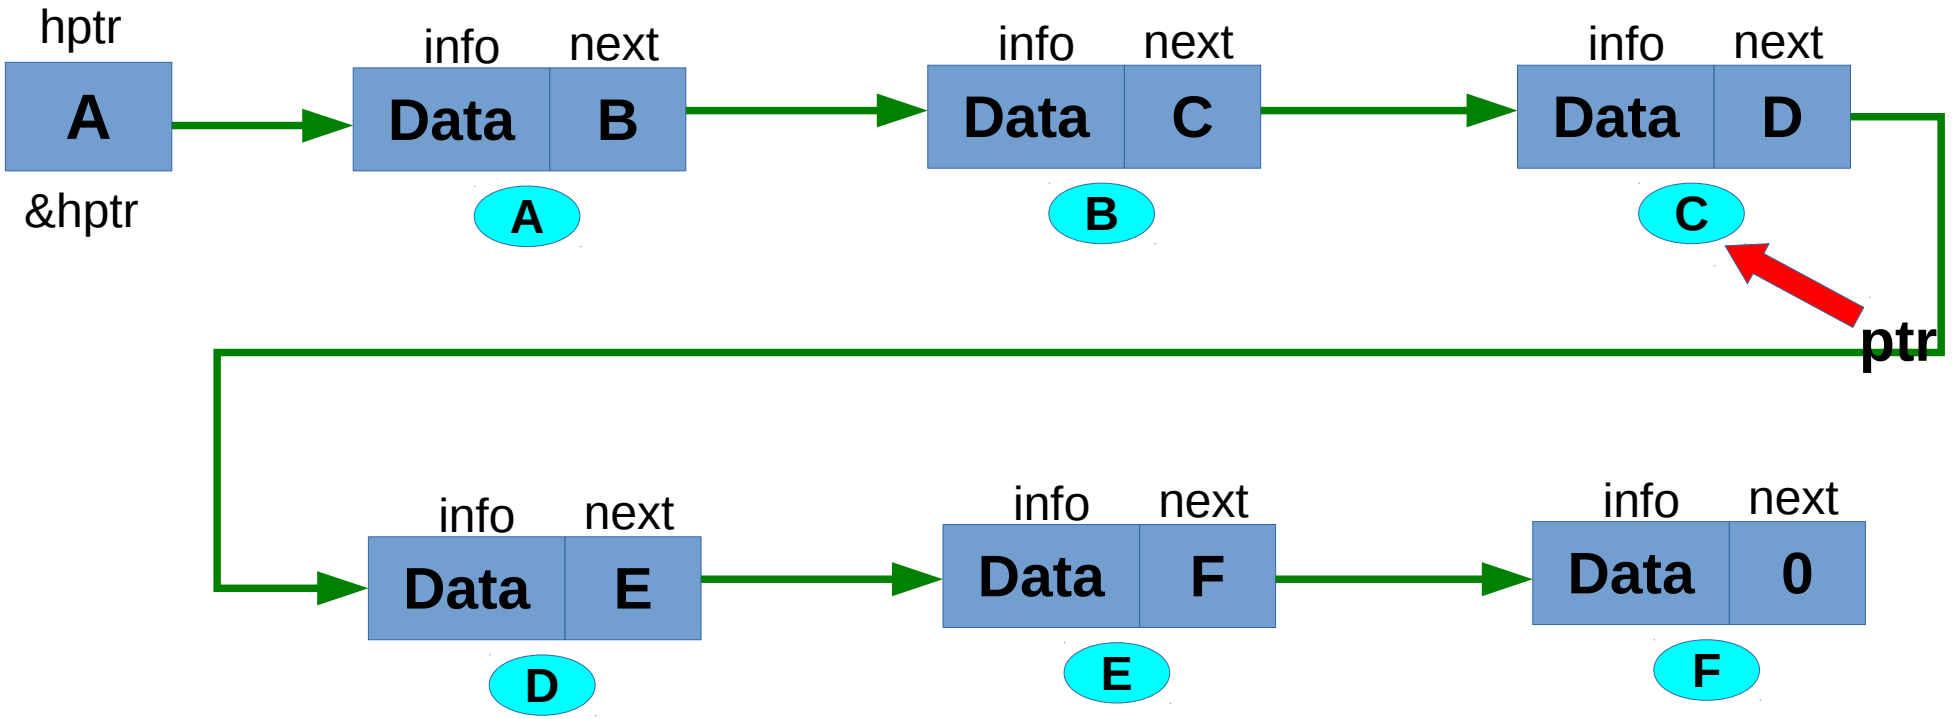

1 .

count

6

2 .

Array of Pointers memory (P)

[0]	[1]	[2]	[3]	[4]	[5]
A	B	C			

print the nodes in reverse

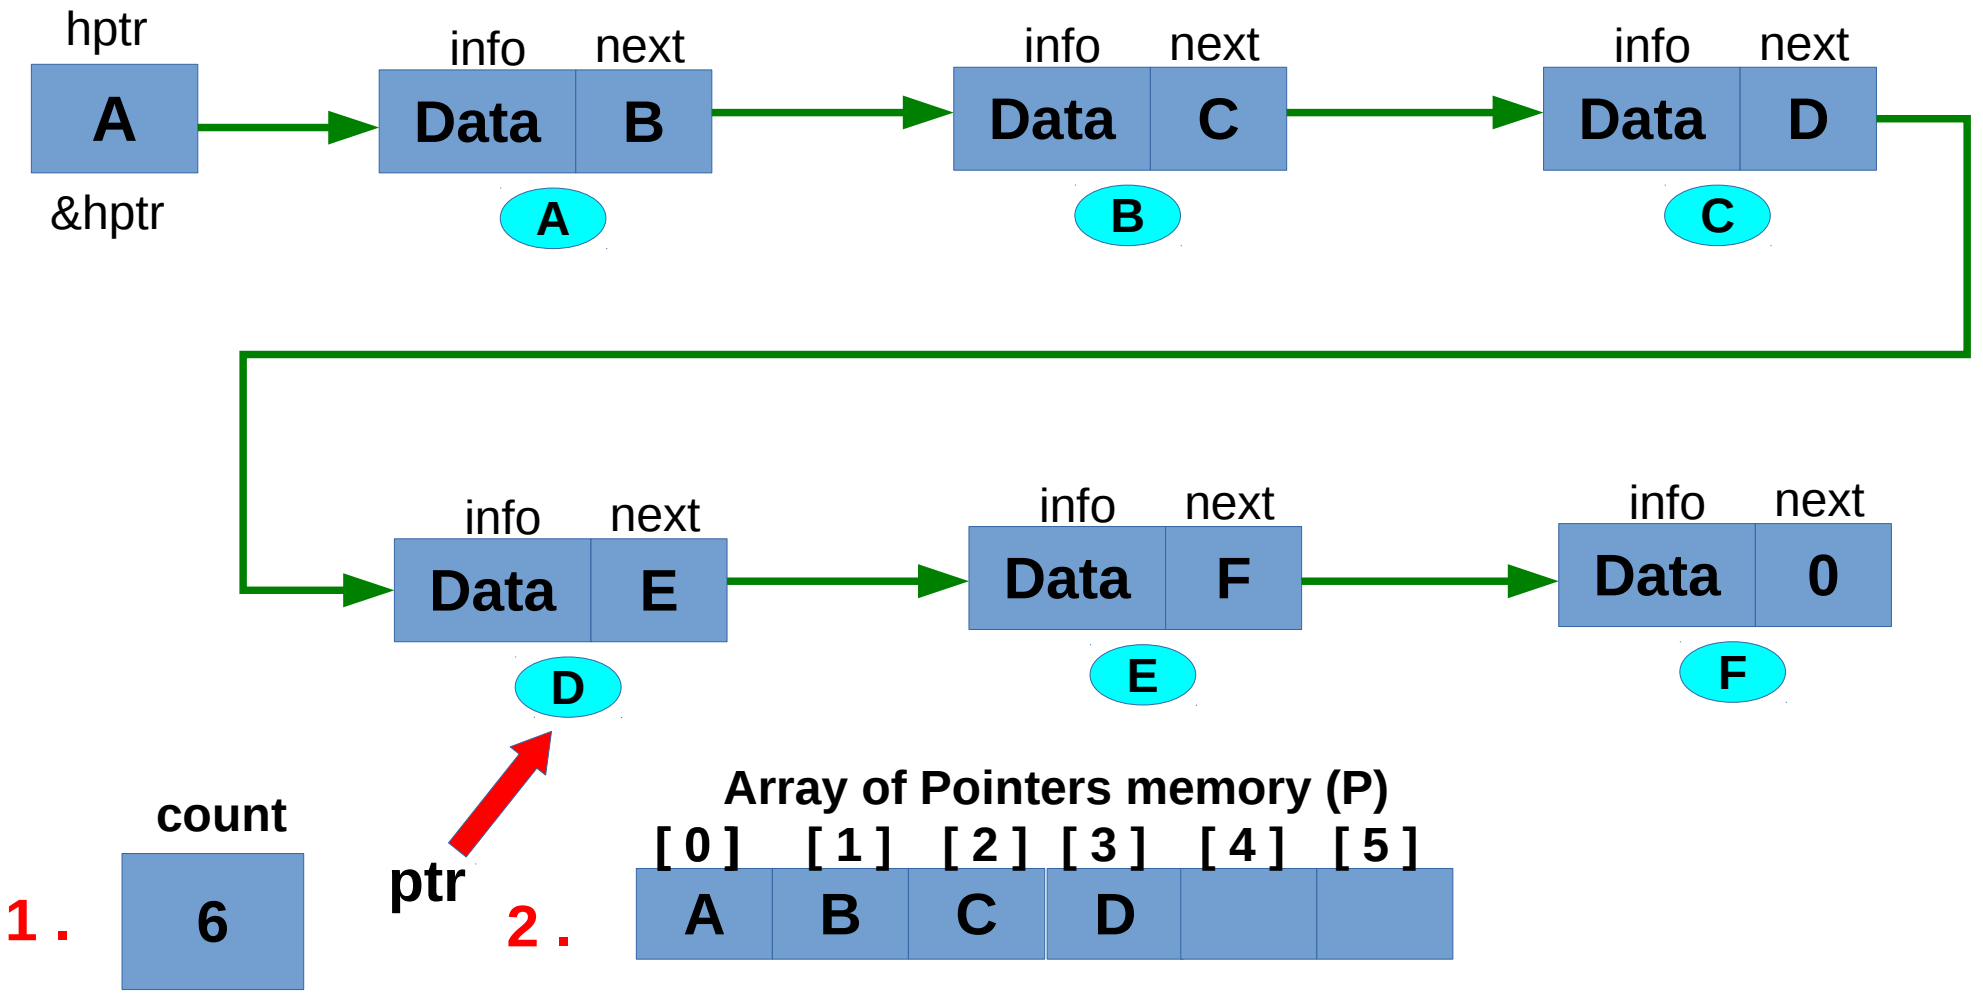

print the nodes in reverse

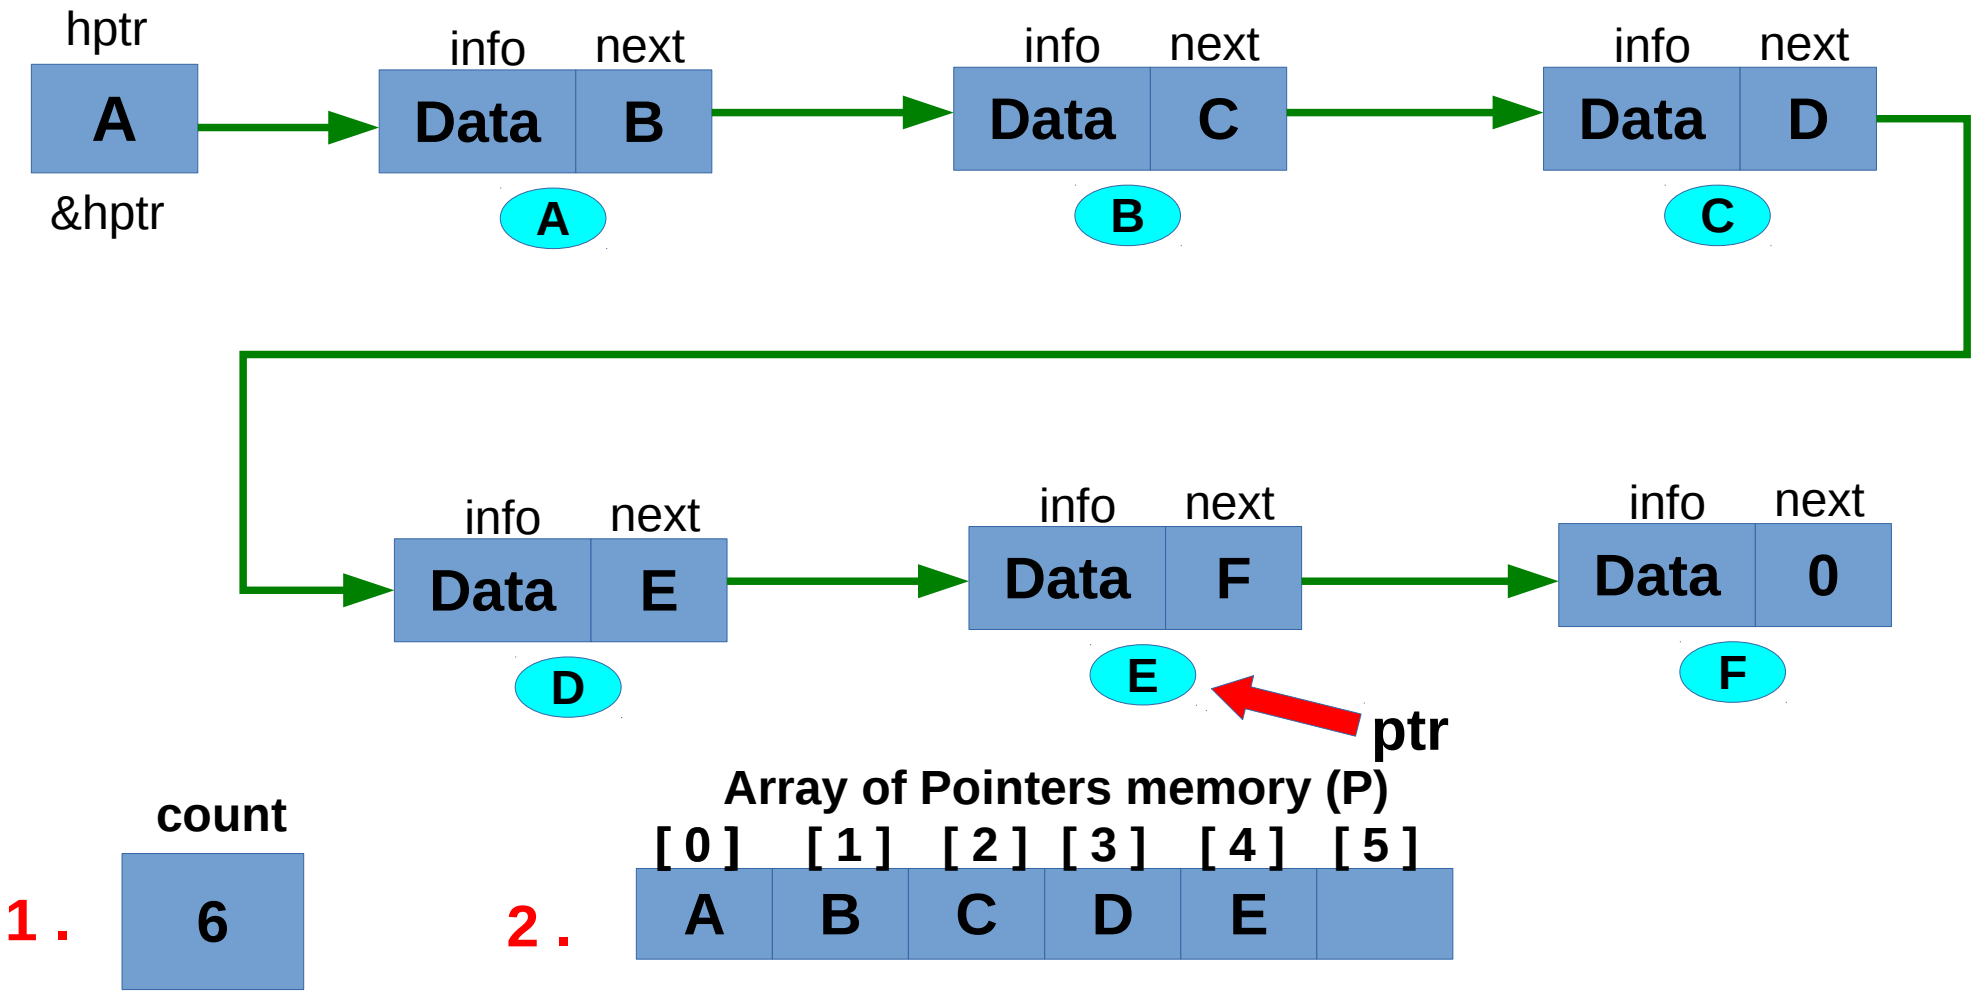

print the nodes in reverse

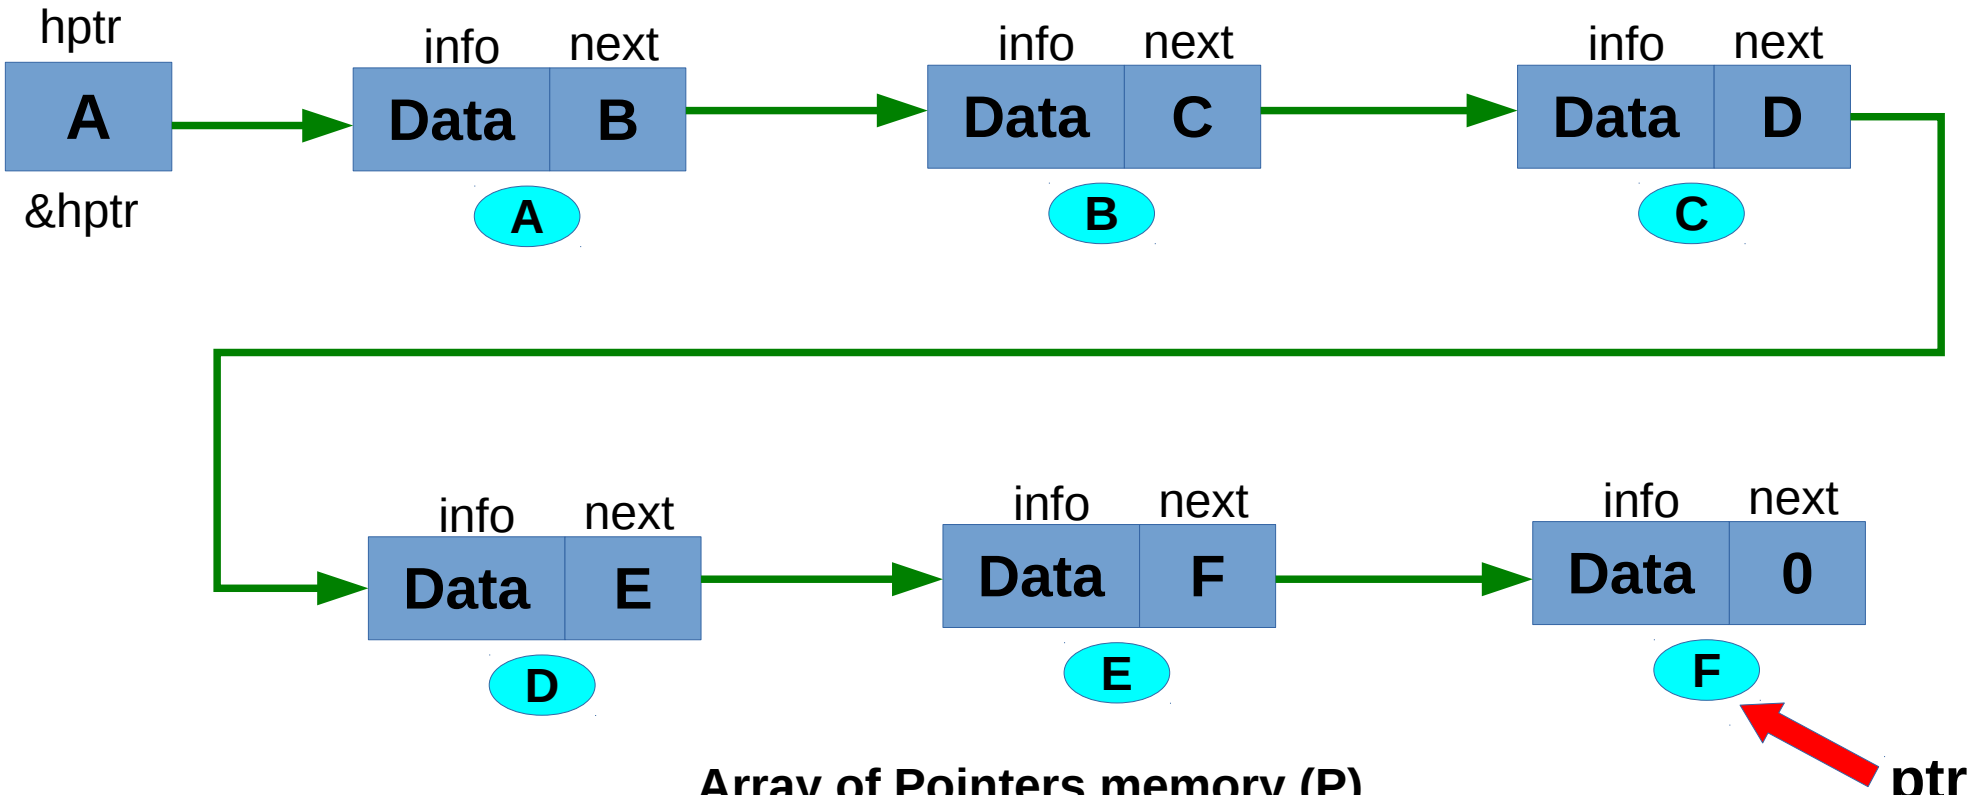

count

1 .

6

2 .

Array of Pointers memory (P)

[0]	[1]	[2]	[3]	[4]	[5]
A	B	C	D	E	F

print the nodes in reverse