

SciCalc Next CI/CD Report

Pradyun Devarakonda
IMT2022525
Devarakonda.Pradyun@iiitb.ac.in

November 16, 2025

Quick Links:

GitHub: <https://github.com/pradyunuydarp/CI-CD-Learning.git>

Docker Hub:

<https://hub.docker.com/repository/docker/pradyunuydarp/sci-calc-next/general>

1 DevOps Overview

What and Why

DevOps is the practice of combining software development and operations so that product increments can reach users quickly and safely. For this project, DevOps bridges the scientific calculator codebase and the deployment host: every change moves from Git commits through automated tests, container builds, image pushes, and finally to an Ansible-managed runtime. Automating these feedback loops reduces manual effort, ensures reproducibility, and keeps the calculator available.

Toolchain Summary

- **GitHub** — central source control for the repository (CI-CD-Learning) and pull-request history.
- **Node.js 20 & Next.js 15** — application runtime and framework powering the web UI.
- **TypeScript & ESLint** — static typing and linting to catch issues before runtime.
- **Vitest** — unit testing harness for the calculator logic.
- **Jenkins** — orchestrates the CI pipeline across install, test, build, container, and deploy stages.
- **Docker** — packages the Next.js application into a portable image.

- **Docker Hub** — hosts the pushed image under `pradyunuydarp/sci-calc-next`.
- **Ansible** — pulls the published image and manages the running container on the deployment target.
- **Ansible Vault** — stores Docker Hub credentials for production pulls.
- **LaTeX** — renders this report as a PDF artefact for submission.

2 System Architecture

- Next.js App Router renders the UI under `src/app`. The main calculator form is implemented in `src/components/Calculator.tsx` and rendered by `src/app/page.tsx`.
- Computations live in `src/lib/math.ts` with exported helpers `sqrX`, `factX`, `lnX`, and `power`. Input validation guards edge cases (negative factorials, non-positive logarithm operands, etc.).
- API requests hit `src/app/api/calc/route.ts`, which accepts JSON payloads, validates the requested operation, and delegates to the math helpers.
- Styling relies on utility classes to keep the layout responsive across laptops and tablets.

3 Implementation Walkthrough

3.1 Source Control Management (GitHub)

The project lives at `github.com/pradyunuydarp/CI-CD-Learning`, and the repository layout is highlighted in Figure 4. The `sci-calc-next` directory is the Next.js workspace. Typical commands:

```
# clone
$ git clone https://github.com/pradyunuydarp/CI-CD-Learning.git
$ cd CI-CD-Learning/sci-calc-next

# create feature branch, then commit
$ git checkout -b feat/new-capability
$ git add src/app/page.tsx
$ git commit -m "feat(ui): surface factorial operation"
$ git push origin feat/new-capability
```

The incremental commit trail shown in Figure 6 documents each feature, test, and deployment tweak. Jenkins tracks the `main` branch via a GitHub webhook, so every push schedules a pipeline run automatically.

3.2 Testing and Quality Gates

Unit tests use Vitest and live in `src/lib/math.test.ts`. Linting enforces Next.js conventions. Both run locally and in CI:

```
$ npm run lint
$ npm run test
```

The pipeline stops if either command fails, preventing regressions from reaching Docker build or deployment stages. Figure 7 captures the passing Vitest suite executed before container builds progress.

3.3 Build Automation

The production bundle is created with the standard Next.js build command:

```
$ npm run build
```

In Jenkins, the build stage sets `NODE_ENV=production` inline for the command so that devDependencies remain available during earlier steps.

3.4 Continuous Integration with Jenkins

The Jenkinsfile orchestrates every step, with the stage progression captured in Figure 2. The Install stage now clears leftover dependencies to avoid `ENOTEMPTY` errors before running `npm ci`. Relevant excerpt:

```
stage('Install') {
  steps {
    dir('sci-calc-next') {
      sh 'node -v'
      sh 'rm -rf node_modules'
      sh 'npm ci'
    }
  }
}
```

Dynamic host-port detection prevents deploy clashes, and email notifications keep the team informed. The success/failure handlers share build metadata, Docker tag, and the resolved host port:

```
post {
  success {
    script {
      if (env.NOTIFY_EMAILS?.trim()) {
        emailext(
          to: env.NOTIFY_EMAILS,
          subject: "SciCalc Next build ${env.BUILD_NUMBER} succeeded",

```

```

        mimeType: 'text/html',
        body: ""
<p>Build <a href='${env.BUILD_URL}'>#${env.BUILD_NUMBER}</a> completed successfully.</p>
<p>Docker image: ${env.DOCKER_IMAGE ?: 'n/a'}<br/>
Host port: ${env.DEPLOY_HOST_PORT ?: '3000'}</p>
""
    )
  }
}
failure {
  echo 'Pipeline failed. Review the logs for details.'
  script {
    if (env.NOTIFY_EMAILS?.trim()) {
      emailx(
        to: env.NOTIFY_EMAILS,
        subject: "SciCalc Next build #${env.BUILD_NUMBER} failed",
        mimeType: 'text/html',
        body: ""
<p>Build <a href='${env.BUILD_URL}'>#${env.BUILD_NUMBER}</a> failed.</p>
<p>Review the <a href='${env.BUILD_URL}console'>console log</a> for details.</p>
"",
        attachLog: true
      )
    }
  }
}
}
}

```

During the 10 Oct 2025 run at 16:34 the script detected that port 3000 was occupied, selected 3300 automatically, and completed deployment without manual intervention, as evidenced by the console trace in Figure 8.

3.5 Containerization

The Dockerfile performs a multi-stage build. Key fragment:

```

FROM node:20-alpine AS builder
WORKDIR /app
COPY package*.json ./
RUN npm ci
COPY . .
RUN npm run build

FROM node:20-alpine AS runner
ENV NODE\_ENV=production

```

```

WORKDIR /app
COPY --from=builder /app/package*.json ./
COPY --from=builder /app/.next ./next
COPY --from=builder /app/public ./public
RUN npm ci --omit=dev
EXPOSE 3000
CMD ["npm", "run", "start"]

```

The Jenkins Docker stage logs into Docker Hub using the `dockerhub` credential and tags the image as `pradyunuydarp/sci-calc-next:latest`.

3.6 Registry Publishing

Image publishing relies on native Docker CLI commands executed from Jenkins:

```

echo "${DOCKERHUB_TOKEN}" | docker login -u "${DOCKERHUB_USER}" --password-stdin
docker build -t "${DOCKERHUB_USER}/sci-calc-next:latest" .
docker push "${DOCKERHUB_USER}/sci-calc-next:latest"
docker logout

```

The resulting image is visible under Docker Hub tags, and Figure 5 shows the live repository page.

3.7 Configuration Management and Deployment

Ansible handles the final delivery. Inventory and group variables pin the container name, port mapping, and interpreter:

```

# ansible/inventory/hosts.ini
[target]
localhost ansible_connection=local

# ansible/inventory/group_vars/all.yml
app_name: sci-calc-next
docker_image: "{{ lookup('env', 'DOCKER_IMAGE') | default('pradyunuydarp/sci-calc-next:latest') }}"
container_name: sci-calc-next
container_port: 3000
host_port: "{{ lookup('env', 'HOST_PORT') | default('3000', true) }}"
ansible_python_interpreter: "{{ lookup('env', 'ANSIBLE_PYTHON_INTERPRETER') | default('/usr/bin/python3') }}"

```

When the 16 Nov 2025 Jenkins deploy failed with Error while fetching server API version: `FileNotFoundError(2, '/var/run/docker.sock')`, the playbook and pipeline were patched to export the active Docker context host (for example `unix:///Users/pradyundevarakonda/` via `DOCKER_HOST`). Module defaults now reuse that value across login, image pulls, and container tasks so the Docker SDK can reach the desktop daemon even when the socket path is non-standard.

The deploy playbook removes stale containers, pulls the requested image, and recreates the service:

```

- name: Stop existing SciCalc Next container
  community.docker.docker_container:
    name: "{{ container_name }}"
    state: stopped
    ignore_errors: true

- name: Remove existing SciCalc Next container
  community.docker.docker_container:
    name: "{{ container_name }}"
    state: absent
    ignore_errors: true

- name: Ensure SciCalc Next container is running
  community.docker.docker_container:
    name: "{{ container_name }}"
    image: "{{ docker_image }}"
    state: started
    recreate: true
    force_kill: true
    restart_policy: always
    published_ports:
      - "{{ host_port }}:{{ container_port }}"
    env:
      NODE_ENV: production

```

During the successful Jenkins run, the play recap reported `ok=3 changed=1 failed=0`, confirming the container restart on the new port (Figure 3).

4 Application Experience

User Journey

Landing on / presents a centered glassmorphism shell with the "SciCalc Next" banner and a two-column layout on desktop. Figure 1 illustrates the default view alongside the responsive controls. The left pane hosts the interactive form: four quick-action pills switch between square root, factorial, natural logarithm, and power, while an optional free-form expression box accepts inputs such as `5!`, `sqrt(144)`, `ln(10)`, or `pow(2,8)`. Selecting an operation swaps in the relevant structured fields (single numeric input for unary functions, paired base/exponent inputs for power) so the user can either type shorthand math or rely on labelled controls.

Feedback Loop

Submitting the form issues a POST to `/api/calc`, which validates the payload and runs the math helpers. Results appear instantly in the right-hand "Result preview" card, formatted

with up to six decimal places and wrapped in a scrollable badge for long outputs. A single click copies the numeric answer to the clipboard and surfaces a transient "Copied!" indicator; unsupported clipboard environments fall back to an inline warning instead of failing silently.

Guidance and Validation

Each operation tile advertises its domain (e.g., factorial highlights non-negative integers, logarithm warns about positive inputs only), and the sidebar mirrors the currently selected operation with a description and worked example. Client-side parsing catches malformed expressions before the request leaves the browser, while the API raises explicit error messages for domain breaches such as negative square roots or overflowing factorials. These messages render in the sidebar with accentuated error styling, ensuring users understand why a computation failed.

Responsiveness and Accessibility

The grid collapses to a single column below 960 px, keeping the keypad, inputs, and feedback stacked for mobile reachability. Buttons expose `aria-pressed` state, results live in an `aria-live` region, and focus-visible styles ensure keyboard navigation remains clear. Color contrast between foreground text and the dark background exceeds WCAG AA targets, making the calculator legible in low-light settings.

5 Runtime Access

A secure tunnel is exposed through ngrok during local demos so remote reviewers can reach the calculator without opening firewall ports.

6 Results and Verification

- **Automated tests:** `npm run test` and `npm run lint` are executed locally and inside Jenkins. Both passed before the most recent push.
- **Pipeline completion:** The 10 Oct 2025 16:34 IST Jenkins run completed every stage, published the Docker image, and redeployed via Ansible using host port 3300.
- **Runtime check:** On the deployment host, `docker ps --filter name=sci-calc-next --format '{{.Ports}}'` shows the chosen port mapping (for example `0.0.0.0:3300->3000/tcp`).
- **Local reproduction:** `npm run lint`, `npm run test`, `npm run build`, and `ansible-playbook playbooks/deploy.yml` reproduce the pipeline sequence offline.

7 References and Access

- GitHub repository: <https://github.com/pradyunuydarp/CI-CD-Learning>.git

- Docker Hub image: <https://hub.docker.com/repository/docker/pradyunuydarp/sci-calc-next/general>
- Jenkins job: hosted on the local Jenkins master (<https://<jenkins-host>/job/SciCalc/>).
- Ansible inventory: `ansible/inventory/hosts.ini`
- Jenkins pipeline script: `Jenkinsfile`
- Dockerfile: `Dockerfile`

8 Appendix A: Assignment Brief

Problem Statement

Create a scientific calculator that supports the following operations: square root ($\sqrt{x}$), factorial ($x!$), natural logarithm ($\ln x$), and exponentiation (x^b). The solution may be a command-line or web application in any programming language.

DevOps Requirements

1. Manage the source code with Git on a hosted platform such as GitHub, GitLab, or Bitbucket.
2. Implement automated testing (JUnit, Selenium, Vitest, etc.).
3. Configure a build step using tools like Maven, Gradle, npm, or equivalents.
4. Set up continuous integration with Jenkins.
5. Containerise the application with Docker.
6. Push the resulting image to Docker Hub.
7. Use Ansible for configuration management: pull the image to managed hosts and run the container (local machine or cloud host).
8. Document the entire pipeline and provide screenshots demonstrating each stage and calculator functionality.

Submission Expectations

- Report on the DevOps approach, tools, configuration steps, commands, and screenshots of key milestones (Git commits, Jenkins credentials, Docker Hub repository, Ansible execution, and application UI).
- Provide artefacts such as the Dockerfile, Ansible playbooks, Jenkinsfile, and application source code.

- Include links to the public GitHub repository and Docker Hub image in the report.
- Export the final document as PDF named with the roll number.

9 Appendix B: Screenshot Gallery

The figures below showcase core artefacts captured during the project.

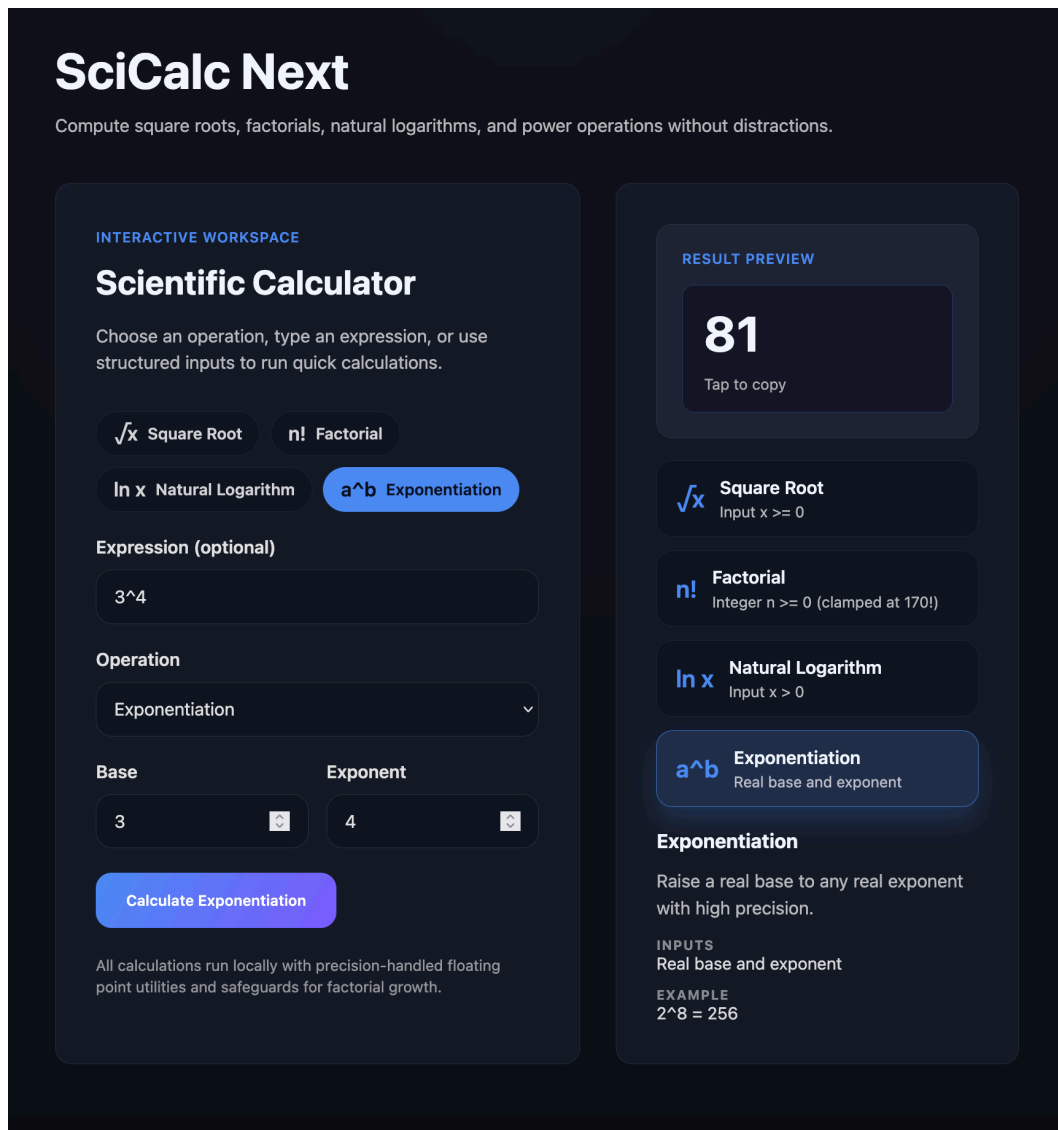


Figure 1: Scientific calculator UI demonstrating square root, factorial, logarithm, and power operations.

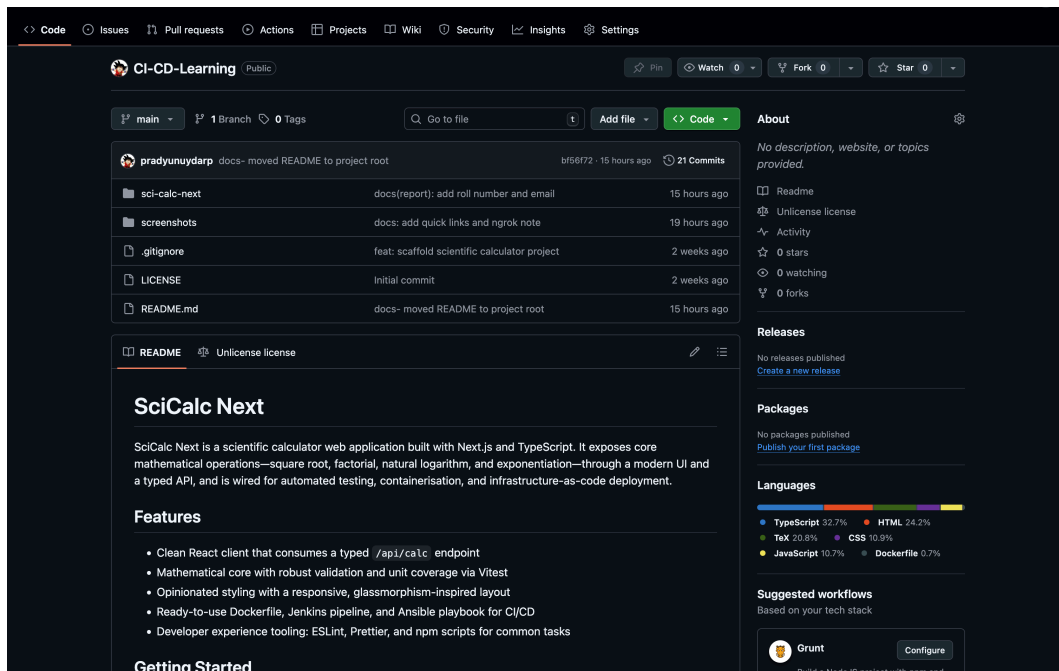


Figure 4: Repository explorer highlighting the SciCalc Next workspace and key configuration files.

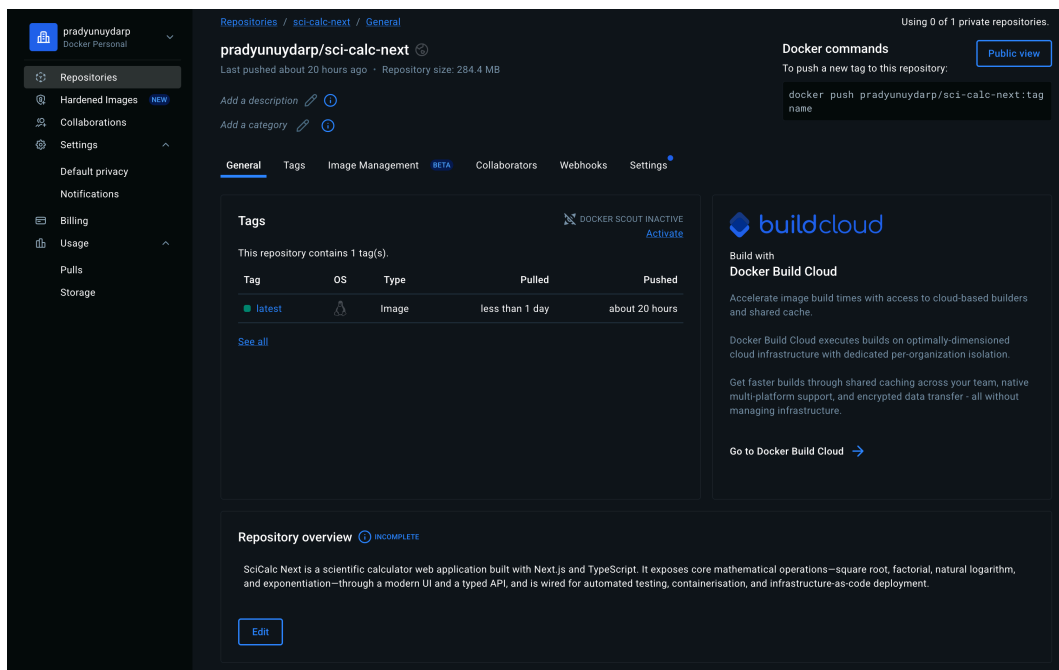


Figure 5: Docker Hub page showing the pradyunuydarp/sci-calc-next image tags and metadata.

Commits		
main	All users	All time
Commits on Oct 10, 2025		
docs- moved README to project root	pradyunuydarp committed 15 hours ago	b156f72 <>
docs(report): add roll number and email	pradyunuydarp committed 15 hours ago	dfc1508 <>
docs(report): keep appendix gallery ahead of references	pradyunuydarp committed 15 hours ago	49b6cbb <>
docs(report): document application experience details	pradyunuydarp committed 15 hours ago	c7a55b8 <>
docs: add quick links and ngrok note	pradyunuydarp committed 19 hours ago	8c59a86 <>
docs: capture complete devops walkthrough	pradyunuydarp committed 20 hours ago	8a38a9c <>
fix(ci): clean workspace before npm ci	pradyunuydarp committed 20 hours ago	348703a <>
docs: expand report with ci snippets	pradyunuydarp committed 20 hours ago	62c6a3b <>
fix(ci): correct email body quoting	pradyunuydarp committed yesterday	255b10c <>
feat(ci): add email notifications	pradyunuydarp committed yesterday	02a98dc <>
fix(ci): avoid port conflicts during deploy	pradyunuydarp committed yesterday	73d0232 <>
fix(ci): export ansible interpreter from jenkins	pradyunuydarp committed yesterday	742d052 <>

Figure 6: Commit history illustrating incremental feature, test, and deployment changes.

```

Jenkins / SciCalc / #29 / Pipeline Overview


Search

[✓] Checkout SCM 8.7s
[✓] Install 14s
[✓] Test 7.3s
[✓] Build 8.9s
[✓] Docker Build & Push 1m 30s
[✓] Ansible Deploy 22s
[✓] Post Actions 0.24s

npm run lint 5.3s
3 18:52:48 > next lint
4 18:52:48
5 18:52:48 'next lint' is deprecated and will be removed in Next.js 16.
6 18:52:48 For new projects, use create-next-app to choose your preferred linter.
7 18:52:48 For existing projects, migrate to the ESLint CLI:
8 18:52:48 npx @next/codemod@canary next-lint-to-eslint-cli .
9 18:52:48
10 18:52:53 ✓ No ESLint warnings or errors

npm run test 1.7s
0 18:52:53 + npm run test
1 18:52:53
2 18:52:53 > sci-calc-next@0.1.0 test
3 18:52:53 > vitest run
4 18:52:53
5 18:52:54 The CJS build of Vite's Node API is deprecated. See <a href="https://vite.dev/guide/troubleshooting.html#vite-cjs-node-api-deprecated">https://vite.dev/guide/troubleshooting.html#vite-cjs-node-api-deprecated</a> for more details.
6 18:52:54
7 18:52:54 [vite] v3.2.4 /Users/pradyundevarakonda/.jenkins/workspace/SciCalc/sci-calc-next
8 18:52:54
9 18:52:54 ✓ src/lib/math.test.ts (11 tests) 3ms
10 18:52:54
11 18:52:54 Test Files 1 passed (1)
12 18:52:54 Tests 11 passed (11)
13 18:52:54 Start at 18:52:54
14 18:52:54 Duration 208ms (transform 28ms, setup 0ms, collect 19ms, tests 3ms, environment 0ms, prepare 50ms)
15 18:52:54
  
```

Figure 7: Terminal output confirming a successful `npm run test` (Vitest) execution.

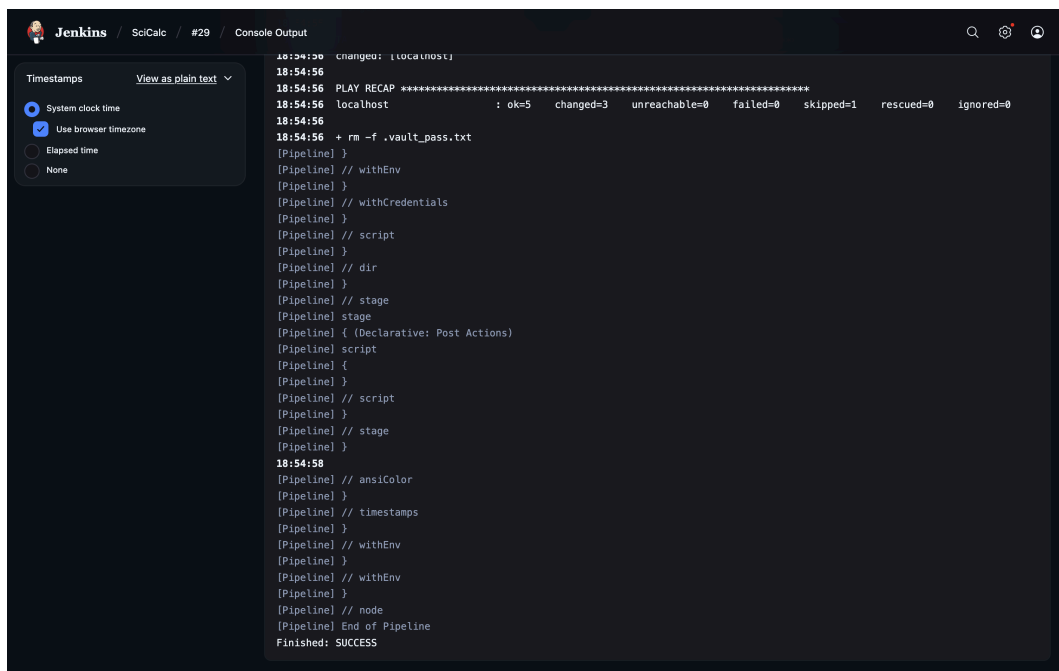A screenshot of the Jenkins web interface showing the console output of a pipeline. The interface has a dark theme. On the left, there's a sidebar with 'Timestamps' and 'View as plain text' options. The main area displays the pipeline's execution log, including a 'PLAY RECAP' section and a final 'Finished: SUCCESS' message. The log shows various pipeline steps like 'changed: localhost', 'PLAY RECAP', and 'rm -f .vault_pass.txt'. The output is timestamped with '18:54:56' and '18:54:58'.

```
18:54:56 changed: localhost
18:54:56 PLAY RECAP *****
18:54:56 localhost : ok=5 changed=3 unreachable=0 failed=0 skipped=1 rescued=0 ignored=0
18:54:56 + rm -f .vault_pass.txt
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withCredentials
[Pipeline] }
[Pipeline] // script
[Pipeline] }
[Pipeline] // dir
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Declarative: Post Actions)
[Pipeline] script
[Pipeline] {
[Pipeline] }
[Pipeline] // script
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
18:54:58
[Pipeline] // ansiColor
[Pipeline] }
[Pipeline] // timestamps
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

Figure 8: Console output from the Jenkins pipeline demonstrating a successful end-to-end run.

10 Appendix C: Command Reference

```
# Local development
npm install
npm run dev

# Quality gates
npm run lint
npm run test

# Build and containerise
npm run build
docker build -t pradyunuydarp/sci-calc-next:dev .

# Run Ansible locally
cd ansible
ansible-playbook playbooks/deploy.yml

# Inspect deployed container
docker ps --filter name=sci-calc-next --format '{{.Ports}}'
```

11 Learnings and Improvements

- Automated port detection in Jenkins prevented repeated binding errors once multiple containers were active on the same host.
- Exporting the virtual environment interpreter resolved “module not found” issues for `community.docker` modules.
- Future enhancements include Playwright smoke tests, caching the Ansible virtual environment between Jenkins runs, and promoting tagged releases through a staging environment before production.