HEALTHCARE CASE STUDY

Dagents for Sepsis Warnings

A case across several hospitals: analyze patient data inside each hospital, share only approved results, and track every model update.

Patient records | **Local agent** | **Global agent** | **Clinician review** | **Controlled updates**

Pradyun Devarakonda
Professor presentation

WHERE THIS PATTERN HELPS

Regulated work needs local control and shared coordination.

Healthcare and finance both have scattered data, strict access rules, changing models, and heavy evidence requirements. This deck uses sepsis as the first detailed example.

- Healthcare: sepsis warnings, patient decline, repeat visits, long-term care, claims checks, and medical-image model changes.
- Finance: fraud, money laundering, changing loan risk, cash-flow risk, and unusual transactions.
- Why sepsis: urgent decisions stay local while approved learning improves across hospitals.
- Scope: test past records, then silent live runs—never diagnose or treat automatically.

FIRST CASE SEPSIS

approved summary

GLOBAL COMPARISON

WHY SEPSIS

Sepsis is a strong first test because delays matter.

Sepsis is the body's extreme response to infection. It can damage organs quickly, so hospitals need timely and dependable warning support.

48.9 million cases

WHO summary of a published global estimate.

11 million deaths

About one in five deaths in that global estimate.

15 per 1,000

Estimated hospitalized patients who develop sepsis during care.

Why it is difficult

Warning signs are spread across patient records, lab results, devices, and hospital routines.

Evidence: WHO Sepsis fact sheet, 3 May 2024

WHY START WITH SEPSIS?

Start narrow with sepsis; reuse the platform broadly.

A first case should test the hardest parts of the platform without pretending one model can cover every disease.

Time matters

A delayed warning can matter, so the system must be fast, reliable, and easy to stop safely.

Many routine signals

The warning may use vital signs, lab results, medicines, and visit information already found in hospitals.

Hospitals differ

Patient populations, data formats, workflows, and warning limits vary—exactly what local and global agents must handle.

Safe staged testing

Teams can test past data, then run silently, then try a limited pilot before affecting care.

THE CORE PROBLEM

The hard part is coordination—not just prediction.

A useful warning system must handle different data, different hospital rules, safe updates, and clear evidence of what happened.

Scattered data

Values arrive in different formats, units, and times. Dagents checks and standardizes them locally.

Different hospitals

Patients, workflows, and acceptable warning volume vary. Dagents keeps local settings while comparing approved results.

Repeated platform work

Without a shared framework, every site rebuilds scheduling, model runs, deployment, monitoring, and rollback.

Late audit evidence

Approvals, changes, overrides, and run history are often gathered after the fact. Dagents records them as work happens.

Result: duplicated engineering, slower rollout, uneven behavior, and weak cross-hospital learning / 05

WHAT THE SYSTEM MUST DO

The case needs a reusable system—not just a risk score.

Five capabilities turn a model into controlled warning support across several hospitals.

Connect + check

Connect hospital systems, standardize units, check missing or old data, and record where values came from.

Run locally

The local agent checks approved data, calculates risk inside the hospital, blocks unsafe runs, and records what happened.

Help the clinician

Show why the warning appeared, how certain it is, and known limits. Record the clinician's response.

Learn across hospitals

The global agent compares approved summaries and chooses model settings that fit each hospital.

Update safely


Track versions, test small rollouts, monitor results, and return to an older version if needed.

Controls across every step: security, privacy, change history, data retention, and clear human ownership.

CURRENT STATE

Hospitals often build separate warning systems.


Different data, rules, and vendors make comparison difficult. Patient-identifying information should remain protected.

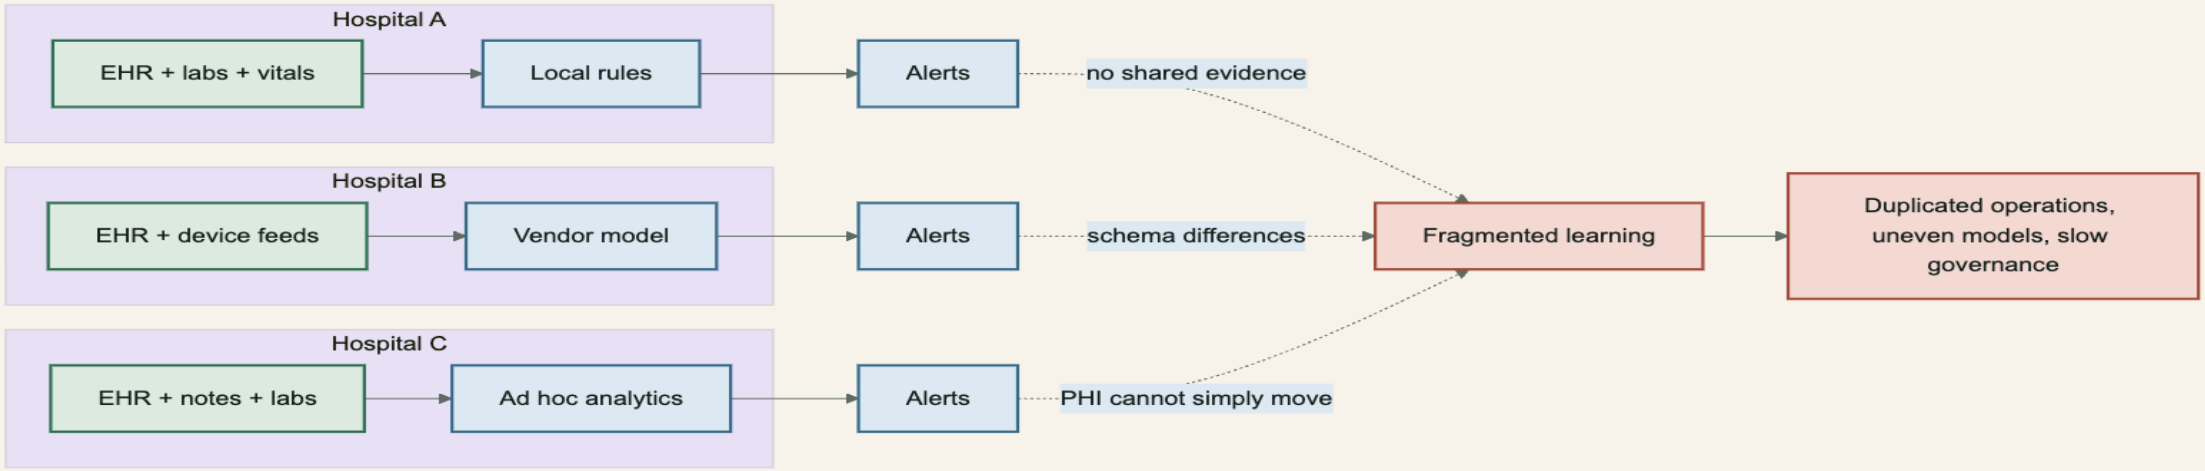

TARGET DESIGN

Dagents keeps patient work local.

Local agents stay in each hospital; the global agent exchanges approved summaries and controlled updates.

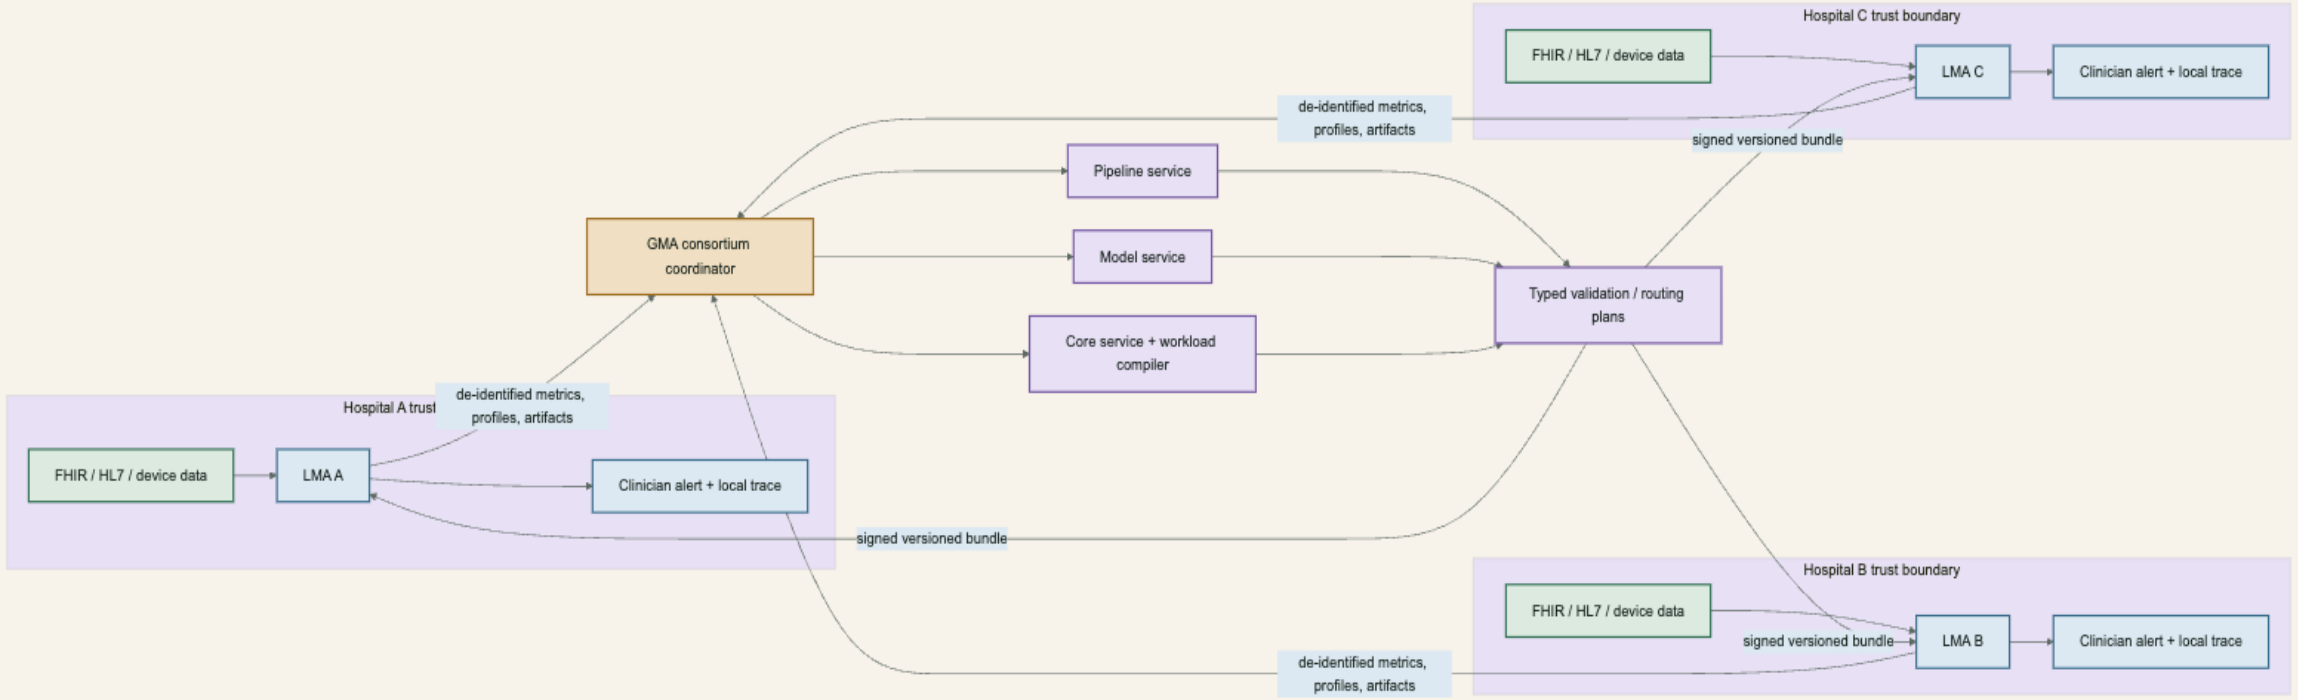

LOCAL AGENT (LMA)

The local agent handles patient-level work.

It checks that the data and intended use are allowed before calculating risk; the clinician still decides what to do.

RECEIVE

Receive approved patient-record data and device readings inside the hospital.

CHECK

Check format, units, age, allowed use, and missing values.

CALCULATE

Run the approved model; return a risk score, the main reasons, and the model version.

SHOW

Show the warning to a clinician and record the response and outcome.

Only approved summaries without patient names or identifiers leave the hospital.

GLOBAL AGENT (GMA)

The global agent coordinates learning across hospitals.

It improves consistency while allowing each hospital to keep its own patients, workflow, and warning limits.

REGISTER

Track each hospital, local agent, version, capability, and sharing rule.

COLLECT

Receive approved summaries and performance results—not unrestricted patient records.

COMPARE

Compare warning quality, changes over time, workload, and system reliability across hospitals.

PLAN + UPDATE

Choose settings for each hospital, test with a small rollout, monitor, pause, or return to an older version.

The global agent coordinates hospitals; it does not make patient-care decisions.

ONE RUN

One patient warning becomes a safe learning signal.

Every run follows the same simple path, while the final care decision remains human.

DATA ARRIVES

New vital signs, lab results, medicines, and visit information reach the local agent.

CHECK

The local agent checks permission and data quality, then runs the approved model.

REVIEW

The clinician sees the warning and its main reasons, then decides whether to act.

SHARE

A summary without patient identifiers is shared so hospitals can learn from each other.

If a check fails, no warning is shown; the reason is recorded for review.

COORDINATION LAYER

Dagents already has the basic coordination pieces.

It can register agents, check data, run models, send updates, watch system health, and prepare deployment instructions.

REGISTER

Record each hospital and local agent, what it can do, and which version it should run.

CHECK

Summarize local data quality and compare approved summaries across hospitals.

RUN

Send a clear request describing the task, model, inputs, version, and allowed scope.

UPDATE

Send versioned plans, watch health, and return to a safe version when needed.

Still needed for production: durable storage, reliable messaging, signed updates, and tamper-resistant logs.

COMPLIANCE

Dagents does not guarantee compliance.

The framework can enforce repeatable technical checks. Hospitals still own policies, staff training, security operations, privacy decisions, and clinical safety.

HIPAA

U.S. rules for protecting patient health information. Dagents can keep identifying data local and record each run. Hospitals still need access controls, encryption, retention rules, risk reviews, and incident response.

SOC 2

An independent review of service security and reliability controls. Dagents can provide health checks and change records. The organization still needs control owners, access reviews, vendor checks, incident evidence, and an auditor.

CLINICAL AI SAFETY

Rules and evidence for software that informs care. Dagents can track model versions, reasons, approvals, and rollback. Teams still need a clear intended use, clinical testing, usability work, and safety review.

Architecture is only a starting point. A real compliance claim depends on controls being implemented, used, tested, and reviewed.

WHO OWNS WHAT?

Dagents helps; hospitals remain accountable.

Each requirement needs both a technical mechanism and a named person or team responsible for it.

Area	Dagents helps with	Hospital team still owns
Patient-data security	Keep work local; limit data sources; record versions and runs	User access, login protection, encryption, backups, audits, and incident response
Patient privacy	Share approved summaries instead of unrestricted patient records	Purpose, permission, minimum data, retention, deletion, and legal decisions
Service assurance	Repeatable deployment, health checks, and change history	Control owners, access and vendor reviews, operating proof, and external audit
Clinical safety	Human decision point, model and input history, approvals, and rollback	Clinical testing, usability, intended use, regulation, and safety ownership
Health-data standards	A clear connector boundary for hospital data	Correct coding, terminology, source tracking, and patient matching

SAFETY CHECKS

Four checks must pass before a warning is shown.

Any failed check stops the run, records the reason, and sends the issue for review.

1. APPROVED USE

Is this data allowed for this patient group and this purpose?

2. GOOD DATA

Is the data recent, complete enough, correctly formatted, and in the right units?

3. MODEL

Is the correct tested model and hospital setting being used?

4. CLINICIAN

Can the clinician see the reasons and limits and make the final care decision?

Start with past data, then run silently. Stop safely and record why whenever a check fails.

EFFORT

Dagents reduces repeated platform work.

The benefit grows when more hospitals, models, or regulated use cases share the same coordination layer.

Area	Reusable in Dagents	Still specific to this case
Data connections	Standard checks, data summaries, and local/global boundaries	Connect each hospital system; align terms, units, patient groups, and source history
Run coordination	Reusable pipelines, run records, agent registration, and deployment plans	Production-grade queues, retries, schedules, storage, and recovery
Model management	Reusable model-run, result, testing, and version patterns	Build and clinically test the sepsis model, warning limits, and monitoring
Deployment	Reusable container and deployment instructions	Protect secrets, sign updates, isolate sites, test small rollouts, and plan recovery
Evidence + controls	Reusable plans, run IDs, policy checks, and change history	Access rules, tamper-resistant logs, staff training, audits, and clinical oversight

For one fixed model at one site, Dagents may be more infrastructure than needed / 16

DECISION GUIDE

Where Dagents fits—and where other tools lead.

Use Dagents when one coordinating layer must span hospitals, models, and deployment targets.

Option	Why teams choose it	Limit / Dagents fit
Dagents	Local and global agents, workflows, model runs, versioned plans, and deployment instructions	Broad and reusable, but less mature; needs production hardening and healthcare connectors
Federated-learning tools	Train or test models across sites without moving all raw data	Stronger for this specialist job; can run inside a Dagents-managed workflow
Cloud ML platforms	Managed training, model catalog, online endpoints, and monitoring	Faster cloud setup; hospital integration and dependence on one cloud still remain
Workflow platforms	Schedule steps, retry failures, reuse results, and run work on Kubernetes	Mature workflows, but they do not define hospital ownership or clinical safety rules
Clinical point product	A ready-made, validated product for one exact care workflow	Fastest for that exact use; less flexible across diseases, models, and hospitals

Dagents can coordinate these tools instead of replacing every specialist component / 17

PILOT ROADMAP

Evidence—not dates—moves the pilot forward.

Each phase must pass its review before the next phase begins; dates alone are not enough.

Phase	What happens	Proof needed
1. Define	Agree who the warning is for, what it predicts, which data it uses, exclusions, and owners	Approved case definition and shared data description
2. Test past data	Run the local agent separately on historical records at each hospital	Data quality, warning accuracy across groups, and normal warning volume
3. Run silently	Use live data but do not show warnings to clinicians	Speed, reliability, warning volume, complete records, and recovery results
4. Limited pilot	Show warnings to clinicians under an approved plan	Workflow usefulness, workload, overrides, usability, and safety review
5. Expand	Compare hospitals, test updates at a small set first, and prove rollback	Multi-hospital results plus security, privacy, regulatory, and audit readiness

EVALUATION

A useful pilot must work beyond the model.

Model accuracy alone is not enough. The warning must also be safe, dependable, understandable, and controllable.

Useful warnings

How many true cases are caught, how many warnings are correct, and how much advance notice is given.

Safe across groups

Check whether any patient group receives worse performance or too many warnings.

Reliable in practice

Fresh and complete data, successful runs, response time, recovery, and time to return to a safe version.

Proof of control

Complete history of data, model version, access exceptions, and differences between hospitals.

Targets must come from measured baselines; this deck does not invent clinical outcomes / 19

RECOMMENDATION

Use Dagents for a silent sepsis pilot, then extend carefully.

Sepsis is the first proving ground because it tests urgent, local, multi-hospital coordination. It is not the permanent scope of the platform.

- Local agents keep identifying patient data inside each hospital.
- The global agent compares only approved summaries and coordinates updates.
- Shared services reduce repeated engineering across hospitals and later diseases.
- HIPAA and SOC 2 work becomes a clear list of controls and supporting evidence.
- Each new disease still needs its own data rules, validated model, workflow, and safety review.

GLOSSARY

Healthcare terms used in this deck.

Plain working definitions for this presentation—not medical or legal advice.

Term	Plain meaning	Why it matters here
Sepsis	The body's extreme response to infection; it can damage organs quickly	Chosen first because delays matter and many hospital signals must be coordinated
EHR	A hospital's digital patient record	Source of vital signs, lab results, medicines, and visit information
PHI	Health information that can identify a person	Kept inside the hospital unless an approved use allows sharing
Clinical decision support	Software advice shown to a clinician	The clinician—not the software—makes the care decision
Past-data test / silent live test	Test old records / run on live data without showing warnings	Safer steps before a limited clinician-facing pilot

GLOSSARY

Dagents and compliance terms used in this deck.

These labels describe project roles and control frameworks—not automatic proof of safety or compliance.

Term	Plain meaning	Why it matters here
LMA / GMA	Local agent in one hospital / global agent coordinating hospitals	Separates patient-level work from approved cross-hospital learning
FHIR / HL7	Common standards for exchanging health data	Connectors translate different hospital systems into consistent inputs
HIPAA	U.S. rules for protecting patient health information	Guides privacy and security controls; architecture alone is not compliance
SOC 2	Independent review of service security and reliability controls	Requires working controls and evidence, not only design documents
Small rollout / rollback	Try an update at a few sites / return to the earlier safe version	Limits harm when a new model or setting behaves badly