


AWS-Solution-Architect-Associate Dumps

AWS Certified Solutions Architect - Associate

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>

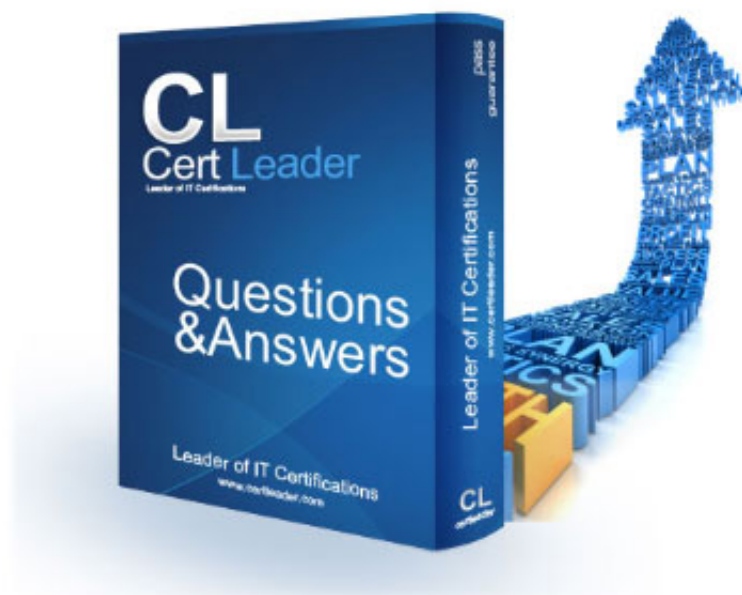

NEW QUESTION 1

You are trying to launch an EC2 instance, however the instance seems to go into a terminated status immediately. What would probably not be a reason that this is happening?

- A. The AMI is missing a required part.
- B. The snapshot is corrupt.
- C. You need to create storage in EBS first.
- D. You've reached your volume limit

Answer: C

Explanation: Amazon EC2 provides a virtual computing environments, known as an instance.

After you launch an instance, AWS recommends that you check its status to confirm that it goes from the pending status to the running status, the not terminated status.

The following are a few reasons why an Amazon EBS-backed instance might immediately terminate: You've reached your volume limit.

The AMI is missing a required part. The snapshot is corrupt. Reference:

http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Using_InstanceStraightToTerminated.html

NEW QUESTION 2

You have set up an Auto Scaling group. The cool down period for the Auto Scaling group is 7 minutes. The first instance is launched after 3 minutes, while the second instance is launched after 4 minutes. How many minutes after the first instance is launched will Auto Scaling accept another scaling activity request?

- A. 11 minutes
- B. 7 minutes
- C. 10 minutes
- D. 14 minutes

Answer: A

Explanation: If an Auto Scaling group is launching more than one instance, the cool down period for each instance starts after that instance is launched. The group remains locked until the last instance that was launched has completed its cool down period. In this case the cool down period for the first instance starts after 3 minutes and finishes at the 10th minute (3+7 cool down), while for the second instance it starts at the 4th minute and finishes at the 11th minute (4+7 cool down). Thus, the Auto Scaling group will receive another request only after 11 minutes.

Reference: http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html

NEW QUESTION 3

Can a user get a notification of each instance start / terminate configured with Auto Scaling?

- A. Yes, if configured with the Launch Config
- B. Yes, always
- C. Yes, if configured with the Auto Scaling group
- D. No

Answer: C

Explanation: The user can get notifications using SNS if he has configured the notifications while creating the Auto Scaling group.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/GettingStartedTutorial.html>

NEW QUESTION 4

Amazon EBS provides the ability to create backups of any Amazon EC2 volume into what is known as

- A. snapshots
- B. images
- C. instance backups
- D. mirrors

Answer: A

Explanation: Amazon allows you to make backups of the data stored in your EBS volumes through snapshots that can later be used to create a new EBS volume.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 5

To specify a resource in a policy statement, in Amazon EC2, can you use its Amazon Resource Name (ARN)?

- A. Yes, you can.
- B. No, you can't because EC2 is not related to ARN.
- C. No, you can't because you can't specify a particular Amazon EC2 resource in an IAM policy.
- D. Yes, you can but only for the resources that are not affected by the action

Answer: A

Explanation: Some Amazon EC2 API actions allow you to include specific resources in your policy that can be created or modified by the action. To specify a

resource in the statement, you need to use its Amazon Resource Name (ARN).
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ec2-ug.pdf>

NEW QUESTION 6

A user is launching an EC2 instance in the US East region. Which of the below mentioned options is recommended by AWS with respect to the selection of the availability zone?

- A. Always select the AZ while launching an instance
- B. Always select the US-East-1-a zone for HA
- C. Do not select the AZ; instead let AWS select the AZ
- D. The user can never select the availability zone while launching an instance

Answer: C

Explanation: When launching an instance with EC2, AWS recommends not to select the availability zone (AZ). AWS specifies that the default Availability Zone should be accepted. This is because it enables AWS to select the best Availability Zone based on the system health and available capacity. If the user launches additional instances, only then an Availability Zone should be specified. This is to specify the same or different AZ from the running instances.
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

NEW QUESTION 7

A user is storing a large number of objects on AWS S3. The user wants to implement the search functionality among the objects. How can the user achieve this?

- A. Use the indexing feature of S3.
- B. Tag the objects with the metadata to search on that.
- C. Use the query functionality of S3.
- D. Make your own DB system which stores the S3 metadata for the search functionalit

Answer: D

Explanation: In Amazon Web Services, AWS S3 does not provide any query facility. To retrieve a specific object the user needs to know the exact bucket / object key. In this case it is recommended to have an own DB system which manages the S3 metadata and key mapping.
Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 8

What is a placement group in Amazon EC2?

- A. It is a group of EC2 instances within a single Availability Zone.
- B. It the edge location of your web content.
- C. It is the AWS region where you run the EC2 instance of your web content.
- D. It is a group used to span multiple Availability Zone

Answer: A

Explanation: A placement group is a logical grouping of instances within a single Availability Zone. Reference:
<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 9

A client needs you to import some existing infrastructure from a dedicated hosting provider to AWS to try and save on the cost of running his current website. He also needs an automated process that manages backups, software patching, automatic failure detection, and recovery. You are aware that his existing set up currently uses an Oracle database. Which of the following AWS databases would be best for accomplishing this task?

- A. Amazon RDS
- B. Amazon Redshift
- C. Amazon SimpleDB
- D. Amazon ElastiCache

Answer: A

Explanation: Amazon RDS gives you access to the capabilities of a familiar MySQL, Oracle, SQL Server, or PostgreSQL database engine. This means that the code, applications, and tools you already use today with your existing databases can be used with Amazon RDS. Amazon RDS automatically patches the database software and backs up your database, storing the backups for a user-defined retention period and enabling point-in-time recovery.
Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 10

An edge location refers to which Amazon Web Service?

- A. An edge location is referred to the network configured within a Zone or Region
- B. An edge location is an AWS Region
- C. An edge location is the location of the data center used for Amazon CloudFront.
- D. An edge location is a Zone within an AWS Region

Answer: C

Explanation: Amazon CloudFront is a content distribution network. A content delivery network or content distribution network (CDN) is a large distributed system of servers deployed in multiple data centers across the world. The location of the data center used for CDN is called edge location. Amazon CloudFront can cache static content at each edge location. This means that your popular static content (e.g., your site's logo, navigational images, cascading style sheets, JavaScript code, etc.) will be available at a nearby edge location for the browsers to download with low latency and improved performance for viewers. Caching popular static content with Amazon CloudFront also helps you offload requests for such files from your origin server — CloudFront serves the cached copy when available and only makes a request to your origin server if the edge location receiving the browser's request does not have a copy of the file. Reference: <http://aws.amazon.com/cloudfront/>

NEW QUESTION 10

Do Amazon EBS volumes persist independently from the running life of an Amazon EC2 instance?

- A. Yes, they do but only if they are detached from the instance.
- B. No, you cannot attach EBS volumes to an instance.
- C. No, they are dependent.
- D. Yes, they do

Answer: D

Explanation: An Amazon EBS volume behaves like a raw, unformatted, external block device that you can attach to a single instance. The volume persists independently from the running life of an Amazon EC2 instance. Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 14

Your supervisor has asked you to build a simple file synchronization service for your department. He doesn't want to spend too much money and he wants to be notified of any changes to files by email. What do you think would be the best Amazon service to use for the email solution?

- A. Amazon SES
- B. Amazon CloudSearch
- C. Amazon SWF
- D. Amazon AppStream

Answer: A

Explanation: File change notifications can be sent via email to users following the resource with Amazon Simple Email Service (Amazon SES), an easy-to-use, cost-effective email solution. Reference: http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_filesync_08.pdf

NEW QUESTION 18

Does DynamoDB support in-place atomic updates?

- A. Yes
- B. No
- C. It does support in-place non-atomic updates
- D. It is not defined

Answer: A

Explanation: DynamoDB supports in-place atomic updates.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/WorkingWithItems.html#WorkingWithItems.AtomicCounters>

NEW QUESTION 23

Your manager has just given you access to multiple VPN connections that someone else has recently set up between all your company's offices. She needs you to make sure that the communication between the VPNs is secure. Which of the following services would be best for providing a low-cost hub-and-spoke model for primary or backup connectivity between these remote offices?

- A. Amazon CloudFront
- B. AWS Direct Connect
- C. AWS CloudHSM
- D. AWS VPN CloudHub

Answer: D

Explanation: If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who would like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html

NEW QUESTION 24

Amazon EC2 provides a . It is an HTTP or HTTPS request that uses the HTTP verbs GET or POST.

- A. web database
- B. .net framework
- C. Query API
- D. C library

Answer: C

Explanation: Amazon EC2 provides a Query API. These requests are HTTP or HTTPS requests that use the HTTP verbs GET or POST and a Query parameter named Action.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/APIReference/making-api-requests.html>

NEW QUESTION 27

In Amazon AWS, which of the following statements is true of key pairs?

- A. Key pairs are used only for Amazon SDKs.
- B. Key pairs are used only for Amazon EC2 and Amazon CloudFront.
- C. Key pairs are used only for Elastic Load Balancing and AWS IAM.
- D. Key pairs are used for all Amazon service

Answer: B

Explanation: Key pairs consist of a public and private key, where you use the private key to create a digital signature, and then AWS uses the corresponding public key to validate the signature. Key pairs are used only for Amazon EC2 and Amazon CloudFront.

Reference: <http://docs.aws.amazon.com/general/latest/gr/aws-sec-cred-types.html>

NEW QUESTION 30

A user has created an EBS volume with 1000 IOPS. What is the average IOPS that the user will get for most of the year as per EC2 SLA if the instance is attached to the EBS optimized instance?

- A. 950
- B. 990
- C. 1000
- D. 900

Answer: D

Explanation: As per AWS SLA if the instance is attached to an EBS-Optimized instance, then the Provisioned IOPS volumes are designed to deliver within 10% of the provisioned IOPS performance 99.9% of the time in a given year. Thus, if the user has created a volume of 1000 IOPS, the user will get a minimum 900 IOPS 99.9% time of the year.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 34

You need to migrate a large amount of data into the cloud that you have stored on a hard disk and you decide that the best way to accomplish this is with AWS Import/Export and you mail the hard disk to AWS. Which of the following statements is incorrect in regards to AWS Import/Export?

- A. It can export from Amazon S3
- B. It can Import to Amazon Glacier
- C. It can export from Amazon Glacier.
- D. It can Import to Amazon EBS

Answer: C

Explanation: AWS Import/Export supports: Import to Amazon S3

Export from Amazon S3 Import to Amazon EBS Import to Amazon Glacier

AWS Import/Export does not currently support export from Amazon EBS or Amazon Glacier. Reference:

<https://docs.aws.amazon.com/AWSImportExport/latest/DG/whatisdisk.html>

NEW QUESTION 38

You are in the process of creating a Route 53 DNS failover to direct traffic to two EC2 zones. Obviously, if one fails, you would like Route 53 to direct traffic to the other region. Each region has an ELB with some instances being distributed. What is the best way for you to configure the Route 53 health check?

- A. Route 53 doesn't support ELB with an internal health check. You need to create your own Route 53 health check of the ELB
- B. Route 53 natively supports ELB with an internal health check
- C. Turn "Evaluate target health" off and "Associate with Health Check" on and R53 will use the ELB's internal health check.
- D. Route 53 doesn't support ELB with an internal health check
- E. You need to associate your resource record set for the ELB with your own health check
- F. Route 53 natively supports ELB with an internal health check
- G. Turn "Evaluate target health" on and "Associate with Health Check" off and R53 will use the ELB's internal health check.

Answer: D

Explanation: With DNS Failover, Amazon Route 53 can help detect an outage of your website and redirect your end users to alternate locations where your application is operating properly. When you enable this feature, Route 53 uses health checks-regularly making Internet requests to your application's endpoints from multiple locations around the world-to determine whether each endpoint of your application is up or down.

To enable DNS Failover for an ELB endpoint, create an Alias record pointing to the ELB and set the "Evaluate Target Health" parameter to true. Route 53 creates and manages the health checks for your ELB automatically. You do not need to create your own Route 53 health check of the ELB. You also do not need to associate your resource record set for the ELB with your own health check, because Route 53 automatically associates it with the health checks that Route 53 manages on your behalf. The ELB health check will also inherit the health of your backend instances behind that ELB.

Reference:

<http://aws.amazon.com/about-aws/whats-new/2013/05/30/amazon-route-53-adds-elb-integration-for-dns-failover/>

NEW QUESTION 42

An Elastic IP address (EIP) is a static IP address designed for dynamic cloud computing. With an EIP, you can mask the failure of an instance or software by rapidly remapping the address to another instance in your account. Your EIP is associated with your AWS account, not a particular EC2 instance, and it remains associated with your account until you choose to explicitly release it. By default how many EIPs is each AWS account limited to on a per region basis?

- A. 1
- B. 5
- C. Unlimited
- D. 10

Answer: B

Explanation: By default, all AWS accounts are limited to 5 Elastic IP addresses per region for each AWS account, because public (IPv4) Internet addresses are a scarce public resource. AWS strongly encourages you to use an EIP primarily for load balancing use cases, and use DNS hostnames for all other inter-node communication.

If you feel your architecture warrants additional EIPs, you would need to complete the Amazon EC2 Elastic IP Address Request Form and give reasons as to your need for additional addresses. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/elastic-ip-addresses-eip.html#using-instance-addressing-limit>

NEW QUESTION 44

In Amazon EC2, partial instance-hours are billed .

- A. per second used in the hour
- B. per minute used
- C. by combining partial segments into full hours
- D. as full hours

Answer: D

Explanation: Partial instance-hours are billed to the next hour. Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 49

In EC2, what happens to the data in an instance store if an instance reboots (either intentionally or unintentionally)?

- A. Data is deleted from the instance store for security reasons.
- B. Data persists in the instance store.
- C. Data is partially present in the instance store.
- D. Data in the instance store will be lost

Answer: B

Explanation: The data in an instance store persists only during the lifetime of its associated instance. If an instance reboots (intentionally or unintentionally), data in the instance store persists. However, data on instance store volumes is lost under the following circumstances.

Failure of an underlying drive

Stopping an Amazon EBS-backed instance Terminating an instance

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/InstanceStorage.html>

NEW QUESTION 54

Can you specify the security group that you created for a VPC when you launch an instance in EC2-Classic?

- A. No, you can specify the security group created for EC2-Classic when you launch a VPC instance.
- B. No
- C. Yes
- D. No, you can specify the security group created for EC2-Classic to a non-VPC based instance only

Answer: B

Explanation: If you're using EC2-Classic, you must use security groups created specifically for EC2-Classic. When you launch an instance in EC2-Classic, you must specify a security group in the same region as the instance. You can't specify a security group that you created for a VPC when you launch an instance in EC2-Classic.

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html#ec2-classic-security-groups>

NEW QUESTION 56

You have been asked to build a database warehouse using Amazon Redshift. You know a little about it, including that it is a SQL data warehouse solution, and uses industry standard ODBC and JDBC connections and PostgreSQL drivers. However you are not sure about what sort of storage it uses for database tables.

What sort of storage does Amazon Redshift use for database tables?

- A. InnoDB Tables
- B. NDB data storage
- C. Columnar data storage
- D. NDB CLUSTER Storage

Answer: C

Explanation: Amazon Redshift achieves efficient storage and optimum query performance through a combination of massively parallel processing, columnar data storage, and very efficient, targeted data compression encoding schemes.

Columnar storage for database tables is an important factor in optimizing analytic query performance because it drastically reduces the overall disk I/O requirements and reduces the amount of data you need to load from disk.

Reference: http://docs.aws.amazon.com/redshift/latest/dg/c_columnar_storage_disk_mem_mgmt.html

NEW QUESTION 60

You are checking the workload on some of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes and it seems that the I/O latency is higher than you require. You should probably check the to make sure that your application is not trying to drive more IOPS than you have provisioned.

- A. Amount of IOPS that are available
- B. Acknowledgement from the storage subsystem
- C. Average queue length
- D. Time it takes for the I/O operation to complete

Answer: C

Explanation: In EBS workload demand plays an important role in getting the most out of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes. In order for your volumes to deliver the amount of IOPS that are available, they need to have enough I/O requests sent to them. There is a relationship between the demand on the volumes, the amount of IOPS that are available to them, and the latency of the request (the amount of time it takes for the I/O operation to complete).

Latency is the true end-to-end client time of an I/O operation; in other words, when the client sends a IO, how long does it take to get an acknowledgement from the storage subsystem that the IO read or write is complete.

If your I/O latency is higher than you require, check your average queue length to make sure that your application is not trying to drive more IOPS than you have provisioned. You can maintain high IOPS while keeping latency down by maintaining a low average queue length (which is achieved by provisioning more IOPS for your volume).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-workload-demand.html>

NEW QUESTION 63

Which of the below mentioned options is not available when an instance is launched by Auto Scaling with EC2 Classic?

- A. Public IP
- B. Elastic IP
- C. Private DNS
- D. Private IP

Answer: B

Explanation: Auto Scaling supports both EC2 classic and EC2-VPC. When an instance is launched as a part of EC2 classic, it will have the public IP and DNS as well as the private IP and DNS.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/GettingStartedTutorial.html>

NEW QUESTION 67

You have been given a scope to deploy some AWS infrastructure for a large organisation. The requirements are that you will have a lot of EC2 instances but may need to add more when the average utilization of your Amazon EC2 fleet is high and conversely remove them when CPU utilization is low. Which AWS services would be best to use to accomplish this?

- A. Auto Scaling, Amazon CloudWatch and AWS Elastic Beanstalk
- B. Auto Scaling, Amazon CloudWatch and Elastic Load Balancing.
- C. Amazon CloudFront, Amazon CloudWatch and Elastic Load Balancing.
- D. AWS Elastic Beanstalk , Amazon CloudWatch and Elastic Load Balancing

Answer: B

Explanation: Auto Scaling enables you to follow the demand curve for your applications closely, reducing the need to manually provision Amazon EC2 capacity in advance. For example, you can set a condition to add new

Amazon EC2 instances in increments to the Auto Scaling group when the average utilization of your Amazon EC2 fleet is high; and similarly, you can set a condition to remove instances in the same increments when CPU utilization is low. If you have predictable load changes, you can set a schedule through Auto Scaling to plan your scaling activities. You can use Amazon CloudWatch to send alarms to trigger scaling activities and Elastic Load Balancing to help distribute traffic to your instances within Auto Scaling groups. Auto Scaling enables you to run your Amazon EC2 fleet at optimal utilization. Reference:

<http://aws.amazon.com/autoscaling/>

NEW QUESTION 71

You are building infrastructure for a data warehousing solution and an extra request has come through that there will be a lot of business reporting queries running all the time and you are not sure if your current DB instance will be able to handle it. What would be the best solution for this?

- A. DB Parameter Groups
- B. Read Replicas
- C. Multi-AZ DB Instance deployment
- D. Database Snapshots

Answer: B

Explanation: Read Replicas make it easy to take advantage of MySQL's built-in replication functionality to elastically scale out beyond the capacity constraints of a single DB Instance for read-heavy database workloads. There are a variety of scenarios where deploying one or more Read Replicas for a given source DB Instance may make sense. Common reasons for deploying a Read Replica include:

Scaling beyond the compute or I/O capacity of a single DB Instance for read-heavy database workloads. This excess read traffic can be directed to one or more Read Replicas.

Serving read traffic while the source DB Instance is unavailable. If your source DB Instance cannot take I/O requests (e.g. due to I/O suspension for backups or scheduled maintenance), you can direct read traffic to your Read Replica(s). For this use case, keep in mind that the data on the Read Replica may be "stale" since the source DB Instance is unavailable.

Business reporting or data warehousing scenarios; you may want business reporting queries to run against a Read Replica, rather than your primary, production DB Instance.

Reference: <https://aws.amazon.com/rds/faqs/>

NEW QUESTION 74

In DynamoDB, could you use IAM to grant access to Amazon DynamoDB resources and API actions?

- A. In DynamoDB there is no need to grant access
- B. Depended to the type of access
- C. No
- D. Yes

Answer: D

Explanation: Amazon DynamoDB integrates with AWS Identity and Access Management (IAM). You can use AWS IAM to grant access to Amazon DynamoDB resources and API actions. To do this, you first write an AWS IAM policy, which is a document that explicitly lists the permissions you want to grant. You then attach that policy to an AWS IAM user or role.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/UsingIAMWithDDB.html>

NEW QUESTION 77

Much of your company's data does not need to be accessed often, and can take several hours for retrieval time, so it's stored on Amazon Glacier. However someone within your organization has expressed concerns that his data is more sensitive than the other data, and is wondering whether the high level of encryption that he knows is on S3 is also used on the much cheaper Glacier service. Which of the following statements would be most applicable in regards to this concern?

- A. There is no encryption on Amazon Glacier, that's why it is cheaper.
- B. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3 but you can change it to AES-256 if you are willing to pay more.
- C. Amazon Glacier automatically encrypts the data using AES-256, the same as Amazon S3.
- D. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3.

Answer: C

Explanation: Like Amazon S3, the Amazon Glacier service provides low-cost, secure, and durable storage. But where S3 is designed for rapid retrieval, Glacier is meant to be used as an archival service for data that is not accessed often, and for which retrieval times of several hours are suitable.

Amazon Glacier automatically encrypts the data using AES-256 and stores it durably in an immutable form. Amazon Glacier is designed to provide average annual durability of 99.999999999% for an archive. It stores each archive in multiple facilities and multiple devices. Unlike traditional systems which can require laborious data verification and manual repair, Glacier performs regular, systematic data integrity checks, and is built to be automatically self-healing.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 81

Your EBS volumes do not seem to be performing as expected and your team leader has requested you look into improving their performance. Which of the following is not a true statement relating to the performance of your EBS volumes?

- A. Frequent snapshots provide a higher level of data durability and they will not degrade the performance of your application while the snapshot is in progress.
- B. General Purpose (SSD) and Provisioned IOPS (SSD) volumes have a throughput limit of 128 MB/s per volume.
- C. There is a relationship between the maximum performance of your EBS volumes, the amount of I/O you are drMng to them, and the amount of time it takes for each transaction to complete.
- D. There is a 5 to 50 percent reduction in IOPS when you first access each block of data on a newly created or restored EBS volume

Answer: A

Explanation: Several factors can affect the performance of Amazon EBS volumes, such as instance configuration, I/O characteristics, workload demand, and storage configuration.

Frequent snapshots provide a higher level of data durability, but they may slightly degrade the

performance of your application while the snapshot is in progress. This trade off becomes critical when you have data that changes rapidly. Whenever possible, plan for snapshots to occur during off-peak times in order to minimize workload impact.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSPerformance.html>

NEW QUESTION 82

A major finance organisation has engaged your company to set up a large data mining application. Using AWS you decide the best service for this is Amazon Elastic MapReduce(EMR) which you know uses Hadoop. Which of the following statements best describes Hadoop?

- A. Hadoop is 3rd Party software which can be installed using AMI
- B. Hadoop is an open source python web framework
- C. Hadoop is an open source Java software framework
- D. Hadoop is an open source javascript framework

Answer: C

Explanation: Amazon EMR uses Apache Hadoop as its distributed data processing engine.

Hadoop is an open source, Java software framework that supports data-intensive distributed applications running on large clusters of commodity hardware.

Hadoop implements a programming model named "MapReduce," where the data is dMded into many small fragments of work, each of which may be executed on any node in the cluster.

This framework has been widely used by developers, enterprises and startups and has proven to be a reliable software platform for processing up to petabytes of data on clusters of thousands of commodity machines.

Reference: <http://aws.amazon.com/elasticmapreduce/faqs/>

NEW QUESTION 83

In Amazon EC2 Container Service, are other container types supported?

- A. Yes, EC2 Container Service supports any container service you need.
- B. Yes, EC2 Container Service also supports Microsoft container service.
- C. No, Docker is the only container platform supported by EC2 Container Service presently.
- D. Yes, EC2 Container Service supports Microsoft container service and Openstac

Answer: C

Explanation: In Amazon EC2 Container Service, Docker is the only container platform supported by EC2 Container Service presently.

Reference: <http://aws.amazon.com/ecs/faqs/>

NEW QUESTION 84

In Amazon RDS, security groups are ideally used to:

- A. Define maintenance period for database engines
- B. Launch Amazon RDS instances in a subnet
- C. Create, describe, modify, and delete DB instances
- D. Control what IP addresses or EC2 instances can connect to your databases on a DB instance

Answer: D

Explanation: In Amazon RDS, security groups are used to control what IP addresses or EC2 instances can connect to your databases on a DB instance.

When you first create a DB instance, its firewall prevents any database access except through rules specified by an associated security group.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/UsingWithRDS.html>

NEW QUESTION 89

You need to set up a complex network infrastructure for your organization that will be reasonably easy to deploy, replicate, control, and track changes on. Which AWS service would be best to use to help you accomplish this?

- A. AWS Import/Export
- B. AWS CloudFormation
- C. Amazon Route 53
- D. Amazon CloudWatch

Answer: B

Explanation: AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. You don't need to indMdually create and configure AWS resources

and figure out what's dependent on what. AWS CloudFormation handles all of that.

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/Welcome.html>

NEW QUESTION 93

You have just been given a scope for a new client who has an enormous amount of data(petabytes) that he constantly needs analysed. Currently he is paying a huge amount of money for a data warehousing company to do this for him and is wondering if AWS can provide a cheaper solution. Do you think AWS has a solution for this?

- A. Ye
- B. Amazon SimpleDB
- C. N
- D. Not presently
- E. Ye
- F. Amazon Redshift
- G. Ye

H. Your choice of relational AMLs on Amazon EC2 and EBS

Answer: C

Explanation: Amazon Redshift is a fast, fully managed, petabyte-scale data warehouse service that makes it simple and cost-effective to efficiently analyze all your data using your existing business intelligence tools. You can start small for just \$0.25 per hour with no commitments or upfront costs and scale to a petabyte or more for \$1,000 per terabyte per year, less than a tenth of most other data warehousing solutions. Amazon Redshift delivers fast query performance by using columnar storage technology to improve I/O efficiency and parallelizing queries across multiple nodes. Redshift uses standard PostgreSQL JDBC and ODBC drivers, allowing you to use a wide range of familiar SQL clients. Data load speed scales linearly with cluster size, with integrations to Amazon S3, Amazon DynamoDB, Amazon Elastic MapReduce, Amazon Kinesis or any SSH-enabled host.

Reference: https://aws.amazon.com/running_databases/#redshift_anchor

NEW QUESTION 94

In an experiment, if the minimum size for an Auto Scaling group is 1 instance, which of the following statements holds true when you terminate the running instance?

- A. Auto Scaling must launch a new instance to replace it.
- B. Auto Scaling will raise an alarm and send a notification to the user for action.
- C. Auto Scaling must configure the schedule actMty that terminates the instance after 5 days.
- D. Auto Scaling will terminate the experimen

Answer: A

Explanation: If the minimum size for an Auto Scaling group is 1 instance, when you terminate the running instance, Auto Scaling must launch a new instance to replace it.

Reference: http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html

NEW QUESTION 98

In Amazon EC2, while sharing an Amazon EBS snapshot, can the snapshots with AWS IV|arketplace product codes be public?

- A. Yes, but only for US-based providers.
- B. Yes, they can be public.
- C. No, they cannot be made public.
- D. Yes, they are automatically made public by the syste

Answer: C

Explanation: Snapshots with AWS Marketplace product codes can't be made public. Reference:

[http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/ebs-modifying-snapshot-permissions.ht ml](http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/ebs-modifying-snapshot-permissions.html)

NEW QUESTION 99

An organization has created an application which is hosted on the AWS EC2 instance. The application stores images to S3 when the end user uploads to it. The organization does not want to store the AWS secure credentials required to access the S3 inside the instance. Which of the below mentioned options is a possible solution to avoid any security threat?

- A. Use the IAM based single sign between the AWS resources and the organization application.
- B. Use the IAM role and assign it to the instance.
- C. Since the application is hosted on EC2, it does not need credentials to access S3.
- D. Use the X.509 certificates instead of the access and the secret access key

Answer: B

Explanation: The AWS IAM role uses temporary security credentials to access AWS services. Once the role is assigned to an instance, it will not need any security credentials to be stored on the instance. Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/iam-roles-for-amazon-ec2.html>

NEW QUESTION 104

Can resource record sets in a hosted zone have a different domain suffix (for example, www.blog. acme.com and www.acme.ca)?

- A. Yes, it can have for a maximum of three different TLDs.
- B. Yes
- C. Yes, it can have depending on the TLD.
- D. No

Answer: D

Explanation: The resource record sets contained in a hosted zone must share the same suffix. For example, the example.com hosted zone can contain resource record sets for www.example.com and www.aws.example.com subdomains, but it cannot contain resource record sets for a www.example.ca subdomain.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/AboutHostedZones.html>

NEW QUESTION 107

You are running PostgreSQL on Amazon RDS and it seems to be all running smoothly deployed in one availability zone. A database administrator asks you if DB instances running PostgreSQL support Multi-AZ deployments. What would be a correct response to this QUESTION ?

- A. Yes.
- B. Yes but only for small db instances.
- C. No.
- D. Yes but you need to request the service from AW

Answer: A

Explanation: Amazon RDS supports DB instances running several versions of PostgreSQL. Currently we support PostgreSQL versions 9.3.1, 9.3.2, and 9.3.3. You can create DB instances and DB snapshots, point-in-time restores and backups.

DB instances running PostgreSQL support Multi-AZ deployments, Provisioned IOPS, and can be created inside a VPC. You can also use SSL to connect to a DB instance running PostgreSQL.

You can use any standard SQL client application to run commands for the instance from your client computer. Such applications include pgAdmin, a popular Open Source administration and development tool for PostgreSQL, or psql, a command line utility that is part of a PostgreSQL installation. In order to deliver a managed service experience, Amazon RDS does not provide host access to DB instances, and it restricts access to certain system procedures and tables that require advanced privileges. Amazon RDS supports access to databases on a DB instance using any standard SQL client application. Amazon RDS does not allow direct host access to a DB instance via Telnet or Secure Shell (SSH).

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_PostgreSQL.html

NEW QUESTION 109

Which of the following AWS CLI commands is syntactically incorrect?

1. \$ aws ec2 describe-instances
2. \$ aws ec2 start-instances --instance-ids i-1348636c
3. \$ aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"
4. \$ aws sqs receive-message --queue-url https://queue.amazonaws.com/546419318123/Test

- A. 3
- B. 4
- C. 2
- D. 1

Answer: A

Explanation: The following CLI command is missing a hyphen before "-message".

aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"

It has been added below in red

aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError ---message "Script Failure"

Reference: <http://aws.amazon.com/cji/>

NEW QUESTION 113

An organization has developed a mobile application which allows end users to capture a photo on their mobile device, and store it inside an application. The application internally uploads the data to AWS S3. The organization wants each user to be able to directly upload data to S3 using their Google ID. How will the mobile app allow this?

- A. Use the AWS Web identity federation for mobile applications, and use it to generate temporary security credentials for each user.
- B. It is not possible to connect to AWS S3 with a Google ID.
- C. Create an IAM user every time a user registers with their Google ID and use IAM to upload files to S3.
- D. Create a bucket policy with a condition which allows everyone to upload if the login ID has a Google part to it.

Answer: A

Explanation: For Amazon Web Services, the Web identity federation allows you to create cloud-backed mobile apps that use public identity providers, such as login with Facebook, Google, or Amazon. It will create temporary security credentials for each user, which will be authenticated by the AWS services, such as S3.

Reference: <http://docs.aws.amazon.com/STS/latest/UsingSTS/CreatingWIF.html>

NEW QUESTION 118

You are architecting an auto-scalable batch processing system using video processing pipelines and Amazon Simple Queue Service (Amazon SQS) for a customer. You are unsure of the limitations of SQS and need to find out. What do you think is a correct statement about the limitations of Amazon SQS?

- A. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.
- B. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- C. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- D. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.

Answer: B

Explanation: Amazon Simple Queue Service (Amazon SQS) is a messaging queue service that handles message or workflows between other components in a system.

Amazon SQS supports an unlimited number of queues and unlimited number of messages per queue for each user. Please be aware that Amazon SQS automatically deletes messages that have been in the queue for more than 4 days.

Reference: <http://aws.amazon.com/documentation/sqs/>

NEW QUESTION 120

An online gaming site asked you if you can deploy a database that is a fast, highly scalable NoSQL database service in AWS for a new site that he wants to build. Which database should you recommend?

- A. Amazon DynamoDB
- B. Amazon RDS
- C. Amazon Redshift
- D. Amazon SimpleDB

Answer: A

Explanation: Amazon DynamoDB is ideal for database applications that require very low latency and predictable performance at any scale but don't need complex querying capabilities like joins or transactions. Amazon DynamoDB is a fully-managed NoSQL database service that offers high performance, predictable throughput and low cost. It is easy to set up, operate, and scale.

With Amazon DynamoDB, you can start small, specify the throughput and storage you need, and easily scale your capacity requirements on the fly. Amazon DynamoDB automatically partitions data over a number of servers to meet your request capacity. In addition, DynamoDB automatically replicates your data synchronously across multiple Availability Zones within an AWS Region to ensure high-availability and data durability.

Reference: https://aws.amazon.com/running_databases/#dynamodb_anchor

NEW QUESTION 124

You have been doing a lot of testing of your VPC Network by deliberately failing EC2 instances to test whether instances are failing over properly. Your customer who will be paying the AWS bill for all this asks you if he being charged for all these instances. You try to explain to him how the billing works on EC2 instances to the best of your knowledge. What would be an appropriate response to give to the customer in regards to this?

- A. Billing commences when Amazon EC2 AM instance is completely up and billing ends as soon as the instance starts to shutdown.
- B. Billing only commences only after 1 hour of uptime and billing ends when the instance terminates.
- C. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends when the instance shuts down.
- D. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends as soon as the instance starts to shutdown.

Answer: C

Explanation: Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance shuts down, which could occur through a web services command, by running "shutdown -h", or through instance failure.

Reference: <http://aws.amazon.com/ec2/faqs/#Billing>

NEW QUESTION 126

You log in to IAM on your AWS console and notice the following message. "Delete your root access keys." Why do you think IAM is requesting this?

- A. Because the root access keys will expire as soon as you log out.
- B. Because the root access keys expire after 1 week.
- C. Because the root access keys are the same for all users.
- D. Because they provide unrestricted access to your AWS resource

Answer: D

Explanation: In AWS an access key is required in order to sign requests that you make using the command-line interface (CLI), using the AWS SDKs, or using direct API calls. Anyone who has the access key for your root account has unrestricted access to all the resources in your account, including billing information. One of the best ways to protect your account is to not have an access key for your root account. We recommend that unless you must have a root access key (this is very rare), that you do not generate one. Instead, AWS best practice is to create one or more AWS Identity and Access Management (IAM) users, give them the necessary permissions, and use IAM users for everyday interaction with AWS.

Reference:

<http://docs.aws.amazon.com/general/latest/gr/aws-access-keys-best-practices.html#root-password>

NEW QUESTION 130

Once again your customers are concerned about the security of their sensitive data and with their latest enquiry ask about what happens to old storage devices on AWS. What would be the best answer to this QUESTION ?

- A. AWS reformats the disks and uses them again.
- B. AWS uses the techniques detailed in DoD 5220.22-M to destroy data as part of the decommissioning process.
- C. AWS uses their own proprietary software to destroy data as part of the decommissioning process.
- D. AWS uses a 3rd party security organization to destroy data as part of the decommissioning proces

Answer: B

Explanation: When a storage device has reached the end of its useful life, AWS procedures include a decommissioning process that is designed to prevent customer data from being exposed to unauthorized individuals.

AWS uses the techniques detailed in DoD 5220.22-M ("National Industrial Security Program Operating Manual ") or NIST 800-88 ("Guidelines for Media Sanitization") to destroy data as part of the decommissioning process.

All decommissioned magnetic storage devices are degaussed and physically destroyed in accordance with industry-standard practices.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 134

You are in the process of building an online gaming site for a client and one of the requirements is that it must be able to process vast amounts of data easily.

Which AWS Service would be very helpful in processing all this data?

- A. Amazon S3
- B. AWS Data Pipeline
- C. AWS Direct Connect
- D. Amazon EMR

Answer: D

Explanation: Managing and analyzing high data volumes produced by online games platforms can be difficult. The back-end infrastructures of online games can be challenging to maintain and operate. Peak usage periods, multiple players, and high volumes of write operations are some of the most common problems that operations teams face.

Amazon Elastic MapReduce (Amazon EMR) is a service that processes vast amounts of data easily. Input data can be retrieved from web server logs stored on Amazon S3 or from player data stored in Amazon DynamoDB tables to run analytics on player behavior, usage patterns, etc. Those results can be stored again on Amazon S3, or inserted in a relational database for further analysis with classic business intelligence tools.

Reference: http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_games_10.pdf

NEW QUESTION 137

You need to change some settings on Amazon Relational Database Service but you do not want the database to reboot immediately which you know might happen depending on the setting that you change. Which of the following will cause an immediate DB instance reboot to occur?

- A. You change storage type from standard to PIOPS, and Apply Immediately is set to true.
- B. You change the DB instance class, and Apply Immediately is set to false.
- C. You change a static parameter in a DB parameter group.
- D. You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

Answer: A

Explanation: A DB instance outage can occur when a DB instance is rebooted, when the DB instance is put into a state that prevents access to it, and when the database is restarted. A reboot can occur when you manually reboot your DB instance or when you change a DB instance setting that requires a reboot before it can take effect.

A DB instance reboot occurs immediately when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0 and set Apply Immediately to true.

You change the DB instance class, and Apply Immediately is set to true.

You change storage type from standard to PIOPS, and Apply Immediately is set to true.

A DB instance reboot occurs during the maintenance window when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

You change the DB instance class, and Apply Immediately is set to false. Reference:

http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Troubleshooting.Security

NEW QUESTION 141

What does the following policy for Amazon EC2 do?

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

- A. Allow users to use actions that start with "Describe" over all the EC2 resources.
- B. Share an AMI with a partner
- C. Share an AMI within the account
- D. Allow a group to only be able to describe, run, stop, start, and terminate instances

Answer: A

Explanation: You can use IAM policies to control the actions that your users can perform against your EC2 resources. For instance, a policy with the following statement will allow users to perform actions whose name start with "Describe" against all your EC2 resources.

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 143

Amazon RDS provides high availability and failover support for DB instances using .

- A. customized deployments
- B. Appstream customizations
- C. log events
- D. Multi-AZ deployments

Answer: D

Explanation: Amazon RDS provides high availability and failover support for DB instances using Multi-AZ deployments. Multi-AZ deployments for Oracle, PostgreSQL, MySQL, and MariaDB DB instances use Amazon technology, while SQL Server DB instances use SQL Server Mirroring.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Concepts.IV|ultiAZ.html>

NEW QUESTION 146

A major customer has asked you to set up his AWS infrastructure so that it will be easy to recover in the case of a disaster of some sort. Which of the following is important when thinking about being able to quickly launch resources in AWS to ensure business continuity in case of a disaster?

- A. Create and maintain AMIs of key servers where fast recovery is required.
- B. Regularly run your servers, test them, and apply any software updates and configuration changes.
- C. All items listed here are important when thinking about disaster recovery.
- D. Ensure that you have all supporting custom software packages available in AWS

Answer: C

Explanation: In the event of a disaster to your AWS infrastructure you should be able to quickly launch resources in Amazon Web Services (AWS) to ensure business continuity.

The following are some key steps you should have in place for preparation:

1. Set up Amazon EC2 instances to replicate or mirror data.
2. Ensure that you have all supporting custom software packages available in AWS.
3. Create and maintain AMIs of key servers where fast recovery is required.
4. Regularly run these servers, test them, and apply any software updates and configuration changes.
5. Consider automating the provisioning of AWS resources.

Reference: http://d36cz9buwru1tt.cloudfront.net/AWS_Disaster_Recovery.pdf

NEW QUESTION 148

What does Amazon DynamoDB provide?

- A. A predictable and scalable MySQL database
- B. A fast and reliable PL/SQL database cluster
- C. A standalone Cassandra database, managed by Amazon Web Services
- D. A fast, highly scalable managed NoSQL database service

Answer: D

Explanation: Amazon DynamoDB is a managed NoSQL database service offered by Amazon. It automatically manages tasks like scalability for you while it provides high availability and durability for your data, allowing you to concentrate in other aspects of your application.

Reference: check link - https://aws.amazon.com/running_databases/

NEW QUESTION 151

You want to use AWS Import/Export to send data from your S3 bucket to several of your branch offices. What should you do if you want to send 10 storage units to AWS?

- A. Make sure your disks are encrypted prior to shipping.
- B. Make sure you format your disks prior to shipping.
- C. Make sure your disks are 1TB or more.
- D. Make sure you submit a separate job request for each device

Answer: D

Explanation: When using Amazon Import/Export, a separate job request needs to be submitted for each physical device even if they belong to the same import or export job.

Reference: <http://docs.aws.amazon.com/AWSImportExport/latest/DG/Concepts.html>

NEW QUESTION 152

What would be the best way to retrieve the public IP address of your EC2 instance using the CLI?

- A. Using tags
- B. Using traceroute
- C. Using ipconfig
- D. Using instance metadata

Answer: D

Explanation: To determine your instance's public IP address from within the instance, you can use instance metadata. Use the following command to access the public IP address: For Linux use, `$ curl`

`http://169.254.169.254/latest/meta-data/public-ipv4`, and for Windows use, `$ wget http://169.254.169.254/latest/meta-data/public-ipv4`.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-instance-addressing.html>

NEW QUESTION 155

You need to measure the performance of your EBS volumes as they seem to be under performing. You have come up with a measurement of 1,024 KB I/O but your colleague tells you that EBS volume performance is measured in IOPS. How many IOPS is equal to 1,024 KB I/O?

- A. 16
- B. 256
- C. 8

D. 4

Answer: D

Explanation: Several factors can affect the performance of Amazon EBS volumes, such as instance configuration, I/O characteristics, workload demand, and storage configuration.

IOPS are input/output operations per second. Amazon EBS measures each I/O operation per second

(that is 256 KB or smaller) as one IOPS. I/O operations that are larger than 256 KB are counted in 256 KB capacity units.

For example, a 1,024 KB I/O operation would count as 4 IOPS.

When you provision a 4,000 IOPS volume and attach it to an EBS-optimized instance that can provide the necessary bandwidth, you can transfer up to 4,000 chunks of data per second (provided that the I/O does not exceed the 128 MB/s per volume throughput limit of General Purpose (SSD) and Provisioned IOPS (SSD) volumes).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSPerformance.html>

NEW QUESTION 160

Having set up a website to automatically be redirected to a backup website if it fails, you realize that there are different types of failovers that are possible. You need all your resources to be available the majority of the time. Using Amazon Route 53 which configuration would best suit this requirement?

- A. Active-active failover.
- B. Non
- C. Route 53 can't failover.
- D. Active-passive failover.
- E. Active-active-passive and other mixed configuration

Answer: A

Explanation: You can set up a variety of failover configurations using Amazon Route 53 alias: weighted, latency, geolocation routing, and failover resource record sets.

Active-active failover: Use this failover configuration when you want all of your resources to be available the majority of the time. When a resource becomes unavailable, Amazon Route 53 can detect that it's unhealthy and stop including it when responding to queries.

Active-passive failover: Use this failover configuration when you want a primary group of resources to be available the majority of the time and you want a secondary group of resources to be on standby in case all of the primary resources become unavailable. When responding to queries, Amazon Route 53 includes only the healthy primary resources. If all of the primary resources are unhealthy, Amazon Route 53 begins to include only the healthy secondary resources in response to DNS queries.

Active-active-passive and other mixed configurations: You can combine alias and non-alias resource record sets to produce a variety of Amazon Route 53 behaviors.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/dns-failover.html>

NEW QUESTION 164

True or False: In Amazon Route 53, you can create a hosted zone for a top-level domain (TLD).

- A. FALSE
- B. False, Amazon Route 53 automatically creates it for you.
- C. True, only if you send an XML document with a CreateHostedZoneRequest element for TLD.
- D. TRUE

Answer: A

Explanation: In Amazon Route 53, you cannot create a hosted zone for a top-level domain (TLD).

Reference: http://docs.aws.amazon.com/Route53/latest/APIReference/API_CreateHostedZone.html

NEW QUESTION 165

A user needs to run a batch process which runs for 10 minutes. This will only be run once, or at maximum twice, in the next month, so the processes will be temporary only. The process needs 15 X-Large instances. The process downloads the code from S3 on each instance when it is launched, and then generates a temporary log file. Once the instance is terminated, all the data will be lost. Which of the below mentioned pricing models should the user choose in this case?

- A. Spot instance.
- B. Reserved instance.
- C. On-demand instance.
- D. EBS optimized instanc

Answer: A

Explanation: In Amazon Web Services, the spot instance is useful when the user wants to run a process temporarily. The spot instance can terminate the instance if the other user outbids the existing bid. In this case all storage is temporary and the data is not required to be persistent. Thus, the spot instance is a good option to save money.

Reference: <http://aws.amazon.com/ec2/purchasing-options/spot-instances/>

NEW QUESTION 166

You have been storing massive amounts of data on Amazon Glacier for the past 2 years and now start to wonder if there are any limitations on this. What is the correct answer to your QUESTION ?

- A. The total volume of data is limited but the number of archives you can store are unlimited.
- B. The total volume of data is unlimited but the number of archives you can store are limited.
- C. The total volume of data and number of archives you can store are unlimited.

D. The total volume of data is limited and the number of archives you can store are limited

Answer: C

Explanation: An archive is a durably stored block of information. You store your data in Amazon Glacier as archives. You may upload a single file as an archive, but your costs will be lower if you aggregate your data. TAR and ZIP are common formats that customers use to aggregate multiple files into a single file before uploading to Amazon Glacier.

The total volume of data and number of archives you can store are unlimited. Individual Amazon Glacier archives can range in size from 1 byte to 40 terabytes.

The largest archive that can be uploaded in a single upload request is 4 gigabytes.

For items larger than 100 megabytes, customers should consider using the Multipart upload capability. Archives stored in Amazon Glacier are immutable, i.e. archives can be uploaded and deleted but cannot be edited or overwritten.

Reference: <https://aws.amazon.com/glacier/faqs/>

NEW QUESTION 170

A user has configured ELB with two EBS backed EC2 instances. The user is trying to understand the DNS access and IP support for ELB. Which of the below mentioned statements may not help the user understand the IP mechanism supported by ELB?

- A. The client can connect over IPV4 or IPV6 using Dualstack
- B. Communication between the load balancer and back-end instances is always through IPV4
- C. ELB DNS supports both IPV4 and IPV6
- D. The ELB supports either IPV4 or IPV6 but not both

Answer: D

Explanation: Elastic Load Balancing supports both Internet Protocol version 6 (IPv6) and Internet Protocol version 4 (IPv4). Clients can connect to the user's load balancer using either IPv4 or IPv6 (in EC2-Classic) DNS. However, communication between the load balancer and its back-end instances uses only IPv4. The user can use the Dualstack-prefixed DNS name to enable IPv6 support for communications between the client and the load balancers. Thus, the clients are able to access the load balancer using either IPv4 or IPv6 as their individual connectivity needs dictate.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/UserScenariosForEC2.html>

NEW QUESTION 175

Does AWS CloudFormation support Amazon EC2 tagging?

- A. Yes, AWS CloudFormation supports Amazon EC2 tagging
- B. No, CloudFormation doesn't support any tagging
- C. No, it doesn't support Amazon EC2 tagging.
- D. It depends if the Amazon EC2 tagging has been defined in the template

Answer: A

Explanation: In AWS CloudFormation, Amazon EC2 resources that support the tagging feature can also be tagged in an AWS template. The tag values can refer to template parameters, other resource names, resource attribute values (e.g. addresses), or values computed by simple functions (e.g., a concatenated list of strings).

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 180

An existing client comes to you and says that he has heard that launching instances into a VPC (virtual private cloud) is a better strategy than launching instances into an EC2-classic which he knows is what you currently do. You suspect that he is correct and he has asked you to do some research about this and get back to him. Which of the following statements is true in regards to what ability launching your instances into a VPC instead of EC2-Classic gives you?

- A. All of the things listed here.
- B. Change security group membership for your instances while they're running
- C. Assign static private IP addresses to your instances that persist across starts and stops
- D. Define network interfaces, and attach one or more network interfaces to your instances

Answer: A

Explanation: By launching your instances into a VPC instead of EC2-Classic, you gain the ability to: Assign static private IP addresses to your instances that persist across starts and stops Assign multiple IP addresses to your instances

Define network interfaces, and attach one or more network interfaces to your instances Change security group membership for your instances while they're running

Control the outbound traffic from your instances (egress filtering) in addition to controlling the inbound traffic to them (ingress filtering)

Add an additional layer of access control to your instances in the form of network access control lists (ACL)

Run your instances on single-tenant hardware

Reference: http://media.amazonwebservices.com/AWS_Cloud_Best_Practices.pdf

NEW QUESTION 182

Which of the following statements is true of creating a launch configuration using an EC2 instance?

- A. The launch configuration can be created only using the Query APIs.
- B. Auto Scaling automatically creates a launch configuration directly from an EC2 instance.
- C. A user should manually create a launch configuration before creating an Auto Scaling group.
- D. The launch configuration should be created manually from the AWS CLI

Answer: B

Explanation: You can create an Auto Scaling group directly from an EC2 instance. When you use this feature, Auto Scaling automatically creates a launch configuration for you as well.

Reference:

<http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/create-lc-with-instanceID.html>

NEW QUESTION 187

You have been using T2 instances as your CPU requirements have not been that intensive. However you now start to think about larger instance types and start looking at M and IV|3 instances. You are a little confused as to the differences between them as they both seem to have the same ratio of CPU and memory. Which statement below is incorrect as to why you would use one over the other?

- A. M3 instances are less expensive than M1 instances.
- B. IV|3 instances are configured with more swap memory than M instances.
- C. IV|3 instances provide better, more consistent performance than M instances for most use-cases.
- D. M3 instances also offer SSD-based instance storage that delivers higher I/O performance.

Answer: B

Explanation: Amazon EC2 allows you to set up and configure everything about your instances from your operating system up to your applications. An Amazon Machine Image (AMI) is simply a packaged-up environment that includes all the necessary bits to set up and boot your instance.

M1 and M3 Standard instances have the same ratio of CPU and memory, some reasons below as to why you would use one over the other.

IV|3 instances provide better, more consistent performance than M instances for most use-cases. M3 instances also offer SSD-based instance storage that delivers higher I/O performance.

M3 instances are also less expensive than M1 instances. Due to these reasons, we recommend M3 for applications that require general purpose instances with a balance of compute, memory, and network resources.

However, if you need more disk storage than what is provided in M3 instances, you may still find M1 instances useful for running your applications.

Reference: <https://aws.amazon.com/ec2/faqs/>

NEW QUESTION 191

You have set up an Elastic Load Balancer (ELB) with the usual default settings, which route each request independently to the application instance with the smallest load. However, someone has asked you to bind a user's session to a specific application instance so as to ensure that all requests coming from the user during the session will be sent to the same application instance. AWS has a feature to do this. What is it called?

- A. Connection draining
- B. Proxy protocol
- C. Tagging
- D. Sticky session

Answer: D

Explanation: An Elastic Load Balancer (ELB) by default, routes each request independently to the application instance with the smallest load. However, you can use the sticky session feature (also known as session affinity), which enables the load balancer to bind a user's session to a specific application instance. This ensures that all requests coming from the user during the session will be sent to the same application instance. The key to managing the sticky session is determining how long your load balancer should consistently route the user's request to the same application instance. If your application has its own session cookie, then you can set Elastic Load Balancing to create the session cookie to follow the duration specified by the application's session cookie. If your application does not have its own session cookie, then you can set Elastic Load Balancing to create a session cookie by specifying your own stickiness duration. You can associate stickiness duration for only HTTP/HTTPS load balancer listeners.

An application instance must always receive and send two cookies: A cookie that defines the stickiness duration and a special Elastic Load Balancing cookie named AWSELB, that has the mapping to the application instance.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html#session-stickiness>

NEW QUESTION 192

A user wants to achieve High Availability with PostgreSQL DB. Which of the below mentioned functionalities helps achieve HA?

- A. Multi AZ
- B. Read Replica
- C. Multi region
- D. PostgreSQL does not support HA

Answer: A

Explanation: The Multi AZ feature allows the user to achieve High Availability. For Multi AZ, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 195

A user has created an application which will be hosted on EC2. The application makes calls to DynamoDB to fetch certain data. The application is using the DynamoDB SDK to connect with from the EC2 instance. Which of the below mentioned statements is true with respect to the best practice for security in this scenario?

- A. The user should create an IAM user with DynamoDB access and use its credentials within the application to connect with DynamoDB
- B. The user should attach an IAM role with DynamoDB access to the EC2 instance
- C. The user should create an IAM role, which has EC2 access so that it will allow deploying the application
- D. The user should create an IAM user with DynamoDB and EC2 access
- E. Attach the user with the application so that it does not use the root account credentials

Answer: B

Explanation: With AWS IAM a user is creating an application which runs on an EC2 instance and makes requests to AWS, such as DynamoDB or S3 calls. Here it is recommended that the user should not create an IAM user and pass the user's credentials to the application or embed those credentials inside the application. Instead, the user should use roles for EC2 and give that role access to DynamoDB /S3. When the roles are attached to EC2, it will give temporary security credentials to the application hosted on that EC2, to connect with DynamoDB / S3.
Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_WorkingWithGroupsAndUsers.html

NEW QUESTION 196

After setting up several database instances in Amazon Relational Database Service (Amazon RDS) you decide that you need to track the performance and health of your databases. How can you do this?

- A. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.
- B. Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance.
- C. All of the items listed will track the performance and health of a database.
- D. View, download, or watch database log files using the Amazon RDS console or Amazon RDS API
- E. You can also query some database log files that are loaded into database tables.

Answer: C

Explanation: Amazon Relational Database Service (Amazon RDS) is a web service that makes it easier to set up, operate, and scale a relational database in the cloud. It provides cost-efficient, resizeable capacity for an industry-standard relational database and manages common database administration tasks. There are several ways you can track the performance and health of a database or a DB instance. You can:
Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.
View, download, or watch database log files using the Amazon RDS console or Amazon RDS APIs. You can also query some database log files that are loaded into database tables.
Use the AWS CloudTrail service to record AWS calls made by your AWS account. The calls are recorded in log files and stored in an Amazon S3 bucket.
Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Monitoring.html

NEW QUESTION 199

A user has attached 1 EBS volume to a VPC instance. The user wants to achieve the best fault tolerance of data possible. Which of the below mentioned options can help achieve fault tolerance?

- A. Attach one more volume with RAID 1 configuration.
- B. Attach one more volume with RAID 0 configuration.
- C. Connect multiple volumes and stripe them with RAID 6 configuration.
- D. Use the EBS volume as a root device

Answer: A

Explanation: The user can join multiple provisioned IOPS volumes together in a RAID 1 configuration to achieve better fault tolerance. RAID 1 does not provide a write performance improvement; it requires more bandwidth than non-RAID configurations since the data is written simultaneously to multiple volumes.
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/raid-config.html>

NEW QUESTION 203

A user has created a subnet in VPC and launched an EC2 instance within it. The user has not selected the option to assign the IP address while launching the instance. The user has 3 elastic IPs and is trying to assign one of the Elastic IPs to the VPC instance from the console. The console does not show any instance in the IP assignment screen. What is a possible reason that the instance is unavailable in the assigned IP console?

- A. The IP address may be attached to one of the instances
- B. The IP address belongs to a different zone than the subnet zone
- C. The user has not created an internet gateway
- D. The IP addresses belong to EC2 Classic; so they cannot be assigned to VPC

Answer: D

Explanation: A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. A user can create a subnet with VPC and launch instances inside that subnet. When the user is launching an instance he needs to select an option which attaches a public IP to the instance. If the user has not selected the option to attach the public IP then it will only have a private IP when launched. If the user wants to connect to an instance from the internet he should create an elastic IP with VPC. If the elastic IP is a part of EC2 Classic it cannot be assigned to a VPC instance.
Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/GettingStartedGuide/LaunchInstance.html>

NEW QUESTION 207

A user is aware that a huge download is occurring on his instance. He has already set the Auto Scaling policy to increase the instance count when the network I/O increases beyond a certain limit. How can the user ensure that this temporary event does not result in scaling?

- A. The network I/O are not affected during data download
- B. The policy cannot be set on the network I/O
- C. There is no way the user can stop scaling as it is already configured
- D. Suspend scaling

Answer: D

Explanation: The user may want to stop the automated scaling processes on the Auto Scaling groups either to perform manual operations or during emergency situations. To perform this, the user can suspend one or more scaling processes at any time. Once it is completed, the user can resume all the suspended

processes. Reference: http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html

NEW QUESTION 210

Select a true statement about Amazon EC2 Security Groups (EC2-Classic).

- A. After you launch an instance in EC2-Classic, you can't change its security groups.
- B. After you launch an instance in EC2-Classic, you can change its security groups only once.
- C. After you launch an instance in EC2-Classic, you can only add rules to a security group.
- D. After you launch an instance in EC2-Classic, you cannot add or remove rules from a security group.

Answer: A

Explanation: After you launch an instance in EC2-Classic, you can't change its security groups. However, you can add rules to or remove rules from a security group, and those changes are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 211

A user is planning to launch a scalable web application. Which of the below mentioned options will not affect the latency of the application?

- A. Region.
- B. Provisioned IOPS.
- C. Availability Zone.
- D. Instance size.

Answer: C

Explanation: In AWS, the instance size decides the I/O characteristics. The provisioned IOPS ensures higher throughput, and lower latency. The region does affect the latency; latency will always be less when the instance is near to the end user. Within a region the user uses any AZ and this does not affect the latency. The AZ is mainly for fault toleration or HA.

Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 215

Which of the following strategies can be used to control access to your Amazon EC2 instances?

- A. DB security groups
- B. IAM policies
- C. None of these
- D. EC2 security groups

Answer: D

Explanation: IAM policies allow you to specify what actions your IAM users are allowed to perform against your EC2 Instances. However, when it comes to access control, security groups are what you need in order to define and control the way you want your instances to be accessed, and whether or not certain kind of communications are allowed or not.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 217

A user has launched one EC2 instance in the US East region and one in the US West region. The user has launched an RDS instance in the US East region. How can the user configure access from both the EC2 instances to RDS?

- A. It is not possible to access RDS of the US East region from the US West region
- B. Configure the US West region's security group to allow a request from the US East region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- C. Configure the security group of the US East region to allow traffic from the US West region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- D. Configure the security group of both instances in the ingress rule of the RDS security group

Answer: C

Explanation: The user cannot authorize an Amazon EC2 security group if it is in a different AWS Region than the RDS DB instance. The user can authorize an IP range or specify an Amazon EC2 security group in the same region that refers to an IP address in another region. In this case allow IP of US West inside US East's security group and open the RDS security group for US East region.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 220

In Amazon EC2, if your EBS volume stays in the detaching state, you can force the detachment by clicking .

- A. Force Detach
- B. Detach Instance
- C. AttachVolume
- D. AttachInstance

Answer:

A

Explanation: If your volume stays in the detaching state, you can force the detachment by clicking Force Detach. Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/ebs-detaching-volume.html>

NEW QUESTION 223

Do you need to shutdown your EC2 instance when you create a snapshot of EBS volumes that serve as root devices?

- A. No, you only need to shutdown an instance before deleting it.
- B. Yes
- C. No, the snapshot would turn off your instance automatically.
- D. No

Answer: B

Explanation: Yes, to create a snapshot for Amazon EBS volumes that serve as root devices, you should stop the instance before taking the snapshot. Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-creating-snapshot.html>

NEW QUESTION 228

An organization has a statutory requirement to protect the data at rest for data stored in EBS volumes. Which of the below mentioned options can the organization use to achieve data protection?

- A. Data replication.
- B. Data encryption.
- C. Data snapshot.
- D. All the options listed her

Answer: D

Explanation: For protecting the Amazon EBS data at REST, the user can use options, such as Data Encryption (Windows / Linux / third party based), Data Replication (AWS internally replicates data for redundancy), and Data Snapshot (for point in time backup). Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 230

A client of yours has a huge amount of data stored on Amazon S3, but is concerned about someone stealing it while it is in transit. You know that all data is encrypted in transit on AWS, but which of the following is wrong when describing server-side encryption on AWS?

- A. Amazon S3 server-side encryption employs strong multi-factor encryption.
- B. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data.
- C. In server-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools.
- D. Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks.

Answer: C

Explanation: Amazon S3 encrypts your object before saving it on disks in its data centers and decrypts it when you download the objects. You have two options depending on how you choose to manage the encryption keys: Server-side encryption and client-side encryption. Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks in its data centers and decrypts it for you when you access it. As long as you authenticate your request and you have access permissions, there is no difference in the way you access encrypted or unencrypted objects. Amazon S3 manages encryption and decryption for you. For example, if you share your objects using a pre-signed URL, that URL works the same way for both encrypted and unencrypted objects. In client-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools. Server-side encryption is an alternative to client-side encryption in which Amazon S3 manages the encryption of your data, freeing you from the tasks of managing encryption and encryption keys. Amazon S3 server-side encryption employs strong multi-factor encryption. Amazon S3 encrypts each object with a unique key. As an additional safeguard, it encrypts the key itself with a master key that it regularly rotates. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data. Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingServerSideEncryption.html>

NEW QUESTION 235

A user is running a batch process which runs for 1 hour every day. Which of the below mentioned options is the right instance type and costing model in this case if the user performs the same task for the whole year?

- A. EBS backed instance with on-demand instance pricing.
- B. EBS backed instance with heavy utilized reserved instance pricing.
- C. EBS backed instance with low utilized reserved instance pricing.
- D. Instance store backed instance with spot instance pricin

Answer: A

Explanation: For Amazon Web Services, the reserved instance helps the user save money if the user is going to run the same instance for a longer period. Generally if the user uses the instances around 30-40% annually it is recommended to use RI. Here as the instance runs only for 1 hour daily it is not recommended to have RI as it will be costlier. The user should use on-demand with EBS in this case. Reference: <http://aws.amazon.com/ec2/purchasing-options/reserved-instances/>

NEW QUESTION 239

You have just set up a large site for a client which involved a huge database which you set up with Amazon RDS to run as a Multi-AZ deployment. You now start to worry about what will happen if the database instance fails. Which statement best describes how this database will function if there is a database failure?

- A. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- B. Your database will not resume operation without manual administrative intervention.
- C. Updates to your DB Instance are asynchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- D. Updates to your DB Instance are synchronously replicated across S3 to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

Answer: A

Explanation: Amazon Relational Database Service (Amazon RDS) is a managed service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity, while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

When you create or modify your DB Instance to run as a Multi-AZ deployment, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

During certain types of planned maintenance, or in the unlikely event of DB Instance failure or Availability Zone failure, Amazon RDS will automatically failover to the standby so that you can resume database writes and reads as soon as the standby is promoted. Since the name record for your DB Instance remains the same, your application can resume database operation without the need for manual administrative intervention. With Multi-AZ deployments, replication is transparent: you do not interact directly with the standby, and it cannot be used to serve read traffic. If you are using Amazon RDS for MySQL and are looking to scale read traffic beyond the capacity constraints of a single DB Instance, you can deploy one or more Read Replicas.

Reference: <http://aws.amazon.com/rds/faqs/>

NEW QUESTION 242

Name the disk storage supported by Amazon Elastic Compute Cloud (EC2).

- A. None of these
- B. Amazon AppStream store
- C. Amazon SNS store
- D. Amazon Instance Store

Answer: D

Explanation: Amazon EC2 supports the following storage options: Amazon Elastic Block Store (Amazon EBS) Amazon EC2 Instance Store Amazon Simple Storage Service (Amazon S3)

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 246

You are signed in as root user on your account but there is an Amazon S3 bucket under your account that you cannot access. What is a possible reason for this?

- A. An IAM user assigned a bucket policy to an Amazon S3 bucket and didn't specify the root user as a principal
- B. The S3 bucket is full.
- C. The S3 bucket has reached the maximum number of objects allowed.
- D. You are in the wrong availability zone

Answer: A

Explanation: With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In some cases, you might have an IAM user with full access to IAM and Amazon S3. If the IAM user assigns a bucket policy to an Amazon S3 bucket and doesn't specify the root user as a principal, the root user is denied access to that bucket. However, as the root user, you can still access the bucket by modifying the bucket policy to allow root user access.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#testing2>

NEW QUESTION 247

You have a number of image files to encode. In an Amazon SQS worker queue, you create an Amazon SQS message for each file specifying the command (jpeg-encode) and the location of the file in Amazon S3. Which of the following statements best describes the functionality of Amazon SQS?

- A. Amazon SQS is a distributed queuing system that is optimized for horizontal scalability, not for single-threaded sending or receiving speeds.
- B. Amazon SQS is for single-threaded sending or receiving speeds.
- C. Amazon SQS is a non-distributed queuing system.
- D. Amazon SQS is a distributed queuing system that is optimized for vertical scalability and for single-threaded sending or receiving speeds.

Answer: A

Explanation: Amazon SQS is a distributed queuing system that is optimized for horizontal scalability, not for single-threaded sending or receiving speeds. A single client can send or receive Amazon SQS messages at a rate of about 5 to 50 messages per second. Higher receive performance can be achieved by requesting multiple messages (up to 10) in a single call. It may take several seconds before a message that has been to a queue is available to be received.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 251

A user is observing the EC2 CPU utilization metric on CloudWatch. The user has observed some interesting patterns while filtering over the 1 week period for a particular hour. The user wants to zoom that data point to a more granular period. How can the user do that easily with CloudWatch?

- A. The user can zoom a particular period by selecting that period with the mouse and then releasing the mouse
- B. The user can zoom a particular period by specifying the aggregation data for that period
- C. The user can zoom a particular period by double clicking on that period with the mouse
- D. The user can zoom a particular period by specifying the period in the Time Range

Answer: A

Explanation: Amazon CloudWatch provides the functionality to graph the metric data generated either by the AWS services or the custom metric to make it easier for the user to analyse. The AWS CloudWatch console provides the option to change the granularity of a graph and zoom in to see data over a shorter time period. To zoom, the user has to click in the graph details pane, drag on the graph area for selection, and then release the mouse button.

Reference: http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom_in_on_graph.html

NEW QUESTION 254

A scope has been handed to you to set up a super fast gaming server and you decide that you will use Amazon DynamoDB as your database. For efficient access to data in a table, Amazon DynamoDB creates and maintains indexes for the primary key attributes. A secondary index is a data structure that contains a subset of attributes from a table, along with an alternate key to support Query operations. How many types of secondary indexes does DynamoDB support?

- A. 2
- B. 16
- C. 4
- D. As many as you need

Answer: A

Explanation: DynamoDB supports two types of secondary indexes:

Local secondary index — an index that has the same hash key as the table, but a different range key. A local secondary index is "local" in the sense that every partition of a local secondary index is scoped to a table partition that has the same hash key.

Global secondary index — an index with a hash and range key that can be different from those on the table. A global secondary index is considered "global" because queries on the index can span all of the data in a table, across all partitions.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/SecondaryIndexes.html>

NEW QUESTION 259

The common use cases for DynamoDB Fine-Grained Access Control (FGAC) are cases in which the end user wants .

- A. to change the hash keys of the table directly
- B. to check if an IAM policy requires the hash keys of the tables directly
- C. to read or modify any codecommit key of the table directly, without a middle-tier service
- D. to read or modify the table directly, without a middle-tier service

Answer: D

Explanation: FGAC can benefit any application that tracks information in a DynamoDB table, where the end user (or application client acting on behalf of an end user) wants to read or modify the table directly, without a middle-tier service. For instance, a developer of a mobile app named Acme can use FGAC to track the top score of every Acme user in a DynamoDB table. FGAC allows the application client to modify only the top score for the user that is currently running the application.

Reference: http://aws.amazon.com/dynamodb/faqs/#security_anchor

NEW QUESTION 260

A user has set up the CloudWatch alarm on the CPU utilization metric at 50%, with a time interval of 5 minutes and 10 periods to monitor. What will be the state of the alarm at the end of 90 minutes, if the CPU utilization is constant at 80%?

- A. ALERT
- B. ALARM
- C. OK
- D. INSUFFICIENT_DATA

Answer: B

Explanation: In this case the alarm watches a metric every 5 minutes for 10 intervals. Thus, it needs at least 50 minutes to come to the "OK" state.

Till then it will be in the INSUFFICIENT_DATA state.

Since 90 minutes have passed and CPU utilization is at 80% constant, the state of alarm will be "ALARM". Reference:

<http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/AlarmThatSendsEmail.html>

NEW QUESTION 264

You need to set up security for your VPC and you know that Amazon VPC provides two features that you can use to increase security for your VPC: security groups and network access control lists (ACLs). You have already looked into security groups and you are now trying to understand ACLs. Which statement below is incorrect in relation to ACLs?

- A. Supports allow rules and deny rules.
- B. Is stateful: Return traffic is automatically allowed, regardless of any rules.
- C. Processes rules in number order when deciding whether to allow traffic.

D. Operates at the subnet level (second layer of defense).

Answer: B

Explanation: Amazon VPC provides two features that you can use to increase security for your VPC:

Security groups—Act as a firewall for associated Amazon EC2 instances, controlling both inbound and outbound traffic at the instance level

Network access control lists (ACLs)—Act as a firewall for associated subnets, controlling both inbound and outbound traffic at the subnet level

Security groups are stateful: (Return traffic is automatically allowed, regardless of any rules) Network ACLs are stateless: (Return traffic must be explicitly allowed by rules)

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Security.html

NEW QUESTION 269

A user comes to you and wants access to Amazon CloudWatch but only wants to monitor a specific LoadBalancer. Is it possible to give him access to a specific set of instances or a specific LoadBalancer?

A. No because you can't use IAM to control access to CloudWatch data for specific resources.

B. Yes

C. You can use IAM to control access to CloudWatch data for specific resources.

D. No because you need to be Sysadmin to access CloudWatch data.

E. Yes

F. Any user can see all CloudWatch data and needs no access right

Answer: A

Explanation: Amazon CloudWatch integrates with AWS Identity and Access Management (IAM) so that you can

specify which CloudWatch actions a user in your AWS Account can perform. For example, you could create an IAM policy that gives only certain users in your organization permission to use GetMetricStatistics. They could then use the action to retrieve data about your cloud resources.

You can't use IAM to control access to CloudWatch data for specific resources. For example, you can't give a user access to CloudWatch data for only a specific set of instances or a specific LoadBalancer. Permissions granted using IAM cover all the cloud resources you use with CloudWatch. In addition, you can't use IAM roles with the Amazon CloudWatch command line tools.

Using Amazon CloudWatch with IAM doesn't change how you use CloudWatch. There are no changes to CloudWatch actions, and no new CloudWatch actions related to users and access control.

Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingIAM.html>

NEW QUESTION 273

A user is planning to make a mobile game which can be played online or offline and will be hosted on EC2.

The user wants to ensure that if someone breaks the highest score or they achieve some milestone they can inform all their colleagues through email. Which of the below mentioned AWS services helps achieve this goal?

A. AWS Simple Workflow Service.

B. AWS Simple Email Service.

C. Amazon Cognito

D. AWS Simple Queue Service

Answer: B

Explanation: Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. It integrates with other AWS services, making it easy to send emails from applications that are hosted on AWS.

Reference: <http://aws.amazon.com/ses/faqs/>

NEW QUESTION 276

You have multiple VPN connections and want to provide secure communication between sites using the AWS VPN CloudHub. Which statement is the most accurate in describing what you must do to set this up correctly?

A. Create a virtual private gateway with multiple customer gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs)

B. Create a virtual private gateway with multiple customer gateways, each with a unique set of keys

C. Create a virtual public gateway with multiple customer gateways, each with a unique Private subnet

D. Create a virtual private gateway with multiple customer gateways, each with unique subnet id

Answer: A

Explanation: If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who'd like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

To use the AWS VPN CloudHub, you must create a virtual private gateway with multiple customer

gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs). Customer gateways advertise the appropriate routes (BGP prefixes) over their VPN connections. These routing advertisements are received and re-advertised to each BGP peer, enabling each site to send data to and receive data from the other sites. The routes for each spoke must have unique ASNs and the sites must not have overlapping IP ranges. Each site can also send and receive data from the VPC as if they were using a standard VPN connection.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html

NEW QUESTION 279

You need to create an Amazon Machine Image (AMI) for a customer for an application which does not appear to be part of the standard AWS AM template that you can see in the AWS console. What are the alternative possibilities for creating an AMI on AWS?

- A. You can purchase an AMIs from a third party but cannot create your own AM.
- B. You can purchase an AMIs from a third party or can create your own AMI.
- C. Only AWS can create AMIs and you need to wait till it becomes available.
- D. Only AWS can create AMIs and you need to request them to create one for yo

Answer: B

Explanation: You can purchase an AMIs from a third party, including AMIs that come with service contracts from organizations such as Red Hat. You can also create an AMI and sell it to other Amazon EC2 users. After you create an AMI, you can keep it private so that only you can use it, or you can share it with a specified list of AWS accounts. You can also make your custom AMI public so that the community can use it. Building a safe, secure, usable AMI for public consumption is a fairly straightforward process, if you follow a few simple guidelines.
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AMIs.html>

NEW QUESTION 282

While creating an Amazon RDS DB, your first task is to set up a DB that controls which IP address or EC2 instance can access your DB Instance.

- A. security token pool
- B. security token
- C. security pool
- D. security group

Answer: D

Explanation: While creating an Amazon RDS DB, your first task is to set up a DB Security Group that controls what IP addresses or EC2 instances have access to your DB Instance.
Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 284

You are very concerned about security on your network because you have multiple programmers testing APIs and SDKs and you have no idea what is happening. You think CloudTrail may help but are not sure what it does. Which of the following statements best describes the AWS service CloudTrail?

- A. With AWS CloudTrail you can get a history of AWS API calls and related events for your account.
- B. With AWS CloudTrail you can get a history of IAM users for your account.
- C. With AWS CloudTrail you can get a history of S3 logfiles for your account.
- D. With AWS CloudTrail you can get a history of CloudFormation JSON scripts used for your account

Answer: A

Explanation: With AWS CloudTrail, you can get a history of AWS API calls for your account, including API calls made via the AWS Management Console, the AWS SDKs, the command line tools, and higher-level AWS services. You can also identify which users and accounts called AWS APIs for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred. You can identify which users and accounts called AWS for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred. You can integrate CloudTrail into applications using the API, automate trail creation for your organization, check the status of your trails, and control how administrators turn CloudTrail logging on and off.
Reference: http://docs.aws.amazon.com/awscloudtrail/latest/userguide/what_is_cloud_trail_top_level.html

NEW QUESTION 285

After setting up an EC2 security group with a cluster of 20 EC2 instances, you find an error in the security group settings. You quickly make changes to the security group settings. When will the changes to the settings be effective?

- A. The settings will be effective immediately for all the instances in the security group.
- B. The settings will be effective only when all the instances are restarted.
- C. The settings will be effective for all the instances only after 30 minutes.
- D. The settings will be effective only for the new instances added to the security group

Answer: A

Explanation: Amazon Redshift applies changes to a cluster security group immediately. So if you have associated the cluster security group with a cluster, inbound cluster access rules in the updated cluster security group apply immediately.
Reference: <http://docs.aws.amazon.com/redshift/latest/mgmt/working-with-security-groups.html>

NEW QUESTION 288

You are configuring a new VPC for one of your clients for a cloud migration project, and only a public VPN will be in place. After you created your VPC, you created a new subnet, a new internet gateway, and attached your internet gateway to your VPC. When you launched your first instance into your VPC, you realized that you aren't able to connect to the instance, even if it is configured with an elastic IP. What should be done to access the instance?

- A. A route should be created as 0.0.0.0/0 and your internet gateway as target.
- B. Attach another ENI to the instance and connect via new ENI.
- C. A NAT instance should be created and all traffic should be forwarded to NAT instance.
- D. A NACL should be created that allows all outbound traffic

Answer: A

Explanation: All traffic should be routed via Internet Gateway. So, a route should be created with 0.0.0.0/0 as a source, and your Internet Gateway as your target.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Scenario1.html

NEW QUESTION 293

A user is currently building a website which will require a large number of instances in six months, when a demonstration of the new site will be given upon launch. Which of the below mentioned options allows the user to procure the resources beforehand so that they need not worry about infrastructure availability during the demonstration?

- A. Procure all the instances as reserved instances beforehand.
- B. Launch all the instances as part of the cluster group to ensure resource availability.
- C. Pre-warm all the instances one month prior to ensure resource availability.
- D. Ask AWS now to procure the dedicated instances in 6 month

Answer: A

Explanation: Amazon Web Services has massive hardware resources at its data centers, but they are finite. The best way for users to maximize their access to these resources is by reserving a portion of the computing capacity that they require. This can be done through reserved instances. With reserved instances, the user literally reserves the computing capacity in the Amazon Web Services cloud.

Reference: http://media.amazonwebservices.com/AWS_Building_Fault_Tolerant_Applications.pdf

NEW QUESTION 298

You receive the following request from a client to quickly deploy a static website for them, specifically on AWS. The requirements are low-cost, reliable, online storage, and a reliable and cost-effective way to route customers to the website, as well as a way to deliver content with low latency and high data transfer speeds so that visitors to his website don't experience unnecessary delays. What do you think would be the minimum AWS services that could fulfill the client's request?

- A. Amazon Route 53, Amazon CloudFront and Amazon VPC.
- B. Amazon S3, Amazon Route 53 and Amazon RDS
- C. Amazon S3, Amazon Route 53 and Amazon CloudFront
- D. Amazon S3 and Amazon Route 53.

Answer: C

Explanation: You can easily and inexpensively use AWS to host a website that uses client-side technologies (such as HTML, CSS, and JavaScript) and does not require server-side technologies (such as PHP and ASP.NET). This type of site is called a static website, and is used to display content that does not change frequently. Before you create and deploy a static website, you must plan your architecture to ensure that it meets your requirements. Amazon S3, Amazon Route 53, and Amazon CloudFront would be required in this instance.

Reference: <http://docs.aws.amazon.com/gettingstarted/latest/swl/website-hosting-intro.html>

NEW QUESTION 303

What is the default maximum number of Access Keys per user?

- A. 10
- B. 15
- C. 2
- D. 20

Answer: C

Explanation: The default maximum number of Access Keys per user is 2.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

NEW QUESTION 304

What is the network performance offered by the c4.8xlarge instance in Amazon EC2?

- A. 20 Gigabit
- B. 10 Gigabit
- C. Very High but variable
- D. 5 Gigabit

Answer: B

Explanation: Networking performance offered by the c4.8xlarge instance is 10 Gigabit. Reference: <http://aws.amazon.com/ec2/instance-types/>

NEW QUESTION 305

You need to create a JSON-formatted text file for AWS CloudFormation. This is your first template and the only thing you know is that the templates include several major sections but there is only one that is required for it to work. What is the only section required?

- A. Mappings
- B. Outputs
- C. Resources
- D. Conditions

Answer: C

Explanation: AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. A template is a JSON-formatted text file that describes your AWS infrastructure. Templates include several major sections. The Resources section is the only section that is required. The first character in the template must be an open brace ({), and the last character must be a closed brace (}). The following template fragment shows the template structure and sections.
Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/template-anatomy.html>

NEW QUESTION 309

Can a single EBS volume be attached to multiple EC2 instances at the same time?

- A. Yes
- B. No
- C. Only for high-performance EBS volumes.
- D. Only when the instances are located in the US region

Answer: B

Explanation: You can't attach an EBS volume to multiple EC2 instances. This is because it is equivalent to using a single hard drive with many computers at the same time.
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AmazonEBS.html>

NEW QUESTION 311

How long does an AWS free usage tier EC2 last for?

- A. Forever
- B. 12 Months upon signup
- C. 1 Month upon signup
- D. 6 Months upon signup

Answer: B

Explanation: The AWS free usage tier will expire 12 months from the date you sign up. When your free usage expires or if your application use exceeds the free usage tiers, you simply pay the standard, pay-as-you-go service rates.
Reference: <http://aws.amazon.com/free/faqs/>

NEW QUESTION 316

A user is hosting a website in the US West-1 region. The website has the highest client base from the Asia-Pacific (Singapore / Japan) region. The application is accessing data from S3 before serving it to client. Which of the below mentioned regions gives a better performance for S3 objects?

- A. Japan
- B. Singapore
- C. US East
- D. US West-1

Answer: D

Explanation: Access to Amazon S3 from within Amazon EC2 in the same region is fast. In this aspect, though the client base is Singapore, the application is being hosted in the US West-1 region. Thus, it is recommended that S3 objects be stored in the US-West-1 region.
Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 321

Which of the following statements is true of tagging an Amazon EC2 resource?

- A. You don't need to specify the resource identifier while terminating a resource.
- B. You can terminate, stop, or delete a resource based solely on its tags.
- C. You can't terminate, stop, or delete a resource based solely on its tags.
- D. You don't need to specify the resource identifier while stopping a resource

Answer: C

Explanation: You can assign tags only to resources that already exist. You can't terminate, stop, or delete a resource based solely on its tags; you must specify the resource identifier.
Reference: http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Using_Tags.html

NEW QUESTION 322

Your organization is in the business of architecting complex transactional databases. For a variety of reasons, this has been done on EBS. What is AWS's recommendation for customers who have architected databases using EBS for backups?

- A. Backups to Amazon S3 be performed through the database management system.
- B. Backups to AWS Storage Gateway be performed through the database management system.

- C. If you take regular snapshots no further backups are required.
- D. Backups to Amazon Glacier be performed through the database management syste

Answer: A

Explanation: Data stored in Amazon EBS volumes is redundantly stored in multiple physical locations as part of normal operation of those services and at no additional charge.

However, Amazon EBS replication is stored within the same availability zone, not across multiple zones; therefore, it is highly recommended that you conduct regular snapshots to Amazon S3 for long-term data durability.

For customers who have architected complex transactional databases using EBS, it is recommended that backups to Amazon S3 be performed through the database management system so that distributed transactions and logs can be checkpointed.

AWS does not perform backups of data that are maintained on virtual disks attached to running instances on Amazon EC2.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 327

You have three Amazon EC2 instances with Elastic IP addresses in the US East (Virginia) region, and you want to distribute requests across all three IPs evenly for users for whom US East (Virginia) is the appropriate region.

How many EC2 instances would be sufficient to distribute requests in other regions?

- A. 3
- B. 9
- C. 2
- D. 1

Answer: D

Explanation: If your application is running on Amazon EC2 instances in two or more Amazon EC2 regions, and if you have more than one Amazon EC2 instance in one or more regions, you can use latency-based routing to route traffic to the correct region and then use weighted resource record sets to route traffic to instances within the region based on weights that you specify.

For example, suppose you have three Amazon EC2 instances with Elastic IP addresses in the US East (Virginia) region and you want to distribute requests across all three IPs evenly for users for whom US East (Virginia) is the appropriate region. Just one Amazon EC2 instance is sufficient in the other regions, although you can apply the same technique to many regions at once.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/Tutorials.html>

NEW QUESTION 331

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your AWS-Solution-Architect-Associate Exam with Our Prep Materials Via below:

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>