



INSTALASI & KONFIGURASI SERVER LINUX DEBIAN 10

KELOMPOK 8



PRAISILIA PANDOH



JEVIDEO NELWAN



GLORIA NELWAN



SHINTA SUPIT



DAFTAR ISI

- Repository
- DHCP Server
- DNS Server
- FTP Server
- File Server
- WEB Server
- Mail Server
- Database server



INSTALASI & KONFIGURASI REPOSITORY

GLORIA



REPOSITORY

1. Cara konfigurasi repository yakni edit file `/etc/apt/sources.list` menggunakan text editor seperti nano.

```
# nano /etc/apt/sources.list
```

```
deb http://kartolo.sby.datautama.net.id/debian/ buster main contrib non-free
deb http://kartolo.sby.datautama.net.id/debian/ buster-updates main contrib
non-free
deb http://kartolo.sby.datautama.net.id/debian-security/ buster/updates main
contrib non-free
```

(Cari lokal repository di website)

REPOSITORY

2. Kemudian, salin link repository dan paste pada file tersebut. Namun sebelumnya *uncomment* Repo yang tidak dipakai menggunakan tanda # di awal karakter. Kemudian save dan keluar dengan cara tekan ctrl + x, y.

```
GNU nano 3.2 /etc/apt/sources.list Modified
#
# deb cdrom:[Debian GNU/Linux 10.1.0 _Buster_ - Official i386 DVD Binary-1 20190908-02:38]/ buster $
#deb cdrom:[Debian GNU/Linux 10.1.0 _Buster_ - Official i386 DVD Binary-1 20190908-02:38]/ buster c$
#deb http://security.debian.org/debian-security buster/updates main contrib
#deb-src http://security.debian.org/debian-security buster/updates main contrib
# buster-updates, previously known as 'volatile'
# A network mirror was not selected during install. The following entries
# are provided as examples, but you should amend them as appropriate
# for your mirror of choice.
#
# deb http://deb.debian.org/debian/ buster-updates main contrib
# deb-src http://deb.debian.org/debian/ buster-updates main contrib
deb http://kartolo.sby.datautama.net.id/debian/ buster main contrib non-free
deb http://kartolo.sby.datautama.net.id/debian/ buster-updates main contrib non-free
deb http://kartolo.sby.datautama.net.id/debian-security/ buster/updates main contrib non-free_
```

apt-get update

INSTALASI & KONFIGURASI DHCP SERVER

JEVIDEO



DHCP SERVER

1. Instalasi DHCP Server menggunakan perintah :

```
# apt-get install isc-dhcp-server
```

Ctrl + X, Y

2. Kemudian cek status menggunakan perintah :

```
# systemctl status isc-dhcp-server.service
```

DHCP SERVER

3. Letak file konfigurasi DHCP Server menggunakan perintah:

nano /etc/dhcp/dhcpd.conf

```
GNU nano 3.2 /etc/dhcp/dhcpd.conf
# dhcpd.conf
#
# Sample configuration file for ISC dhcpd
#
# option definitions common to all supported networks...
option domain-name "example.org";
option domain-name-servers ns1.example.org, ns2.example.org;

default-lease-time 600;
max-lease-time 7200;

# The ddns-updates-style parameter controls whether or not the server will
# attempt to do a DNS update when a lease is confirmed. We default to the
# behavior of the version 2 packages ('none', since DHCP v2 didn't
# have support for DDNS.)
ddns-update-style none;
```

```
GNU nano 3.2 /etc/dhcp/dhcpd.conf
# dhcpd.conf
#
# Sample configuration file for ISC dhcpd
#
# option definitions common to all supported networks...
#option domain-name "example.org";
#option domain-name-servers ns1.example.org, ns2.example.org;

#default-lease-time 600;
#max-lease-time 7200;

# The ddns-updates-style parameter controls whether or not the server will
# attempt to do a DNS update when a lease is confirmed. We default to the
# behavior of the version 2 packages ('none', since DHCP v2 didn't
# have support for DDNS.)
ddns-update-style none;
```

4. Ubah beberapa konfigurasi dengan menambahkan pagar (#) di depan script konfigurasi. Untuk yang pertama diubah adalah baris ke 7 sampai ke 11 karena pada konfigurasi di bawah akan muncul script yang sama sehingga tidak terjadi duplikasi script.

DHCP SERVER

5. Selanjutnya, temukan baris dengan script konfigurasi seperti berikut.

```
# A slightly different configuration for an internal subnet.
subnet 192.168.1.0 netmask 255.255.255.0 {
    range 192.168.1.2 192.168.1.50;
    option domain-name-servers 192.168.1.1;
    option domain-name "praisilia.tkj.id";
    option routers 192.168.1.1;
    option broadcast-address 192.168.1.254;
    default-lease-time 600;
    max-lease-time 7200;
}
```

6. Setelah berhasil menemukan baris yang dimaksud, hapus tanda pagar (#) di depan script tersebut mulai dari #subnet 10 ... sampai dengan #}. Sesuaikan dengan network masing-masing.

Ctrl + X, Y

DHCP SERVER

7. Kemudian, lakukan konfigurasi default interface untuk berbagi DHCP kepada client.

Ketik:

```
On what interfaces should the DHCP server (dhcpd) serve
Separate multiple interfaces with spaces,
INTERFACESv4="enp0s8"
INTERFACESv6=""
```

```
# nano /etc/default/isc-  
dhcp-server
```

8. Lalu pada bagian INTERFACESv4 sesuaikan dengan nama interface di server.

Ctrl + X, Y

9. Simpan konfigurasi, lalu restart dengan perintah:

```
# systemctl restart isc-dhcp-server.service
```

INSTALASI & KONFIGURASI

DNS SERVER

SHINTA



DNS SERVER

1. Masukkan index sumber instalasi bind 9 dengan perintah:

```
# apt-get install isc-dhcp-server
```

2. Install paket bind9

```
# apt install bind9 dnsutils
```

3. Pindah ke directory bind, lalu lakukan konfigurasi

```
# cd /etc/bind
```

DNS SERVER

4. Menambahkan file forward zone dan reverse zone dengan perintah berikut:

```
/etc/bind# nano named.conf.default-zones
```

```
zone "praisilia.com" {  
    type master;  
    file "/etc/bind/db.192";  
};  
  
zone "20.168.192.in-addr.arpa" {  
    type master;  
    file "/etc/bind/db.192";  
};_
```

DNS SERVER

5. Copy file db.nama dan db.ip

```
root@debian:/etc/bind# cp db.local db.praisilia
root@debian:/etc/bind# cp db.127 db.192
```

6. Konfigurasi db.nama

```
root@debian:/etc/bind# nano db.praisilia_
```

7. Ubah isi file dan konfigurasi

```
;
; BIND data file for local loopback interface
;
$TTL      604800
@         IN      SOA     praisilia.com. root.praisilia.com. (
                        2      ; Serial
                        604800 ; Refresh
                        86400  ; Retry
                        2419200 ; Expire
                        604800 ) ; Negative Cache TTL
;
@         IN      NS      praisilia.com.
@         IN      A       192.168.20.1
www       IN      A       192.168.20.1_
```

DNS SERVER

8. Konfigurasi db.ip

```
root@debian:/etc/bind# nano db.192
```

9. Ubah isi file dan konfigurasi

```
;  
; BIND reverse data file for local loopback interface  
;  
$TTL      604800  
@         IN      SOA      praisilia.com. root.praisilia.com. (  
                                1          ; Serial  
                                604800     ; Refresh  
                                86400      ; Retry  
                                2419200    ; Expire  
                                604800 )   ; Negative Cache TTL  
;  
@         IN      NS       praisilia.com.  
1         IN      PTR      praisilia.com.
```

DNS SERVER

10. Konfigurasi file resolv.conf

```
root@debian:/etc/bind# nano /etc/resolv.conf
```

11. Ubah dan konfigurasi

```
search praisilia.com  
name server 192.168.20.1
```

12. Lakukan restart layanan bind9

```
root@debian:/etc/bind# /etc/init.d/bind9 restart
```

DNS SERVER

13. Lakukan pengujian DNS Server dengan perintah berikut:

```
C:\user\praisilia>nslookup praisilia.com
Server: praisilia.com
Address: 192.168.20.1

Non-authoritative answer:
Name: praisilia.com
Addresses: 192.168.20.1

C:\user\praisilia>
```

15. Lakukan pengetesan dengan perintah ping

14. Selanjutnya lakukan pengujian client pada command prompt

```
root@debian:/etc/bind# nslookup praisilia.com
Server: 192.168.20.1
Address: 192.168.20.1#53

Name: praisilia.com
Address: 192.168.20.1
```

```
C:\user\praisilia>ping 192.168.20.1

Pinging 192.168.20.1 with 32 bytes of data:
Reply from 192.168.20.1: bytes=32 time<1ms TTL=128
Reply from 192.168.20.1: bytes=32 time<1ms TTL=128
Reply from 192.168.20.1: bytes=32 time<1ms TTL=128
Reply from 192.168.20.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

INSTALASI & KONFIGURASI FTP SERVER

GLORIA



FTP SERVER

1. Install ProFTPD di server dengan perintah:

```
# apt-get install proftpd
```

```
root@debian:~# apt-get install proftpd
Reading package lists... Done
Building dependency tree
Reading state information... Done
Note, selecting 'proftpd-core' instead of 'proftpd'
proftpd-core is already the newest version (1.3.7a+dfsg-12+deb11u2).
0 upgraded, 0 newly installed, 0 to remove and 183 not upgraded.
root@debian:~# _
```

FTP SERVER

2. Setelah instalasi sukses, edit file utama konfigurasi ProFTPD yang terletak di proftpd.conf.

```
# nano /etc/proftpd/proftpd.conf
```

- Ubah ServerName

```
ServerName "Debian"  
# Set to inetd only if you would run  
# Read README.Debian for more informa
```



```
ServerName "praisilia.com"  
# Set to inetd only if you would run  
# Read README.Debian for more informa
```

- Hapus tanda pagar pada DefaultRoot

```
# Use this to jail all users in their homes  
DefaultRoot_
```

FTP SERVER

3. Setelah melakukan perubahan, selalu restart service menggunakan superuser/root untuk menjalankan perintah:

```
# etc/init.d/proftpd restart
```

```
root@debian:~# /etc/init.d/proftpd restart  
[ ok ] Restarting proftpd (via systemctl): proftpd.service.  
root@debian:~#
```

INSTALASI & KONFIGURASI FILE SERVER

PRAISILIA



FILE SERVER

1. Install Samba dengan mengetik perintah:

```
# apt install samba -y
```

2. Pilih Yes kemudian enter

```
| Samba server and utilities |
If your computer gets IP address information from a DHCP server on the network, the DHCP
server may also provide information about WINS servers ("NetBIOS name servers") present on
the network. This requires a change to your smb.conf file so that DHCP-provided WINS
settings will automatically be read from /var/lib/samba/dhcp.conf.

The dhcp-client package must be installed to take advantage of this feature.

Modify smb.conf to use WINS settings from DHCP?

<Yes> <No>
```

FILE SERVER

```
Updating certificates in /etc/ssl/certs...
0 added, 0 removed; done.
Running hooks in /etc/ca-certificates/update.d
done.
root@debian:~# mkdir /home/praisilia/share
root@debian:~# chmod 777 /home/praisilia/share
```

4. Lakukan konfigurasi pada Samba dengan perintah:

```
# nano /etc/samba/smb.conf
```

5. Setelah selesai konfigurasi, restart dengan perintah:



3. Buat folder yang akan di-share dan atur juga hak aksesnya, perhatikan di samping.

```
[share]
path = /home/praisilia/share
browseable = yes
writeable = yes
read only = no
public = yes
create mode = 0777
directory mode = 0777
```

```
# /etc/init.d/samba-ad-dc restart
```

FILE SERVER


6. Selanjutnya dapat dicek pada komputer client. Namun, sebelum itu, setting IP Address pada komputer client.

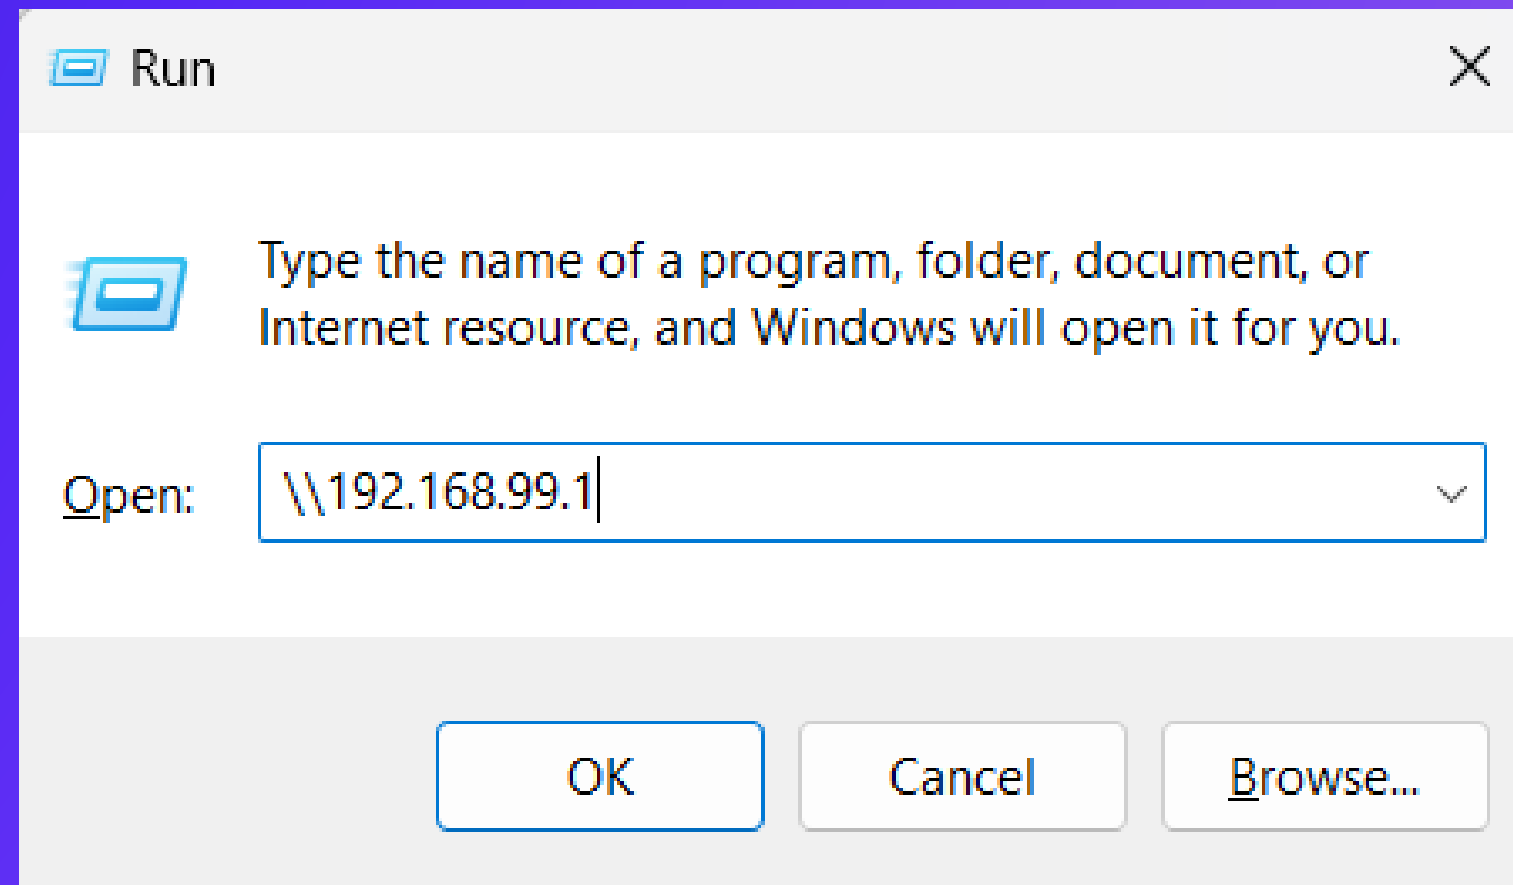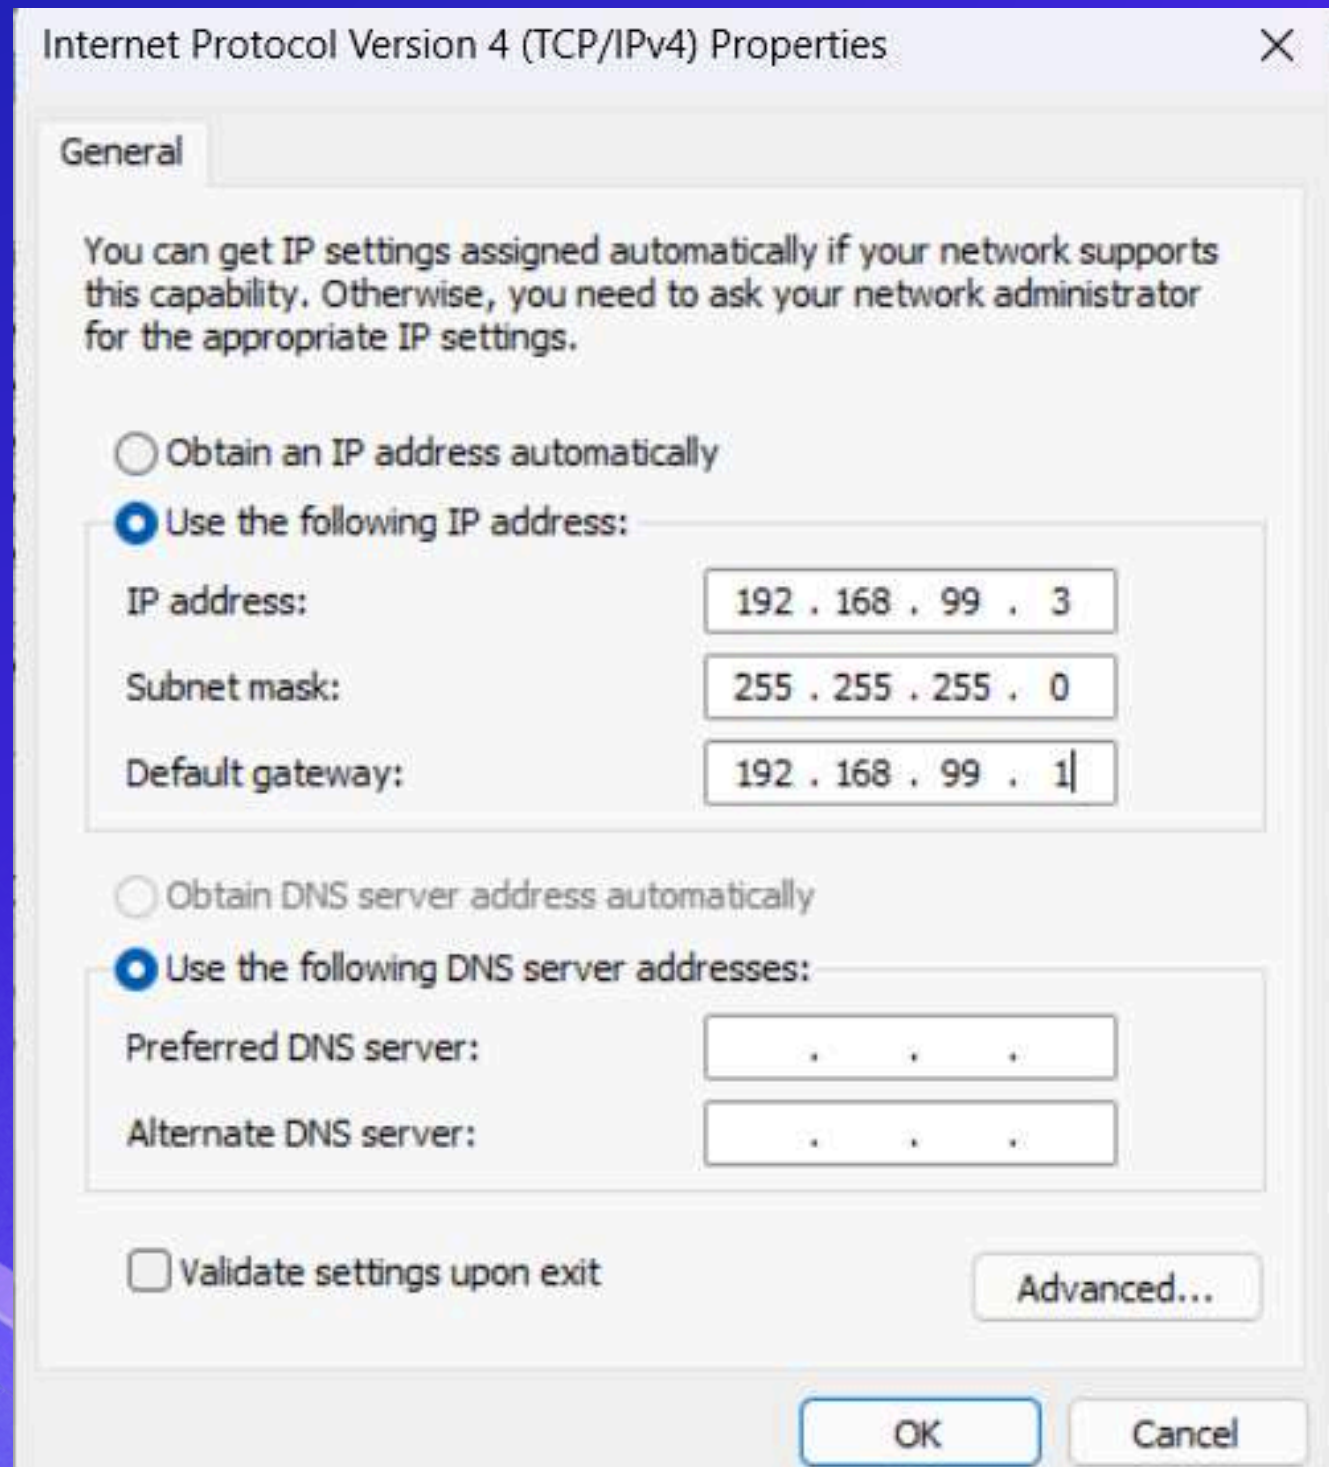

7. Akses file sharing dari server dengan tekan tombol Windows + R. Lalu masukkan IP Server \\192.168.99.1

FILE SERVER

8. Konfigurasi Samba Server telah berhasil dilakukan.

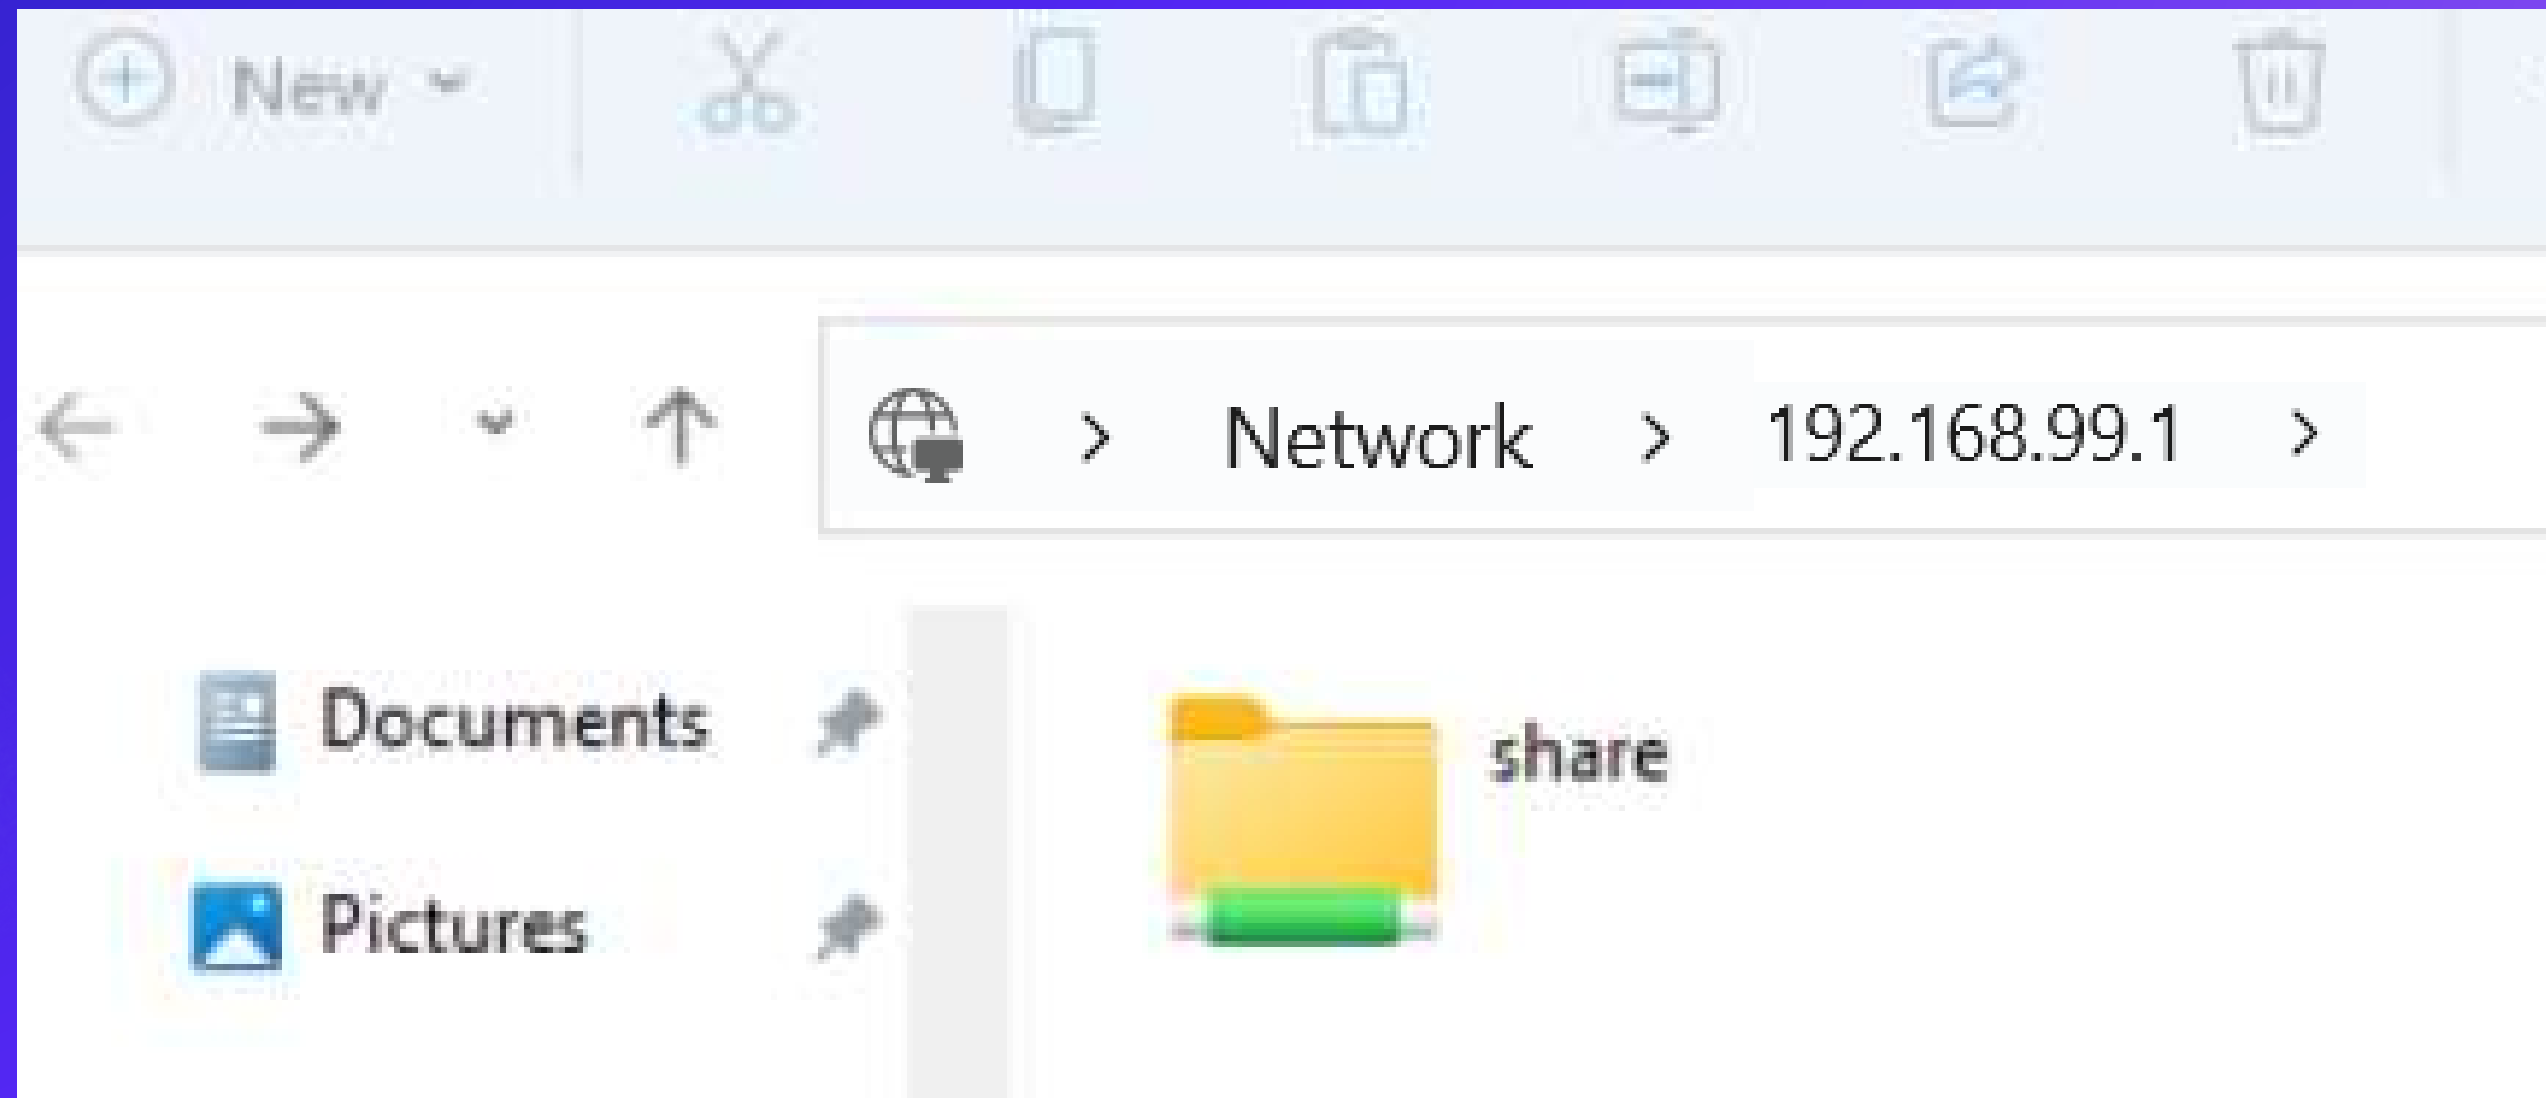

INSTALASI & KONFIGURASI WEB SERVER

JEVIDEO



WEB SERVER

1. Install paket apache2 dengan perintah:

```
root@debian:~# apt install apache2
```

2. Masuk ke folder konfigurasi file testing (index.html)

```
root@debian:~# cd /var/www/  
root@debian:/var/www#
```

```
GNU nano 3.2 index.htm  
  
<html>  
<head>  
<title> SMK Bisa Web Server Linux Debian</title>  
</head>  
<body>  
<center>  
Hello dek<br>  
Praisilia Web Server test<br>  
<marquee>Created by : Praisilia</marquee>  
</center>  
</body>  
</html>
```

3. Isi file testing tersebut.

WEB SERVER

4. Masuk ke folder konfigurasi virtual host

```
root@debian:/var/www# cd /etc/apache2/sites-enabled/_
```

5. Masuk ke folder konfigurasi virtual host.

```
root@debian:/etc/apache2/sites-enabled# nano 000-default.conf
```

6. Sesuaikan IP dan nama servernya

```
GNU nano 3.2                                000-default.conf
<VirtualHost 192.168.99.1:80>
# The ServerName directive sets the request scheme, hostname and port that
# the server uses to identify itself. This is used when creating
# redirection URLs. In the context of virtual hosts, the ServerName
# specifies what hostname must appear in the request's Host: header to
# match this virtual host. For the default virtual host (this file) this
# value is not decisive as it is used as a last resort host regardless.
# However, you must set it for any further virtual host explicitly.
#ServerName www.example.com

ServerAdmin webmaster@praisilia.com
DocumentRoot /var/www/
```

WEB SERVER

7. Lakukan restart pada apache2

```
root@debian:/etc/apache2/sites-enabled# /etc/init.d/apache2 restart  
[ ok ] Restarting apache2 (via systemctl): apache2.service.  
root@debian:/etc/apache2/sites-enabled# _
```

8. Pengujian web server di client menggunakan web browser



INSTALASI & KONFIGURASI MAIL SERVER

DEO SHINTA



MAIL SERVER

1. Lakukan install aplikasi mail server dan client dengan perintah.

```
root@praisilia:~# apt-get install postfix courier-pop courier-imap
```

Klik ok.

Configuring courier-base

SSL certificate required


POP and IMAP over SSL requires a valid, signed, X.509 certificate. During the installation of courier-pop or courier-imap, a self-signed X.509 certificate will be generated if necessary.

For production use, the X.509 certificate must be signed by a recognized certificate authority, in order for mail clients to accept the certificate. The default location for this certificate is /etc/courier/pop3d.pem or /etc/courier/imapd.pem.

<Ok>

MAIL SERVER

Pada tampilan ini pilih internet site lalu klik "ok"

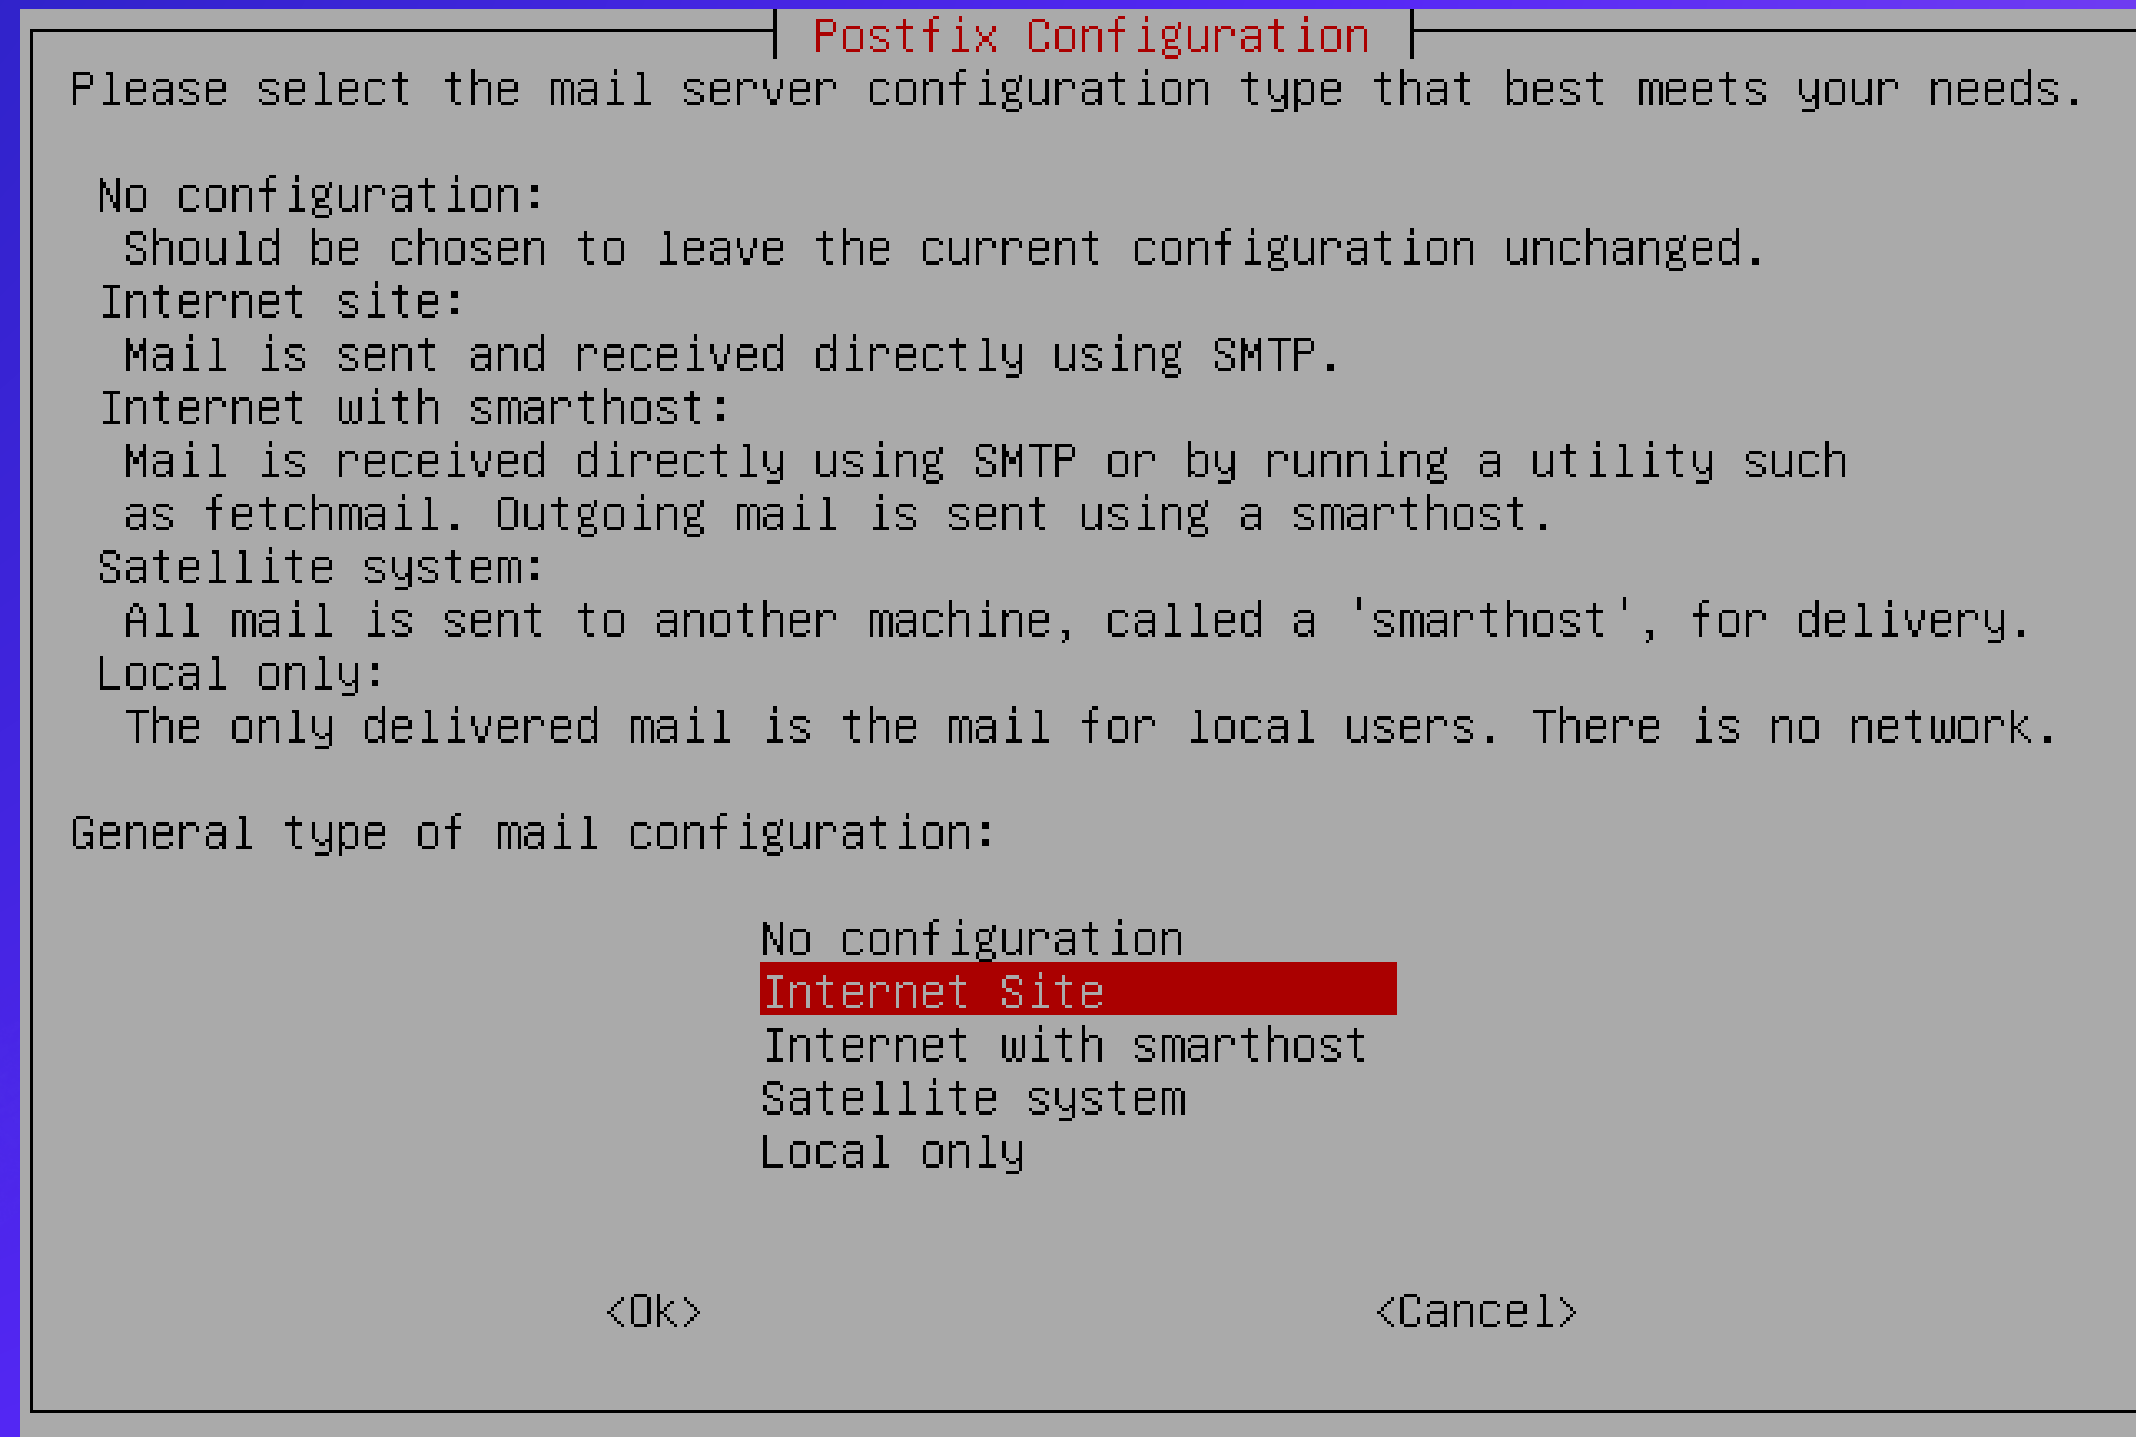

MAIL SERVER

Masukkan Mail Name

Postfix Configuration

The "mail name" is the domain name used to "qualify" `_ALL_` mail addresses without a domain name. This includes mail to and from `<root>`: please do not make your machine send out mail from `root@example.org` unless `root@example.org` has told you to.

This name will also be used by other programs. It should be the single, fully qualified domain name (FQDN).

Thus, if a mail address on the local host is `foo@example.org`, the correct value for this option would be `example.org`.

System mail name:

praisilia.com

<Ok>

<Cancel>

MAIL SERVER

2. Lakukan konfigurasi postfix dengan mengetik perintah

```
root@praisilia:~# nano /etc/postfix/main.cf
```

3. Tambahkan konfigurasi ini di barisan paling bawah


```
home_mailbox = Maildir/
```

4. Berikutnya lakukan perintah berikut pada terminal


```
root@praisilia:/etc/apache2/sites-enabled# dpkg-reconfigure postfix
```

MAIL SERVER


5. Pada konfigurasi pilih internet site.

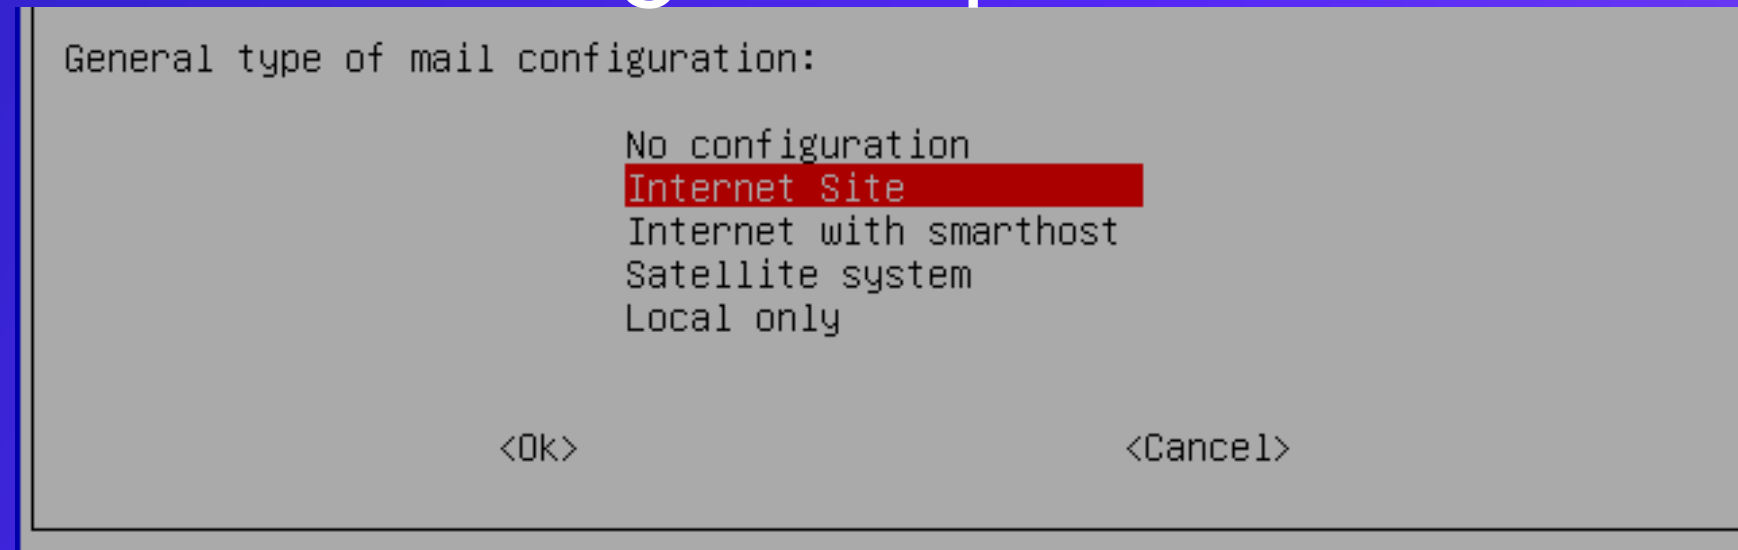


6. Masukkan main name sesuai DNS yang dibuat.

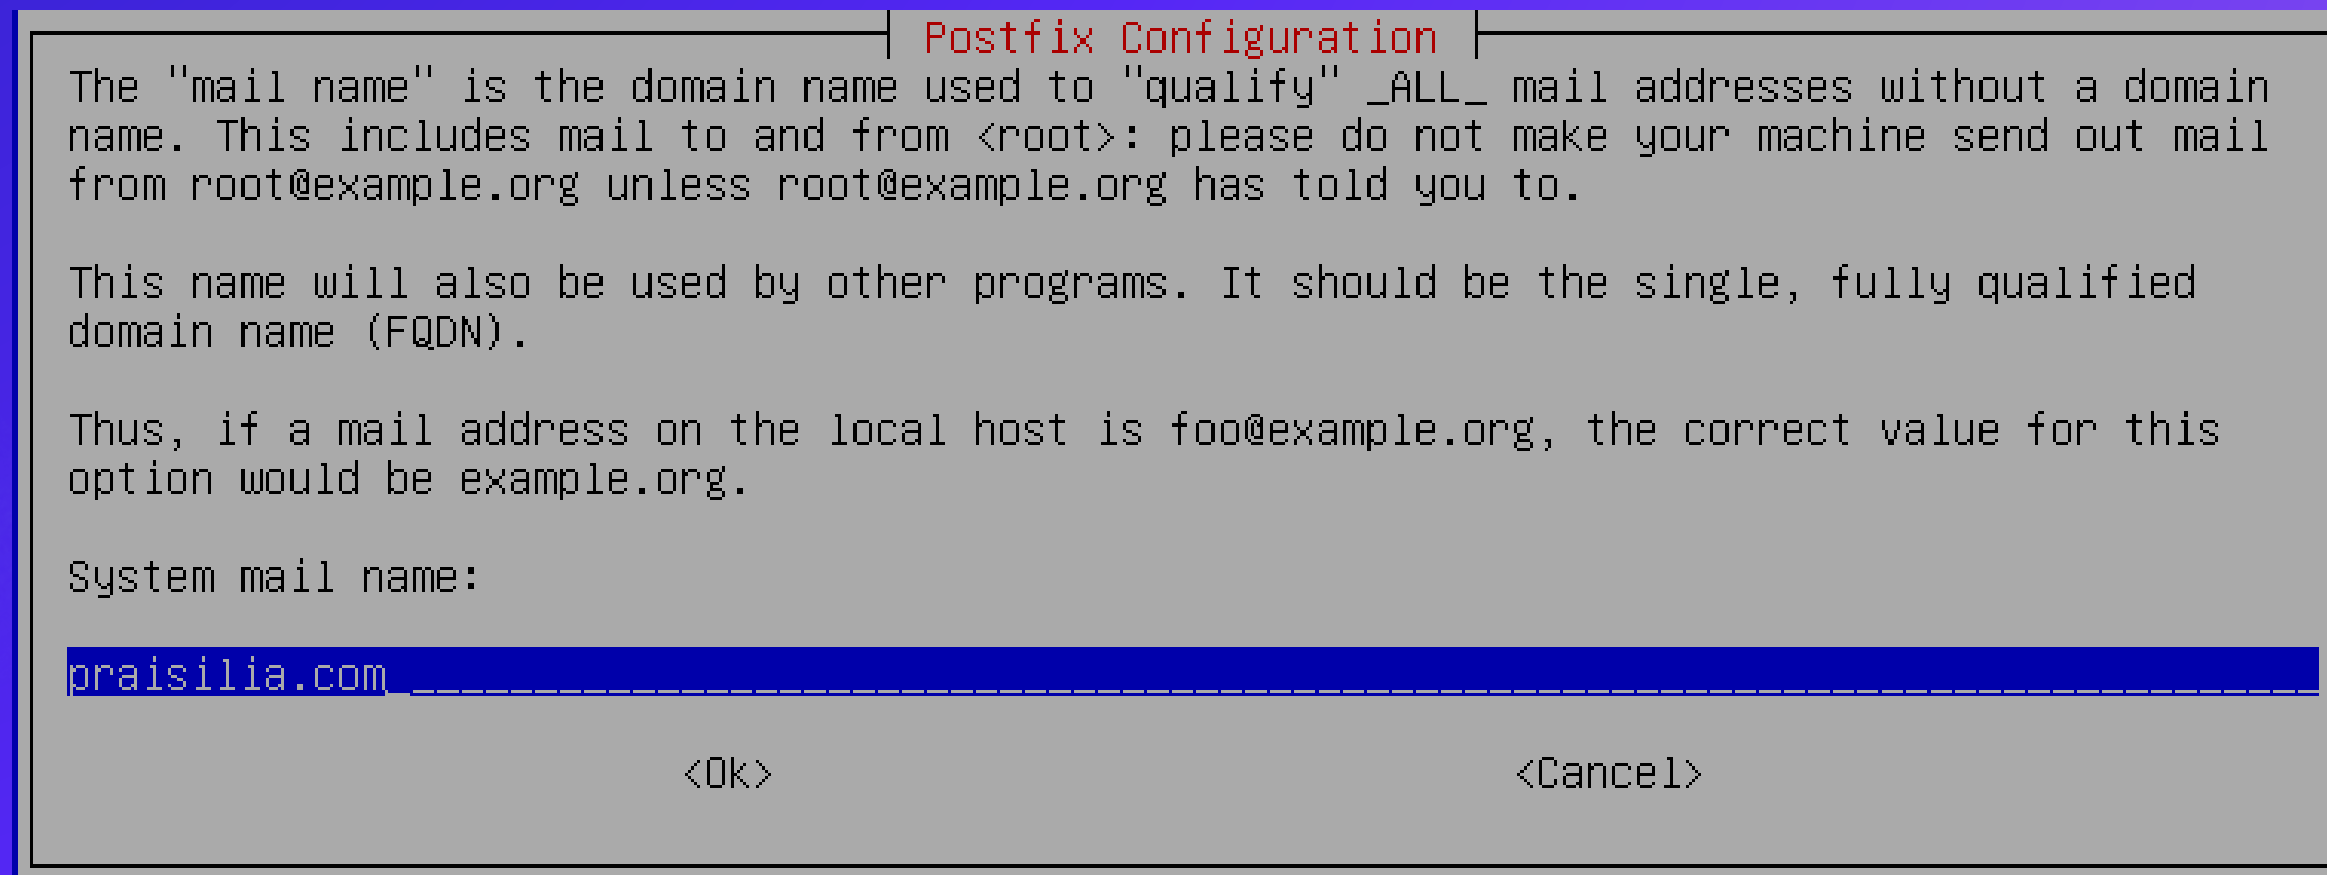

7. Kemudian muncul Force synchronous updates on mail queue, klik saja NO

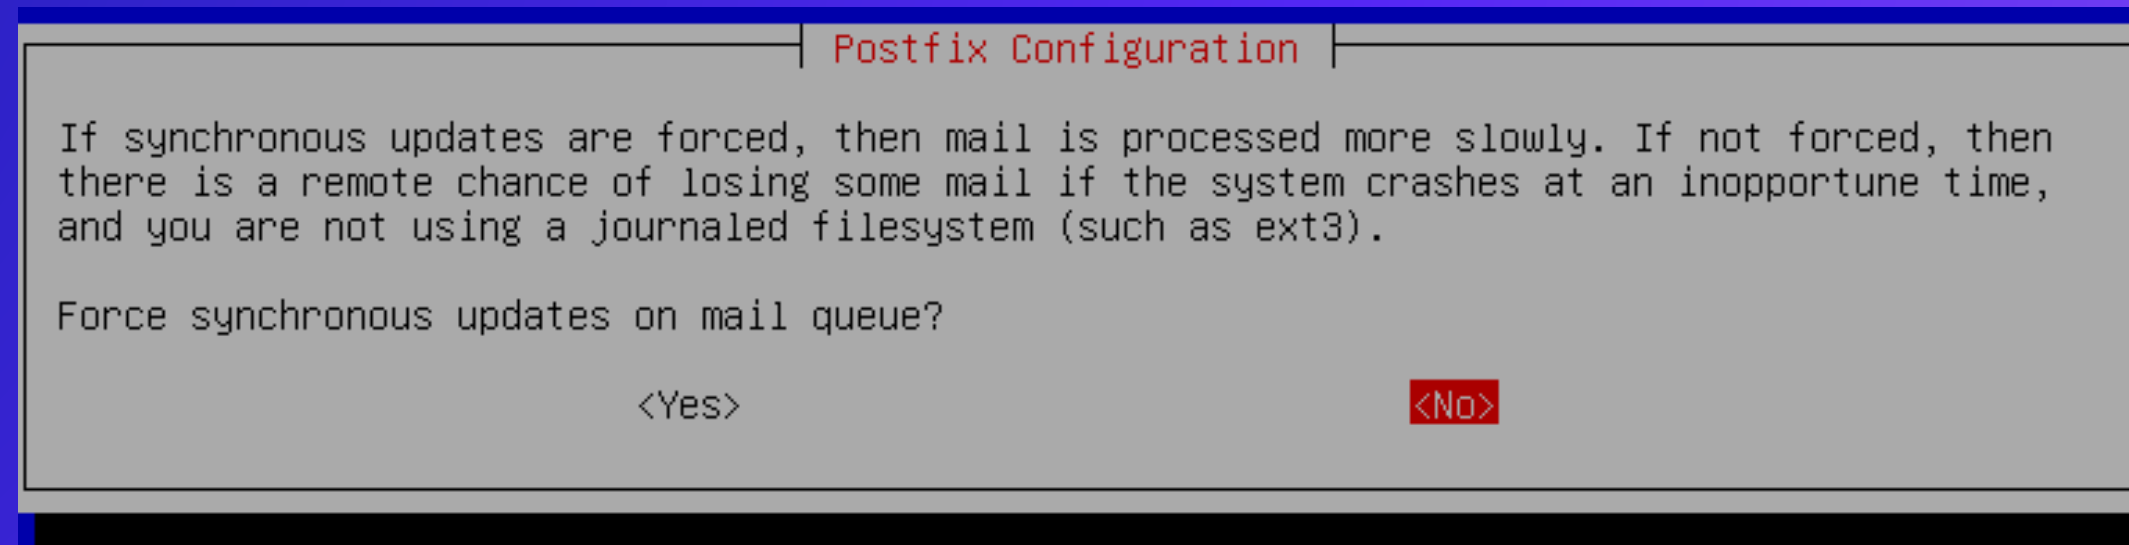

8. Setelah itu muncul local network, tambahkan 0.0.0.0/0 di baris terakhir

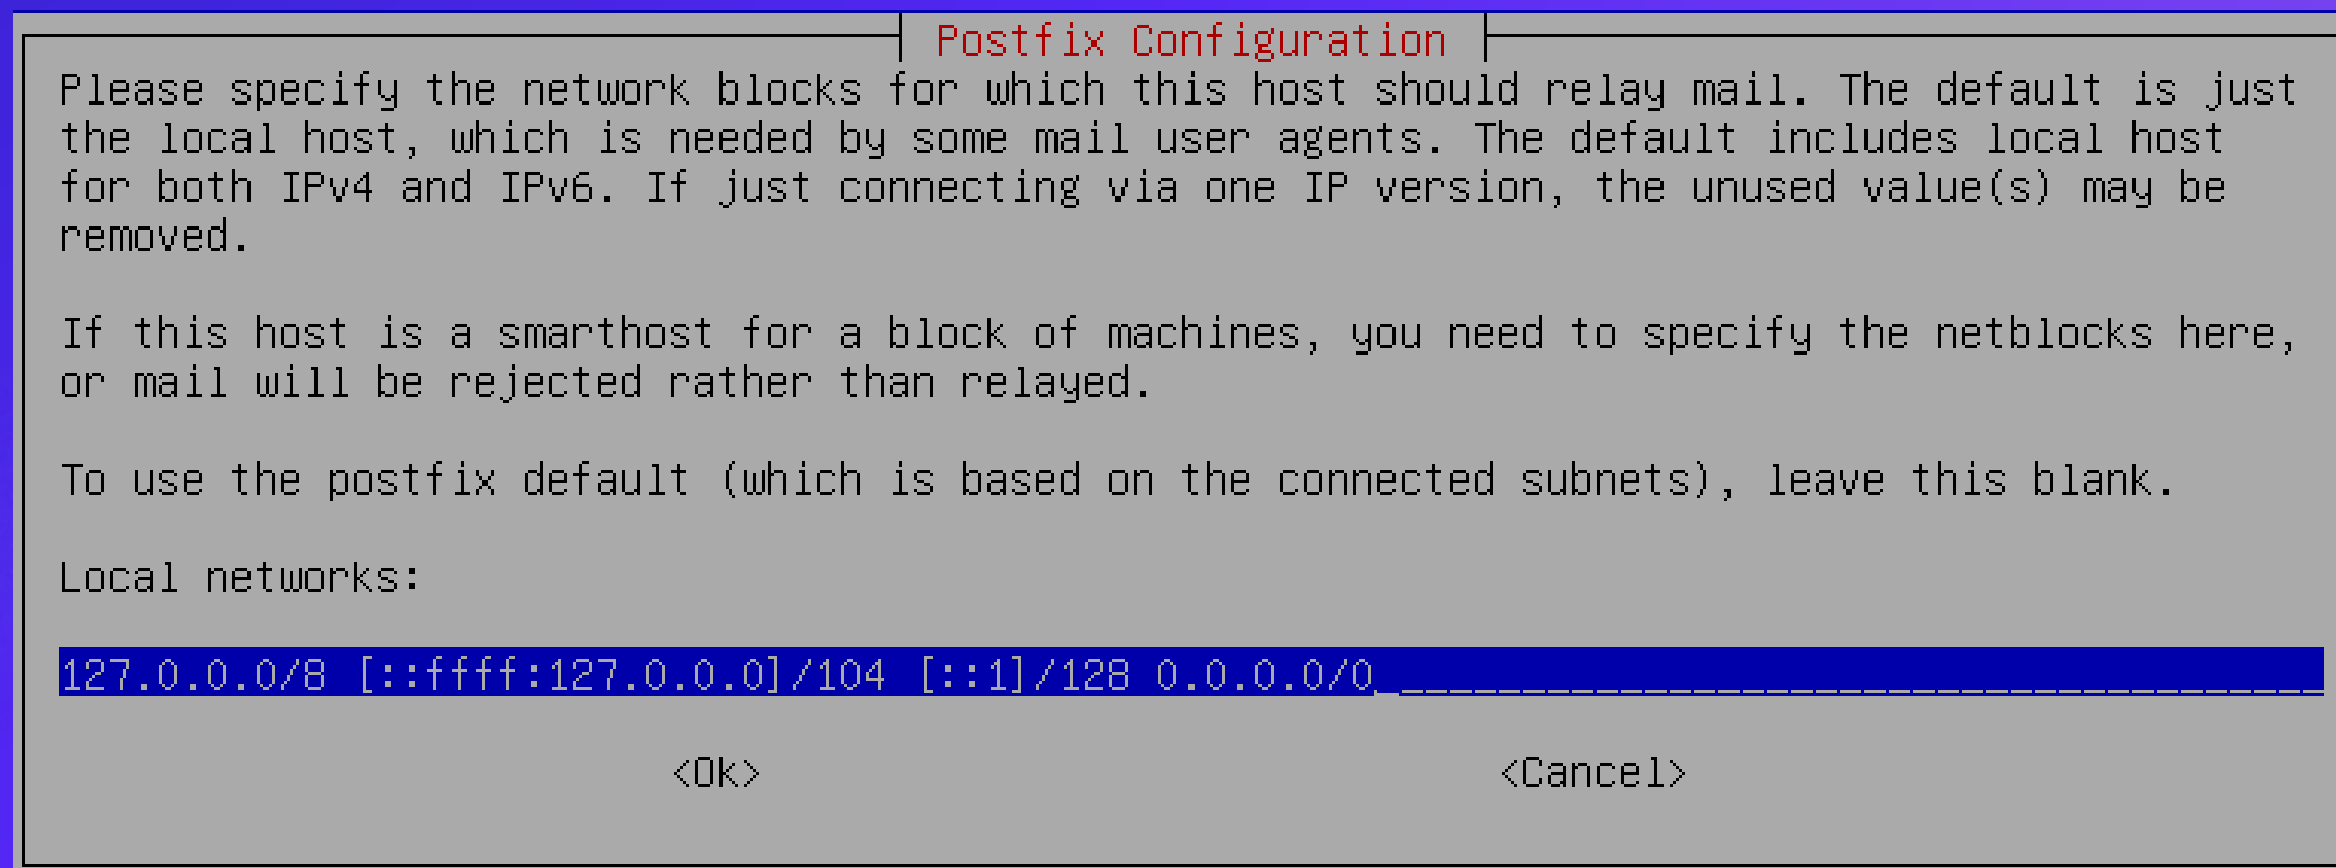

9. Pada mailbox limit, biarkan saja bernilai 0 lalu OK

Postfix Configuration

Please specify the limit that Postfix should place on mailbox files to prevent runaway software errors. A value of zero (0) means no limit. The upstream default is 51200000.

Mailbox size limit (bytes):

0

<Ok> <Cancel>

10. Pada local address extension, biarkan saja bernilai default lalu OK

Postfix Configuration

Please choose the character that will be used to define a local address extension.

To not use address extensions, leave the string blank.

Local address extension character:

+

<Ok> <Cancel>

MAIL
SERVER

MAIL SERVER

11. Berikutnya pilih ipv4



MAIL SERVER

12. Setelah berhasil menginstall dan konfigurasi mail server (postfix, courier-pop, courier-imap) kita lakukan restart pada masing-masing service dengan perintah:

```
root@praisilia:~# /etc/init.d/postfix restart
[ ok ] Restarting postfix (via systemctl): postfix.service.
root@praisilia:~# /etc/init.d/courier-pop restart
[ ok ] Restarting courier-pop (via systemctl): courier-pop.service.
root@praisilia:~# /etc/init.d/courier-imap restart
[ ok ] Restarting courier-imap (via systemctl): courier-imap.service.
root@praisilia:~# courier-imap.service
```

MAIL SERVER

13. Berikutnya kita akan membuat 2 User baru untuk proses melakukan saling mengirim email. Lakukan dengan perintah seperti berikut:

```
root@praisilia:~# adduser satu
Adding user `satu' ...
Adding new group `satu' (1001) ...
Adding new user `satu' (1001) with group `satu' ...
Creating home directory `/home/satu' ...
Copying files from `/etc/skel' ...
New password:
Retype new password:
passwd: password updated successfully
Changing the user information for satu
Enter the new value, or press ENTER for the default
    Full Name []:
    Room Number []:
    Work Phone []:
    Home Phone []:
    Other []:
Is the information correct? [Y/n] y
```

```
root@praisilia:~# adduser dua
Adding user `dua' ...
Adding new group `dua' (1002) ...
Adding new user `dua' (1002) with group `dua' ...
Creating home directory `/home/dua' ...
Copying files from `/etc/skel' ...
New password:
Retype new password:
passwd: password updated successfully
Changing the user information for dua
Enter the new value, or press ENTER for the default
    Full Name []:
    Room Number []:
    Work Phone []:
    Home Phone []:
    Other []:
Is the information correct? [Y/n] y_
```

14. Lakukan install aplikasi mail server dan client

```
root@praisilia:/etc/apache2/sites-enabled# apt-get install squirrelmail_
```

15. Berikutnya, karena squirrelmail terhubung dengan web server atau apache, maka kita akan menambahkan beberapa sintak pada file apache2.conf

```
root@praisilia:/etc/apache2/sites-enabled# nano /etc/apache2/apache2.conf
```

Setelah file terbuka, tambahkan konfigurasi di paling bawah file

```
# Include of directories ignores editors' and dpkg's backup files,  
# see README.Debian for details.  
  
# Include generic snippets of statements  
IncludeOptional conf-enabled/*.conf  
  
# Include the virtual host configurations:  
IncludeOptional sites-enabled/*.conf  
  
# vim: syntax=apache ts=4 sw=4 sts=4 sr noet  
Include "etc/squirrelmail/apache.conf"
```

MAIL SERVER

MAIL SERVER

16. Untuk membuat mail server ini bisa dilihat dengan browser maka kita akan membuat sebuah shortcut dengan perintah:

```
root@praisilia:/etc/apache2/sites-enabled# ln -s /usr/share/squirrelmail/ /var/www/mail
```

17. Jika sudah berikutnya tambahkan file pada folder apache2, lakukan dengan pindah ke folder :

```
root@praisilia:/etc/apache2/sites-enabled# cd /etc/apache2/sites-available/_
```

18. Berikutnya lakukan perintah untuk meng-copy file default ke mail_praisilia.conf, dengan perintah:

```
root@praisilia:/etc/apache2/sites-available# cp 000-default.conf mail_praisilia.conf
```

MAIL SERVER

19. Jika sudah, buka file mail_praisilia.conf dengan perintah:

```
root@praisilia:/etc/apache2/sites-available# nano mail_praisilia.conf
```

Lalu tambahkan sesuai dengan yang diberi kotak.

```
<VirtualHost 192.168.99.1:80>
# The ServerName directive sets the request scheme, hostname and port that
# the server uses to identify itself. This is used when creating
# redirection URLs. In the context of virtual hosts, the ServerName
# specifies what hostname must appear in the request's Host: header to
# match this virtual host. For the default virtual host (this file) this
# value is not decisive as it is used as a last resort host regardless.
# However, you must set it for any further virtual host explicitly.
#ServerName www.example.com
```

```
ServerAdmin webmaster@praisilia.com
ServerName praisilia.com
ServerAlias mail.praisilia.com
DocumentRoot /usr/share/squirrelmail/
```

MAIL SERVER

20. Untuk tahap berikutnya yaitu kita akan mengaktifkan mail_praisilia.conf dengan perintah

```
root@praisilia:/etc/apache2/sites-available# a2ensite mail_praisilia.conf
Enabling site mail_praisilia.
To activate the new configuration, you need to run:
  systemctl reload apache2
root@praisilia:/etc/apache2/sites-available#
```

MAIL SERVER


20. Testing Mail Server dengan Squirrelmail

Untuk melakukan testing, buka sesuai dengan alamat dns yang sudah dibuat.




MAIL SERVER

Disini saya menggunakan 2 mode untuk testing antara 2 user yaitu menggunakan tab biasa dan tab penyamaran dari browser

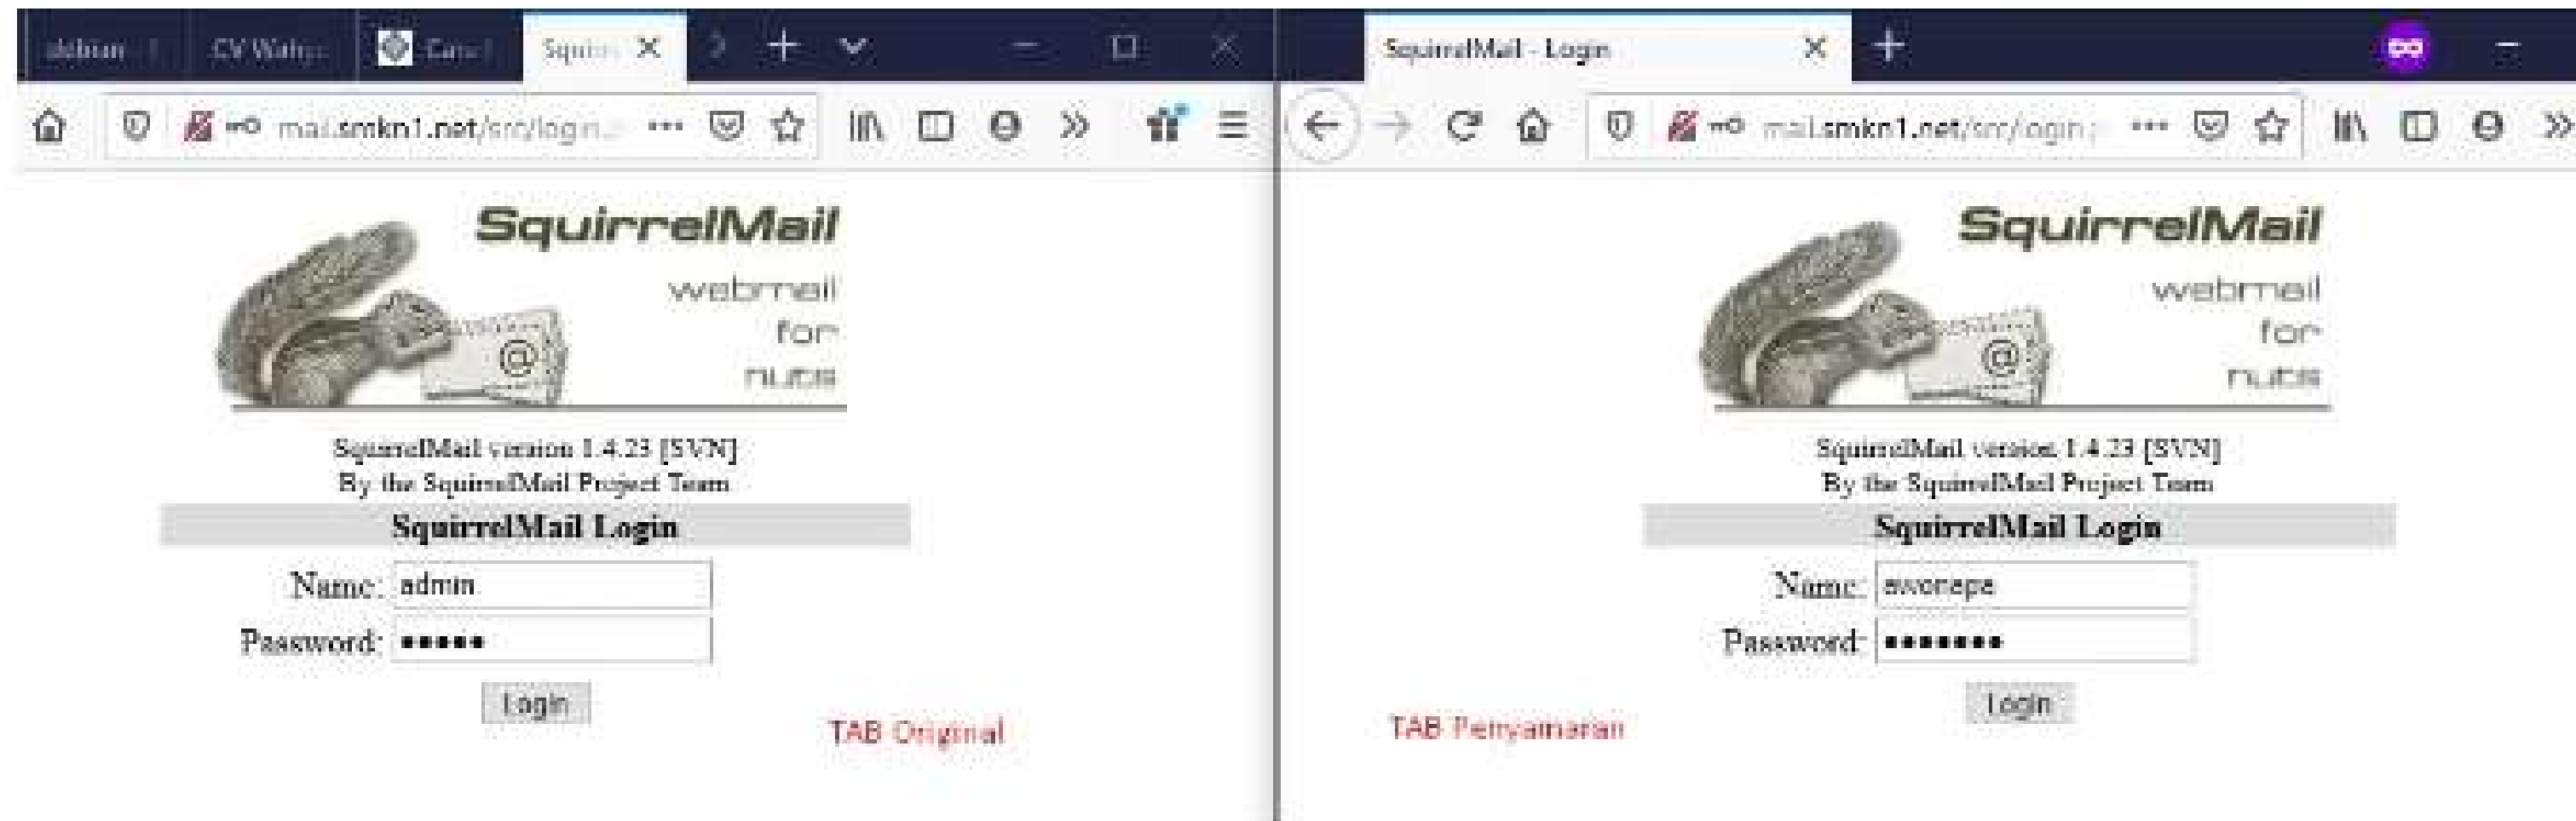


Berikutnya adalah pengiriman email antara 2 user.

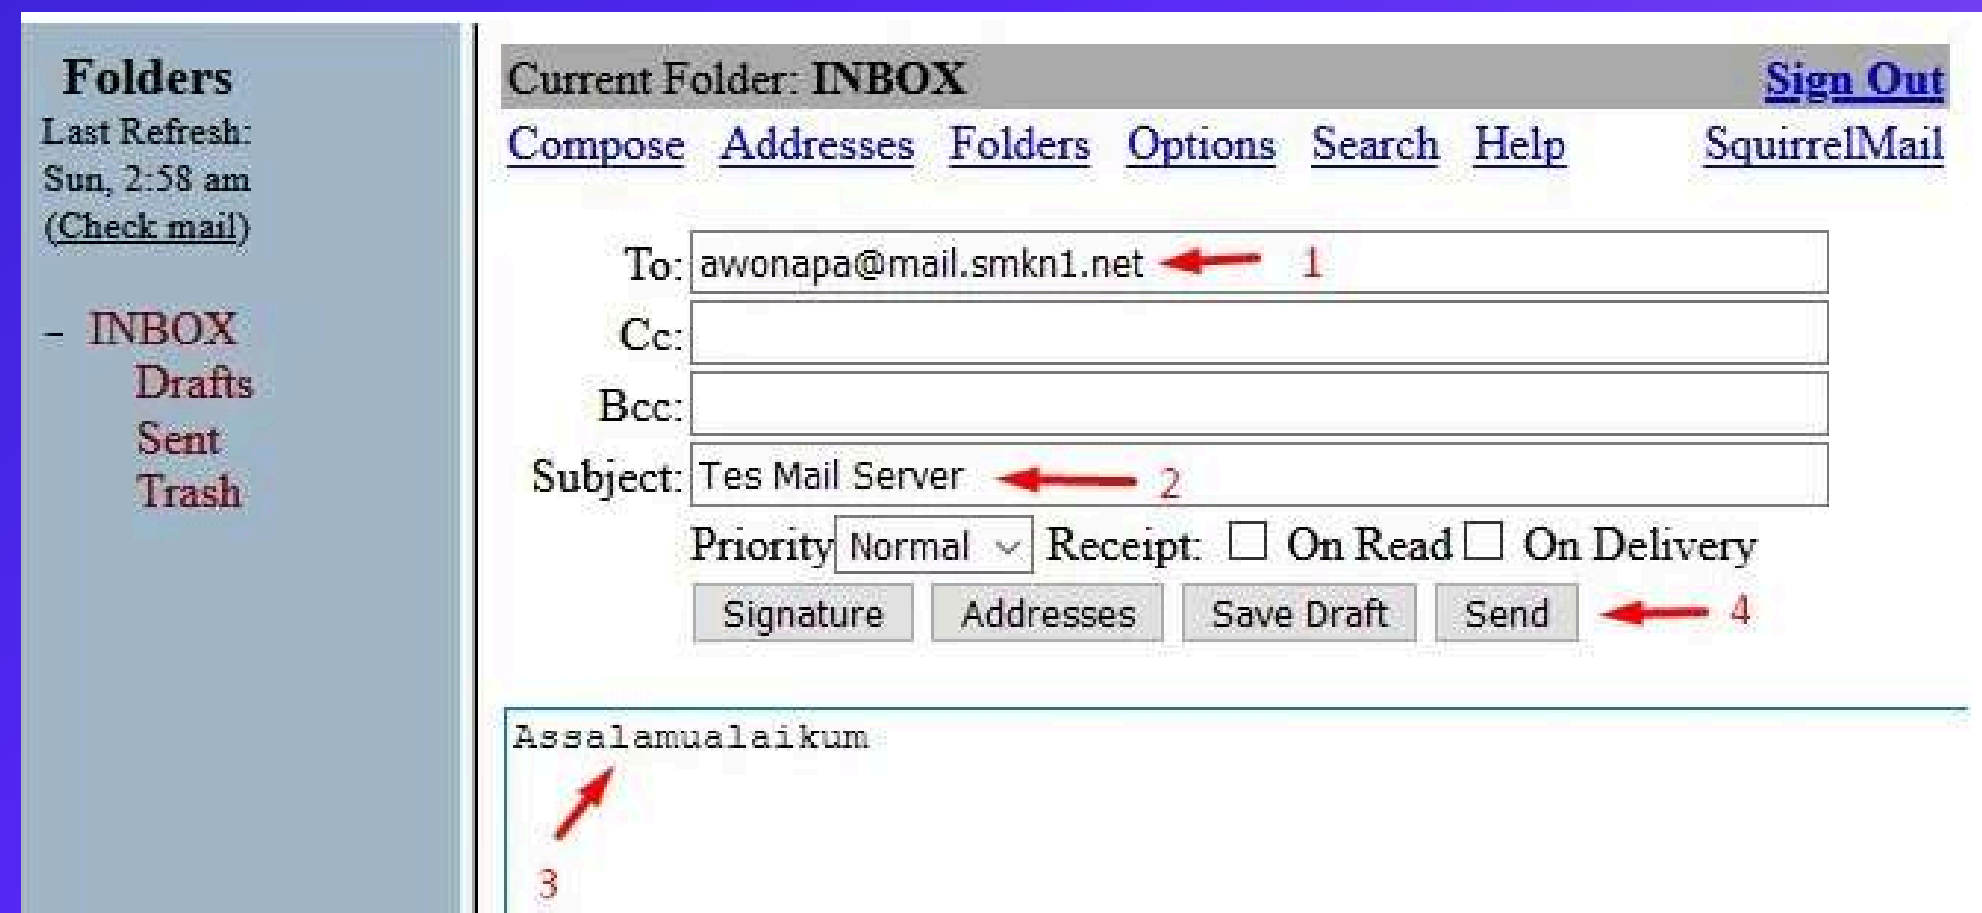


MAIL
SERVER

Jika sudah terikirim, bisa dilihat di menu sent

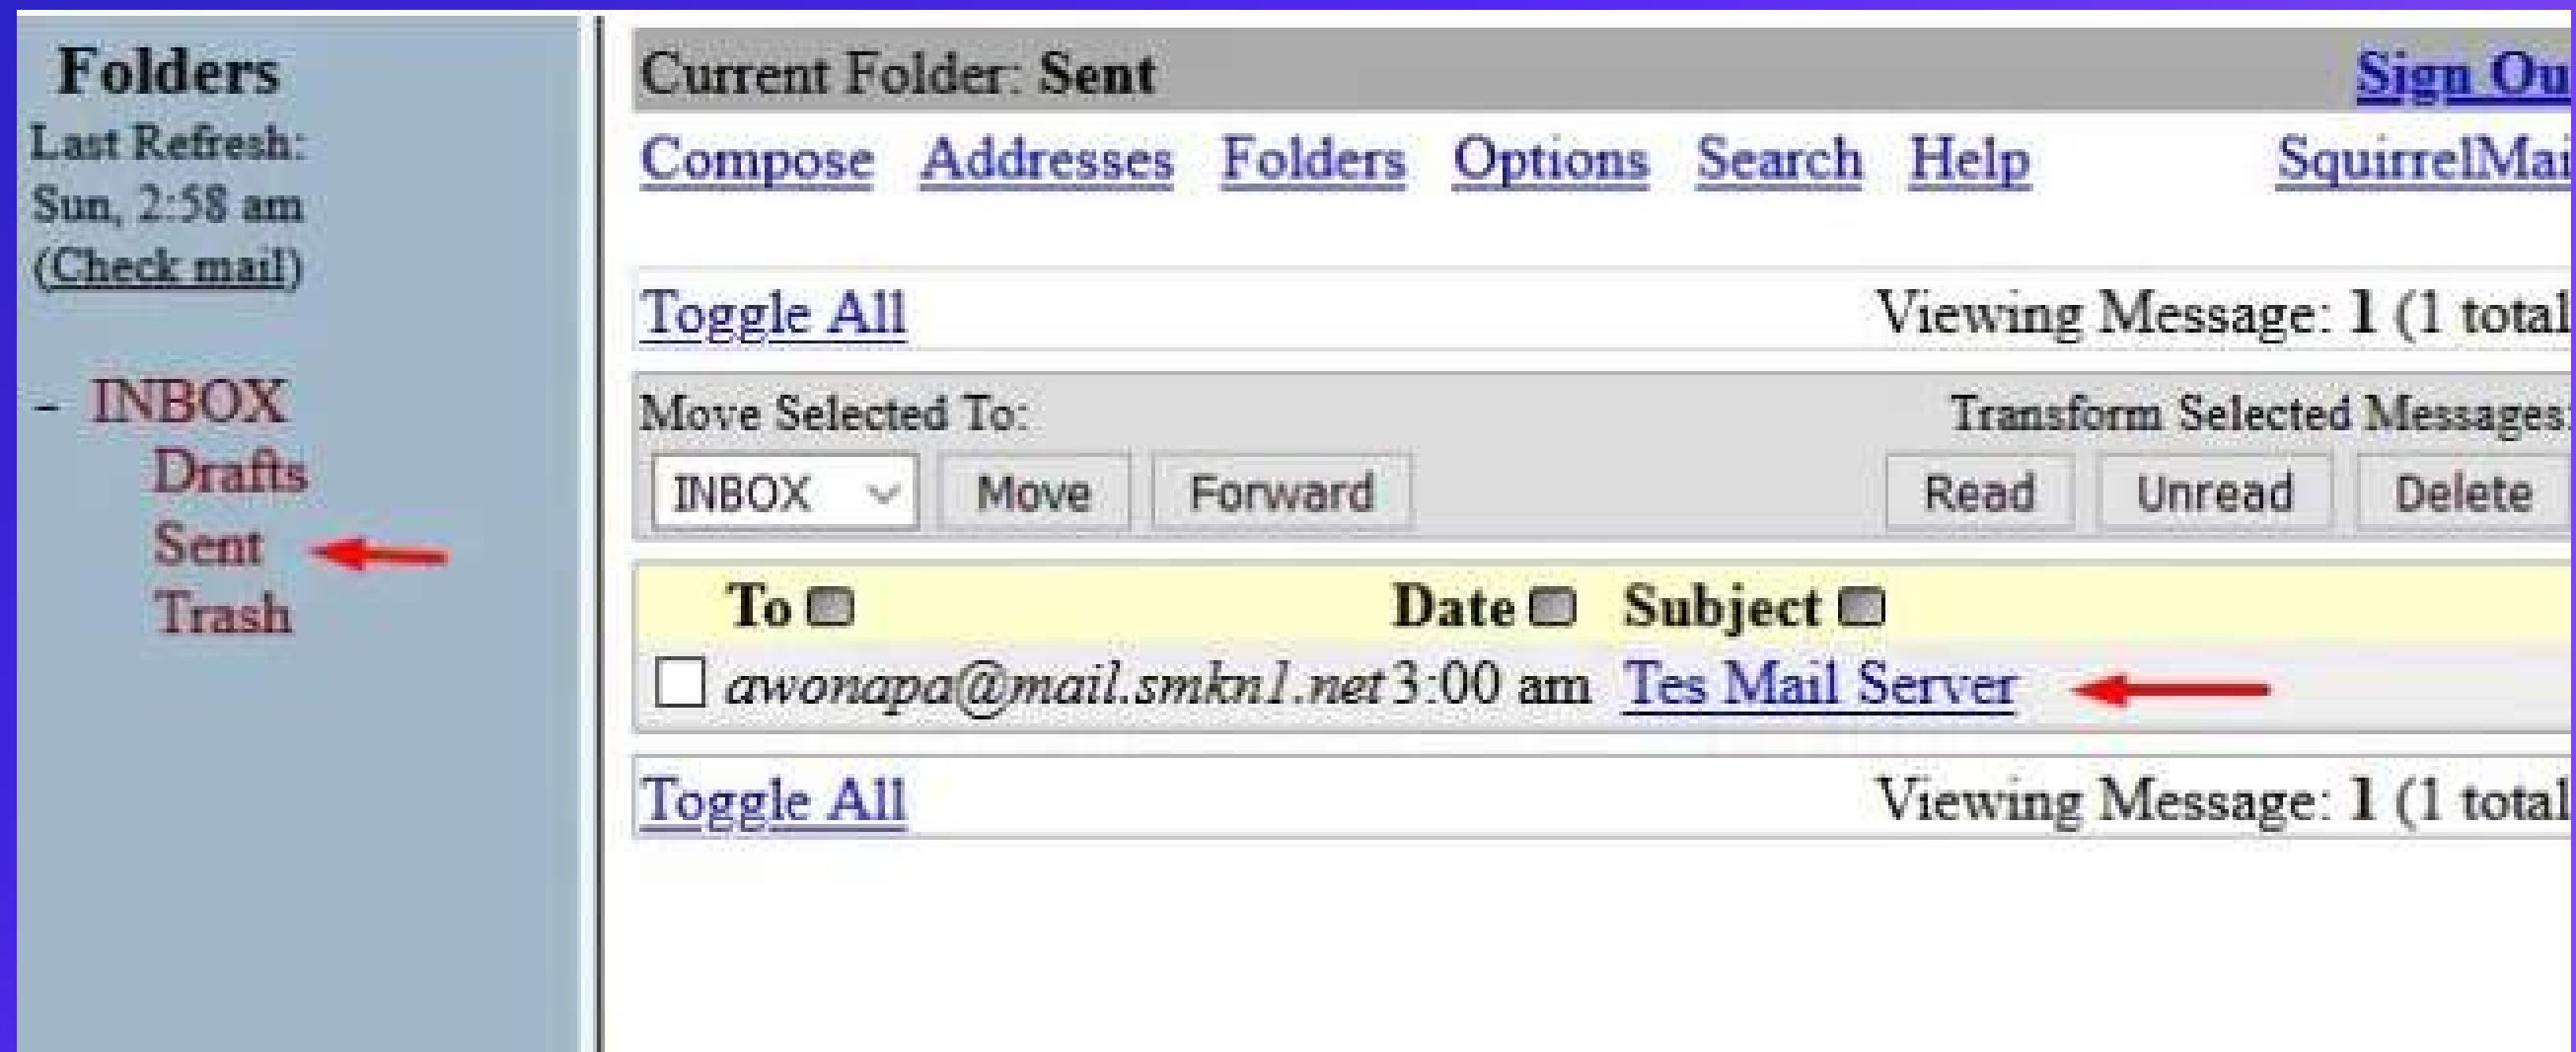

MAIL SERVER

Berikut ini adalah hasil dari kedua interaksi menggunakan email antara 2 user.

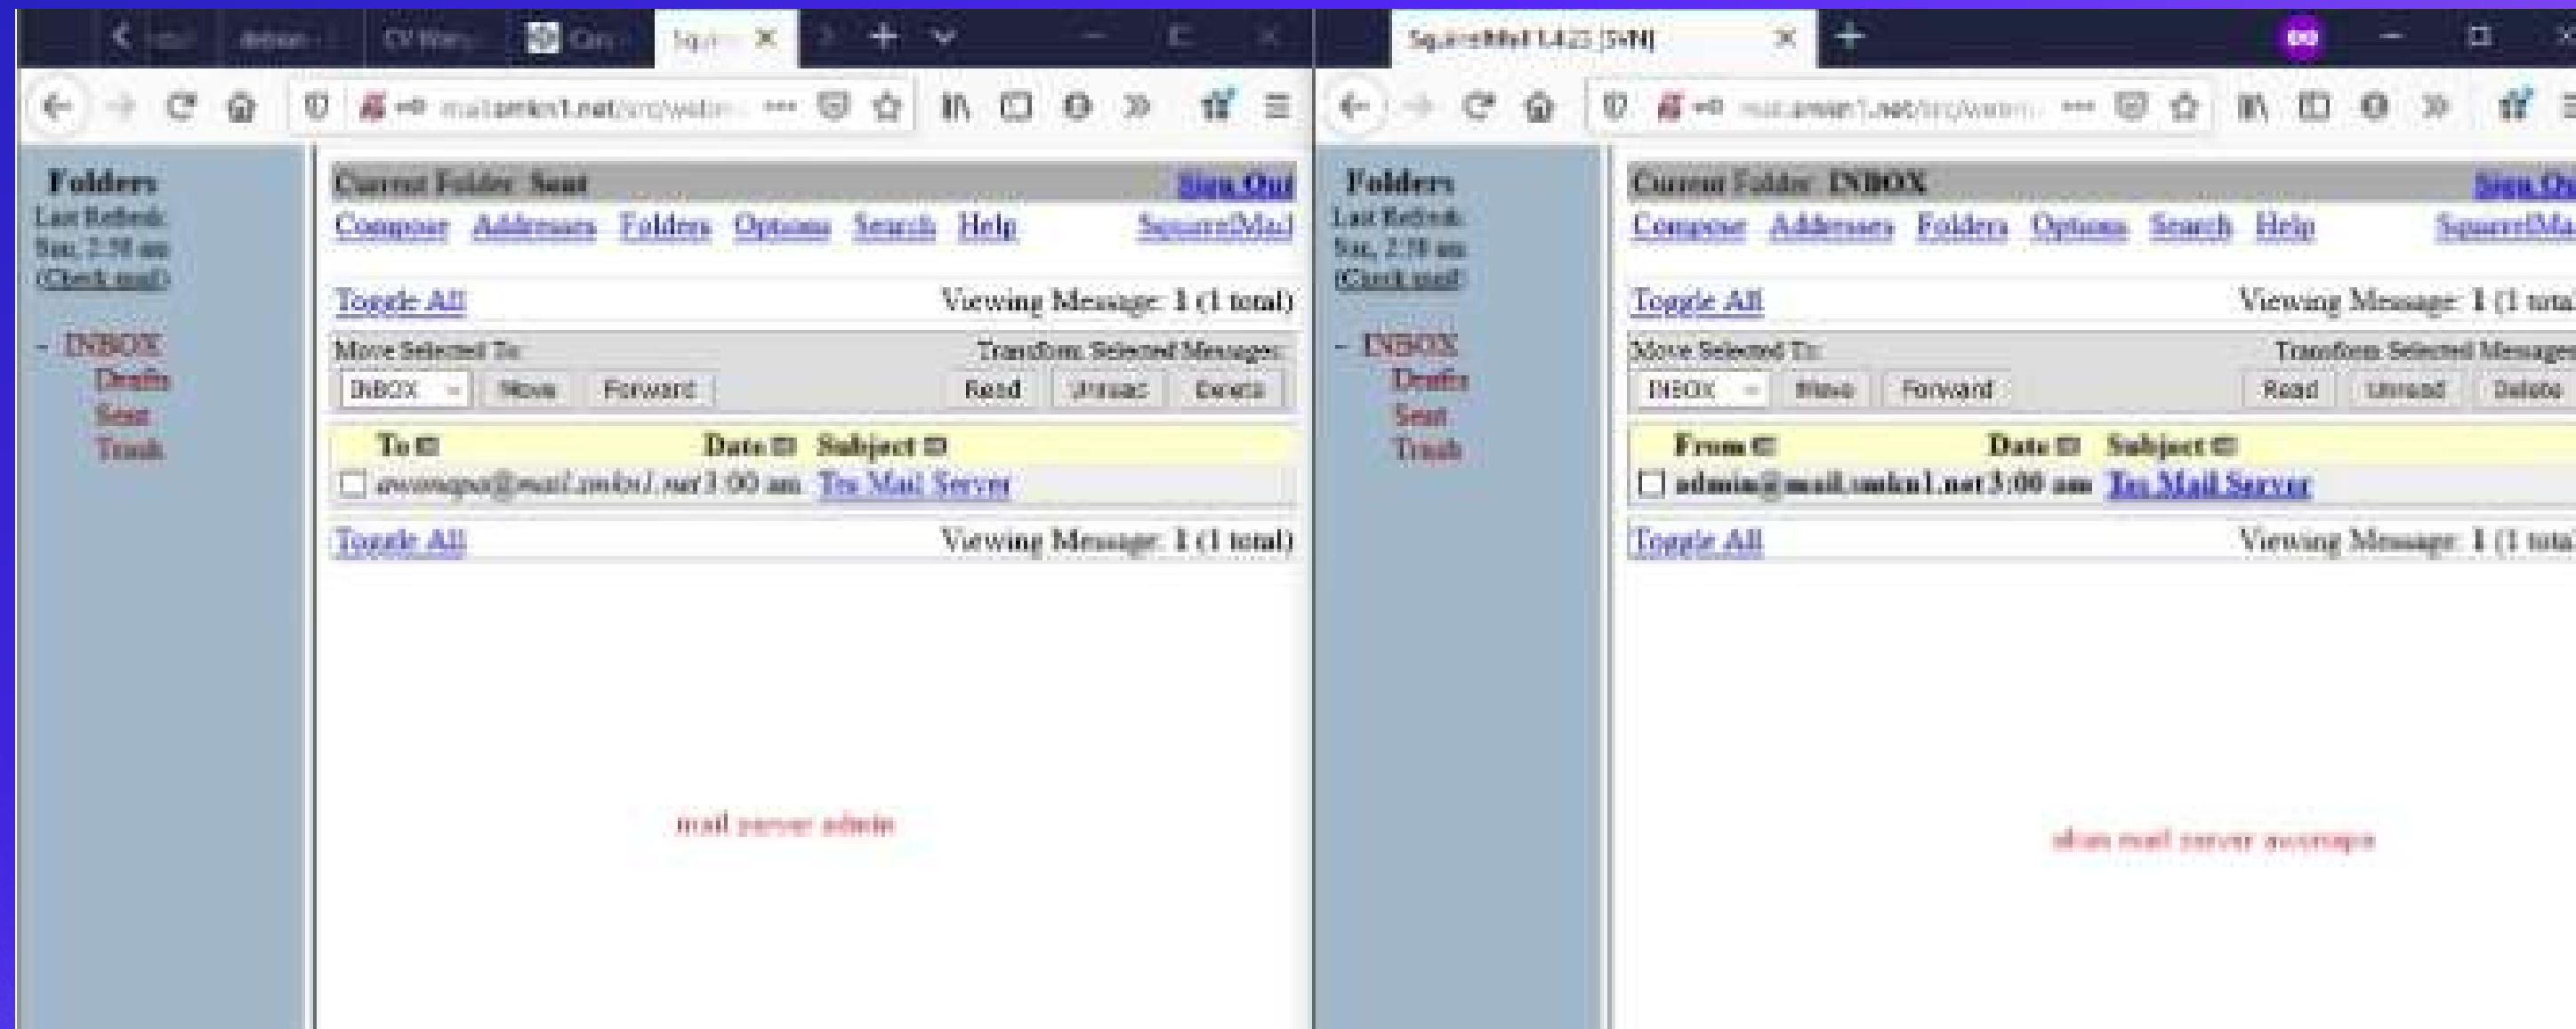

MAIL
SERVER

INSTALASI & KONFIGURASI

DATABASE SERVER

PRAISILIA



DATABASE SERVER

1. Install paket server dan klien MariaDB dengan perintah:

```
apt-get install software-properties-common dirmngr_
```

2. Untuk memastikan MariaDB sudah terinstall dengan baik atau belum, ketik perintah penginstalan kembali.

```
root@praisilia:/etc/apache2/sites-available# apt-get install mariadb-server
```

DATABASE SERVER

3. Layanan MariaDB akan mulai secara otomatis. Kemudian periksa status layanan dengan perintah "systemctl status mariadb".

```
root@praisilia:/etc/apache2/sites-available# systemctl status mariadb
● mariadb.service - MariaDB 10.5.23 database server
   Loaded: loaded (/lib/systemd/system/mariadb.service; enabled; vendor preset: enabled)
   Active: active (running) since Mon 2024-02-26 05:25:49 WITA; 38s ago
     Docs: man:mariabdb(8)
           https://mariadb.com/kb/en/library/systemd/
   Process: 14761 ExecStartPre=/usr/bin/install -m 755 -o mysql -g root -d /var/run/mysqld (code=ex
   Process: 14762 ExecStartPre=/bin/sh -c systemctl unset-environment _WSREP_START_POSITION (code=e
   Process: 14764 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && VAR= || VAR=`cd /u
   Process: 14824 ExecStartPost=/bin/sh -c systemctl unset-environment _WSREP_START_POSITION (code=
   Process: 14826 ExecStartPost=/etc/mysql/debian-start (code=exited, status=0/SUCCESS)
  Main PID: 14811 (mariabdb)
    Status: "Taking your SQL requests now..."
     Tasks: 13 (limit: 2359)
    Memory: 72.2M
    CGroup: /system.slice/mariadb.service
            └─14811 /usr/sbin/mariabdb
```

DATABASE SERVER

4. MariaDB dilengkapi dengan code yang dapat membantu meningkatkan keamanan instalasi. Untuk memulainya ketik perintah:

```
# mysql_secure_installation
```

```
-
Enter current password for root (enter for none):
-
Set root password? [Y/n] y
New password:
Re-enter new password:
-
Remove anonymous users? [Y/n] y
-
Disallow root login remotely? [Y/n] y
-
Remove test database and access to it? [Y/n] y
-
Reload privilege tables now? [Y/n] y
-
Thanks for using MariaDB!
```

5. Kita akan diminta untuk mengatur kata sandi untuk akun root, menghapus pengguna anonim, membatasi akses penggunaan root ke mesin lokal dan menghapus database pengujian.

DATABASE SERVER

6. Kita dapat mengakses ke server MariaDB sebagai root lalu masukkan password root. Kemudian akan muncul laman MariaDB, tempat kita membuat database.

```
root@praisilia:/etc/apache2/sites-available# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 40
Server version: 10.5.23-MariaDB-0+deb11u1 Debian 11

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

DATABASE SERVER

```
MariaDB [(none)]> create database test;  
Query OK, 1 row affected (0.000 sec)
```

```
MariaDB [(none)]> show databases;
```

```
+-----+  
| Database  
+-----+  
| information_schema  
| mysql  
| performance_schema  
| test  
+-----+  
4 rows in set (0.001 sec)
```

```
MariaDB [(none)]>
```

7. Coba membuat database dengan nama test, dan melihat apakah berhasil dibuat dengan show databases.

THANK YOU!

