Supplementary material for Observe, Imagine, Abstain: Hallucination-Aware 3D Reconstruction with Discrete Diffusion and Continual Adaptation

Anonymous CVPR submission

Figure and table numbers below are local to this document; the main paper is self-contained and refers to this material by section title.

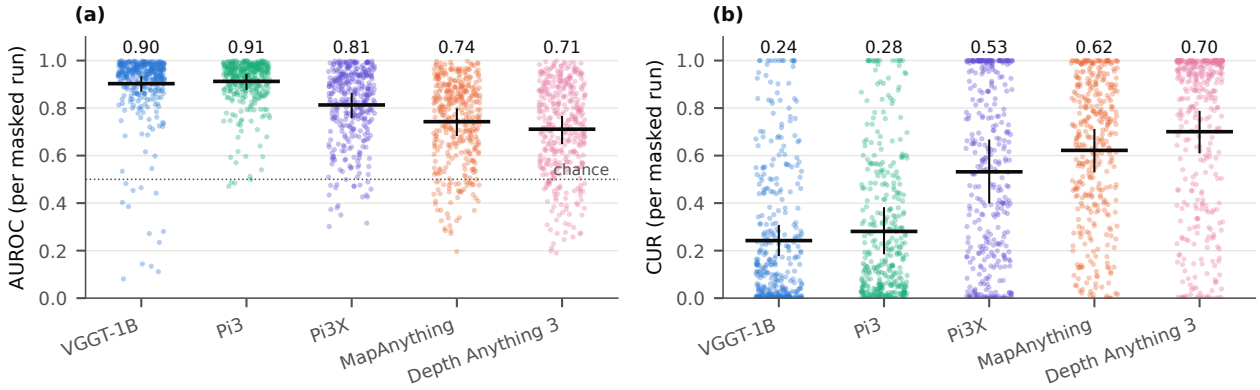


Figure 1. **Per-run spread on DTU.** AUROC and CUR for every (scan, seed, radius) run under blur and noise fills, with pooled means and intervals. The spread across scans is wide for every model; the intervals in the main tables come from resampling scans.

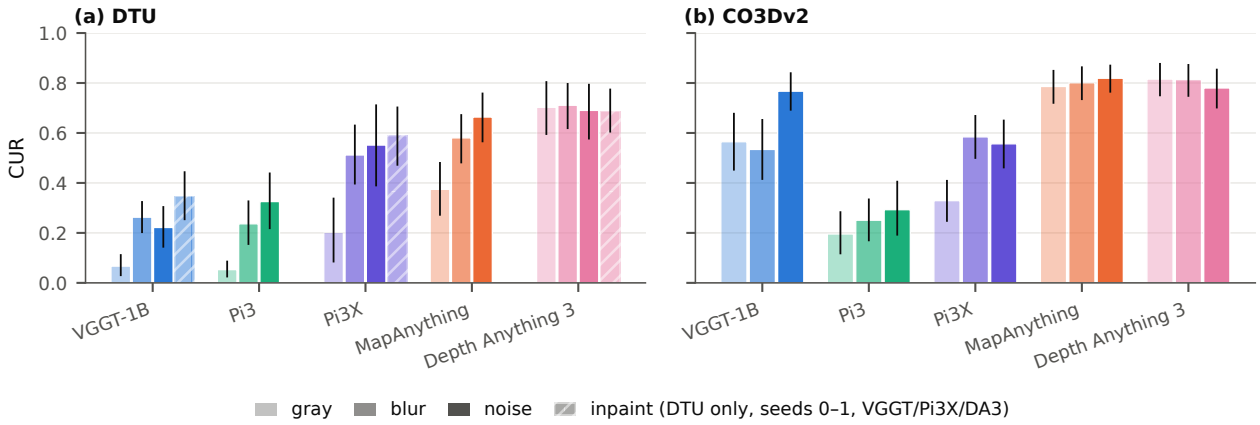


Figure 2. **Fill ablation.** CUR per model and fill on DTU and CO3Dv2 (five seeds) and for the inpainted fill on DTU (two seeds, three models). A visible gray patch gives the lowest leakage; natural-statistics and inpainted fills give more.

Run registry. Every table cell maps to a run id (P1-full, P2-full, P2-stress, P2-co3d, P2-co3d-b, P3-pv-smoke, P2-smoke-b) whose CSV, configuration JSON and kernel log are released with the code, together with the dated log of every failed run and every correction.

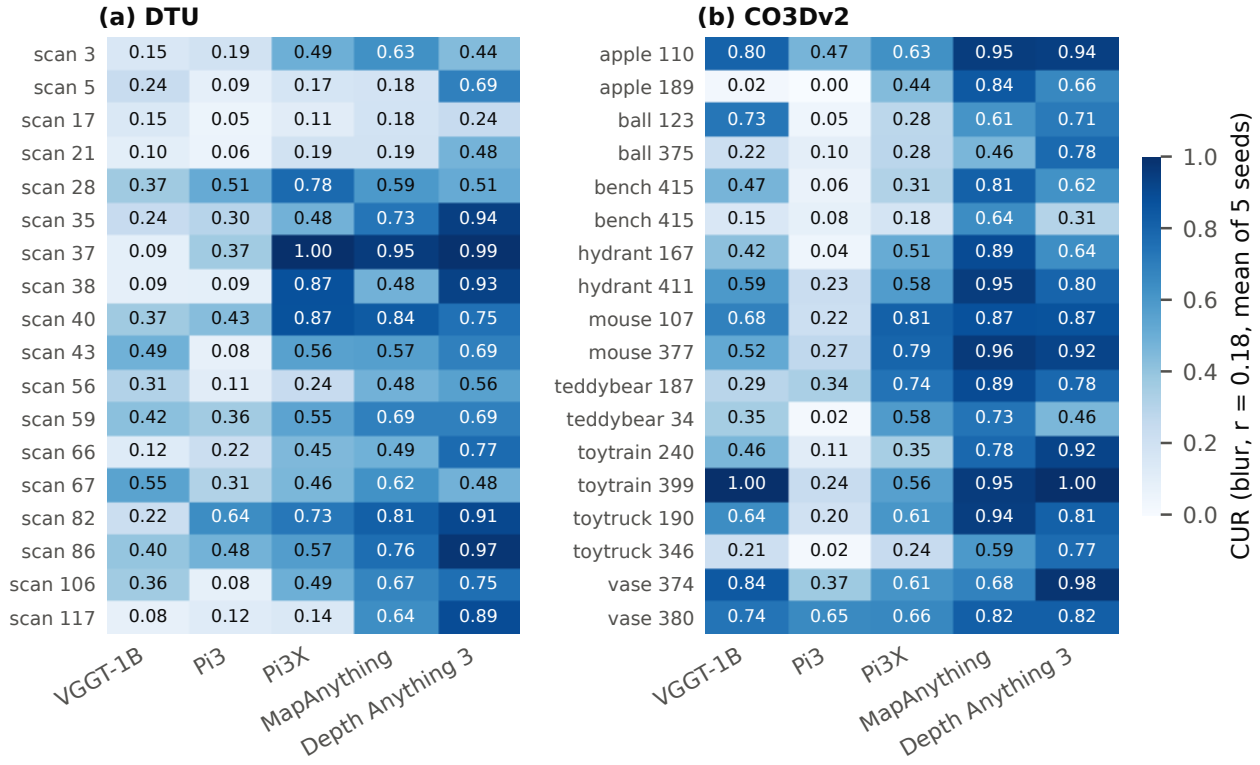


Figure 3. **Per-scene CUR** (blur fill, radius 0.18, mean over seeds) for every model on DTU scans and CO3Dv2 scenes. Rows are scenes, columns are models.