
COSA Assignment no. : 09

Q.1 On a Windows Server NFS server, create an NFS share for an entire drive (for example, drive D:) with the following requirements:


- The share must be created using the NFS Share – Quick profile.
- Only the client with IP address 192.168.x.x is allowed to access this share.
- That client must have read-only access to the share.

State clearly:


- The path that is being shared.

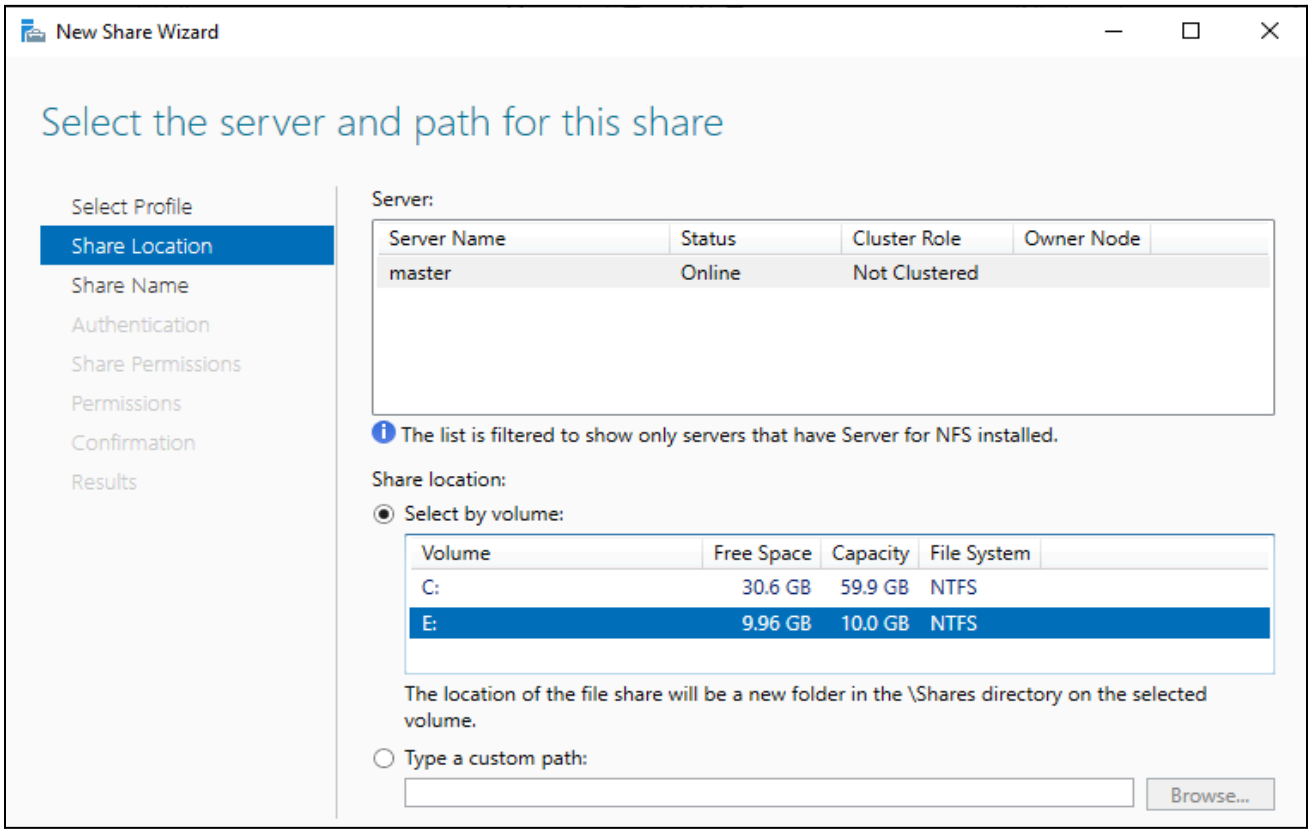


- The share name you created.

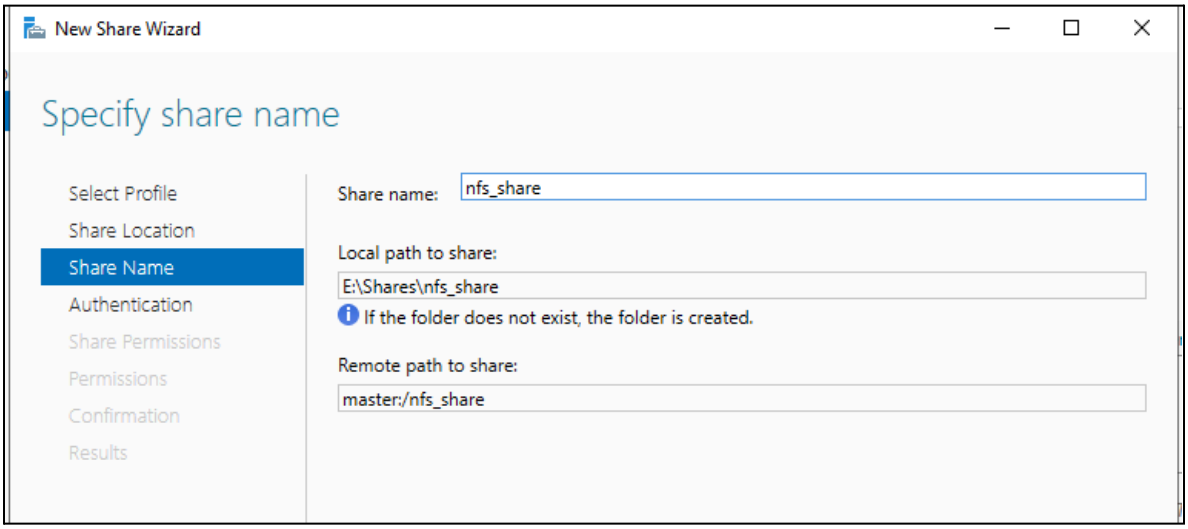

- The permission entry you added for the client (host and permission level).

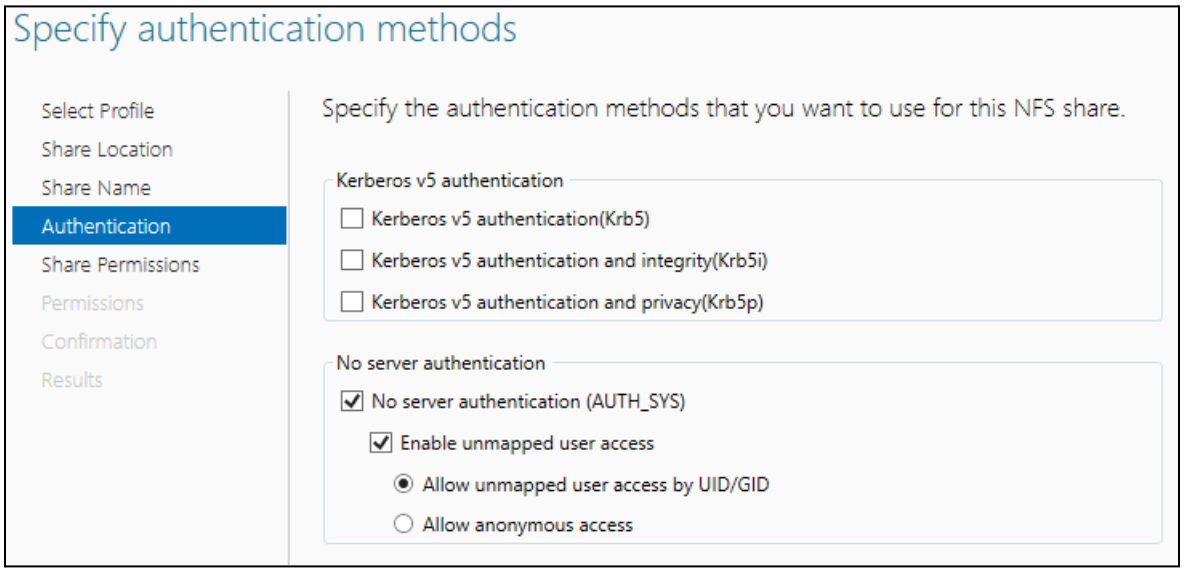

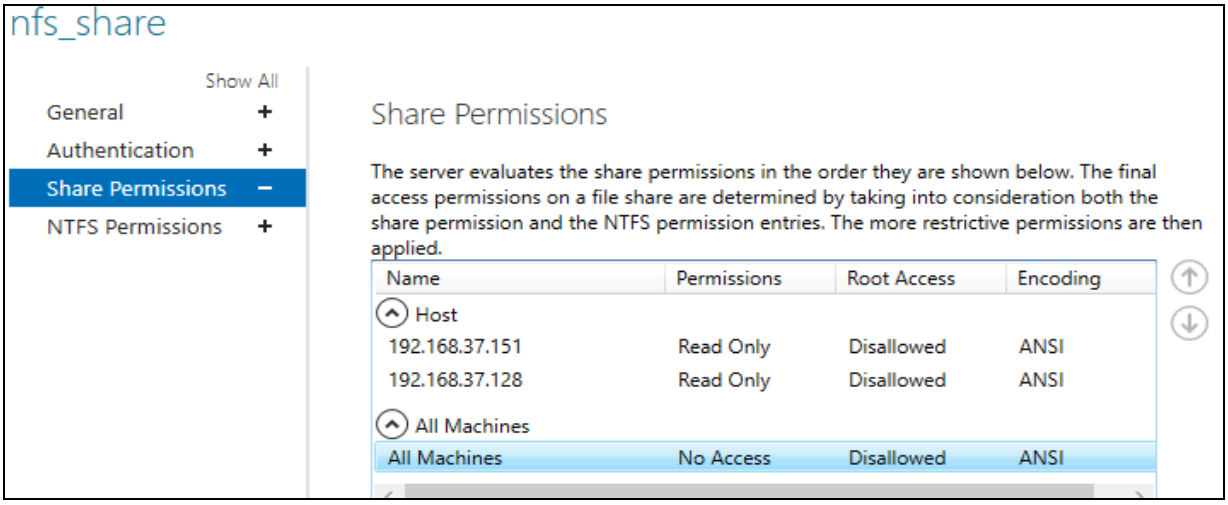


Q.2 On the same Windows Server NFS server, create a second NFS share with these requirements:


- Share the folder C:\money.
- All machines on the network must be able to access this share.
- All clients must have full control (read/write) access.

State clearly:


- The path being shared.

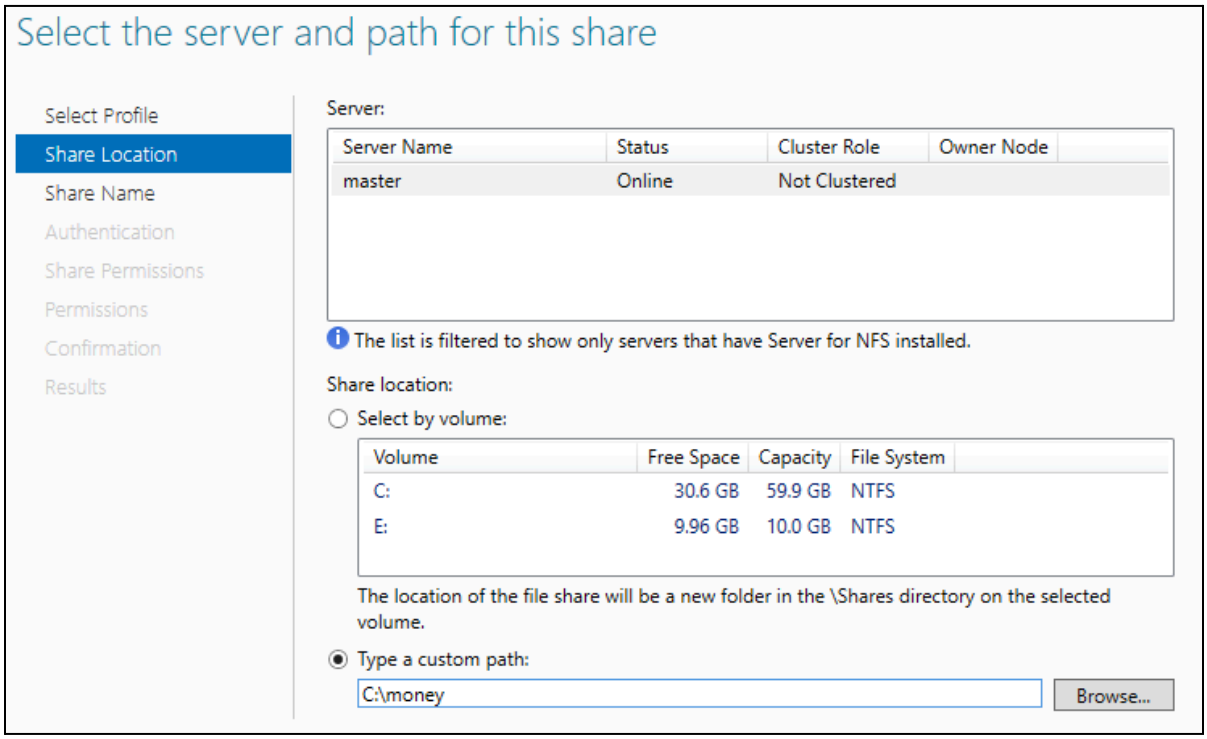

- The share name.

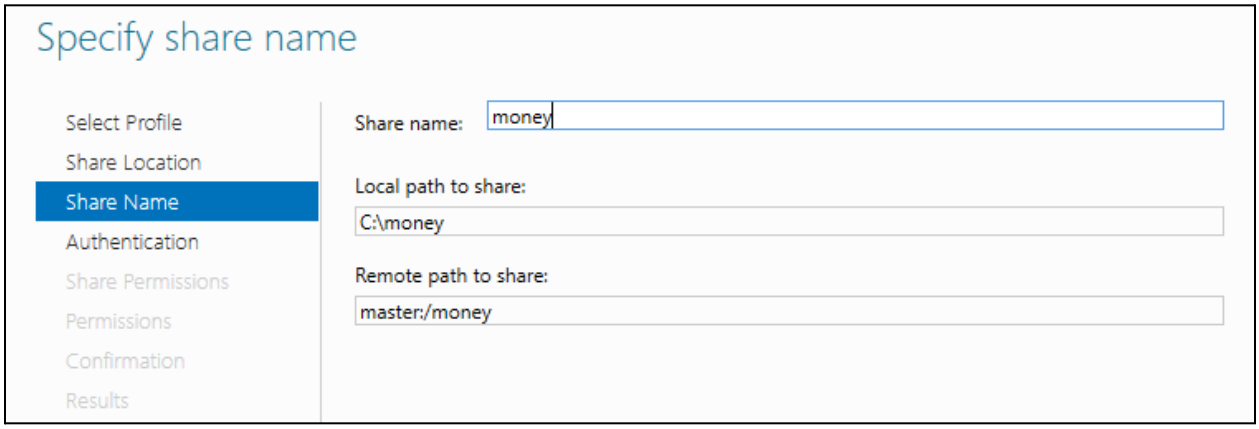

- How you configured the share permissions so that all networks have full privileges.

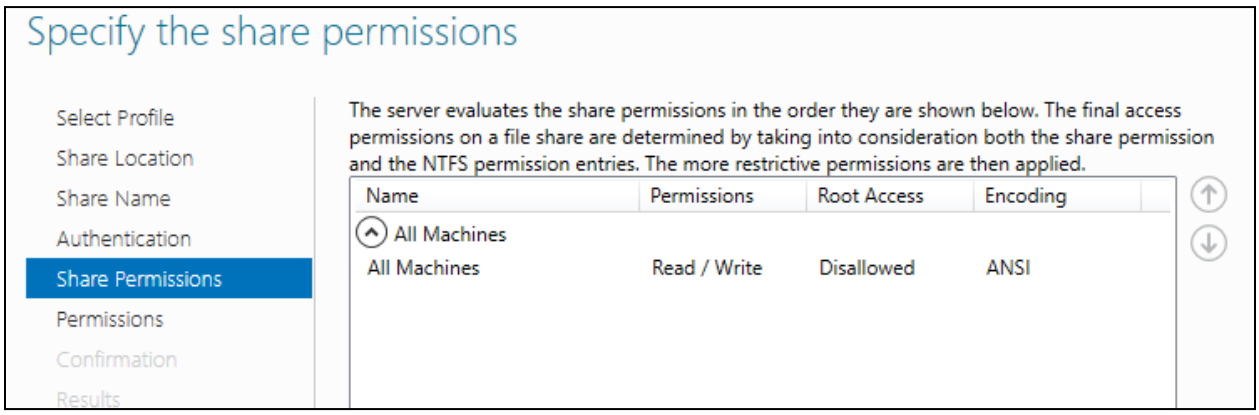


<u>Q.3 On the same Windows Server NFS server, create a third NFS share with these requirements:</u>


- Share the folder C:\honey.
- All machines on the network must be able to access this share.
- All clients must have read-only access.

State clearly:


- The path being shared

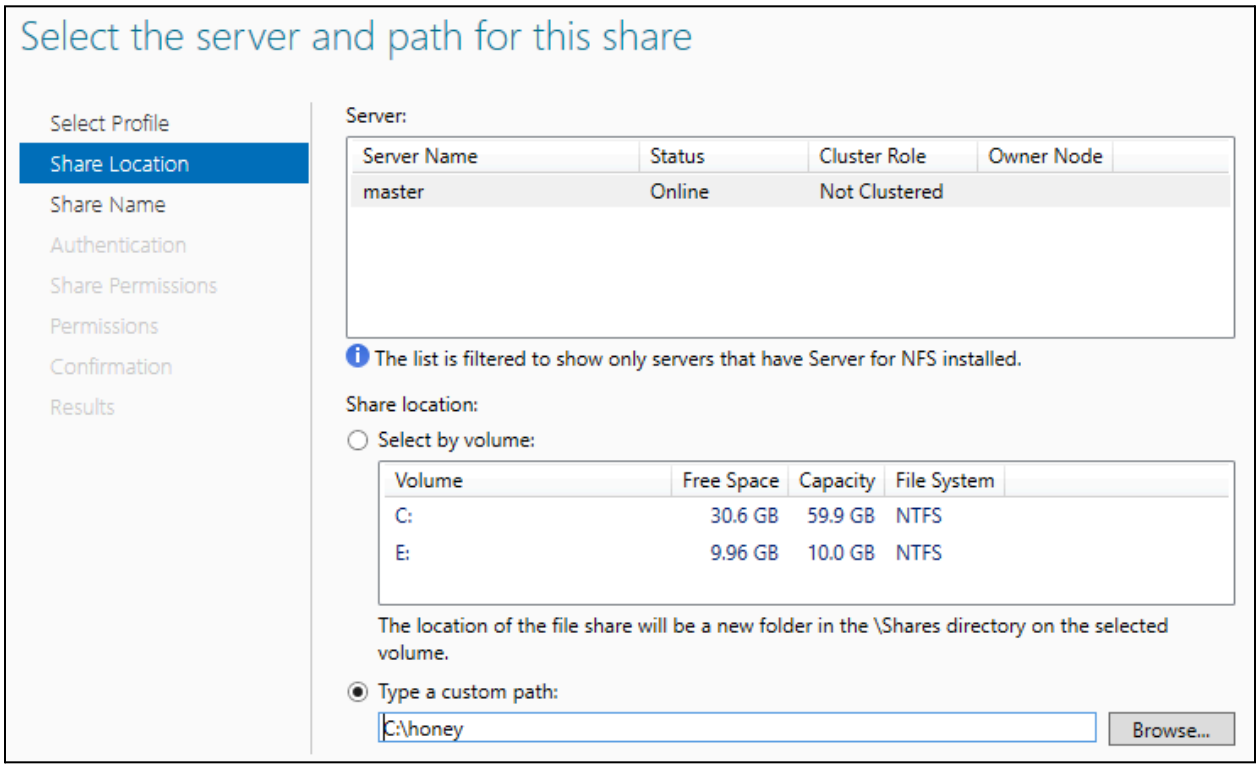

- The share name.

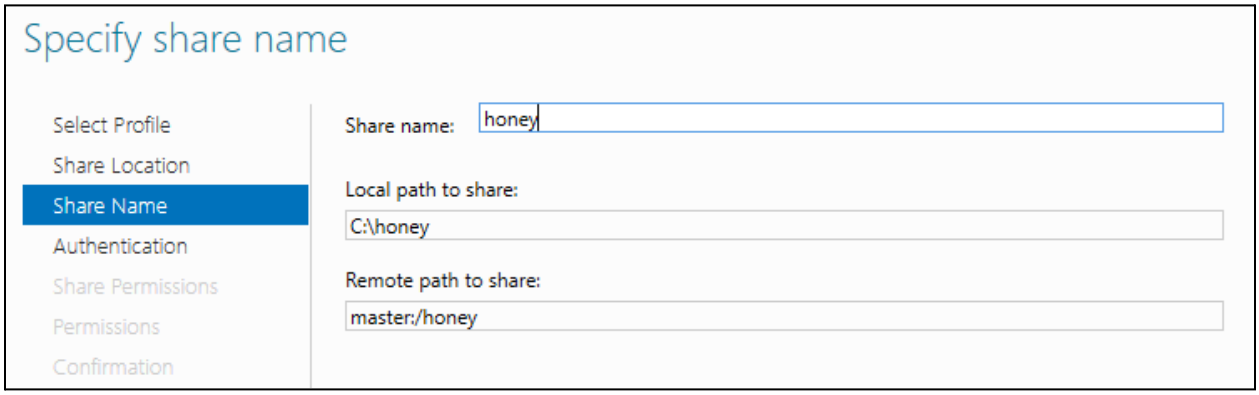


- The permission level you assigned for “All Machines” or “All Networks”.

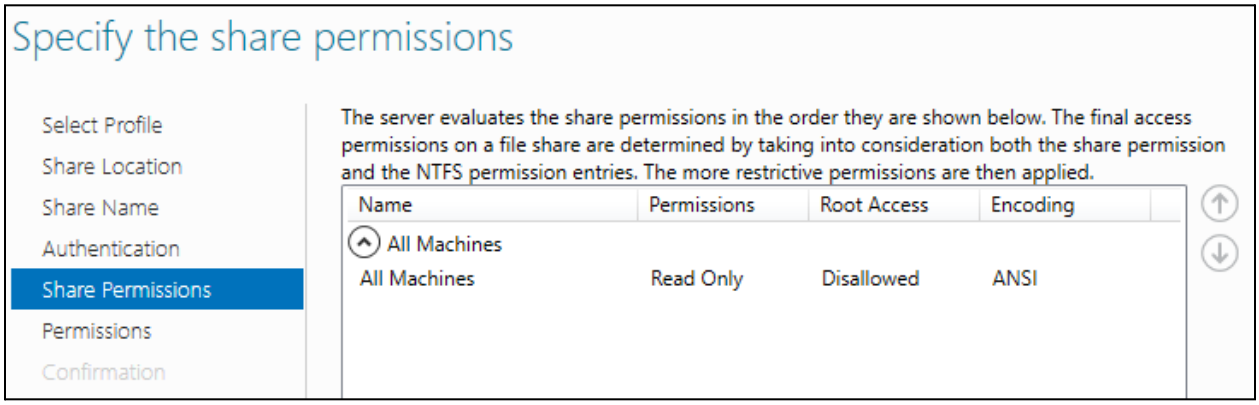


<u>Q.4 (Windows Client)</u>

<u>After creating the shares above, you now need to mount them on a Windows client that has The Client for NFS feature installed.</u>

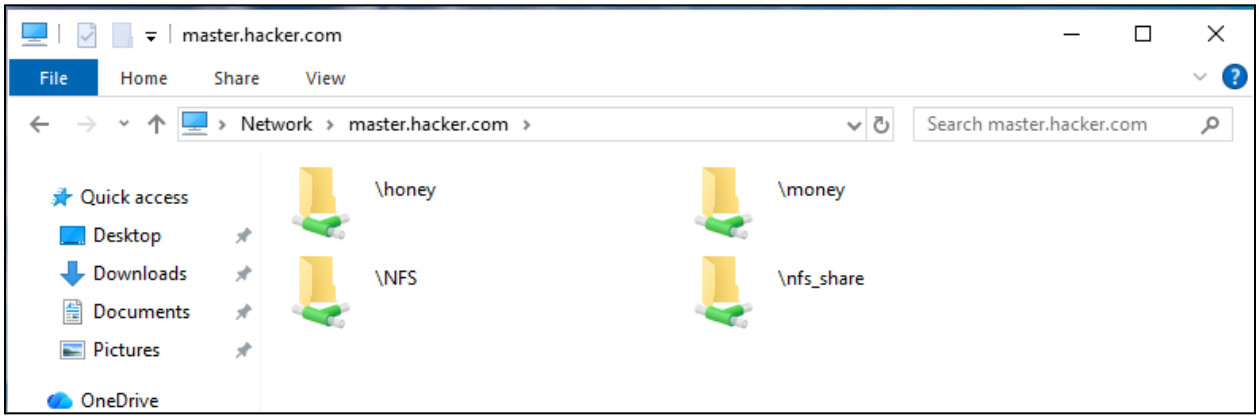

The shares must be mounted permanently with these drive letters:

The complete drive share must be mounted as G:.
The C:\money share must be mounted as H:.
The C:\honey share must be mounted as P:.

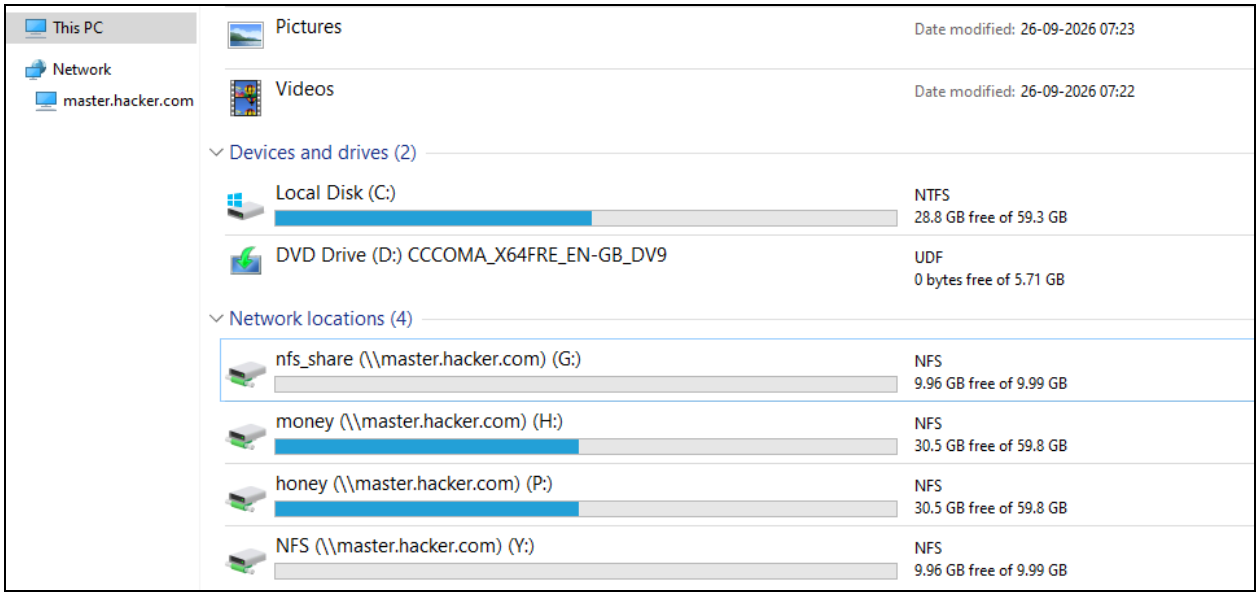

Q.5 (Linux Client)

You now need to mount the same three shares on a Linux client.

```
[root@master ~]# ping master.hacker.com
PING master.hacker.com (192.168.37.130) 56(84) bytes of data.
64 bytes from slave.ditiss.com (192.168.37.130): icmp_seq=1 ttl=128 time=0.405 ms
64 bytes from slave.ditiss.com (192.168.37.130): icmp_seq=2 ttl=128 time=1.71 ms
64 bytes from slave.ditiss.com (192.168.37.130): icmp_seq=3 ttl=128 time=1.62 ms
^C
--- master.hacker.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2041ms
rtt min/avg/max/mdev = 0.405/1.243/1.707/0.593 ms
```

The mounts must be permanent (persistent across reboots) and configured as follows:

The complete drive share must be mounted at /win_drive.
The C:\money share must be mounted at /money.
The C:\honey share must be mounted at /honey.

```
[root@master ~]# mount -t nfs 192.168.37.130:/nfs_share /win_drive
[root@master ~]# mount -t nfs 192.168.37.130:/money /money
[root@master ~]# mount -t nfs 192.168.37.130:/honey /honey
[root@master ~]# df -h
Filesystem                    Size  Used Avail Use% Mounted on
devtmpfs                      3.8G     0  3.8G   0% /dev
tmpfs                         3.8G   12K  3.8G   1% /dev/shm
tmpfs                         1.5G  9.7M  1.5G   1% /run
/dev/nvme0n1p2                 30G  5.9G   25G  20% /
/dev/nvme0n1p1                2.0G  535M  1.5G  27% /boot
tmpfs                         765M   92K  765M   1% /run/user/0
/dev/sr0                      9.1G  9.1G     0 100% /run/media/root/C
master.hacker.com:/nfs_share   10G   34M   10G   1% /win_drive
192.168.37.130:/money          60G   30G   31G  49% /money
192.168.37.130:/honey          60G   30G   31G  49% /honey
```