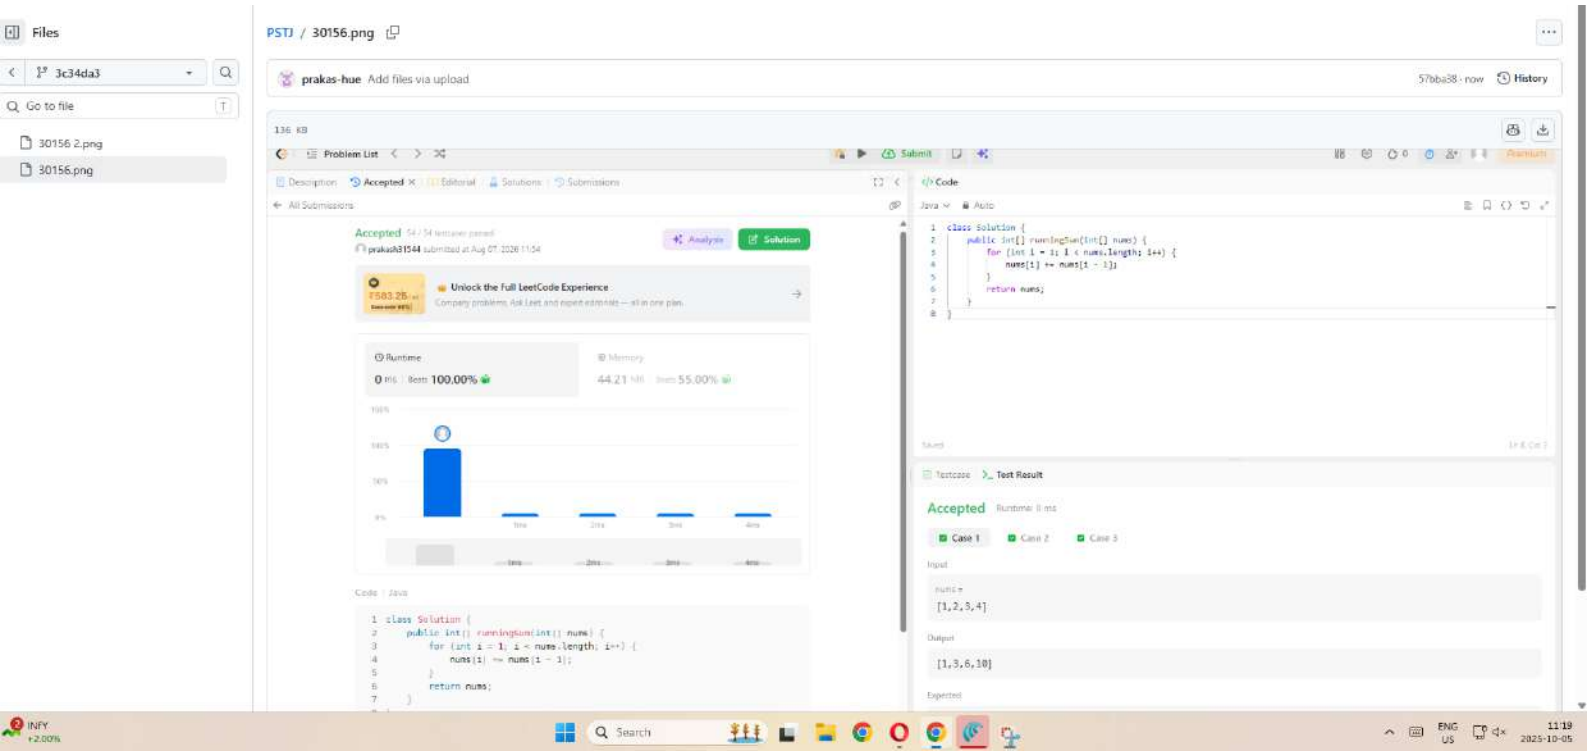
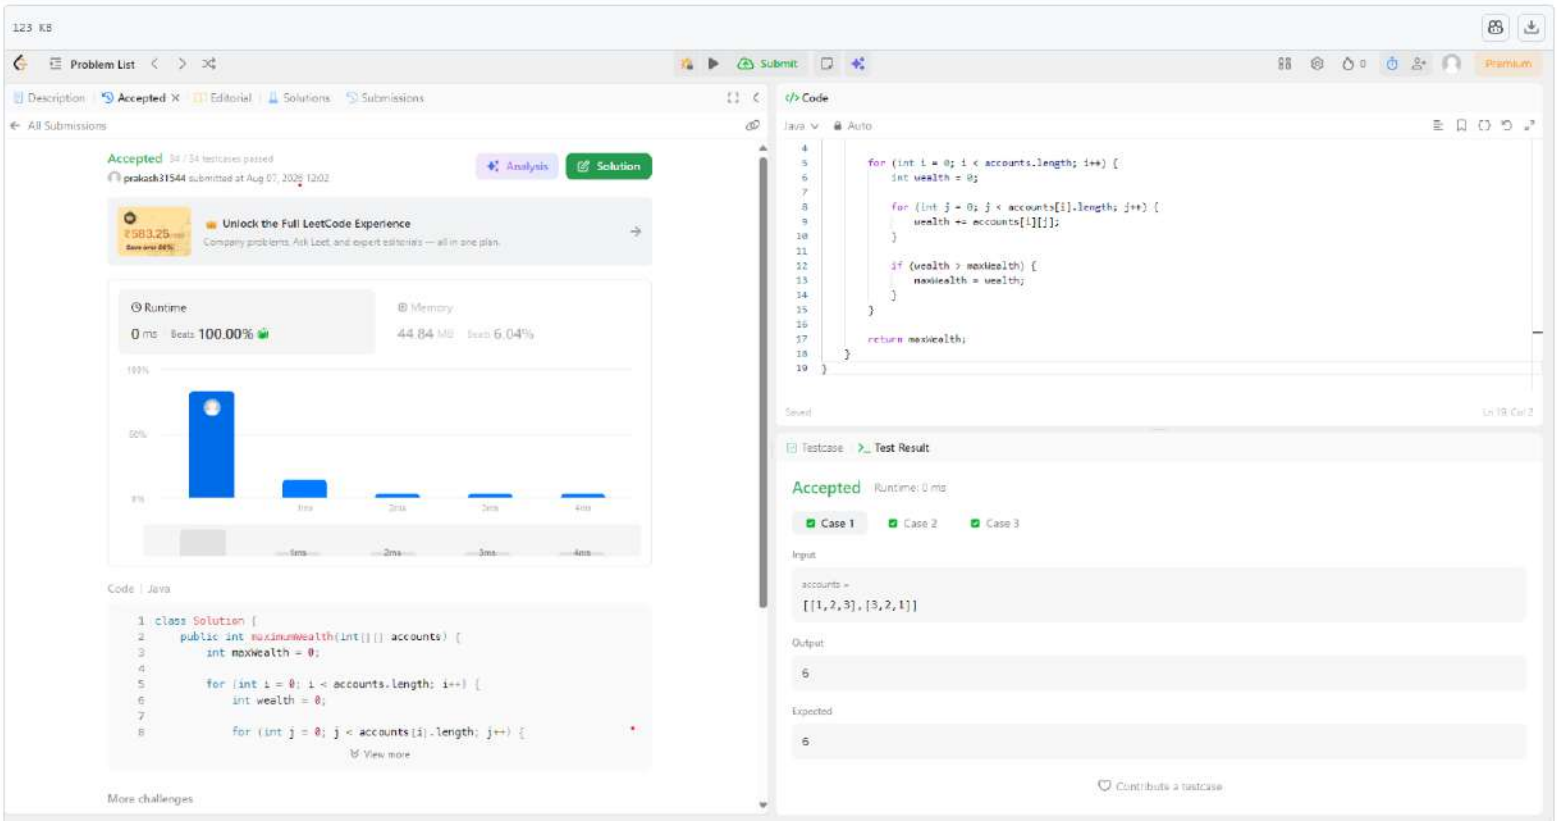
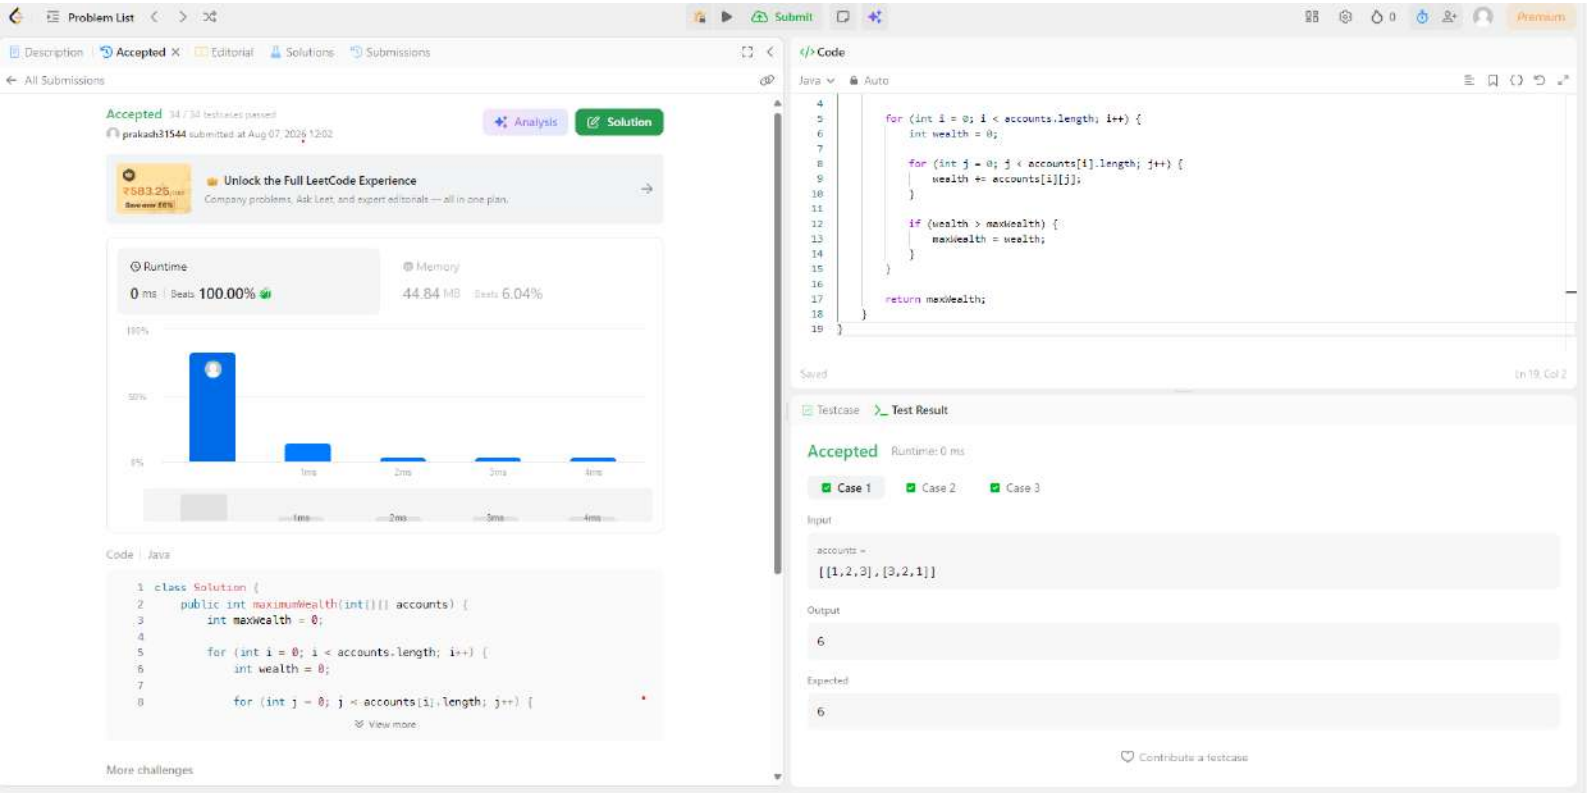
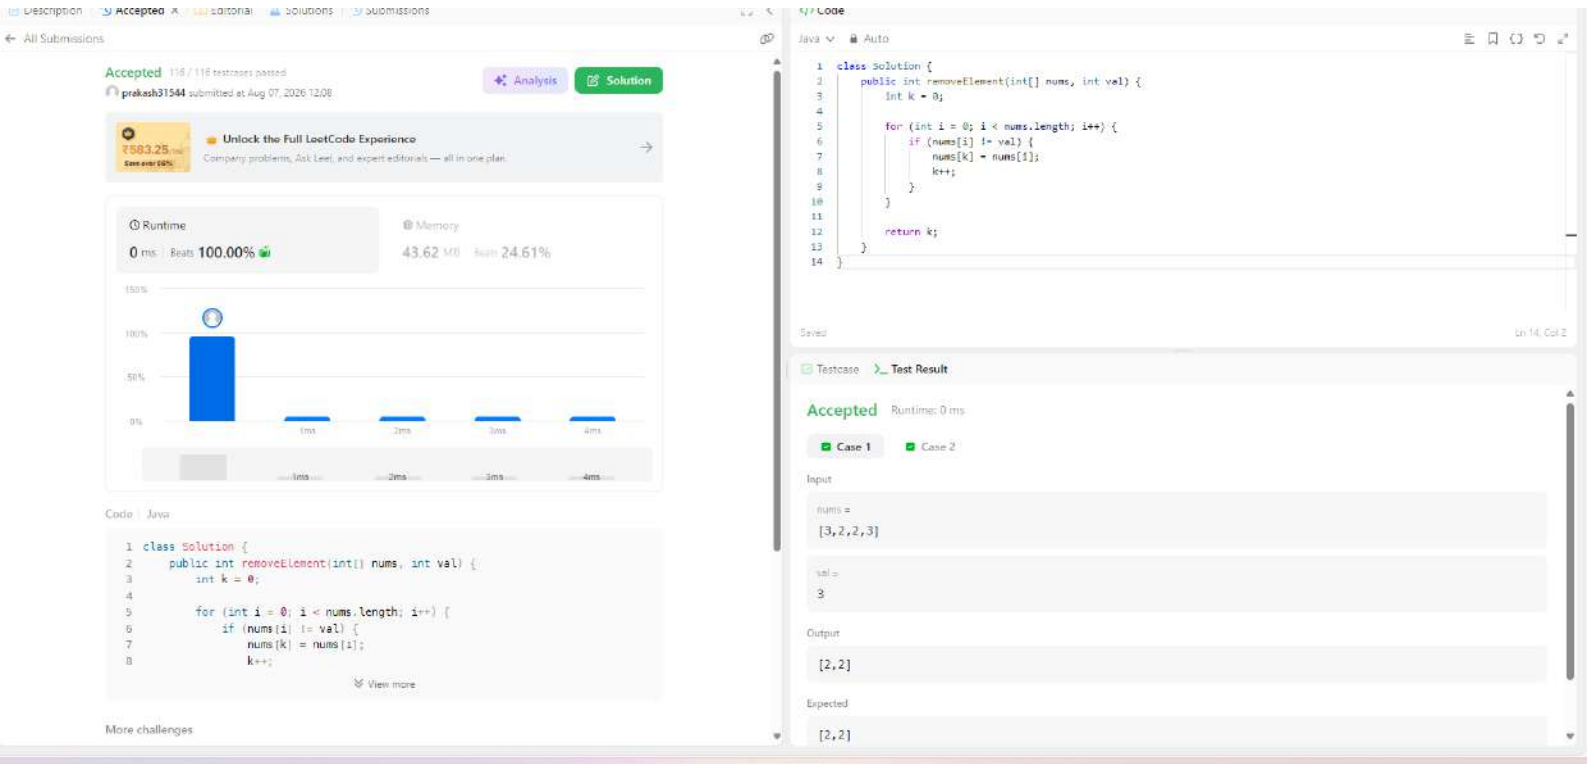
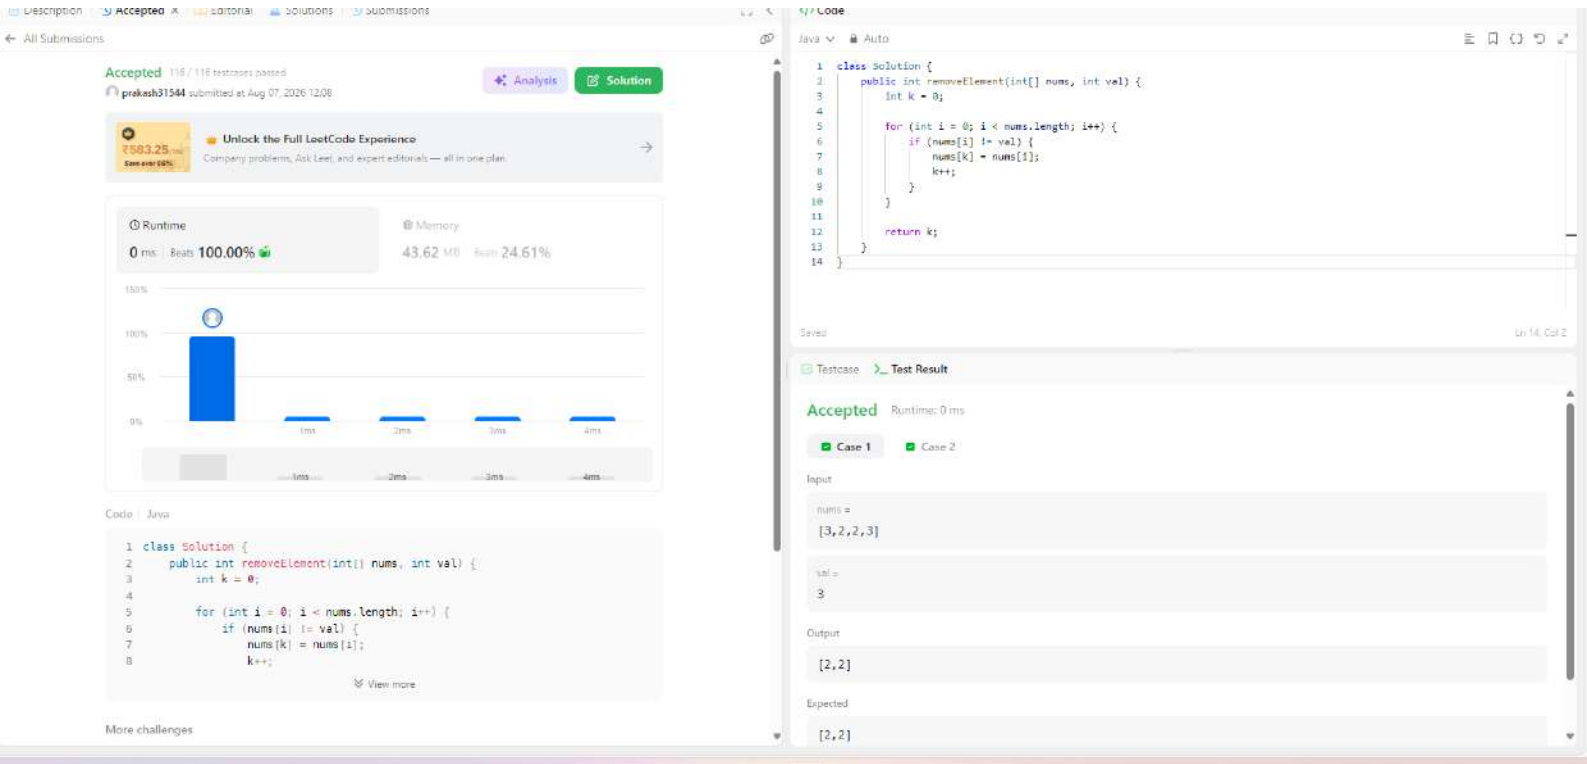
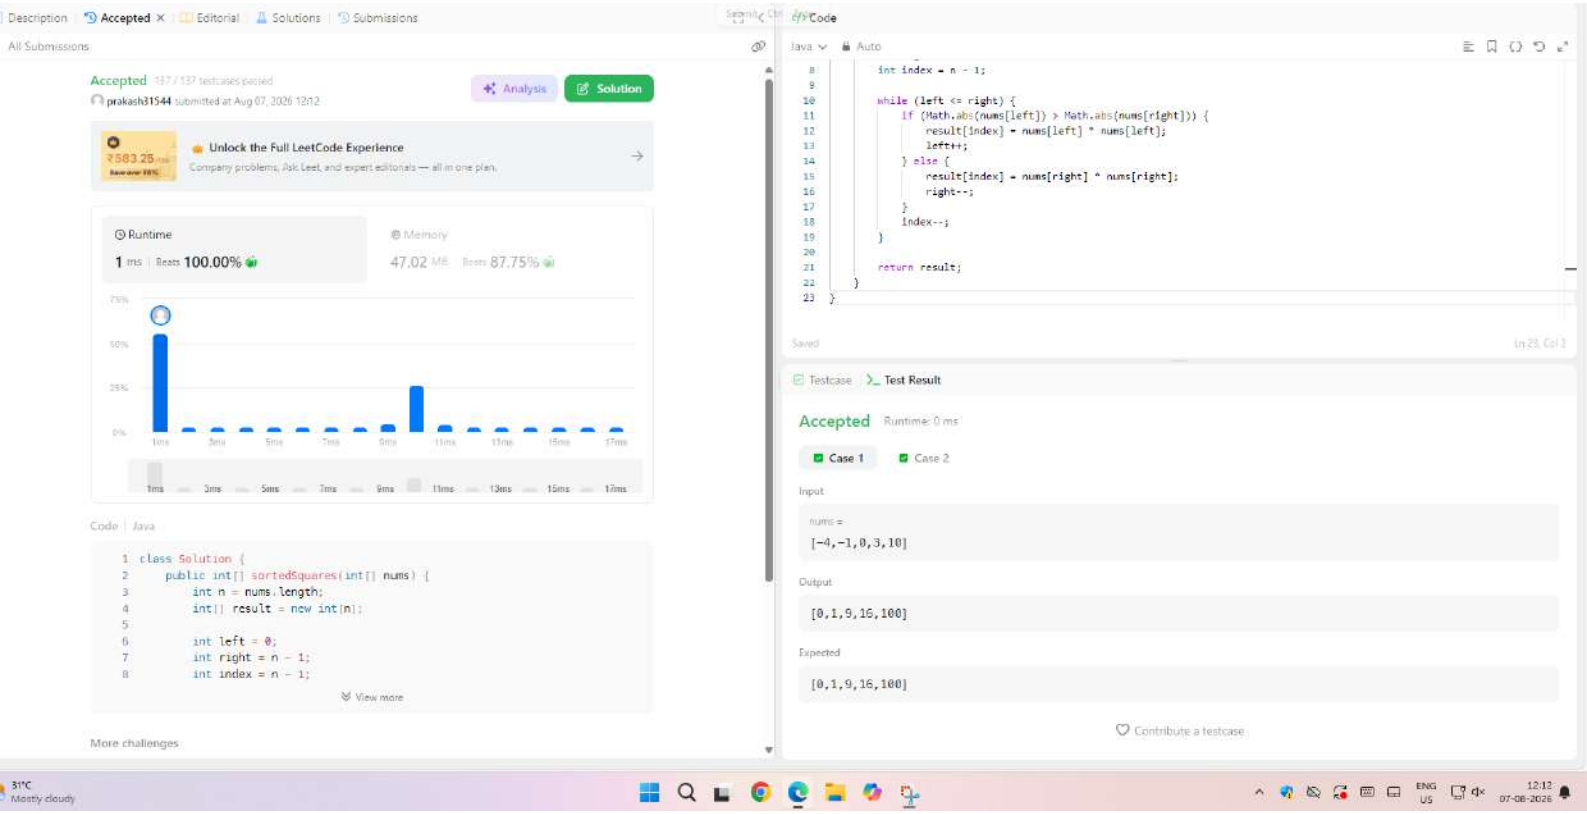

Files
3c34da3
Go to file
30156 2.png
30156.png
PSTJ / 30156.png
prakas-hue Add files via upload
57bba38 · now
History
136 KB
Problem List
Submit
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted
Analyze
Solution
Unlock the Full LeetCode Experience
Runtime
0 ms | Beats 100.00%
Memory
44.21 MB | Beats 55.00%
Code | Java
class Solution {
public int[] runningSum(int[] nums) {
for (int i = 1; i < nums.length; i++) {
nums[i] += nums[i - 1];
}
return nums;
}
}
Code
Java
Auto
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,2,3,4]
Output
[1,3,6,10]
Expected
INFY
+2.00%
Search
ENG
US
11:19
2025-10-05


123 KB
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 34 / 34 testcases passed
prakash31544 submitted at Aug 07, 2026 12:02
Analysis
Solution
₹583.25/mo
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms Beats 100.00%
Memory
44.84 MB Beats 6.04%
Code | Java
class Solution {
public int maximumWealth(int[][] accounts) {
int maxWealth = 0;
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
View more
More challenges
Code
Java
Auto
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
wealth += accounts[i][j];
}
if (wealth > maxWealth) {
maxWealth = wealth;
}
}
return maxWealth;
}
}
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
accounts =
[[1,2,3],[3,2,1]]
Output
6
Expected
6
Contribute a testcase

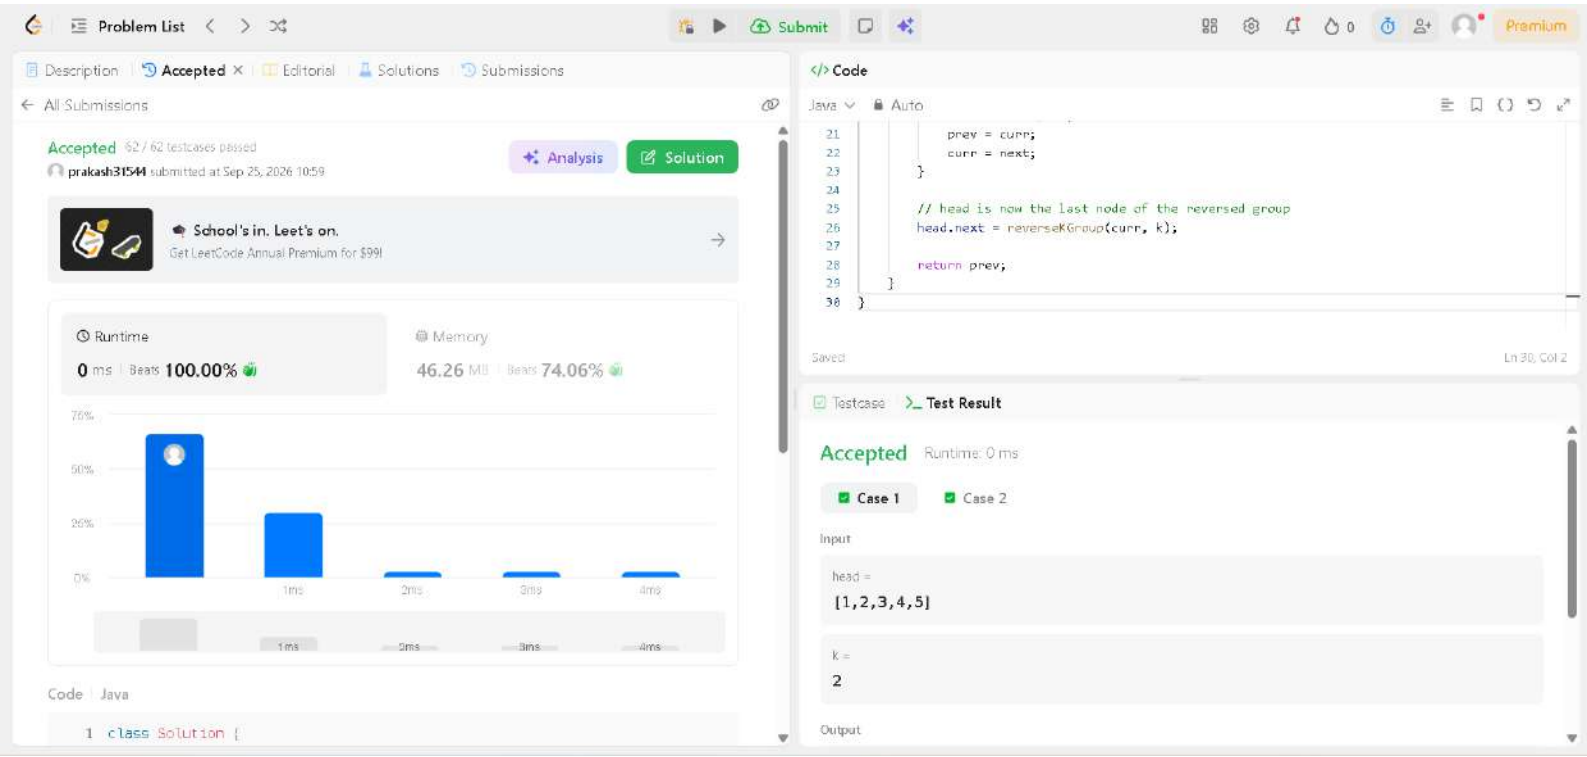

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted
prakash31544 submitted at Aug 07, 2026 12:02
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
44.84 MB Beats 6.04%
Code | Java
class Solution {
public int maximumWealth(int[][] accounts) {
int maxWealth = 0;
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
View more
More challenges
Code
Java
Auto
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
wealth += accounts[i][j];
}
if (wealth > maxWealth) {
maxWealth = wealth;
}
}
return maxWealth;
}
}
Saved
Ln 19, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
accounts =
[[1,2,3],[3,2,1]]
Output
6
Expected
6
Contribute a testcase

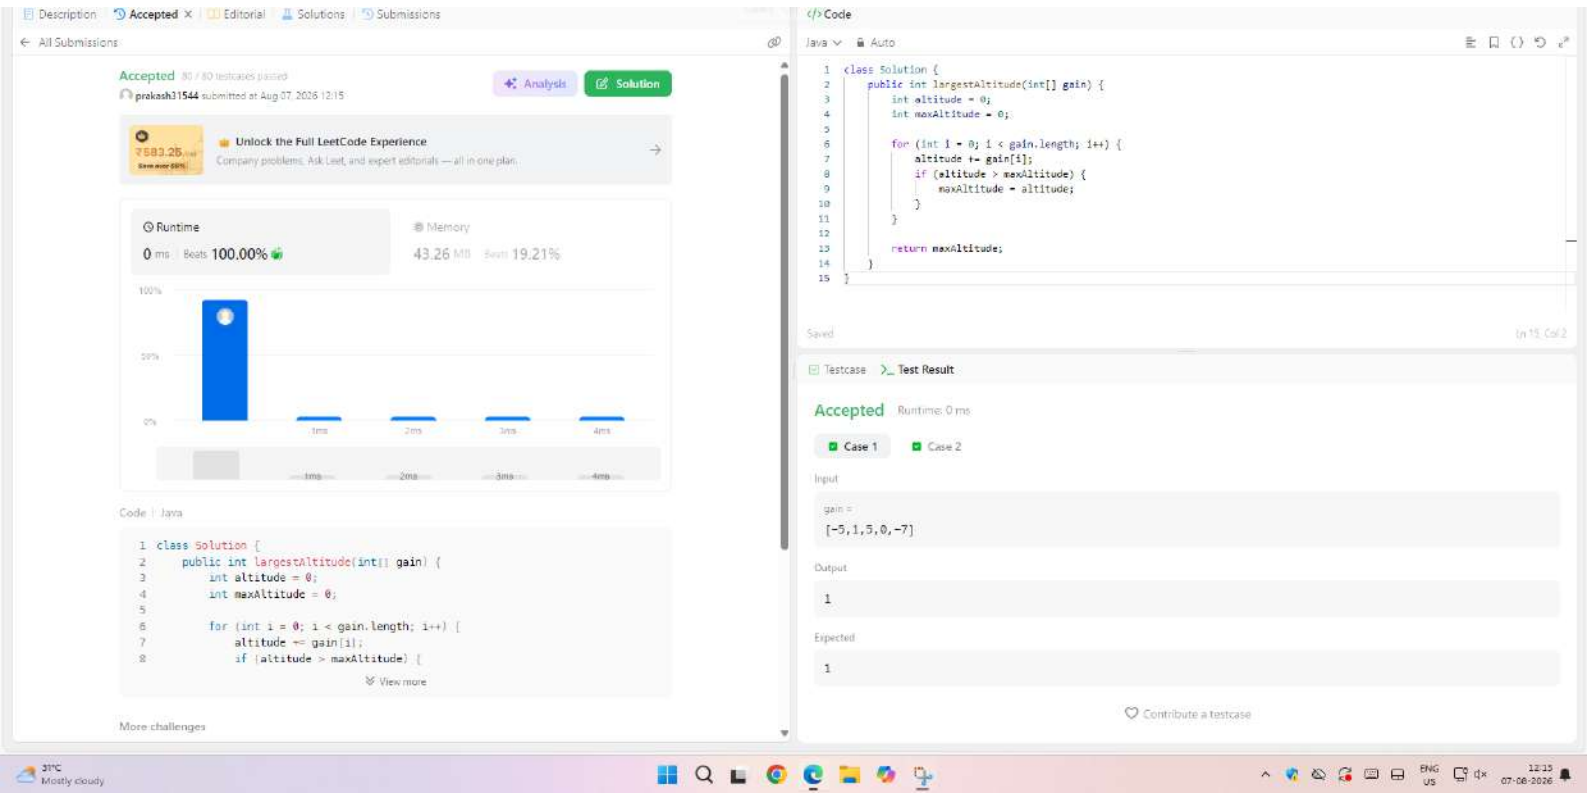

Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 116 / 116 testcases passed
prakash31544 submitted at Aug 07, 2026 12:08
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
43.62 MB | Beats 24.61%
150%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | Java
class Solution {
public int removeElement(int[] nums, int val) {
int k = 0;
for (int i = 0; i < nums.length; i++) {
if (nums[i] != val) {
nums[k] = nums[i];
k++;
View more
More challenges
Code
Java
Auto
class Solution {
public int removeElement(int[] nums, int val) {
int k = 0;
for (int i = 0; i < nums.length; i++) {
if (nums[i] != val) {
nums[k] = nums[1];
k++;
return k;
Saved
Ln 14, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[3,2,2,3]
val =
3
Output
[2,2]
Expected
[2,2]


Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 116 / 116 testcases passed
prakash31544 submitted at Aug 07, 2026 12:08
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
43.62 MB | Beats 24.61%
150%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | Java
class Solution {
public int removeElement(int[] nums, int val) {
int k = 0;
for (int i = 0; i < nums.length; i++) {
if (nums[i] != val) {
nums[k] = nums[i];
k++;
View more
More challenges
Code
Java
Auto
class Solution {
public int removeElement(int[] nums, int val) {
int k = 0;
for (int i = 0; i < nums.length; i++) {
if (nums[i] != val) {
nums[k] = nums[1];
k++;
return k;
Saved
Ln 14, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[3,2,2,3]
val =
3
Output
[2,2]
Expected
[2,2]



31°C
Mostly cloudy
ENG
US
12:12
07-08-2026


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 62 / 62 testcases passed
prakash31544 submitted at Sep 25, 2026 10:59
Analysis
Solution
School's in. Leet's on.
Get LeetCode Annual Premium for $99!
Runtime
0 ms | Beats 100.00%
Memory
46.26 MB | Beats 74.06%
75%
50%
25%
0%
1ms
2ms
3ms
4ms
Code | Java
1 class Solution {
Code
Java
Auto
21 prev = curr;
22 curr = next;
23 }
24
25 // head is now the last node of the reversed group
26 head.next = reverseKGroup(curr, k);
27
28 return prev;
29 }
30 }
Saved
Ln 30, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
head =
[1,2,3,4,5]
k =
2
Output


Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 80 / 80 testcases passed
prakash31544 submitted at Aug 07, 2026 12:15
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
43.26 MB | Beats 19.21%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | Java
class Solution {
public int largestAltitude(int[] gain) {
int altitude = 0;
int maxAltitude = 0;
for (int i = 0; i < gain.length; i++) {
altitude += gain[i];
if (altitude > maxAltitude) {
View more
More challenges
Code
Java
Auto
class Solution {
public int largestAltitude(int[] gain) {
int altitude = 0;
int maxAltitude = 0;
for (int i = 0; i < gain.length; i++) {
altitude += gain[i];
if (altitude > maxAltitude) {
maxAltitude = altitude;
}
}
return maxAltitude;
}
}
Saved
Ln 15, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
gain =
[-5,1,5,0,-7]
Output
1
Expected
1
Contribute a testcase

Description | Accepted | Editorial | Solutions | Submissions

← All Submissions

Accepted 210 / 210 testcases passed

prakash31544 submitted at Aug 07, 2026 12:18

Analysis | Solution



Unlock the Full LeetCode Experience

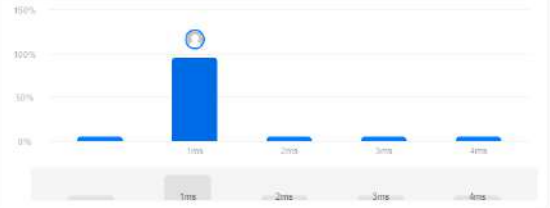
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1 ms | Beats 99.95%

Memory

80.50 MB | Beats 9.94%



Code | Java

```java
class Solution {
    public int maxSubArray(int[] nums) {
        int currentSum = nums[0];
        int maxSum = nums[0];

        for (int i = 1; i < nums.length; i++) {
            currentSum = Math.max(nums[i], currentSum + nums[i]);
            maxSum = Math.max(maxSum, currentSum);
```

View more

More challenges

Code

Java | Auto

```java
class Solution {
    public int maxSubArray(int[] nums) {
        int currentSum = nums[0];
        int maxSum = nums[0];

        for (int i = 1; i < nums.length; i++) {
            currentSum = Math.max(nums[i], currentSum + nums[i]);
            maxSum = Math.max(maxSum, currentSum);
        }

        return maxSum;
    }
}
```

Saved

Ln 13, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

nums =

[-2,1,-3,4,-1,2,1,-5,4]

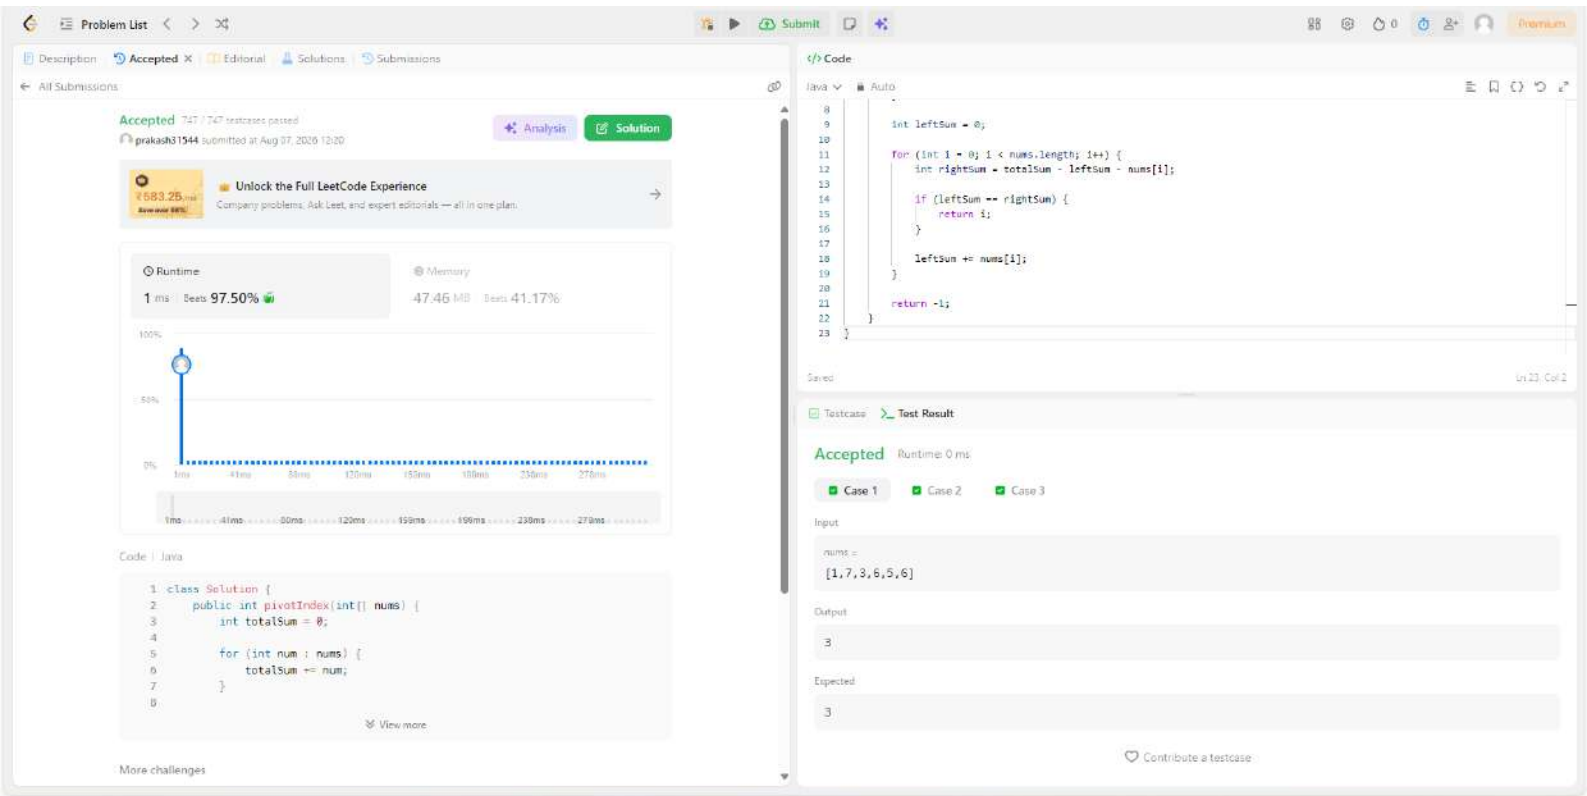
Output

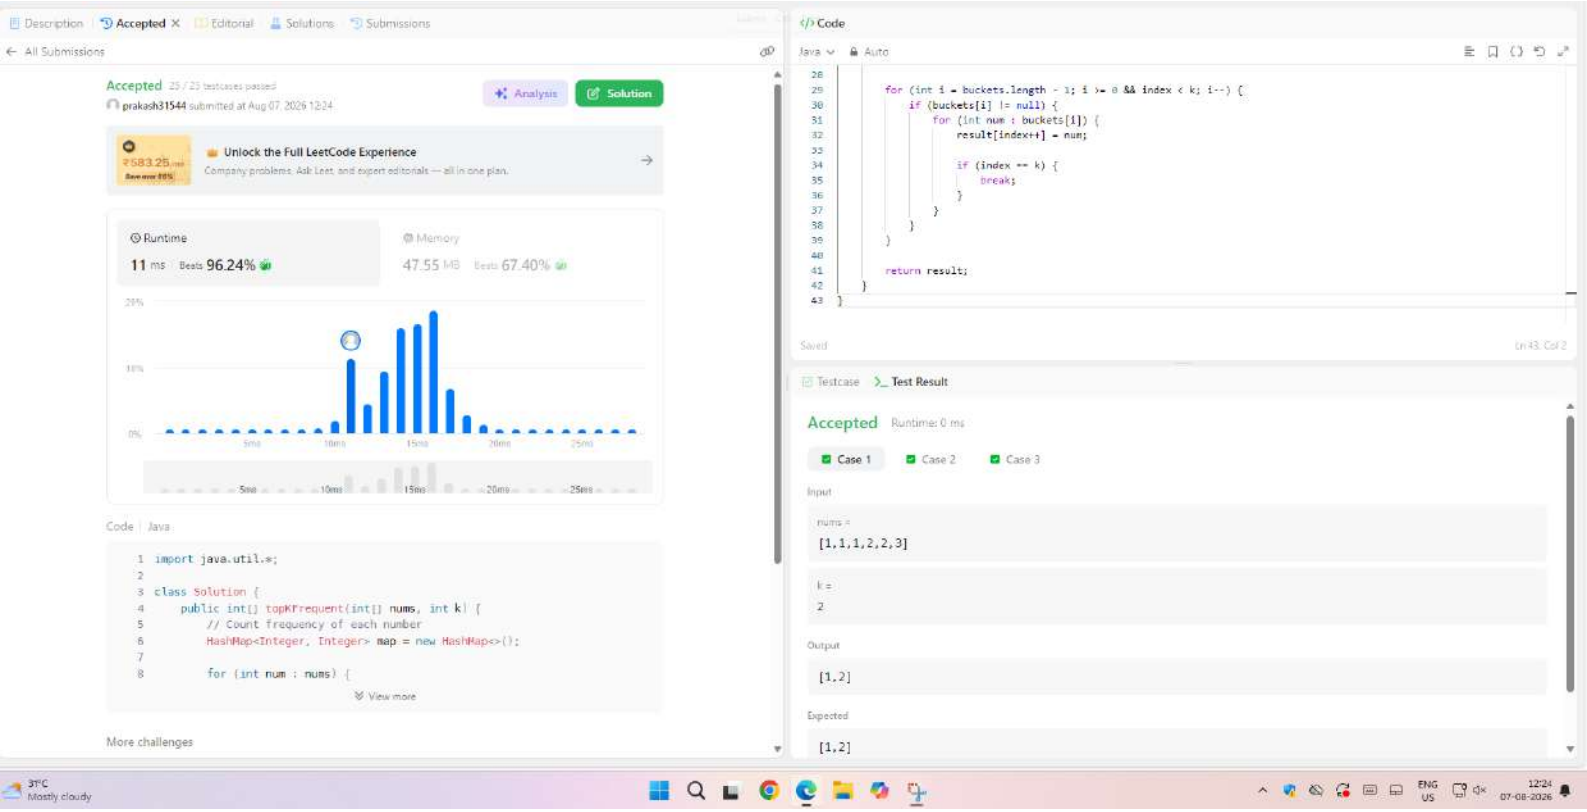
6

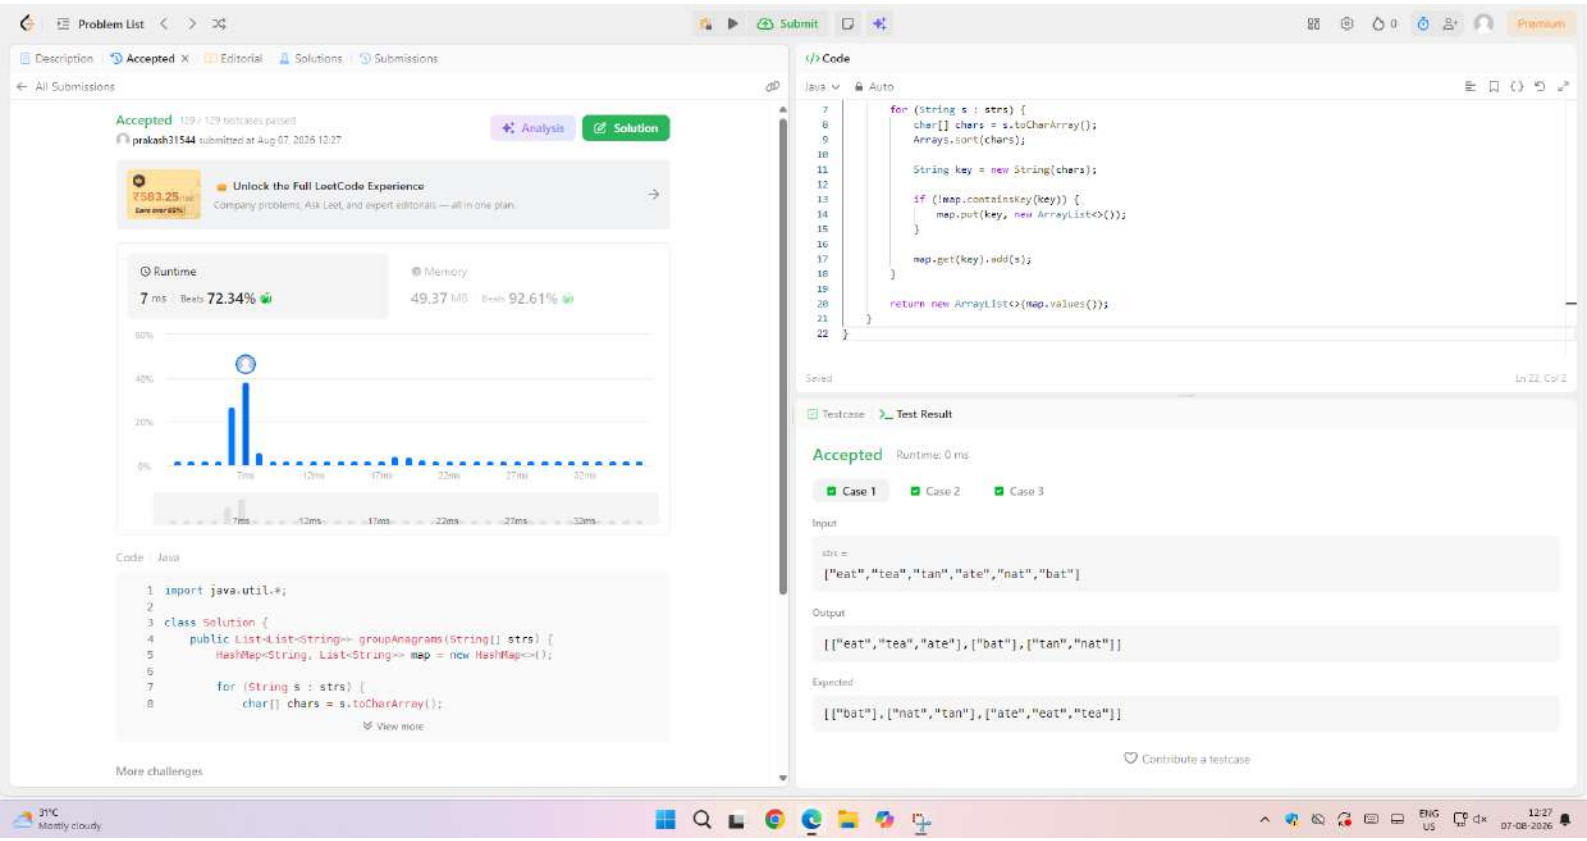
Expected

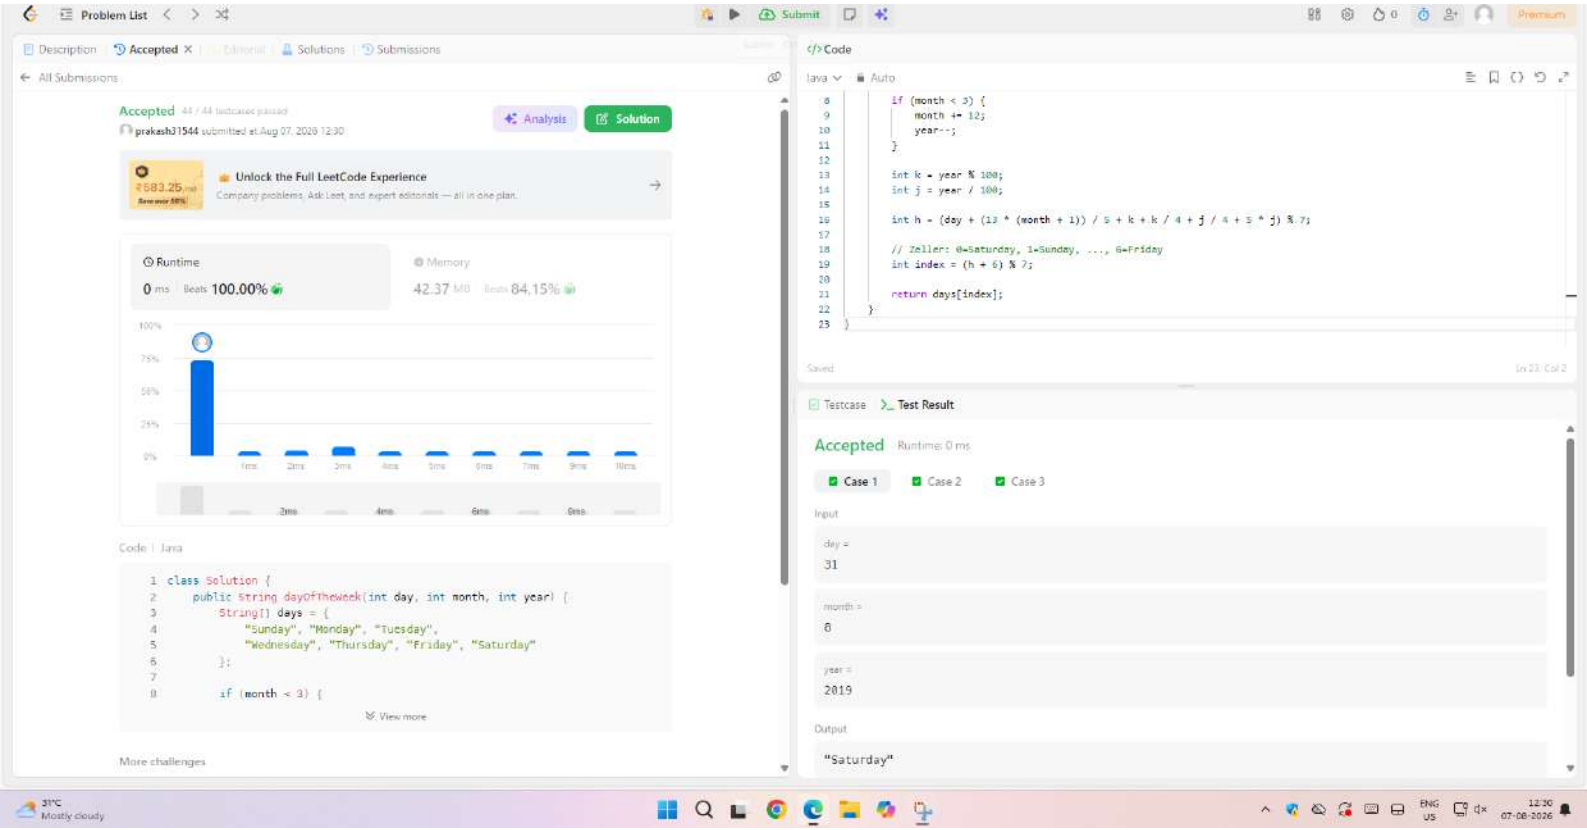
6

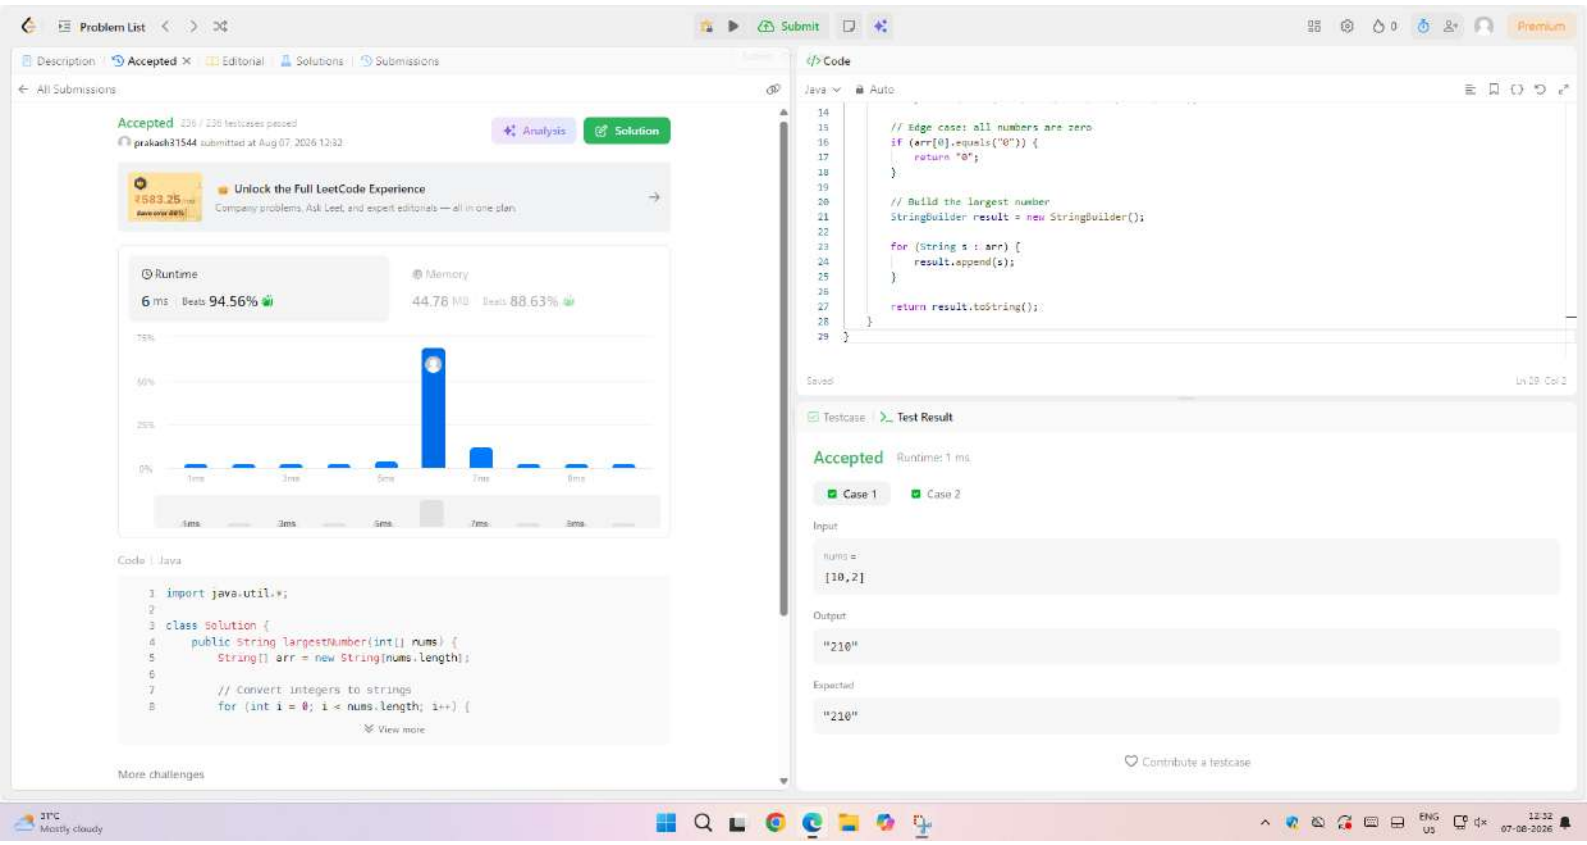
Contribute a testcase

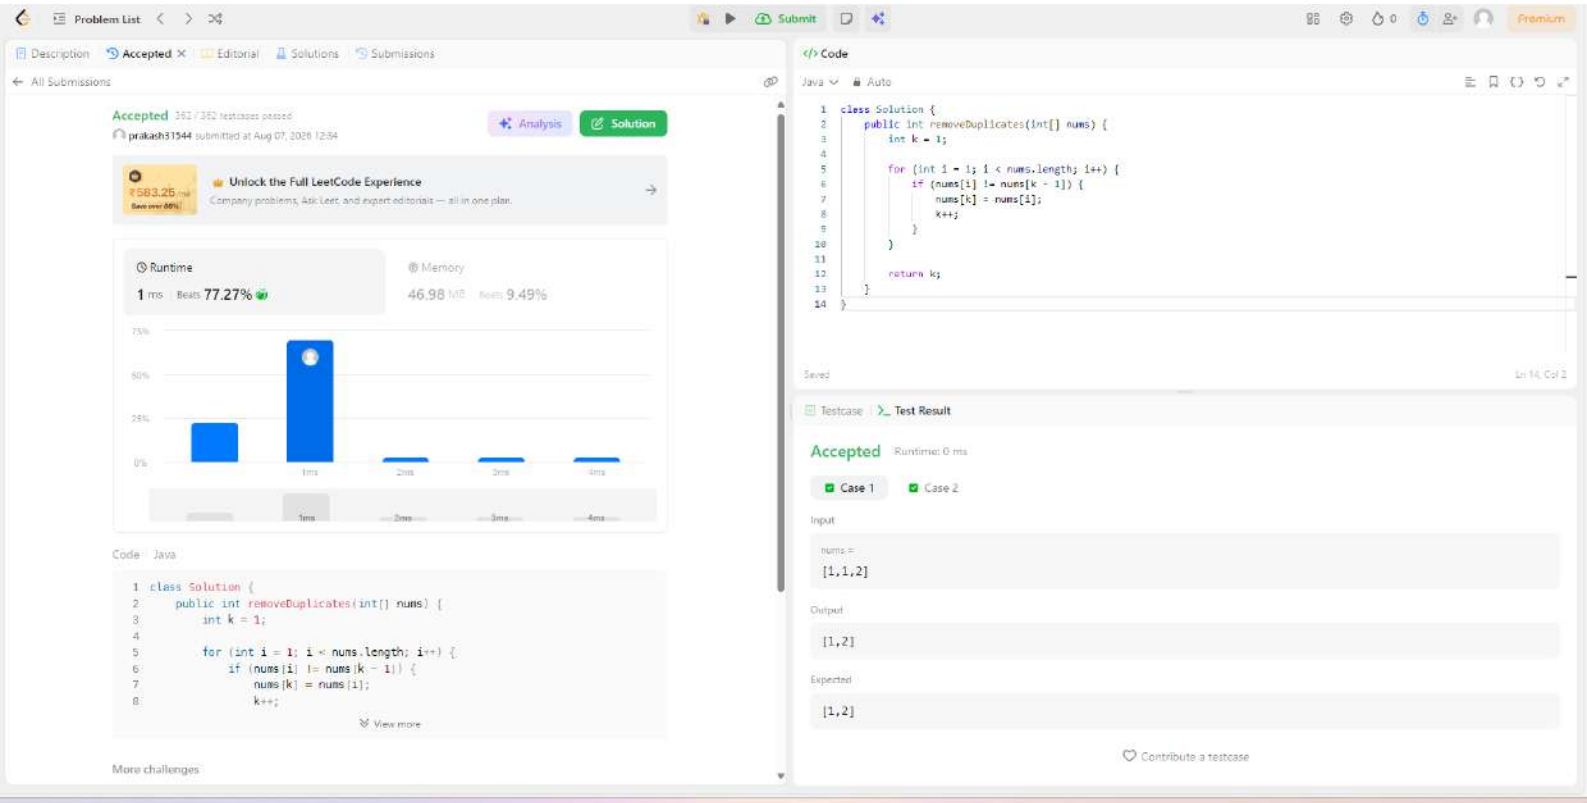

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 747 / 747 testcases passed
prakash31544 submitted at Aug 07, 2026 12:20
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms Beats 97.50%
Memory
47.46 MB Beats 41.17%
Code | Java
class Solution {
public int pivotIndex(int[] nums) {
int totalSum = 0;
for (int num : nums) {
totalSum += num;
}
View more
More challenges
Code
Java
Auto
int leftSum = 0;
for (int i = 0; i < nums.length; i++) {
int rightSum = totalSum - leftSum - nums[i];
if (leftSum == rightSum) {
return i;
}
leftSum += nums[i];
}
return -1;
}
}
Saved
Ln 23, Col 2
Testcase
Test Result
Accepted Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,7,3,6,5,6]
Output
3
Expected
3
Contribute a testcase

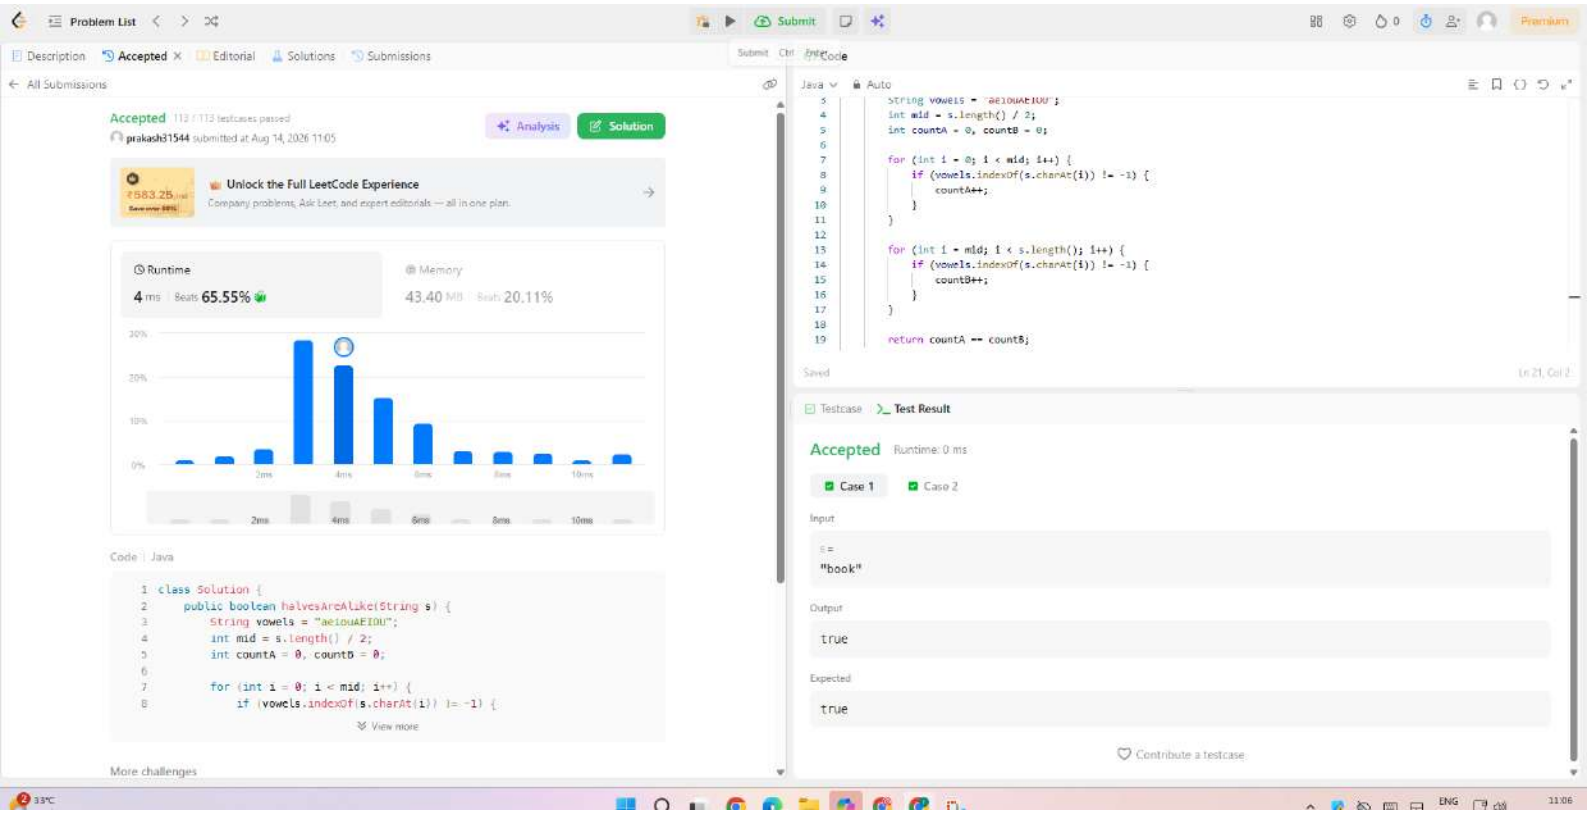

Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 29 / 29 testcases passed
prakash31544 submitted at Aug 07, 2026 12:24
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
11 ms | Beats 96.24%
Memory
47.55 MB | Beats 67.40%
Code | Java
import java.util.*;
class Solution {
public int[] topKFrequent(int[] nums, int k) {
// Count frequency of each number
HashMap<Integer, Integer> map = new HashMap<>();
for (int num : nums) {
View more
More challenges
Code
Java
Auto
for (int i = buckets.length - 1; i >= 0 && index < k; i--) {
if (buckets[i] != null) {
for (int num : buckets[i]) {
result[index++] = num;
if (index == k) {
break;
}
}
}
}
return result;
}
}
Saved
Ln 43, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,1,1,2,2,3]
k =
2
Output
[1,2]
Expected
[1,2]

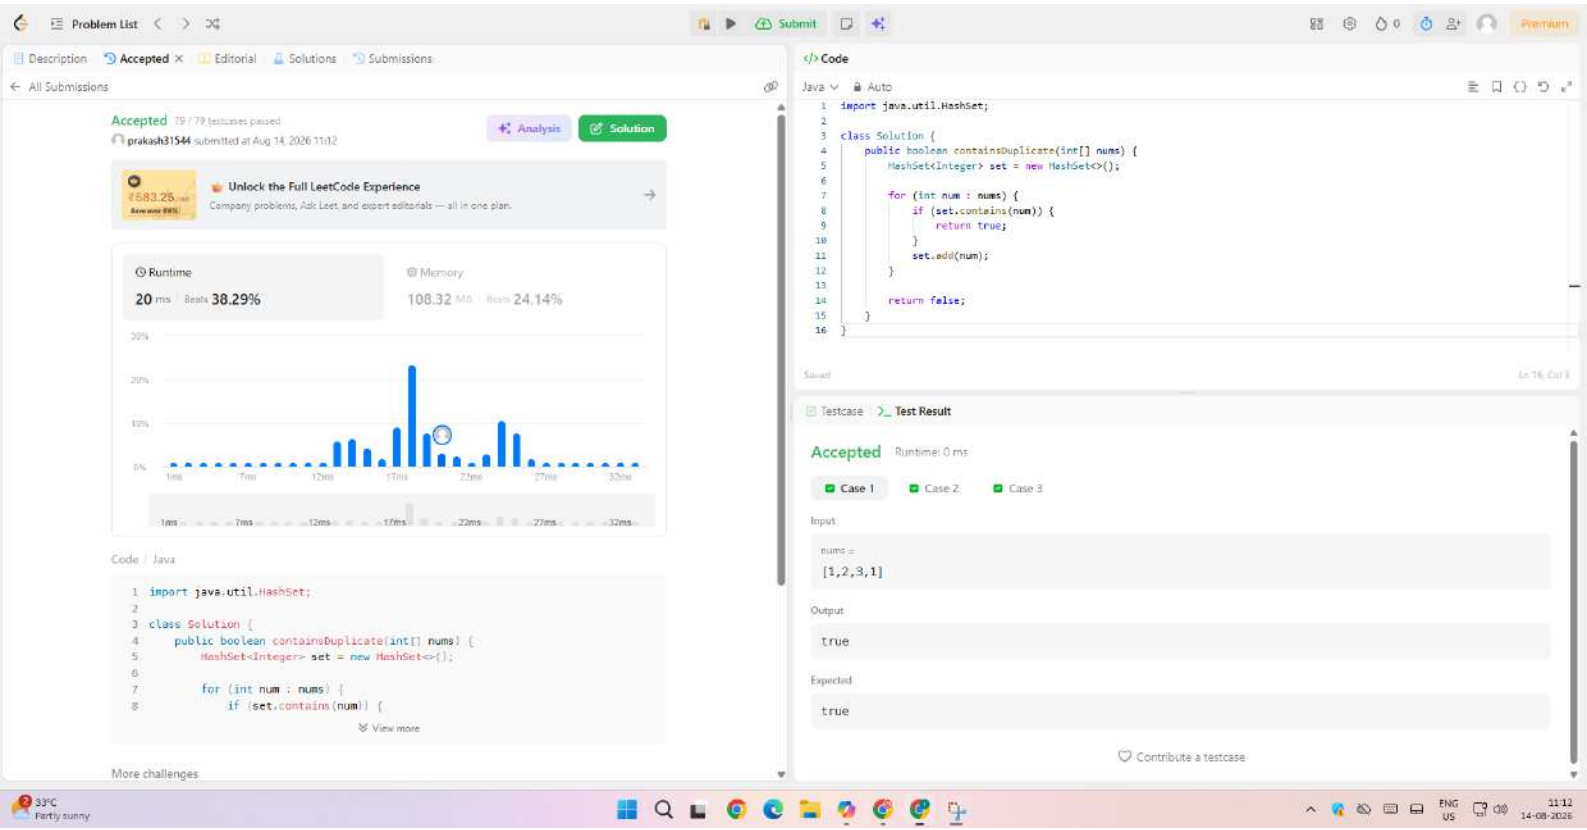

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 129 / 129 testcases passed
prakash31544 submitted at Aug 07, 2026 12:27
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
7 ms Beats 72.34%
Memory
49.37 MB Beats 92.61%
Code Java
1 import java.util.*;
2
3 class Solution {
4 public List<List<String>> groupAnagrams(String[] strs) {
5 HashMap<String, List<String>> map = new HashMap<>();
6
7 for (String s : strs) {
8 char[] chars = s.toCharArray();
View more
More challenges
Code
Java
Auto
7 for (String s : strs) {
8 char[] chars = s.toCharArray();
9 Arrays.sort(chars);
10
11 String key = new String(chars);
12
13 if (!map.containsKey(key)) {
14 map.put(key, new ArrayList<>());
15 }
16
17 map.get(key).add(s);
18 }
19
20 return new ArrayList<>(map.values());
21 }
22 }
Saved
Ln 22, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
strs =
["eat","tea","tan","ate","nat","bat"]
Output
[["eat","tea","ate"],["bat"],["tan","nat"]]
Expected
[["bat"],["nat","tan"],["ate","eat","tea"]]
Contribute a testcase
31°C
Mostly cloudy
ENG
US
12:27
07-08-2026

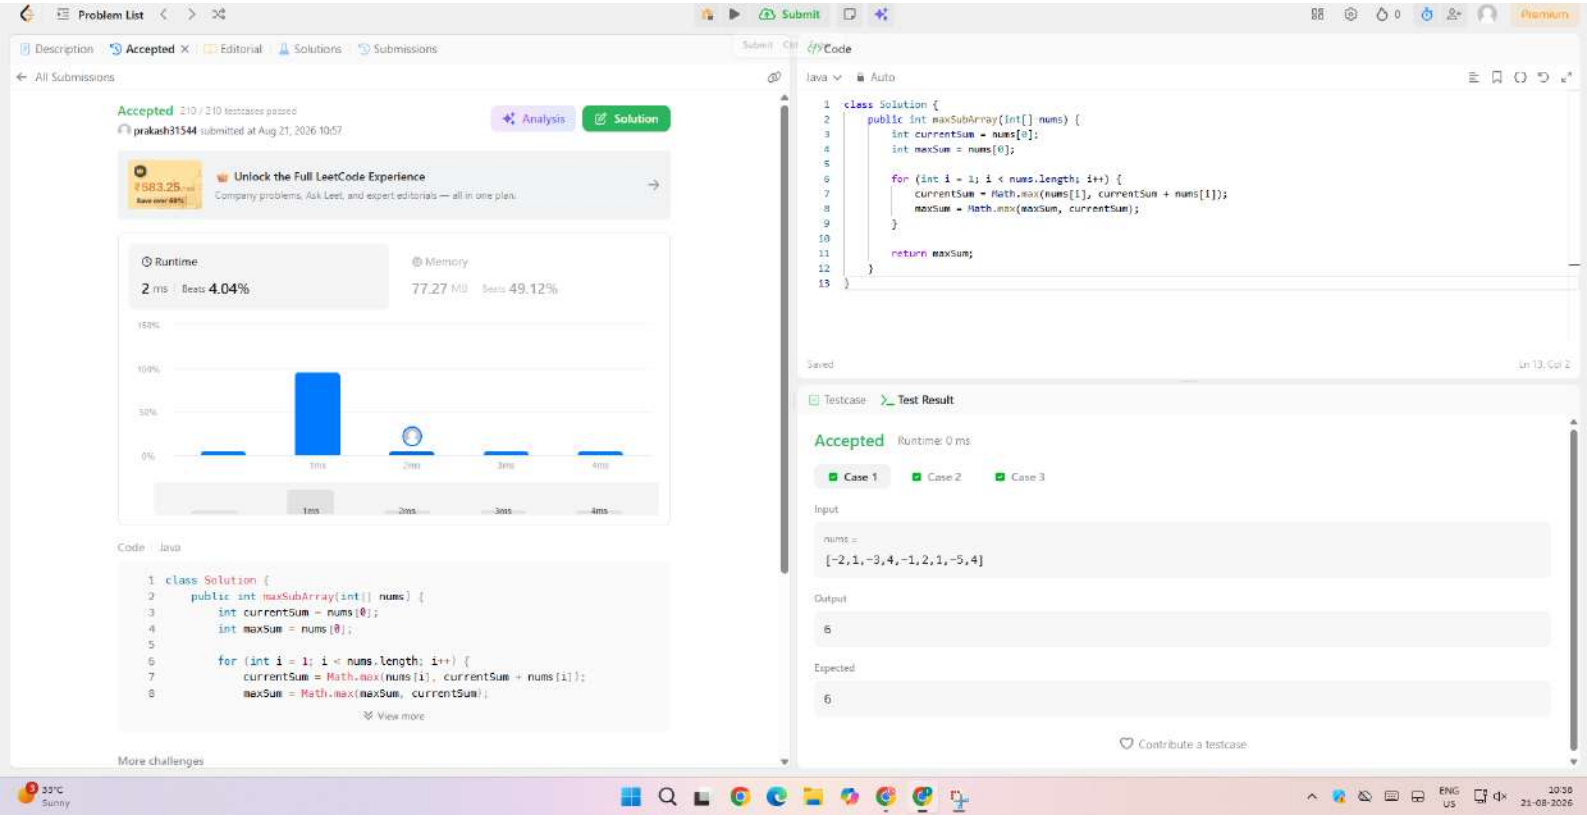

Problem List
Submit
Premium
Description
Accepted
Solutions
Submissions
All Submissions
Accepted
prakash31544 submitted at Aug 07, 2026 12:30
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
42.37 MB | Beats 84.15%
Code | Java
class Solution {
public String dayOfTheWeek(int day, int month, int year) {
String[] days = {
"Sunday", "Monday", "Tuesday",
"Wednesday", "Thursday", "Friday", "Saturday"
};
if (month < 3) {
View more
More challenges
Code
Java
Auto
if (month < 3) {
month += 12;
year--;
}
int k = year % 100;
int j = year / 100;
int h = (day + (13 * (month + 1)) / 5 + k + k / 4 + j / 4 + 5 * j) % 7;
// Zeller: 0=Saturday, 1=Sunday, ..., 6=Friday
int index = (h + 6) % 7;
return days[index];
}
}
Saved
Ln 23, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
day =
31
month =
8
year =
2019
Output
"Saturday"

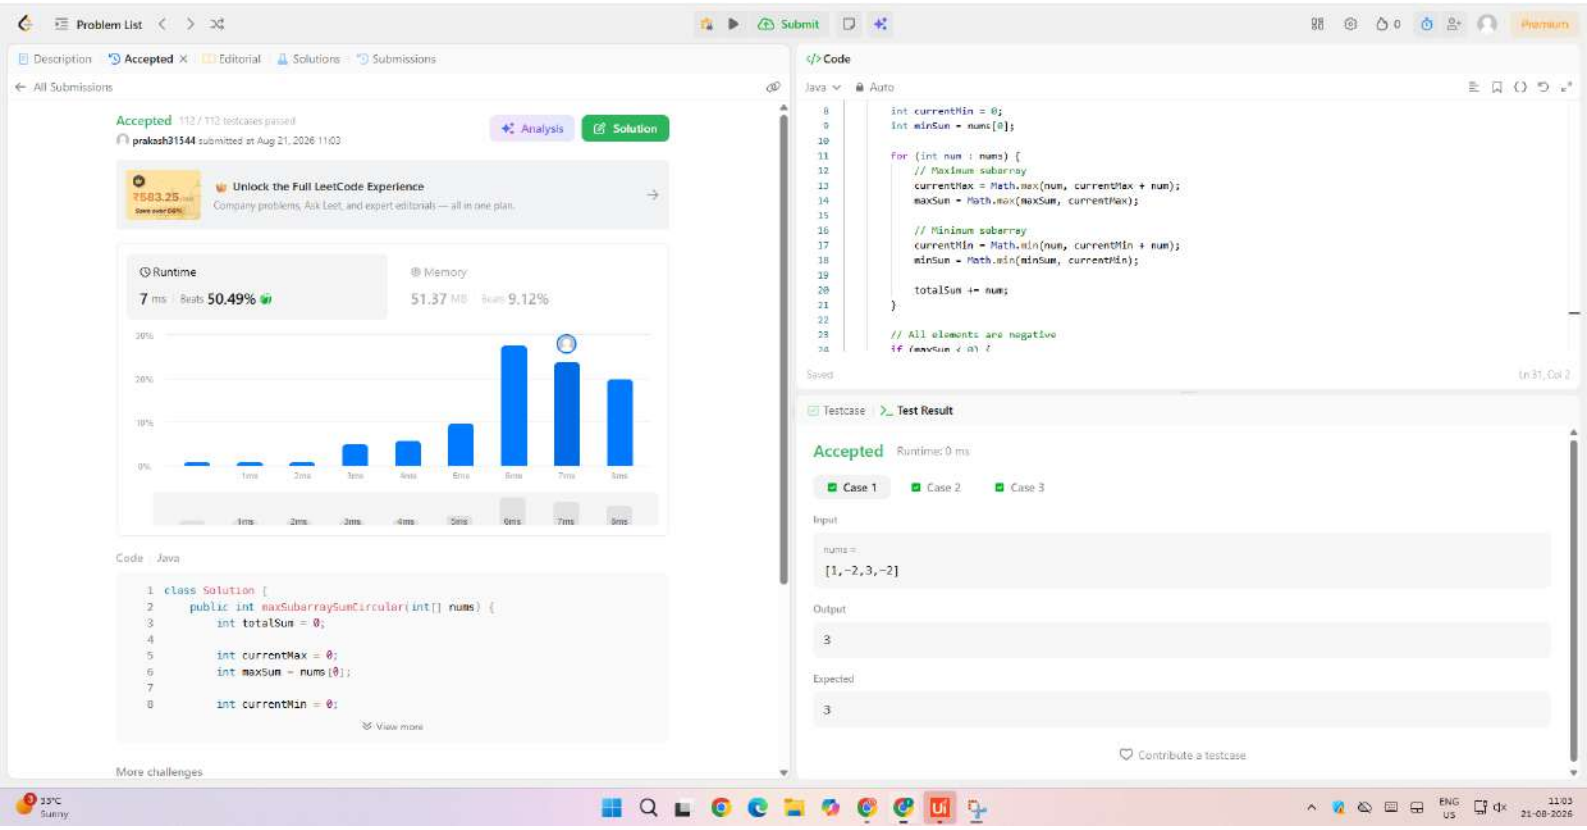

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 236 / 236 testcases passed
prakash31544 submitted at Aug 07, 2026 12:32
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan
Runtime
6 ms | Beats 94.56%
Memory
44.78 MB | Beats 88.63%
Code | Java
import java.util.*;
class Solution {
public String largestNumber(int[] nums) {
String[] arr = new String[nums.length];
// Convert integers to strings
for (int i = 0; i < nums.length; i++) {
View more
More challenges
Code
Java
Auto
// Edge case: all numbers are zero
if (arr[0].equals("0")) {
return "0";
}
// Build the largest number
StringBuilder result = new StringBuilder();
for (String s : arr) {
result.append(s);
}
return result.toString();
}
}
Saved
Ln 29, Col 2
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Input
nums =
[10,2]
Output
"210"
Expected
"210"
Contribute a testcase
31°C
Mostly cloudy
ENG
US
12:32
07-08-2026

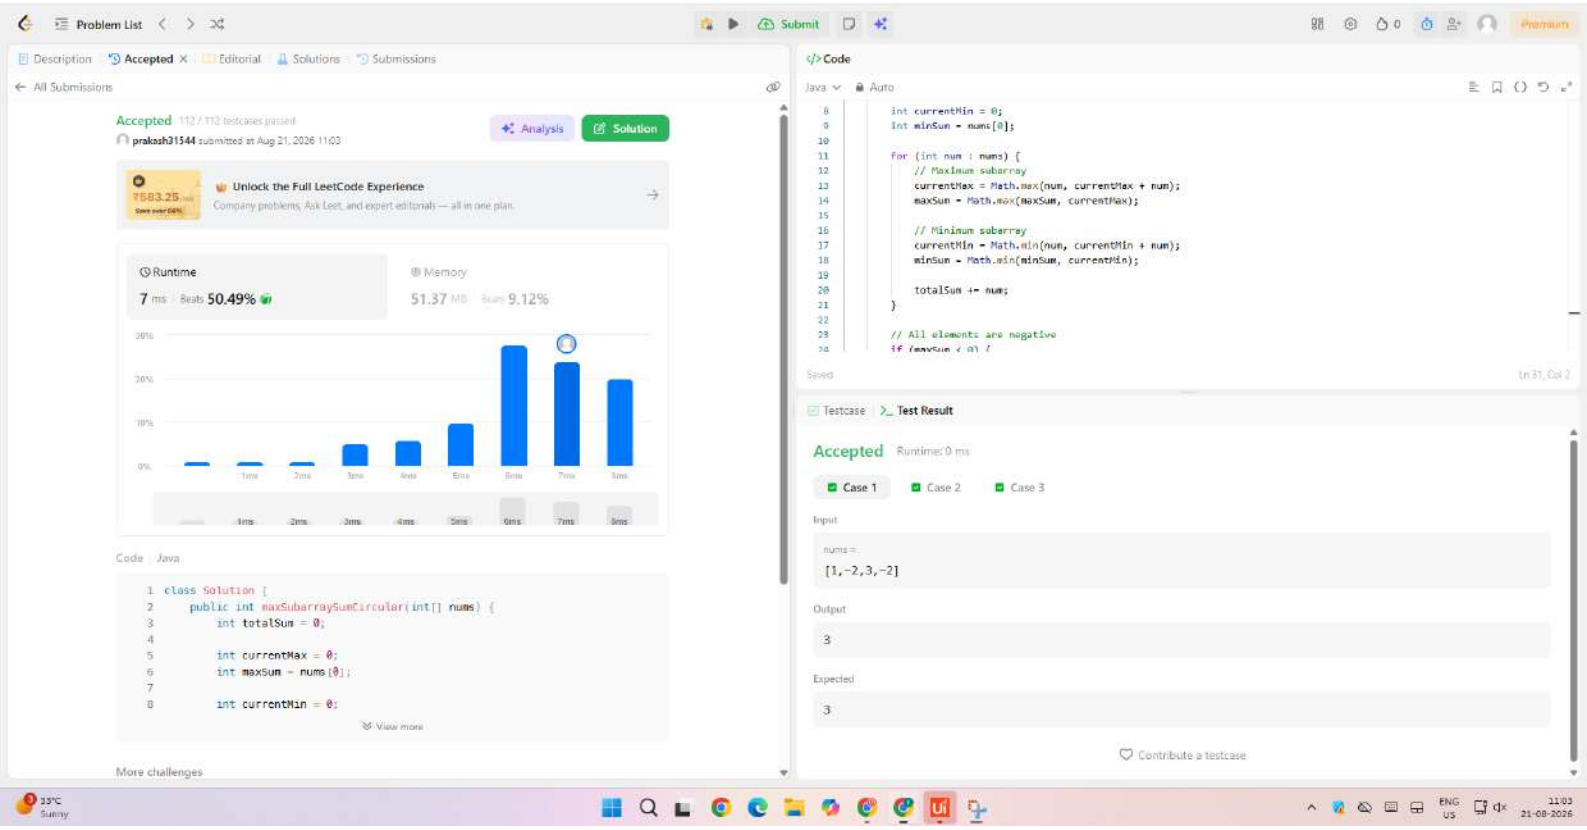

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 362 / 362 testcases passed
prakash31544 submitted at Aug 07, 2026 12:54
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms Beats 77.27%
Memory
46.98 MB Beats 9.49%
Code Java
class Solution {
public int removeDuplicates(int[] nums) {
int k = 1;
for (int i = 1; i < nums.length; i++) {
if (nums[i] != nums[k - 1]) {
nums[k] = nums[i];
k++;
View more
More challenges
Code
Java
Auto
Saved
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[1,1,2]
Output
[1,2]
Expected
[1,2]
Contribute a testcase

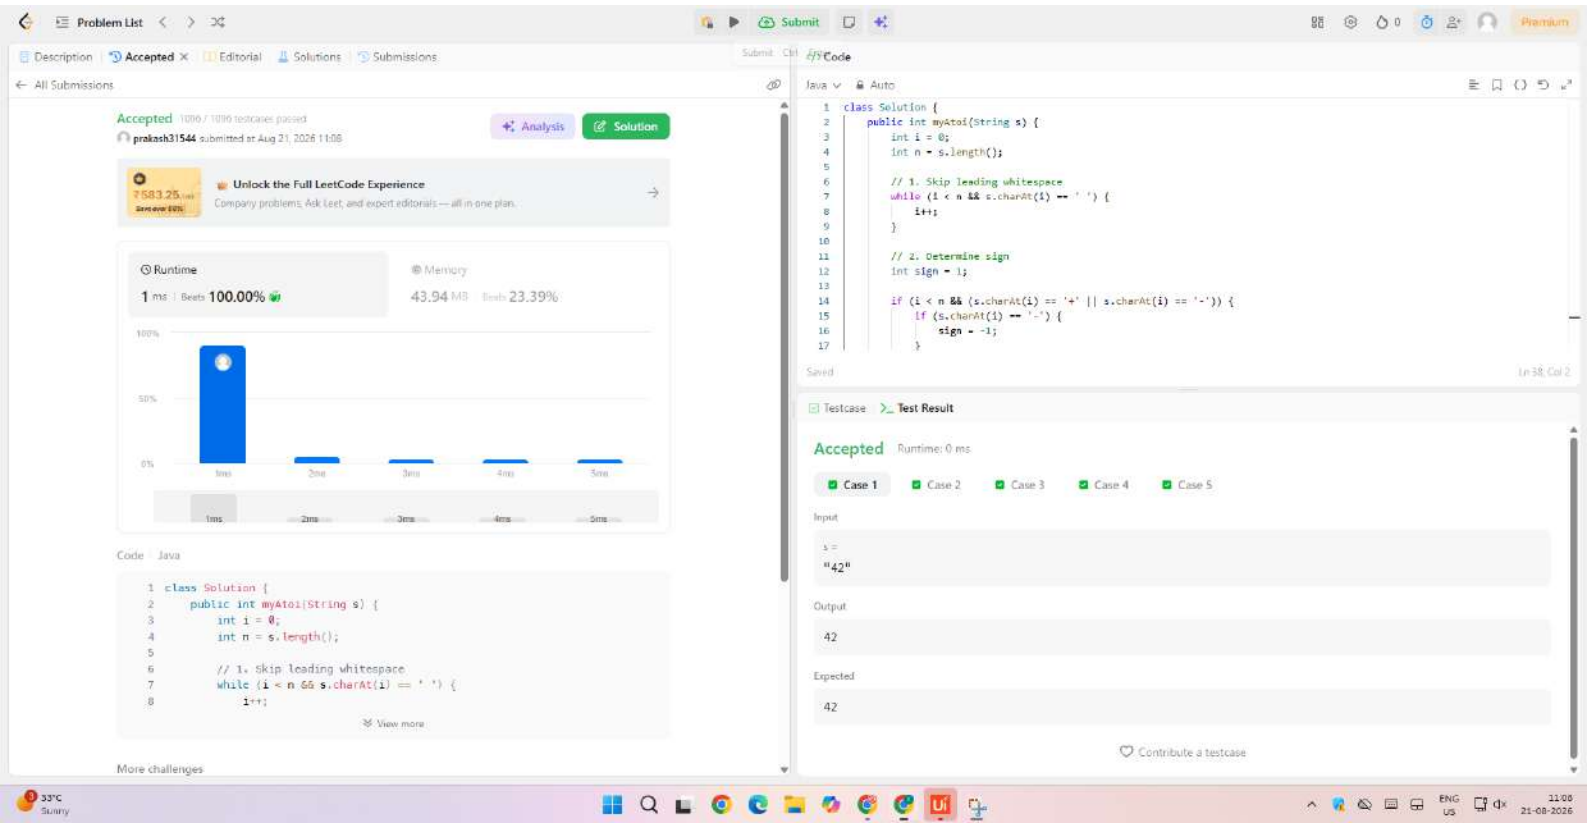

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 113 / 113 testcases passed
prakash31544 submitted at Aug 14, 2026 11:05
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
4 ms | Beats 65.55%
Memory
43.40 MB | Beats 20.11%
Code | Java
class Solution {
public boolean halvesAreAlike(String s) {
String vowels = "aeiouAEIOU";
int mid = s.length() / 2;
int countA = 0, countB = 0;
for (int i = 0; i < mid; i++) {
if (vowels.indexOf(s.charAt(i)) != -1) {
View more
More challenges
Code
Java
Auto
String vowels = "aeiouAEIOU";
int mid = s.length() / 2;
int countA = 0, countB = 0;
for (int i = 0; i < mid; i++) {
if (vowels.indexOf(s.charAt(i)) != -1) {
countA++;
}
}
for (int i = mid; i < s.length(); i++) {
if (vowels.indexOf(s.charAt(i)) != -1) {
countB++;
}
}
return countA == countB;
Saved
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
s =
"book"
Output
true
Expected
true
Contribute a testcase

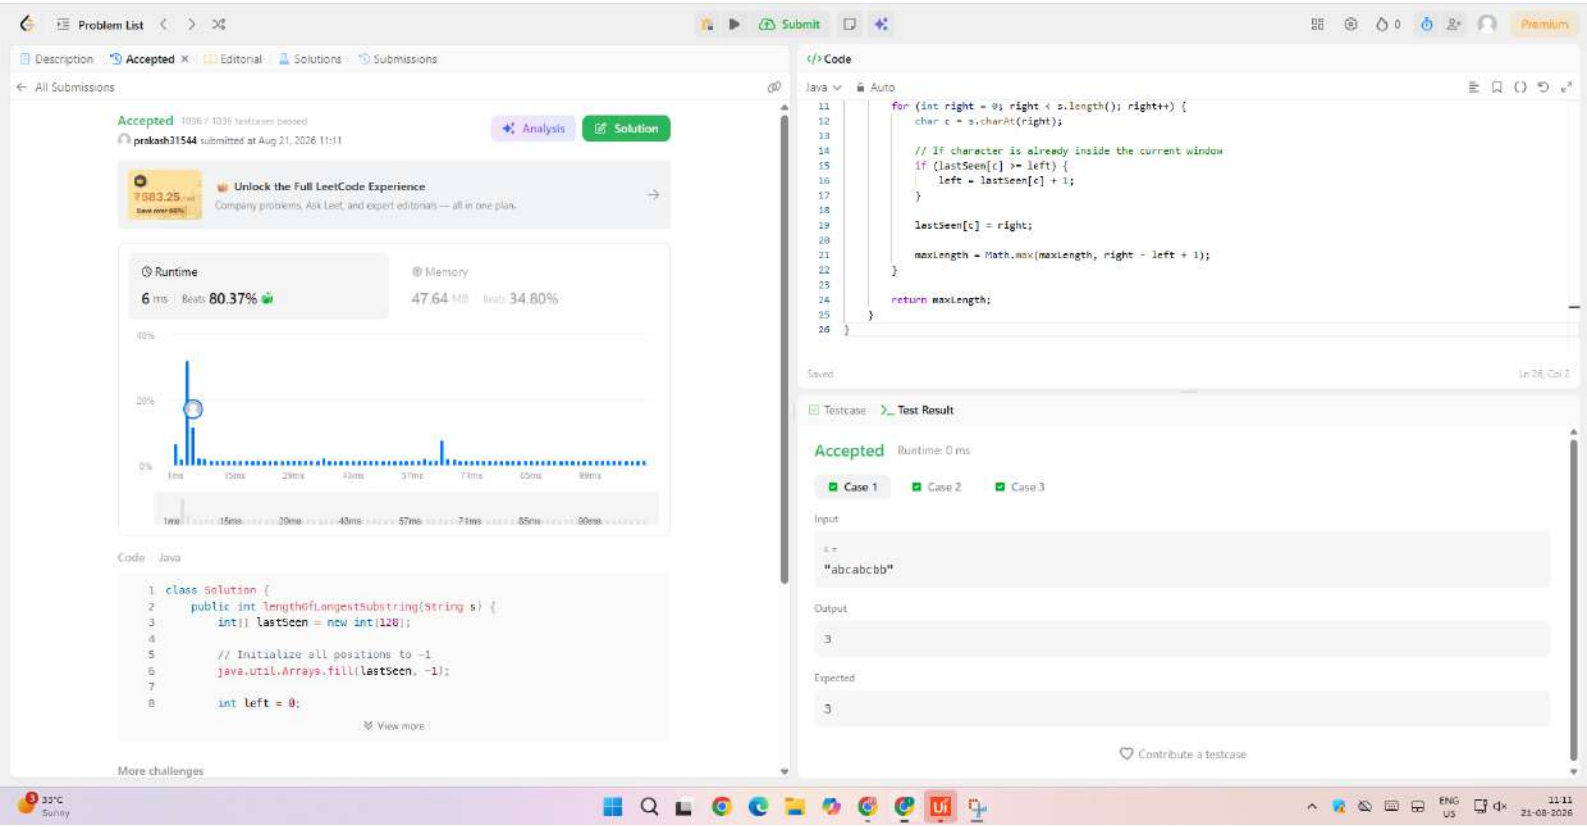

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 79 / 79 testcases passed
prakash31544 submitted at Aug 14, 2026 11:12
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
20 ms | Beats 38.29%
Memory
108.32 MB | Beats 24.14%
Code | Java
import java.util.HashSet;
class Solution {
public boolean containsDuplicate(int[] nums) {
HashSet<Integer> set = new HashSet<>();
for (int num : nums) {
if (set.contains(
View more
More challenges
Code
Java
Auto
import java.util.HashSet;
class Solution {
public boolean containsDuplicate(int[] nums) {
HashSet<Integer> set = new HashSet<>();
for (int num : nums) {
if (set.contains(num)) {
return true;
}
set.add(num);
}
return false;
}
}
Saved
Ln 16, Col 3
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,2,3,1]
Output
true
Expected
true
Contribute a testcase
33°C
Partly sunny
ENG
US
11:12
14-08-2026

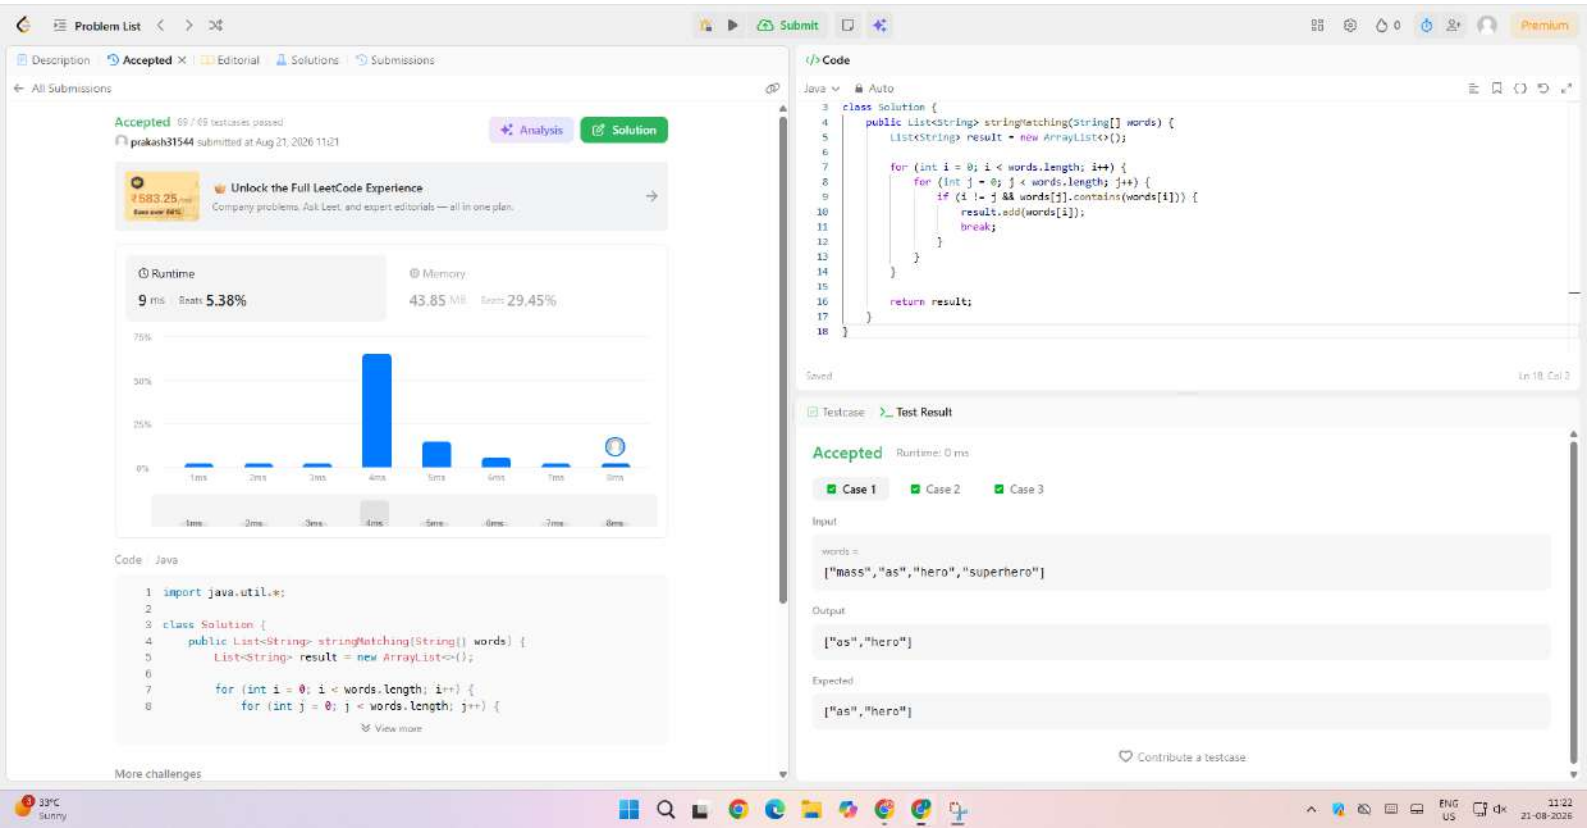

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
Code
All Submissions
Accepted 210 / 210 testcases passed
prakash31544 submitted at Aug 21, 2026 10:57
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
2 ms | Beats 4.04%
Memory
77.27 MB | Beats 49.12%
Code | Java
More challenges
java
Auto
class Solution {
public int maxSubArray(int[] nums) {
int currentSum = nums[0];
int maxSum = nums[0];
for (int i = 1; i < nums.length; i++) {
currentSum = Math.max(nums[i], currentSum + nums[i]);
maxSum = Math.max(maxSum, currentSum);
}
return maxSum;
}
}
Saved
Ln 13, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[-2,1,-3,4,-1,2,1,-5,4]
Output
6
Expected
6
Contribute a testcase


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 112 / 112 testcases passed
prakash31544 submitted at Aug 21, 2026 11:03
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
7 ms | Beats 50.49%
Memory
51.37 MB | Beats 9.12%
Code | Java
class Solution {
public int maxSubarraySumCircular(int[] nums) {
int totalSum = 0;
int currentMax = 0;
int maxSum = nums[0];
int currentMin = 0;
View more
More challenges
Code
Java
Auto
int currentMin = 0;
int minSum = nums[0];
for (int num : nums) {
// Maximum subarray
currentMax = Math.max(num, currentMax + num);
maxSum = Math.max(maxSum, currentMax);
// Minimum subarray
currentMin = Math.min(num, currentMin + num);
minSum = Math.min(minSum, currentMin);
totalSum += num;
}
// All elements are negative
Saved
Ln 31, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,-2,3,-2]
Output
3
Expected
3
Contribute a testcase
33°C
Sunny
ENG
US
11:03
21-08-2026


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 112 / 112 testcases passed
prakash31544 submitted at Aug 21, 2026 11:03
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
7 ms | Beats 50.49%
Memory
51.37 MB | Beats 9.12%
Code | Java
class Solution {
public int maxSubarraySumCircular(int[] nums) {
int totalSum = 0;
int currentMax = 0;
int maxSum = nums[0];
int currentMin = 0;
View more
More challenges
Code
Java
Auto
int currentMin = 0;
int minSum = nums[0];
for (int num : nums) {
// Maximum subarray
currentMax = Math.max(num, currentMax + num);
maxSum = Math.max(maxSum, currentMax);
// Minimum subarray
currentMin = Math.min(num, currentMin + num);
minSum = Math.min(minSum, currentMin);
totalSum += num;
}
// All elements are negative
Saved
Ln 31, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,-2,3,-2]
Output
3
Expected
3
Contribute a testcase
33°C
Sunny
ENG
US
11:03
21-08-2026


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
Code
All Submissions
Accepted 1096 / 1096 testcases passed
prakash31544 submitted at Aug 21, 2026 11:08
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms | Beats 100.00%
Memory
43.94 MB | Beats 23.39%
Code Java
class Solution {
public int myAtoi(String s) {
int i = 0;
int n = s.length();
// 1. Skip leading whitespace
while (i < n && s.charAt(i) == ' ') {
i++;
View more
More challenges
Java Auto
class Solution {
public int myAtoi(String s) {
int i = 0;
int n = s.length();
// 1. Skip leading whitespace
while (i < n && s.charAt(i) == ' ') {
i++;
}
// 2. Determine sign
int sign = 1;
if (i < n && (s.charAt(i) == '+' || s.charAt(i) == '-')) {
if (s.charAt(i) == '-') {
sign = -1;
}
Saved
Ln 38, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Case 4
Case 5
Input
s =
"42"
Output
42
Expected
42
Contribute a testcase


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 1038 / 1038 testcases passed
prakash31544 submitted at Aug 21, 2026 11:11
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
6 ms Beats 80.37%
Memory
47.64 MB Beats 34.80%
Code Java
class Solution {
public int lengthOfLongestSubstring(String s) {
int[] lastSeen = new int[128];
// Initialize all positions to -1
java.util.Arrays.fill(lastSeen, -1);
int left = 0;
View more
More challenges
Code
Java
Auto
for (int right = 0; right < s.length(); right++) {
char c = s.charAt(right);
// If character is already inside the current window
if (lastSeen[c] >= left) {
left = lastSeen[c] + 1;
}
lastSeen[c] = right;
maxLength = Math.max(maxLength, right - left + 1);
}
return maxLength;
}
}
Saved
Ln 26, Col 2
Testcase
Test Result
Accepted Runtime: 0 ms
Case 1
Case 2
Case 3
Input
s =
"abcabcbb"
Output
3
Expected
3
Contribute a testcase
33°C
Sunny
ENG
US
11:11
21-08-2026


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 69 / 69 testcases passed
prakash31544 submitted at Aug 21, 2026 11:21
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
9 ms | Beats 5.38%
Memory
43.85 MB | Beats 29.45%
Code
Java
import java.util.*;
class Solution {
public List<String> stringMatching(String[] words) {
List<String> result = new ArrayList<>();
for (int i = 0; i < words.length; i++) {
for (int j = 0; j < words.length; j++) {
View more
More challenges
Code
Java
Auto
class Solution {
public List<String> stringMatching(String[] words) {
List<String> result = new ArrayList<>();
for (int i = 0; i < words.length; i++) {
for (int j = 0; j < words.length; j++) {
if (i != j && words[j].contains(words[i])) {
result.add(words[i]);
break;
}
}
}
return result;
}
}
Saved
Ln 18, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
words =
["mass","as","hero","superhero"]
Output
["as","hero"]
Expected
["as","hero"]
Contribute a testcase
33°C
Sunny
ENG
US
11:22
21-08-2026

11:25 11.0 KB/S 75%

f907a3e1-32d9-4faf...



Infosys
Navigate your next

COURSE COMPLETION CERTIFICATE

The certificate is awarded to

DARAGANI PRAKASH RAJU

for successfully completing the course

Computational Problem Solving

on September 25, 2026

Infosys | Springboard

Congratulations! You make us proud!

Satheesha B. N.
Satheesha B. Nanjappa
Senior Vice President and Head
Education, Training and Assessment
Infosys Limited

Issued on: Friday, September 25, 2026
To verify, scan the QR code at https://verify.onwingspan.com