

System Design: What is Scalability?

#1 System Design - Scalability



ASHISH PRATAP SINGH

DEC 25, 2023



295



33



10

Share

As a system grows, the performance starts to **degrade** unless we adapt it to deal with that growth.


Scalability is the property of a system to handle a growing amount of load by **adding resources** to the system.

A system that can continuously evolve to support a growing amount of work is scalable.


In this article, we will explore different ways a system can grow and common ways to make a system scalable.

How can a System Grow?


A system can grow in several dimensions.



More Users




More Features



More Data

blog.algomaster.io



More Complexity



More Geographies

1. Growth in User Base

More users started using the system, leading to increased number of requests.

- **Example:** A social media platform experiencing a surge in new users.

2. Growth in Features

More features were introduced to expand the system's capabilities.

- **Example:** An e-commerce website adding support for a new payment method.

3. Growth in Data Volume

Growth in the amount of data the system stores and manages due to user activity or logging.

- **Example:** A video streaming platform like youtube storing more video content over time.

4. Growth in Complexity

The system's architecture evolves to accommodate new features, scale, or integrations, resulting in additional components and dependencies.

- **Example:** A system that started as a simple application is broken into smaller, independent systems.

5. Growth in Geographic Reach

The system is expanded to serve users in new regions or countries.

- **Example:** An e-commerce company launching websites and distribution in new international markets.

 [**Become a Better Software Engineer - CodeCrafters.io**](https://codecrafters.io)

Build your own Redis Learn about TCP servers, the Redis protocol and more 55 stages	Build your own HTTP server Learn about TCP servers, the HTTP protocol and more 11 stages
Build your own Interpreter Learn about tokenization, ASTs, tree-walk interpreters and more. FREE DURING BETA	Build your own Shell Learn about parsing shell commands, executing programs and more 12 stages
Build your own Git Learn about git objects, plumbing commands and more 7 stages	Build your own DNS server Learn about the DNS protocol, DNS record types and more. 8 stages

[CodeCrafters](https://codecrafters.io) is a YC backed platform that offers a unique, **hands-on** approach to practice **complex programming challenges** like building your own **Redis**, **Git**, **SQLite**, **Bittorrent** client and more from scratch.


How to Scale a System?

Here are 10 common ways to make a system scalable:

1. Vertical Scaling (Scale up)

This means adding more power to your existing machines by upgrading server with more RAM, faster CPUs, or additional storage.

It's a good approach for simpler architectures but has limitations in how far you can go.

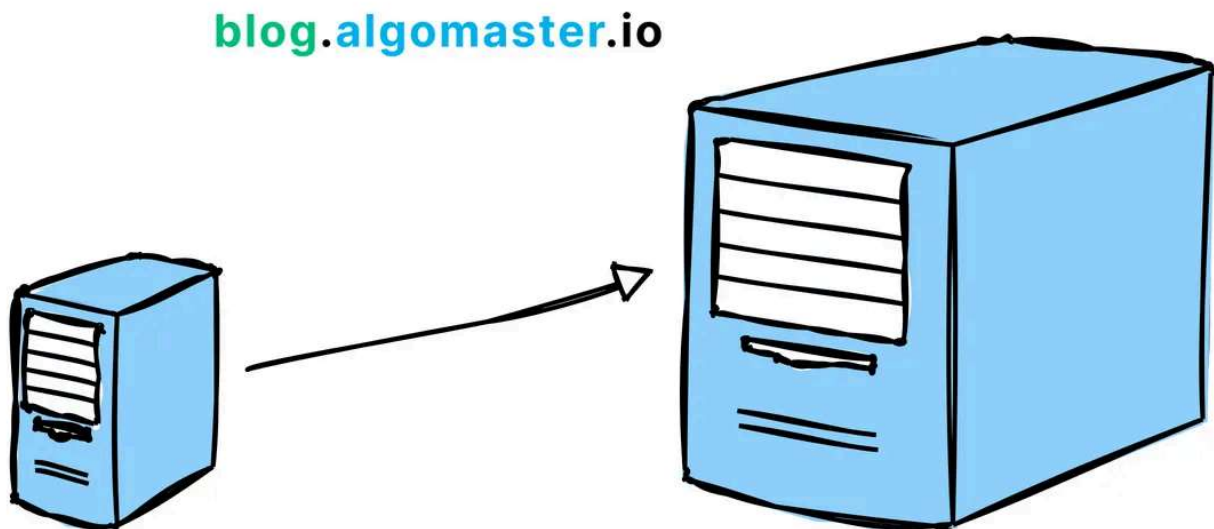


Vertical Scaling

2. Horizontal Scaling (Scale out)

This means adding more machines to your system to spread the workload across multiple servers.

It's often considered the most effective way to scale for large systems.


blog.algomaster.io

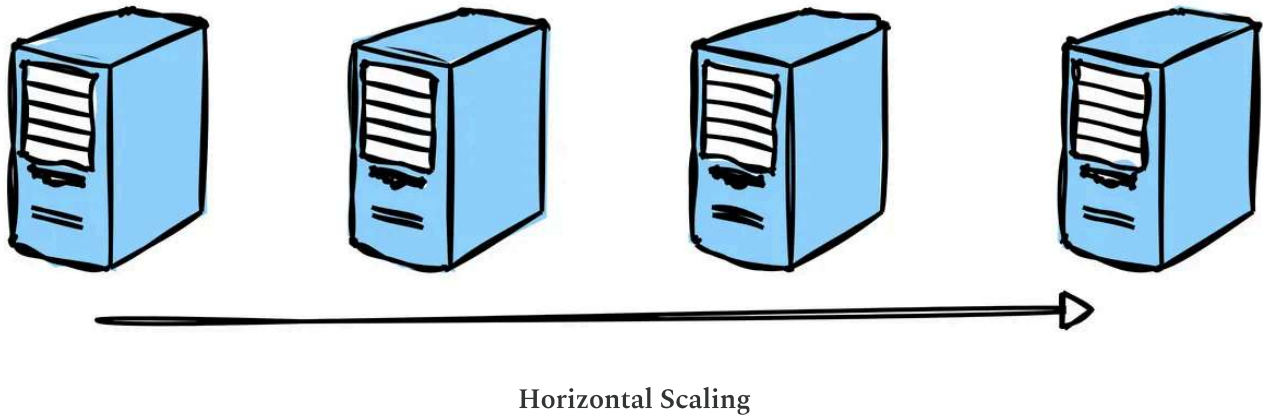

Example: Netflix uses horizontal scaling for its streaming service, adding more servers to their clusters to handle the growing number of users and data traffic.

3. Load Balancing

Load balancing is the process of distributing traffic across multiple servers to ensure no single server becomes overwhelmed.

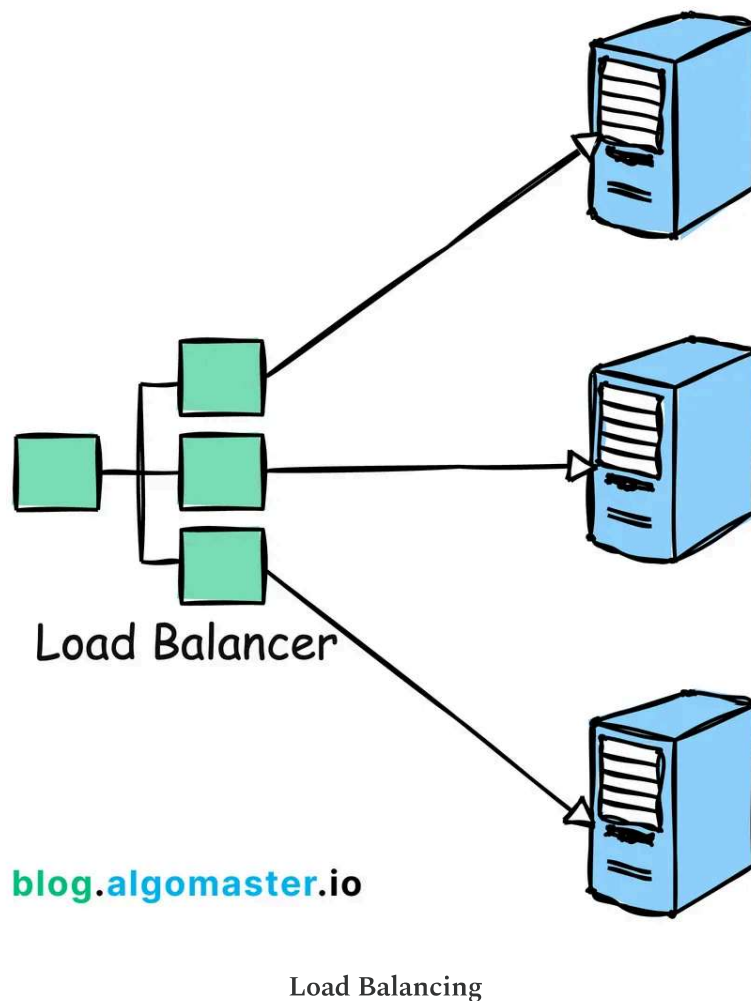


Example: Google employs load balancing extensively across its global infrastructure to distribute search queries and traffic evenly across its massive server farms.

4. Caching

Caching is a technique to store frequently accessed data in-memory (like RAM) to reduce the load on the server or database.

Implementing caching can dramatically improve response times.

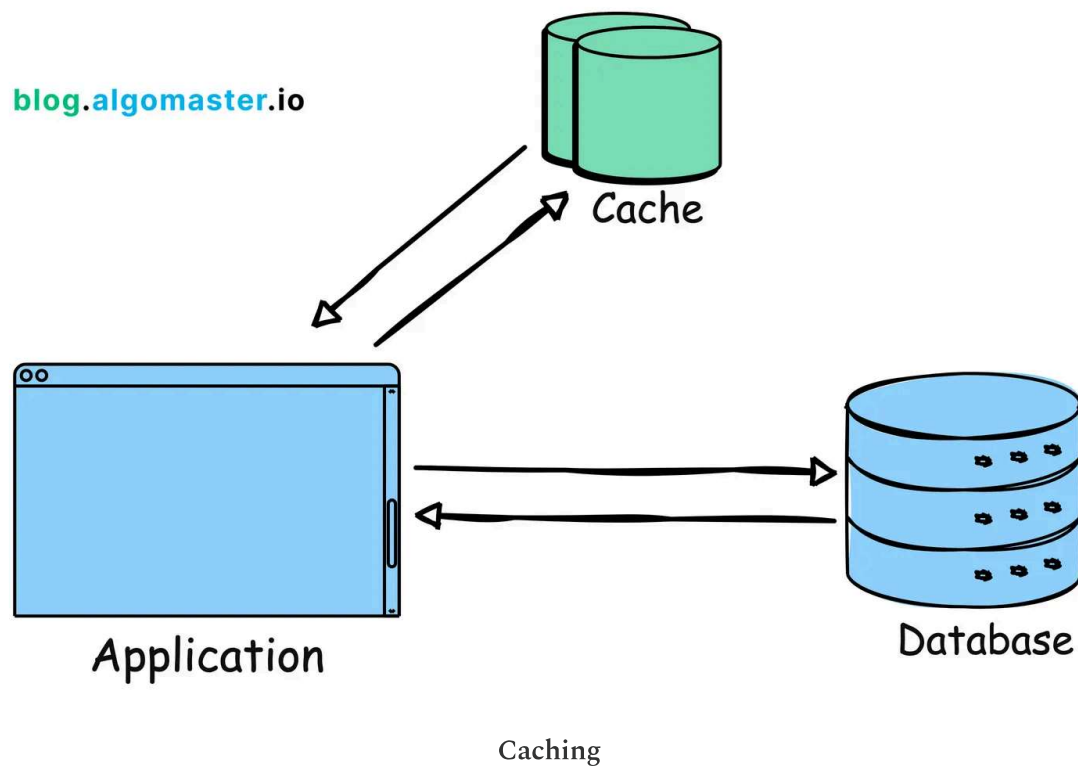

Example: Reddit uses caching to store frequently accessed content like hot posts and comments so that they can be served quickly without querying the database each time.

5. Content Delivery Networks (CDNs)

CDN distributes static assets (images, videos, etc.) closer to users. This can reduce latency and result in faster load times.

Example: Cloudflare provides CDN services, speeding up website access for users worldwide by caching content in servers located close to users.




Credit: <https://www.cloudflare.com/learning/cdn/what-is-a-cdn/>

Subscribe to receive new posts every week.

6. Partitioning

Partitioning means splitting data or functionality across multiple nodes/servers to distribute workload and avoid bottlenecks.

blog.algomaster.io

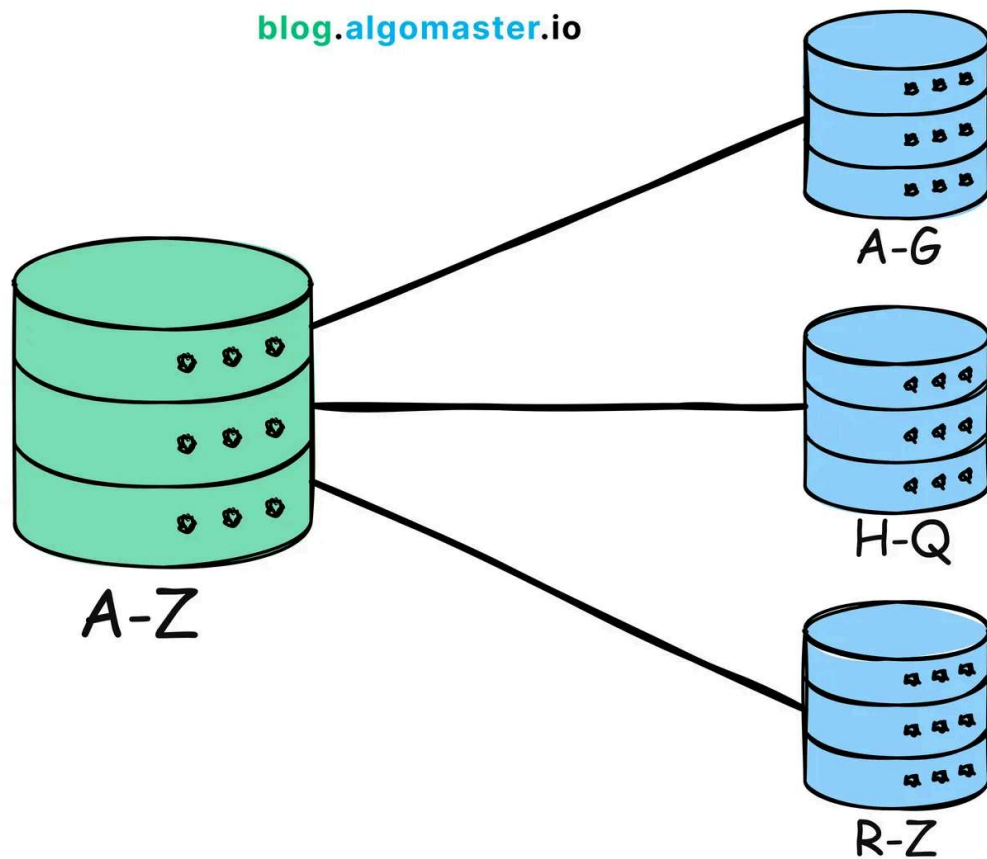

Example: Amazon DynamoDB uses partitioning to distribute data and traffic for its NoSQL database service across many servers, ensuring fast performance and scalability.

7. Asynchronous communication

Asynchronous communication means deferring long-running or non-critical tasks to background queues or message brokers.


This ensures your main application remains responsive to users.

Example: Slack uses asynchronous communication for messaging. When a message is sent, the sender's interface doesn't freeze; it continues to be responsive while the message is processed and delivered in the background.

8. Microservices Architecture

Micro-services architecture breaks down application into smaller, independent services that can be scaled independently.

This improves resilience and allows teams to work on specific components in parallel.

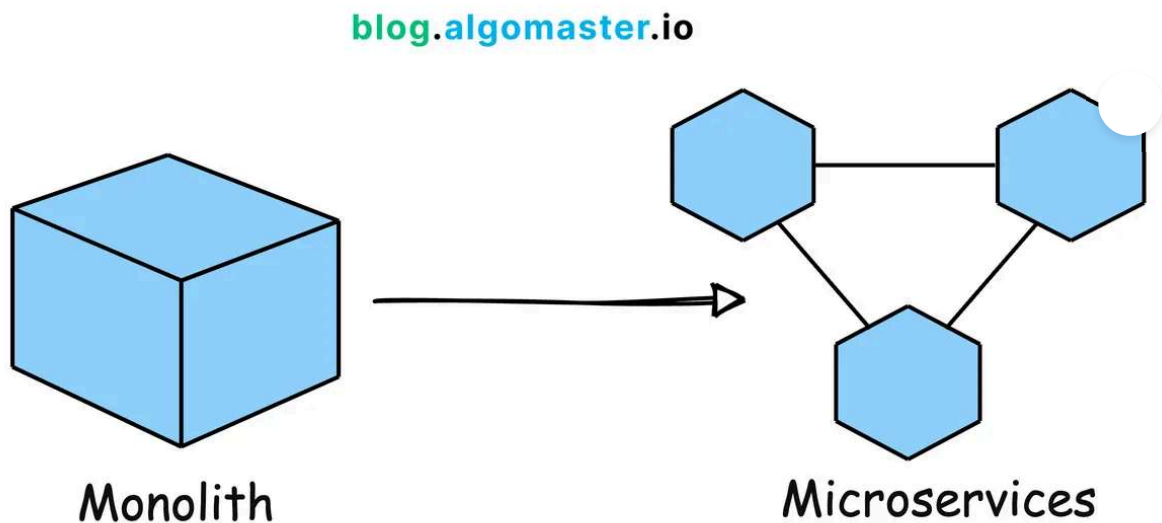


Example: Uber has evolved its architecture into microservices to handle different functions like billing, notifications, and ride matching independently, allowing for efficient scaling and rapid development.

9. Auto-Scaling

Auto-Scaling means automatically adjusting the number of active servers based on the current load.

This ensures that the system can handle spikes in traffic without manual intervention.

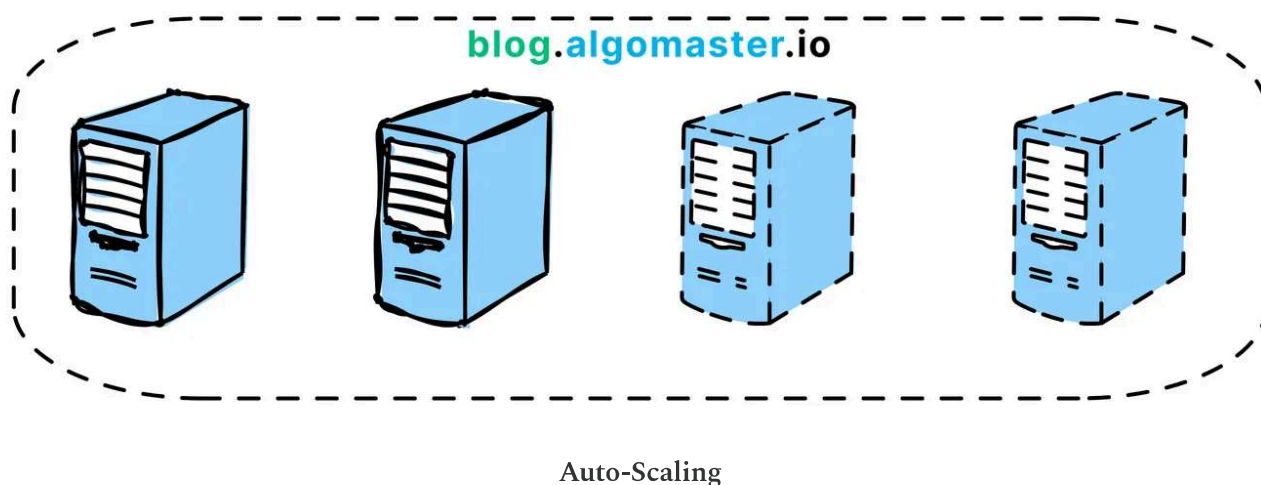

Example: AWS Auto Scaling monitors applications and automatically adjusts capacity to maintain steady, predictable performance at the lowest possible cost.

10. Multi-region Deployment

Deploy the application in multiple data centers or cloud regions to reduce latency and improve redundancy.

Example: Spotify uses multi-region deployments to ensure their music streaming service remains highly available and responsive to users all over the world, regardless of where they are located.

Thank you so much for reading.

If you found it valuable, hit a like ❤️ and consider subscribing for more such content every week.

If you have any questions or suggestions, leave a comment.

This post is public so feel free to share it.

Subscribe for free to receive new articles every week.

Checkout my [Youtube channel](#) for more in-depth content.

Follow me on [LinkedIn](#), [X](#) and [Medium](#) to stay updated.

Checkout my [GitHub repositories](#) for free interview preparation resources.

I hope you have a lovely day!

See you soon,

Ashish



295 Likes · 10 Restacks

Next →

Discussion about this post

Comments

Restacks



Write a comment...



Shivam Singh 9 May

...

♥ Liked by Ashish Pratap Singh

Wonderful explanation . After reading this article i am feeling confident that if i read and understand all your article , i will be good in system design.

Thanks a lot bro. Keep Growing.

Waiting for L1 D and L1 D videos on each topic

♡ LIKE (5) 💬 REPLY ↗ SHARE

1 reply by Ashish Pratap Singh



Ram 17 Apr

...

♡ Liked by Ashish Pratap Singh

Liked it. Very good explanation which is need for interview prep.

♡ LIKE (3) 💬 REPLY ↗ SHARE

1 reply by Ashish Pratap Singh

31 more comments...

© 2024 Ashish Pratap Singh · [Privacy](#) · [Terms](#) · [Collection notice](#)
[Substack](#) is the home for great culture