MARKETING PLATFORM · DESIGN SYSTEM

Typography Guide

What typography is, why the project uses a fixed type system, and how to use it in code. Every text style and every button is shown as the code you write next to what appears on screen.

Aa — Plus Jakarta Sans, headings

Aa — Inter, body text

अआ — Noto Sans Devanagari, Hindi

{ } — JetBrains Mono, code & numbers

01 What is typography?

- **Typography** is how text looks and reads: which **font**, what **size**, how much **space between lines** (line-height), how **bold** (weight), how much **space between letters** (tracking), and what **colour**.
- In this project, typography is a **fixed system**: a small set of named styles (`h1` , `body` , `caption` ...) instead of picking random sizes on every screen.
- It lives in three places:
  - `src/app/fonts.ts` : loads the font files
  - `src/app/globals.css` : font stacks, colours and base text rules
  - `src/components/ui/typography.tsx` : the components you use: `Heading` , `Text` , `Kpi` , `Code`

02 Why we use it

Consistency
Every page uses the same sizes, so the product looks like one app, not many.

Readability
Line-heights and sizes are tuned so long text is easy to read on phone and desktop.

Accessibility
Text colours meet WCAG AA contrast (4.5:1) in both light and dark mode.

Speed
Fonts are self-hosted. Hindi and ₹ glyphs download only when a page needs them.

Hindi support
Devanagari gets its own font and extra line spacing for matras.

Easy to change
Change a size once in `typography.tsx` and every screen updates.

03 Quick start: write this, get this

The easy way to read this page: the left box is the code you type. The right box is exactly what appears on screen. Add one import at the top of your file, then copy any line.

```
import { Heading, Text, Kpi, Code } from "@/components/ui/typography";
```

Headings: for titles

YOU WRITE

```
<Heading level="display">
  Big hero title
</Heading>
```

YOU GET

Big hero title

<h1> · 48px · home page hero only

YOU WRITE

```
<Heading level="h1">Dashboard</Heading>
```

YOU GET

Dashboard

<h1> · 36px · one per page

YOU WRITE

```
<Heading>Campaigns</Heading>
// no level = h2
```

YOU GET

Campaigns

<h2> · 30px · main sections

YOU WRITE

```
<Heading level="h3">This week</Heading>
```

YOU GET

This week

<h3> · 24px · sub-sections

YOU WRITE

```
<Heading level="h4">Diwali Sale 2026</Heading>
```

YOU GET

Diwali Sale 2026

<h4> · 18px · card titles

YOU WRITE

```
<Heading level="h3" as="h1">
  Dashboard
</Heading>
```

YOU GET

Dashboard

looks like h3, but the tag is <h1> (good for SEO/screen readers)

Text: for everything that is not a title

YOU WRITE

```
<Text>Your campaign is live.</Text>
```

YOU GET

Your campaign is live.

<p> · 14px · normal paragraph (default)

YOU WRITE

```
<Text variant="body-lg">
  Reach more customers.
</Text>
```

YOU GET

Reach more customers.

16px · intro line under a title

YOU WRITE

```
<Text variant="small">Last updated today</Text>
```

YOU GET

Last updated today

13px · table cells, helper text

YOU WRITE

```
<Text variant="caption">2 min ago</Text>
```

YOU GET

2 min ago

12px · time, meta info

```
<Text variant="overline">Features</Text>
```

FEATURES
11px · CAPITALS · small label above a title

```
<Text variant="label" as="label">
  Business name
</Text>
```

Business name
14px bold · form field labels

04 Change the colour with `tone`

Add `tone` to any `<Text>`. The colour changes by itself in dark mode.

YOU WRITE	YOU GET
`<Text>Orders today</Text>`	Orders today default · main text
`<Text tone="secondary">Orders today</Text>`	Orders today secondary · slightly softer
`<Text tone="muted">Orders today</Text>`	Orders today muted · grey helper text
`<Text tone="primary">Orders today</Text>`	Orders today primary · brand indigo
`<Text tone="success">Payment received</Text>`	Payment received success · good news
`<Text tone="warning">Credits running low</Text>`	Credits running low warning · needs attention
`<Text tone="danger">Payment failed</Text>`	Payment failed danger · errors

`<Text variant="small" tone="muted">`
`  Meta + Google`
`</Text>`
	Meta + Google
	size and colour together

Numbers and code

YOU WRITE	YOU GET
`<Kpi>{formatINR(84500)}</Kpi>`	**₹84,500** 32px bold · digits line up · Indian grouping
`Run <Code>npm run dev</Code>`	Run `npm run dev` monospace box · commands, file names

Which one should I use?

I need...	Write this	Size
Page title	`<Heading level="h1">`	36px
Big hero title (home page)	`<Heading level="display">`	48px
Section title	`<Heading>` or `level="h3"`	30 / 24px
Card title	`<Heading level="h4">`	18px
Normal paragraph	`<Text>`	14px
Intro line under a title	`<Text variant="body-lg" tone="secondary">`	16px
Grey helper text	`<Text variant="small" tone="muted">`	13px
Time or date	`<Text variant="caption" tone="muted">`	12px
Small label above a title	`<Text variant="overline" tone="primary">`	11px
Form field label	`<Text variant="label" as="label">`	14px
Error message	`<Text variant="small" tone="danger">`	13px
Big money number	`<Kpi>{formatINR(x)}</Kpi>`	32px

05 Buttons: write this, get this

A button is something the user clicks to do an action. Text inside every button is Inter 14px semibold. Pick the **variant** for importance and the **size** for space.

```
import { Button } from "@/components/ui/button";
```

Variant: how important is the action?

YOU WRITE

```
<Button>Start free</Button>
// no variant = primary
```

YOU GET

Start free — main action · one per area

```
<Button variant="secondary">
  Book a demo
</Button>
```

Book a demo — second choice, next to primary

```
<Button variant="ghost">Cancel</Button>
```

Cancel Cancel

quiet · grey box on hover

```
<Button variant="accent">
  Recharge now
</Button>
```

Recharge now — orange · max one per screen

```
<Button variant="destructive">
  Delete campaign
</Button>
```

Delete campaign — delete / can't undo

```
<Button variant="link">View all</Button>
```

View all — looks like a link

Size: how much space is there?

YOU WRITE

```
<Button size="sm">Save</Button>
```

YOU GET

Save — 32px tall · 13px text · tables, cards

```
<Button>Save</Button>
// no size = md
```

Save — 40px tall · 14px text · default

```
<Button size="lg">Save</Button>
```

Save

48px tall · 16px text · hero, mobile

```
<Button variant="ghost" size="icon"
  aria-label="Dark mode">
  <Moon />
</Button>
```

icon 40×40 · icon-sm 32×32
always add aria-label

States and extras

YOU WRITE

```
<Button>
  <Plus /> Create
</Button>
```

YOU GET



icon + text · icon auto 16px

```
<Button loading>Saving</Button>
```



spinner + can't click
while the request runs

```
<Button disabled>Publish</Button>
```



faded · can't click

```
<Button variant="destructive"
  size="sm">
  <Trash2 /> Delete
</Button>
```



variant + size together

```
<Button asChild>
  <Link href="/signup">Start free</Link>
</Button>
```



looks like a button,
is a real link (<a>)

Button rules

- **One primary button** per area (a header, a card, a form). Everything else is secondary or ghost.
- **Accent (orange)** at most once per screen, for the action you most want people to take.
- **Icon-only buttons** must have `aria-label`, so screen readers can say what they do.
- **Going to another page?** Use `asChild` with `<Link>`. Doing an action? Use a normal `<Button onClick>`.
- Buttons are `type="button"` by default, so they never submit a form by accident. Add `type="submit"` on the form's submit button.
- Text is short and says the action: “Save”, “Delete campaign”, not “OK” or “Click here”.

06 Putting it together: one card


YOU WRITE

```
<div className="rounded-xl border bg-card p-5">
  <Text variant="overline" tone="primary">
    Campaign
  </Text>
  <Heading level="h4">Diwali Sale 2026</Heading>
  <Text variant="small" tone="muted">
    Meta + Google · ends 12 Nov
  </Text>

  <Kpi>{formatINR(84500)}</Kpi>
  <Text variant="caption" tone="success">
    +18% vs last week
  </Text>

  <div className="mt-4 flex gap-2">
    <Button size="sm">View report</Button>
    <Button size="sm" variant="secondary">
      Pause
    </Button>
  </div>
</div>
```

YOU GET

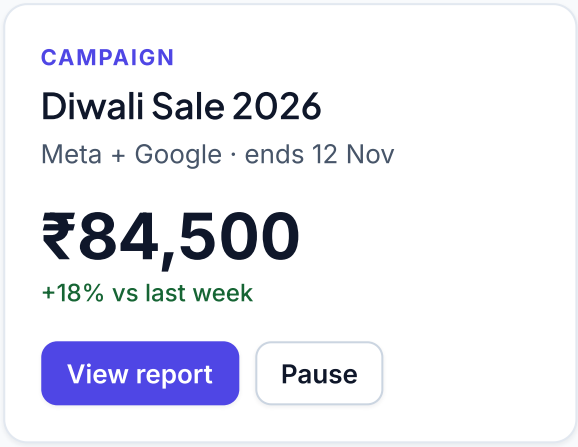

Only layout classes (border, padding, gap) are written by hand. Every size, weight and colour comes from the components, so the card matches the rest of the app in light and dark mode.

07 The four fonts

Plus Jakarta Sans

All your marketing in one app

Display font, for headings

Class `font-display` · variable `--font-jakarta`

Weights 200 – 800 · `preloaded`

Used by: all `h1` – `h6`, `<Heading>`, the logo wordmark

Inter

WhatsApp, posts, ads and creators. Plans from ₹299/month.

Sans font, for body text and UI

Class `font-sans` (default on `body`) · `--font-inter`

Weights 100 – 900 · `preloaded` + Latin Extended for ₹ (on demand)

Used by: paragraphs, buttons, menus, forms, `<Text>`, `<Kpi>`

देवनागरी

इस महीने आपके अभियानों ने ₹12,34,567 कमाए।

Noto Sans Devanagari, for Hindi

Variable `--font-noto-deva` · part of every stack

`on demand` only downloaded when Hindi text appears (`unicode-range`)

Gets `line-height: 1.6` via `:lang(hi)`

JetBrains

`npm run dev · ⌘K · 0123456789`

Mono font, for code and shortcuts

Class `font-mono` · `--font-jbmono`

Weights 100 – 800 · `on demand`

Used by: `<Code>`, the `⌘K` keyboard hint

How a font reaches the screen

1 · Font file
`node_modules/@fontsource-variable/…woff2`
No Google Fonts call, ever.

→

2 · fonts.ts
`localFont({ variable: "--font-jakarta" })`
Next.js copies the file and creates a CSS variable.

→

3 · globals.css
`--font-display: var(--font-jakarta), …`
Builds the stack with fallbacks.

→

4 · Tailwind class
`font-display`
Used directly or inside `<Heading>`.

The variables are set on `<html>` in `layout.tsx` (`fontVariables`), so every page can use them.

Font stacks (from `globals.css`)

```
--font-sans:    var(--font-inter), var(--font-inter-ext), var(--font-noto-deva), system-ui, "Segoe UI", Roboto, …
--font-display: var(--font-jakarta), var(--font-inter-ext), var(--font-noto-deva), var(--font-inter), system-ui, …
--font-mono:    var(--font-jbmono), ui-monospace, SFMono-Regular, Menlo, Consolas, …
```

The browser tries each font in order per character. That is how a Jakarta heading still shows ₹ (from Inter Ext) and Hindi letters (from Noto) correctly.

08 The type scale

Size / line-height in px. Every style below is a real `level` or `variant` in `typography.tsx`, rendered with the project's fonts.

Headings: `<Heading level=…>` · Plus Jakarta Sans

display	**Display**	48 / 56 · 800 tracking -0.02em
h1	**Heading 1**	36 / 44 · 700 tracking -0.02em
h2 (default)	**Heading 2**	30 / 38 · 700 tracking -0.01em
h3	**Heading 3**	24 / 32 · 600 tracking -0.01em
h4	**Heading 4**	18 / 28 · 600


Text: `<Text variant=…>` · Inter

body-lg	Body large for lead paragraphs under a page title.	16 / 26 · 400
body (default)	Body is the default reading size across the product.	14 / 22 · 400
small	Small for table cells and helper copy.	13 / 20 · 400
caption	Caption for timestamps · 2 min ago	12 / 16 · 500
overline	OVERLINE SECTION LABEL	11 / 16 · 700 +0.08em · UPPERCASE
label	**Business name**	14 / 20 · 600

Special components

Kpi	**₹4,52,10,395**	32 / 40 · 700 · Inter tabular-nums
Code	`npm run dev`	13 / 20 · JetBrains Mono muted box + border

09 Anatomy of one style

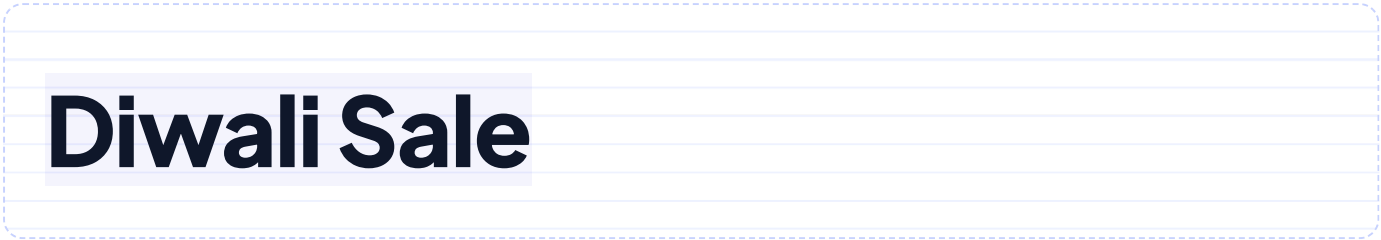

`text-[48px]`
Font size. How big the letters are.

`leading-14`
Line height = 14 × 4px = 56px. The space each line takes.

`font-extrabold`
Weight 800. How thick the strokes are.

`tracking-[-0.02em]`
Letter spacing. Large text is pulled slightly tighter.

Line-heights use Tailwind's canonical spacing classes (`leading-14` = 56px, `leading-5.5` = 22px), each 1 unit = 4px. The shaded band above marks the 56px line box.

10 Text colours (tones)

`<Text tone=…>` maps to a colour token. Tokens switch automatically in dark mode, so never write a hex colour.

default
`text-foreground`
`#0f172a / dark #f8fafc`

secondary
`text-text-secondary`
`#334155 / dark #cbd5e1`

muted
`text-muted-foreground`
`#475569 / dark #94a3b8`

primary
`text-primary`
`#4f46e5`

success
`text-success-soft-foreground`
`#166534 / dark #86efac`

warning
`text-warning-soft-foreground`
`#92400e / dark #fcd34d`

danger
`text-destructive-soft-foreground`
`#991b1b / dark #fca5a5`

dark mode
`same names, new values`

11 How to use it in code

Import

```
import { Heading, Text, Kpi, Code } from "@/components/ui/typography";
```

Heading: `level` sets the look, the tag follows automatically

```
<Heading level="h1">Dashboard</Heading>                // renders <h1>, 36/44
<Heading level="display">All your marketing</Heading>    // renders <h1>, 48/56
<Heading level="h3" as="h2">Everything in one place</Heading> // looks h3, is an <h2>
```

Use `as` when the page outline needs a different tag than the look. Allowed: `h1` – `h6`, `p`, `span`, `div`.

Text: `variant` for size, `tone` for colour

```
<Text>Default body text</Text>                                  // <p>, 14/22, foreground
<Text variant="body-lg" tone="secondary">Lead paragraph</Text>
<Text variant="overline" tone="primary">Design system</Text>
<Text variant="caption" tone="muted" as="span">2 min ago</Text>
```

`as` options for Text: `p` (default), `span`, `div`, `label`, `li`, `dt`, `dd`, `figcaption`.

Numbers and code

```
<Kpi>{formatINR(4_52_10_395)}</Kpi>     // ₹4,52,10,395 with digits aligned
Run <Code>npm run dev</Code> to start.
```

Override or extend with `className`

```
<Heading level="display" className="text-[34px] leading-10 sm:text-[48px]">
  All your marketing in one app
</Heading>
// cn() + tailwind-merge: your class wins over the preset
```

Reuse the styles on other elements

```
import { textVariants } from "@/components/ui/typography";
<Link className={textVariants({ variant: "small", tone: "muted" })}>Help</Link>
```

12 Automatic rules (no code needed)

Rule in `globals.css`	What it does
`body` : 14px / 1.5, `font-sans`	Plain text anywhere is Inter 14px, foreground colour.
`h1 … h6` : `font-display` , −0.01em, `text-wrap: balance`	Any raw heading uses Jakarta, and its lines break evenly.
antialiased + `optimizeLegibility`	Smoother, sharper letters on all screens.
`:lang(hi)` → line-height 1.6	Hindi gets extra room so matras don't touch the next line.
Inputs 16px below 768px	Stops iPhone Safari from zooming in when you tap a field.
`::selection` primary-soft	Selected text is highlighted in the brand colour.
Reduced motion	Animations are cut when the OS asks for less motion.

13 Where it is used today

File	Typography used
`app/design-system/page.tsx`	Every level, variant and tone, plus a Hindi sample, `Kpi` and `Code`. Open `/design-system` to see them live.
`app/(marketing)/page.tsx`	Hero `Heading level="display"` (34px on mobile, 48px from 640px), `Text variant="body-lg"` subtitle, section `h3 as h2`.
`app/(app)/dashboard/page.tsx`	`Heading level="h3" as="h1"` "Dashboard" + muted greeting.
`app/not-found.tsx`, `error.tsx`	Overline "404", heading and secondary text.

Header components (Tailwind classes that follow the same scale)

Element	Style
Logo wordmark	Jakarta 800 · 20px (site desktop), 18px (app desktop), 16px mobile
Website nav items	Inter 15 / 500, text-secondary → foreground on hover
Mega menu item	Title 15 / 600 · description 13 muted · overline 11 / 700
Buttons	Inter 14 / 600 (sm 13, lg 16)
Business switcher	Name 14 / 600 · plan badge 11 / 700
Search field	Placeholder 14 / 400 · `⌘K` JetBrains Mono 11
WA credits chip	Amount 14 / 700 tabular-nums · label 12 / 500

Small UI parts (menus, chips, nav) use Tailwind size classes directly instead of `<Text>`, because their sizes (15px, 11px badges) sit between the named variants. They still use the same fonts and colour tokens.

14 Do and don't

✓ Do

Use the components.

```
<Text tone="muted">Saved</Text>
```

✗ Don't

Invent sizes and hex colours.

```
<p style={{ fontSize: 15, color: "#666" }}>
```

✓ Do

One `<h1>` per page; keep heading order h1 → h2 → h3.

✗ Don't

Pick a heading tag for its size. Use `level` for size and `as` for the tag.

✓ Do

Use `<Kpi>` or `tabular-nums` for money and counts so digits line up.

✗ Don't

Format rupees by hand. Use `formatINR()` for ₹12,34,567.

✓ Do

Add `lang="hi"` on Hindi blocks so spacing and the font switch apply.

✗ Don't

Load fonts from Google or a CDN. The CSP blocks it, and fonts are already self-hosted.

15 How to change typography

- **Change a size:** edit the variant in `typography.tsx` (e.g. `h2: "text-[30px] leading-9.5 …"`). Every screen using it updates.
- **Add a variant:** add a key to `headingVariants` or `textVariants`. TypeScript then allows it in `level` / `variant`.
- **Change a text colour:** edit the token in `globals.css` for both `:root` (light) and `.dark`. Keep contrast at 4.5:1 or above.
- **Change a font:** install its `@fontsource-variable` package, update the `localFont` path in `fonts.ts`, keep the same CSS variable name.
- **Check your change:** open `/design-system` in light and dark mode, then run `npm run lint`, `npm test`, `npm run test:e2e`.

Marketing Platform Frontend · Typography Guide · Source files: `src/components/ui/typography.tsx`, `src/app/fonts.ts`, `src/app/globals.css`