LAB-2.

Aim : configure source & destination address of 2 devices connected with router

Circuit :

ROUTER

PC0   PC1

Outcome :
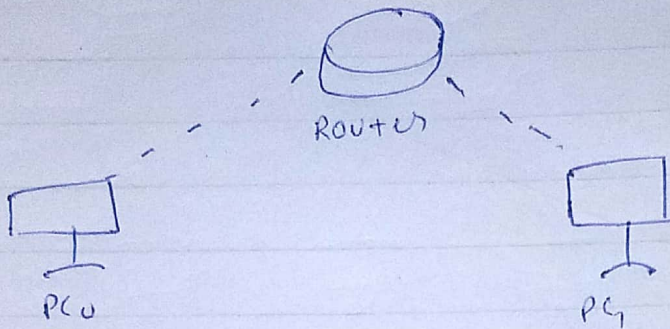
we created a topology with 2 PC and router
configure default gateway & ip address
configure ip address for interfaces
simple simulation by sending simple PDU from source to destination for ICMP protocol