

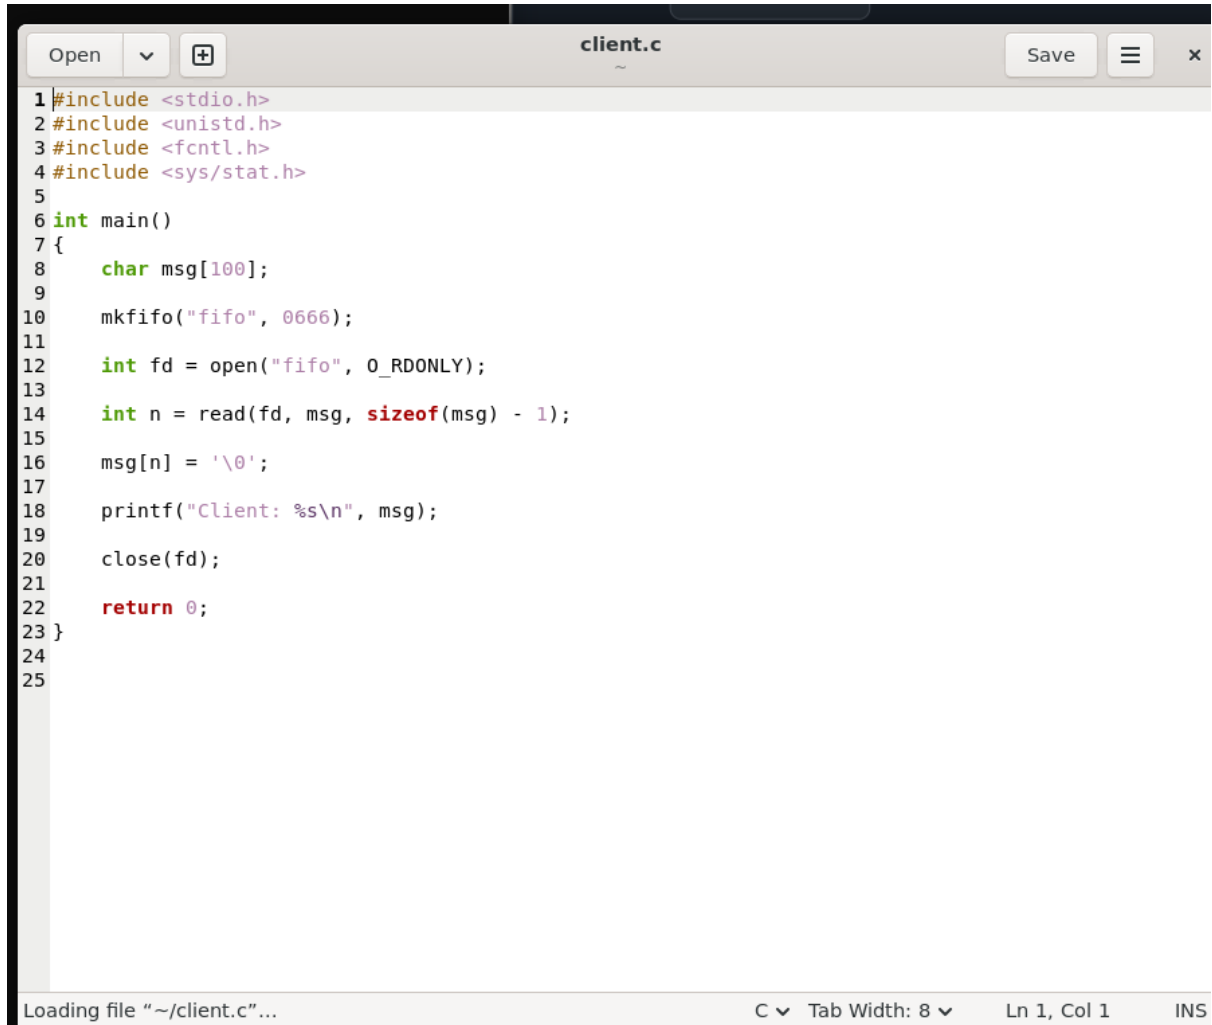
OSSP

Practical- Assignment 6

Name: HAADI HASIL

Roll num: 2520030297

1.

A screenshot of a code editor window titled "client.c". The editor has a menu bar with "Open", a dropdown arrow, a "+" icon, "Save", a hamburger menu icon, and a close "x" icon. The code is as follows:

```
1 #include <stdio.h>
2 #include <unistd.h>
3 #include <fcntl.h>
4 #include <sys/stat.h>
5
6 int main()
7 {
8     char msg[100];
9
10    mkfifo("fifo", 0666);
11
12    int fd = open("fifo", O_RDONLY);
13
14    int n = read(fd, msg, sizeof(msg) - 1);
15
16    msg[n] = '\0';
17
18    printf("Client: %s\n", msg);
19
20    close(fd);
21
22    return 0;
23 }
24
25
```

The status bar at the bottom shows "Loading file '~/client.c'...", "C", a dropdown arrow, "Tab Width: 8", a dropdown arrow, "Ln 1, Col 1", and "INS".

```

1 #include <stdio.h>
2 #include <unistd.h>
3 #include <fcntl.h>
4 int main()
5 char msg [100];
6 printf("Enter message: ");
7 fgets(msg, sizeof(msg), stdin);
8 int fd = open("fifo", O_WRONLY);
9 write(fd, msg, sizeof(msg));
10 close(fd);
11 return 0;
12

```

```

haadi_hasil@DESKTOP-J6ARPCK:~$ rm -f fifo
haadi_hasil@DESKTOP-J6ARPCK:~$ gcc client.c -o server
haadi_hasil@DESKTOP-J6ARPCK:~$ gcc client1.c -o client
haadi_hasil@DESKTOP-J6ARPCK:~$ ./server & ./client
[1] 21830
Enter message: hi am haadi
Client: hi am haadi

[1]+  Done                  ./server

```

```
1 #include <stdio.h>
2 #include <signal.h>
3 #include <unistd.h>
4
5 void handler(int sig)
6 {
7     if (sig == SIGINT)
8         printf("\nSIGINT received\n");
9
10    else if (sig == SIGTERM)
11        printf("\nSIGTERM received\n");
12
13    else if (sig == SIGUSR1)
14        printf("\nSIGUSR1 received\n");
15 }
16
17 int main()
18 {
19     signal(SIGINT, handler);
20     signal(SIGTERM, handler);
21     signal(SIGUSR1, handler);
22
23     printf("Process ID: %d\n", getpid());
24     printf("Waiting for signals...\n");
25
26     while(1)
27     {
28         printf("Program is running...\n");
29         sleep(2);
30     }
31
32     return 0;
33 }
```

```
haadi_hasil@DESKTOP-J6ARPCX:~$ gedit posix.c
haadi_hasil@DESKTOP-J6ARPCX:~$ gcc posix.c
haadi_hasil@DESKTOP-J6ARPCX:~$ ./a.out
```