


OSSP_Practical - 6

Praneeth kumar gadila - 2520030257

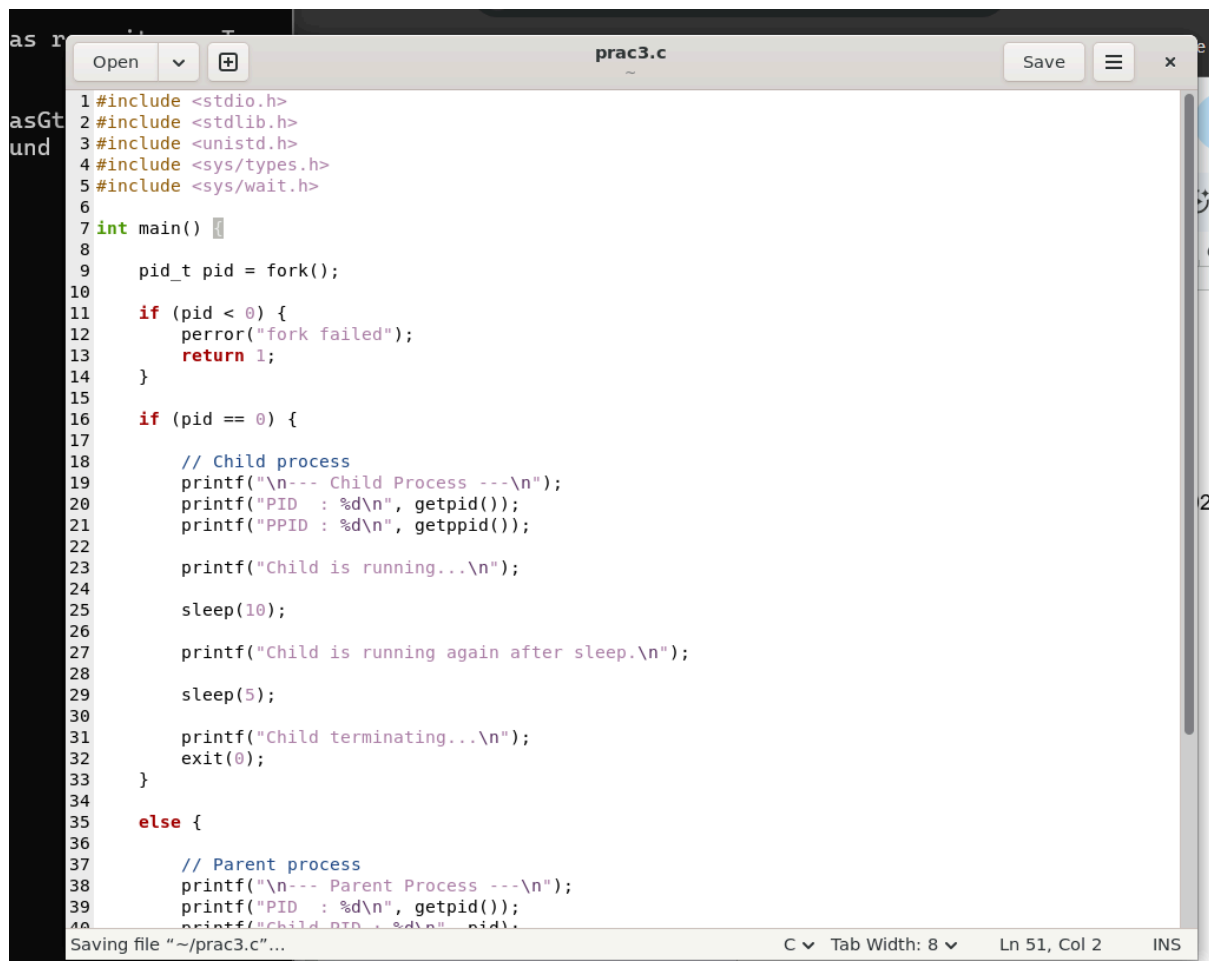

```
1 #include <stdio.h>
2 #include <stdlib.h>
3 #include <unistd.h>
4 #include <sys/types.h>
5 #include <sys/wait.h>
6
7 int main() {
8     pid_t pid = fork();
9
10    if (pid < 0) {
11        perror("fork failed");
12        return 1;
13    }
14
15    if (pid == 0) {
16        // Child process
17        printf("\n--- Child Process ---\n");
18        printf("PID : %d\n", getpid());
19        printf("PPID : %d\n", getppid());
20
21        printf("Child is running...\n");
22
23        sleep(10);
24
25        printf("Child is running again after sleep.\n");
26
27        sleep(5);
28
29        printf("Child terminating...\n");
30        exit(0);
31    }
32
33    else {
34        // Parent process
35        printf("\n--- Parent Process ---\n");
36        printf("PID : %d\n", getpid());
37        printf("Child PID : %d\n", pid);
38    }
39}
```

Saving file "~/prac3.c"...

C Tab Width: 8 Ln 51, Col 2 INS

```
praneethgadila@praneethgadila:~$ ./a.out
```

```
--- Parent Process ---
PID : 4196
Child PID : 4197
Parent is waiting for child...
```

```
--- Child Process ---
PID : 4197
PPID : 4196
Child is running...
0|
```