

DAY 2 - PLACEMENT

19 May 2026 09:36 AM

DATA TYPES:

LET - LOCAL SCOPE

VAR - CAN BE REDECLARED


CONST - VALUE CANNOT BE CHANGED

TO DISPLAY A MESSAGE DUE TIME: </Component/Welcome.jsx/>

```
first-project > src > Component > Welcome.jsx > Welcome > backgroundColor
1  import React from 'react'
2
3  function Welcome() {
4    const hour=new Date().getHours();
5    const greet=hour<12?"Good Morning":hour<18?"Good Afternoon":hour<21?"Good Evening":"Good";
6    return (
7      <div style = {{color:"red", fontSize:"24px", backgroundColor:"lightgreen"}}>Hello, {greet}</div>
8    )
9  }
10
11  export default Welcome
12
```

<app.jsx>

```
first-project > src > App.jsx > default
1  import './App.css'
2  import Welcome from './Component/Welcome'
3
4  function App() {
5
6
7    return (
8      <>
9        <Welcome />
10      </>
11    )
12  }
13
14  export default App
15
```

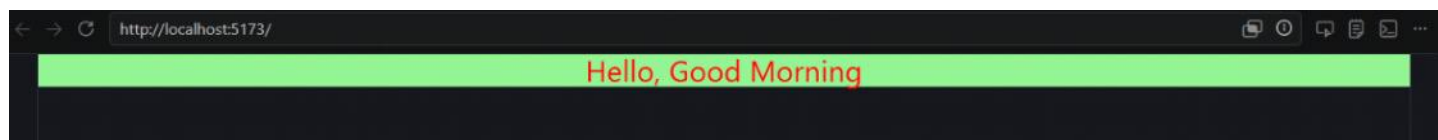

USING PROPS:


INSTEAD OF PASSING EACH VARIABLE NAME TO THE STUDENT FUNCTION, WE CAN ADD "PROPS" TO MAINTAIN A PROPER CODE OF CONDUCT.

```
first-project > src > Component > Student.jsx > ...
1  import React from 'react'
2
3  function Student(props) {
4    return (
5      <div>
6        <p>Name: {props.name}</p>
7        <p>Age: {props.age}</p>
8      </div>
9    )
10  }
11
12  export default Student
13
```

TO CREATE AN ARRAY AND TO PRINT THEM SEPARATELY USING ANOTHER COMPONENT:

```
App.jsx Course.jsx X Student.jsx first-project
first-project > src > Component > Course.jsx > Course > courses.map() callback
1 import React from 'react'
2
3 export default function Course({ courses }) {
4   return (
5     <div>
6       {courses.map((course, index) => (
7         <p key={index}>{course}</p>
8       ))}
9     </div>
10   )
11 }
12
13
```

```
App.jsx X Course.jsx Student.jsx first-project
first-project > src > App.jsx > ...
1 import './App.css'
2 import Welcome from './Component/Welcome'
3 import Student from './Component/Student'
4 import Course from './Component/Course'
5
6 function App() {
7   const student = { name: "John Doe", age: 20 };
8   const courses = ["Math", "Science", "History"];
9   return (
10     <>
11       <Welcome />
12       <Student student={student} />
13       <Course courses={courses} />
14     </>
15   )
16 }
17
18 export default App
19
```

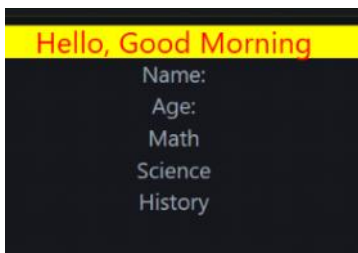

FOR ARROW FUNCTION: NO FUNCTION KEYWORD, NO NAME, JUST ARGUMENT IS PASSED


DAY 3 - PLACEMENT

20 May 2026 09:41 AM

HOW TO IMPORT A PICTURE FROM ASSETS IN OUR PROGRAM:

```
App.jsx  X  Car.jsx  first-project  Task1.jsx
first-project > src > App.jsx > App > car > color
1  import './App.css'
2  import Car from './Component/Car'
3  import camry from './assets/camry.avif'
4
5  function App() {
6    //const student = { name: "James", id: "WIPRO7839A2", dept: "Global IT Infrastructure" };
7    const car = { make: "Toyota", model: "Camry", year: 2020, color: "Red", picture: camry };
8    return (
9      <>
10       /* <Task1 student={student} /> */
11       <Car car={car} />
12     </>
13   )
14 }
15
16
17 export default App
18
```

```
App.jsx  Car.jsx  X  first-project  Task1.jsx
first-project > src > Component > Car.jsx > Car
1  import React from 'react'
2  import car from '../assets/camry.avif'
3
4  function Car({ car }) {
5    return (
6      <div>
7        <h2>{car.year} {car.make} {car.model}</h2>
8        <p>Color: {car.color}</p>
9        <img src = {car.picture} style={{ width: "300px", height: "200px" }} />
10      </div>
11    )
12  }
13
14 export default Car
15
```

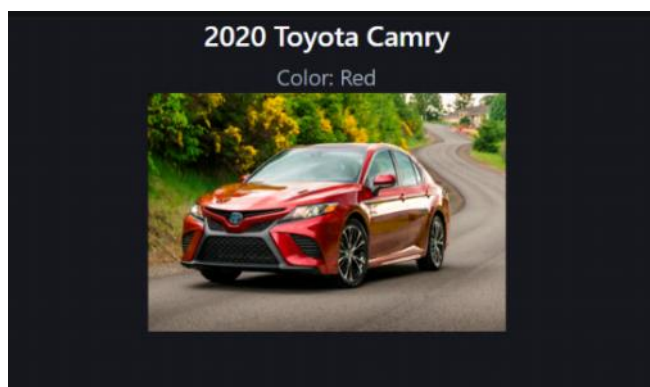

THE OTHER WAY:

```

first-project > src > App.jsx > ...
1  import './App.css'
2  import Car from './Component/Car'
3
4  function App() {
5    //const student = { name: "James", id: "WIPRO7839A2", dept: "Global IT Infrastructure" };
6    //const car = { make: "Toyota", model: "Camry", year: 2020, color: "Red", picture: camry };
7    return (
8      <>
9        /* <Task1 student={student} /> */
10       <Car />
11     </>
12   )
13 }
14
15
16 export default App
17

```

```

first-project > src > Component > Car.jsx > Car
1  import React from 'react'
2  import camry from '../assets/camry.avif'
3
4  function Car() {
5    const car= {name: "wagonR", model: "2018", color: "white", picture: camry}
6    return (
7      <div>
8        <h2>{car.name} {car.model}</h2>
9        <p>Color: {car.color}</p>
10       <img src = {car.picture} width="300px" height="200px" />
11     </div>
12   )
13 }
14
15 export default Car
16

```

(THE SAME OUTPUT OBV)

NOTE: THE .JS FILE AND .JSX FILE SHOULD BE NAMED DIFFERENTLY EVEN WHEN THE CASES ARE DIFFERENT.

TO PRINT IMAGES IN AN ARRAY:

```


first-project > src > App.jsx > ...
1  import React from 'react'
2  import './App.css';
3  import Bikes from './Component/bikes';
4  function App() {
5    return (
6      <div>
7        <Bikes/>
8      </div>
9    )
10 }
11
12 export default App
13

```

```


first-project > src > Component > Bikes.jsx > Bikes
1  import React from "react";
2  import bike from "./bike";
3
4  export default function Bikes() {
5    return (
6      <div>
7        {bike.map((b, index) => (
8          <div key={index}>
9            <h2>
10              {b.name} {b.model}
11            </h2>
12
13            <p>Color: {b.color}</p>
14
15            <img
16              src={b.url}
17              alt={b.name}
18              width="300px"
19              height="200px"
20            />
21          </div>
22        ))}
23      </div>
24    );

```

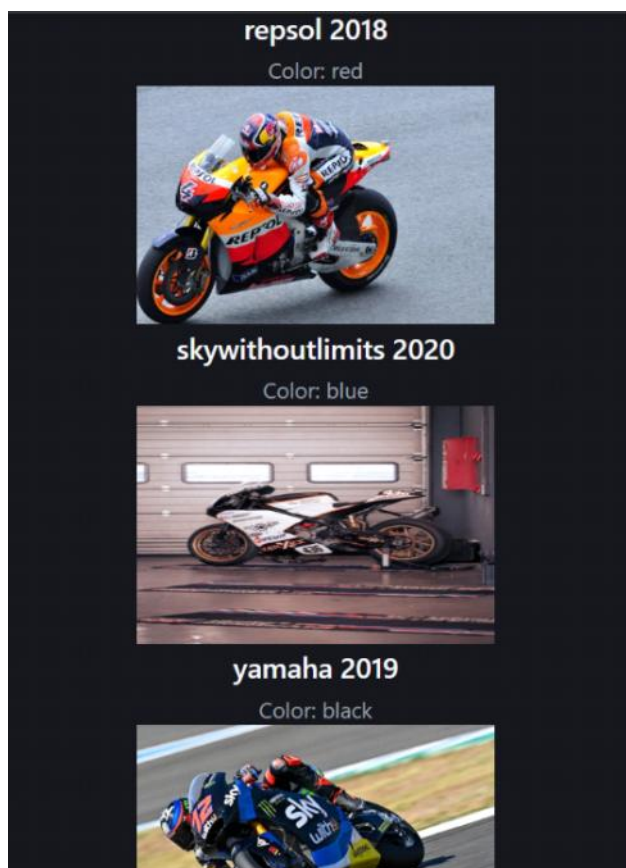


IMPLEMENTING A TEXTBOX:

```
first-project > src > Component > College.jsx > College
1  import React, { useState } from 'react'
2
3  export default function College() {
4    const [name, setName] = useState("KCE")
5    return (
6      <div>
7        <input type="text" onChange={(e) => setName(e.target.value)} />
8        <h1>College: {name}</h1>
9      </div>
10     )
11   }
12
13
```

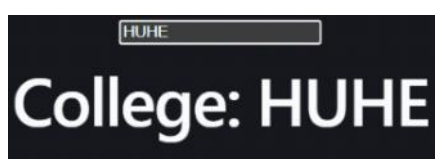


TO INCREMENT AND DECREMENT USING A BUTTON (ACTUALLY TWO):

```
first-project > src > Component > Count.jsx > Count
1  import React, { useState } from 'react'
2
3  function Count() {
4    const [count, setCount] = useState(0)
5
6    return (
7      <div>
8        <p>You clicked {count} times</p>
9        <button onClick={() => setCount(count + 1)}>
10         Click me
11       </button>
12       <button onClick={() => setCount(count - 1)}>
13         Decrease
14       </button>
15       <input type="reset" onClick={() => setCount(0)} />
16     </div>
17   )
18 }
19
20 export default Count
21
```



TO SHOW AND HIDE:

```
first-project > src > Component > Toggle.jsx > Toggle
1  import React, { useState } from 'react'
2
3  function Toggle() {
4    const [show, setShow] = useState(true)
5    return (
6      <div>
7        <button onClick={() => setShow(!show)}>
8          {show ? 'Hide' : 'Show'}
9        </button>
10       {show && <p>This is some content that can be toggled.</p>}
11     </div>
12   )
13 }
14
15 export default Toggle
16
```



DARK MODE/ LIGHT MODE:

```
first-project > src > Component > Mode.jsx > Mode > backgroundColor
1  import React, { useState } from 'react'
2
3  function Mode() {
4    const [dark, setDark] = useState(false)
5    return (
6      <div style={{ backgroundColor: dark ? 'darkGray' : 'white', color: dark ? 'white' : 'black', height: '100vh' }}>
7        <button onClick={() => setDark(!dark)}>
8          {dark ? 'Switch to Light Mode' : 'Switch to Dark Mode'}
9        </button>
10      </div>
11    )
12  }
13
14 export default Mode
15
```



FETCH THIRD PARTY API IN REACT:

```

first-project > src > Component > Users.jsx > Users
1  import React, { use, useState, useEffect } from 'react'
2
3  function Users() {
4    const [user, setUser] = useState({})
5    useEffect(() => {
6      fetch("https://jsonplaceholder.typicode.com/users")
7        .then(response => response.json())
8        .then(data => setUser(data))
9    }, [])
10   return (
11     <div>
12       {user.map((u) => (
13         <div key={u.id}>
14           <h3>{u.name}</h3>
15           <p>{u.email}</p>
16         </div>
17       ))}
18     </div>
19   )
20 }
21
22 export default Users
23

```

Leanne Graham

Sincere@april.biz

Ervin Howell

Shanna@melissa.tv

Clementine Bauch

Nathan@yesenia.net

Patricia Lebsack

Julianne.OConner@kory.org

Chelsey Dietrich

DAY 4 - PLACEMENT

21 May 2026 09:06 AM

FORM:

```
import React, { useState } from 'react'
function UseForm() {
  const [formData, setFormData] = useState({
    firstName: "",
    lastName: "",
    email: "",
    dob: ""
  })
  const [submittedData, setSubmittedData] = useState(null)
  const [isSubmitted, setIsSubmitted] = useState(false)
  const handleSubmit = (e) => {
    e.preventDefault();
    setSubmittedData(formData);
    setIsSubmitted(true);
  }
  return (
    <div style={{ padding: "20px", width: "400px", margin: "0 auto" }}>
      <h1>Form</h1>
      { !isSubmitted ? <p>Please fill out the form and submit.</p> : <p>Thank you for
submitting the form!</p> }
      <form onSubmit={handleSubmit}>
        <label>First Name:</label>
        <input type = "text" name="firstName" onChange={(e) => setFormData({...formData,
firstName: e.target.value})} /> <br />
        <label>Last Name:</label>
        <input type = "text" name="lastName" onChange={(e) => setFormData({...formData,
lastName: e.target.value})} /> <br />
        <label>Email:</label>
        <input type = "email" name="email" onChange={(e) => setFormData({...formData,
email: e.target.value})} /> <br />
        <label>Date of Birth:</label>
        <input type = "date" name="dob" onChange={(e) => setFormData({...formData, dob:
e.target.value})} /> <br />
        <button type="submit">Click Me!</button>
      </form>
      {submittedData && (
        <div style={{ marginTop: "20px", padding: "10px", border: "1px solid #ccc" }}>
          <h2>Submitted Data:</h2>
          <p>First Name: {submittedData.firstName}</p>
          <p>Last Name: {submittedData.lastName}</p>
          <p>Email: {submittedData.email}</p>
          <p>Date of Birth: {submittedData.dob}</p>
        </div>
      )}
    </div>
  )
}
export default UseForm
```

Form

Thank you for submitting the form!

First Name:

Last Name:

Email:

Date of Birth: ☐

Submitted Data:

First Name: hi

Last Name: hi

Email: hi@d

Date of Birth: 0001-01-01

DBMS

STRUCTURED DATA(SENSITIVE) : BANKING SERVICES
UNSTRUCTURED DATA : COMMENT SECTION

A DATABASE MANAGEMENT SYSTEM IS A SOFTWARE USED TO CREATE, STORE, MANAGE AND RETRIEVE DATA

STUDENT :

REG_NO	NAME	AGE
101	CCC	25
105	DDD	39
107	MMM	76


SCENARIO : TO MAINTAIN A DB FOR A SUPERMARKET, FIRSTLY IDENTIFY THE ITEMS PRESENT IN THE SUPERMARKET ALONG WITH THEIR QUALITIES LIKE PRICE, CONTENT AND TYPE. BEFORE DOING THAT, WE NEED TO DESIGN A DB MODEL. FOR THAT TO DEVELOP AN ALGORITHM.
DRAW THE ENTITY-RELATIONSHIP DIAGRAM WHICH ACTS AS A BLUEPRINT TO DESIGN THE DB. DRAW ER SEPARATELY FOR EACH TYPE OF THE ITEM AND JOIN ALL THE TYPES TO CREATE AN OPERATIONAL BLUEPRINT READY FOR DB.

NOTE : ERDPLUS IS A TOOL USED TO DRAW ER-DIAGRAM EFFUCKTIVELY.
AN ER DIAGRAM IS A VISUAL BLUEPRINT OF A DATABASE.


ER-DIAGRAM ESSENTIALS :

STRONG ENTITY	REGULAR RECTANGLE
WEAK ENTITY	DOUBLE RECTANGLE
ASSOSIATIVE ENTITY	SPECIFIES RELATIONSHIP. DIAMOND ENCLOSED WITHIN A RECTANGLE
SUPERTYPE ENTITY(DISJOINT)	CAN BE DISINTEGRATED INTO MULTIPLE ENTITIES EACH PERFORMING DIFFERENT ACTIVITIES. VEHICLES CAN BE CAR, BIKE, BUS.
SUPERTYPE ENTITY(OVERLAP)	WORKERS CAN BE STAFF, TEACHER, ADMIN.

DISJOINT:

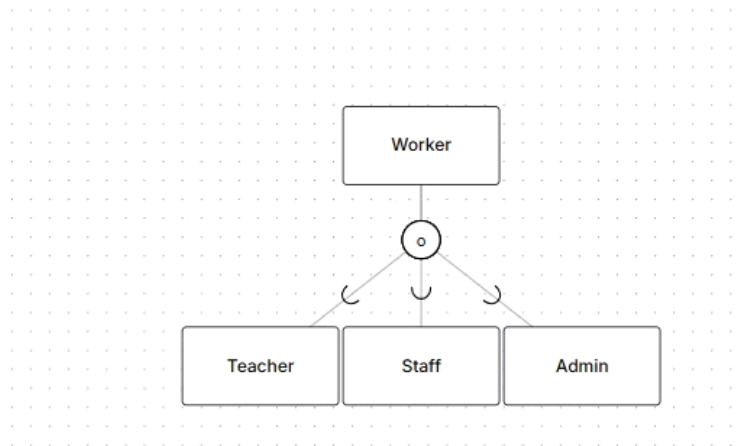

AN EXAMPLE ER-DIAGRAM FOR PEOPLE TAKING LOANS IN BANKS:

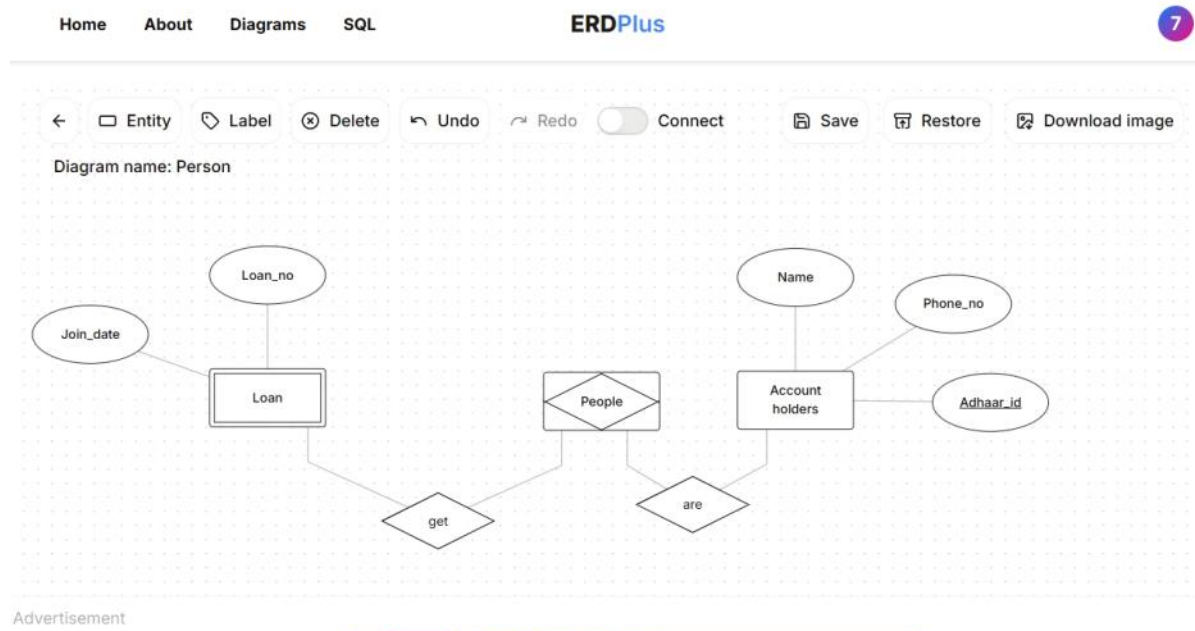

TYPES OF ATTRIBUTES :

UNIQUE ATTRIBUTE	UNIQUE IDENTIFIER TO THE ENTITY. AKA THE PRIMARY KEY.	AN UNDERLINED ATTRIBUTE ENCLOSED WITHIN A CIRCLE.
COMPOSITE ATTRIBUTE	AN ATTRIBUTE CONTAINED FURTHER MORE ATTRIBUTES. NAME : FIRST, MIDDLE, LAST	AN ATTRIBUTE WITHIN A CIRCLE WHICH IS CONNECTED TO FURTHER MORE ATTRIBUTES OF THE SAME TYPE ENCLOSED WITHIN CIRCLES.
OPTIONAL ATTRIBUTES	EITHER CAN BE FILLED OR CAN BE LEFT OUT	A CIRCLE ATTRIBUTE FOLLOWED UP BY (O)
MULTIVALUED ATTRIBUTE	AN ATTRIBUTE CONTAINING MANY ATTRIBUTES OF SAME TYPE. A PERSON HAVING MANY PHONE NUMBERS	AN ATTRIBUTE WITHIN A CIRCLE WHICH IS CONNECTED TO FURTHER MORE ATTRIBUTES OF THE SAME TYPE ENCLOSED WITHIN CIRCLES.
DERIEVED ATTRIBUTE	AN ATTRIBUTE DERIVED FROM ANOTHER ATTRIBUTE. AGE DERIVED FROM DOB	ATTRIBUTES ARE ENCLOSED WITHIN DOTTED LINES OF CIRCLE.

TYPES OF CARDINALITIES :

ONE TO ONE :



ONE TO MANY(MANDATORY)



MANY

ONE TO ONLY ONE(MANDATORY)

ZERO TO ONE(OPTIONAL)

ZERO TO MANY(OPTIONAL)

DAY 9 - PLACEMENT

27 May 2026 09:27 AM

```
App.jsx  X  Trucks.jsx  Car.jsx  Bikes.jsx  JS bike.js  JS truck.js

first-project > src > App.jsx > ...
1  import React from 'react'
2  import './App.css';
3  import Bikes from './Component/Bikes.jsx';
4  import { BrowserRouter as Router, Routes, Route } from 'react-router-dom';
5  import Car from './Component/Car.jsx';
6  import Trucks from './Component/Trucks.jsx';
7  import { NavLink } from 'react-router-dom';
8
9  function App() {
10   return (
11     <>
12     <Router>
13       <nav>
14         <NavLink to="/">Car</NavLink>
15         <NavLink to="/truck">Truck</NavLink>
16         <NavLink to="/bikes">Bikes</NavLink>
17       </nav>
18       <Routes>
19         <Route path="/" element={ <Car /> } />
20         <Route path="/truck" element={ <Trucks /> } />
21         <Route path="/bikes" element={ <Bikes /> } />
22       </Routes>
23     </Router>
24   </>
25 )
26 }
```

```
first-project > src > Component > Trucks.jsx > Trucks > truck.map() callback
1  import React from 'react'
2  import truck from './truck';
3
4  function Trucks() {
5    return (
6      <div>
7        {truck.map((t, index) => (
8          <div key={index}>
9            <h2>
10              {t.name} {t.model}
11            </h2>
12            <p>Color: {t.color}</p>
13            <img
14              src={t.url}
15              alt={t.name}
16              width="300px"
17              height="200px"
18            />
19          </div>
20        ))}
21      </div>
22    )
23  }
24
25
26  export default Trucks
```

first-project > src > Component > Car.jsx > Car > car.map() callback

```
1 import React from 'react'
2 import car from './car';
3
4 function Car() {
5
6   return (
7     <div>
8       {car.map((c, index) => (
9         <div key={index}>
10           <h2>
11             {c.name} {c.model}
12           </h2>
13           <p>Color: {c.color}</p>
14           <img
15             src={c.url}
16             alt={c.name}
17             width="300px"
18             height="200px"|
19           />
20         </div>
21       ))}
22     </div>
23   )
24 }
25
26 export default Car
```

```
import React from "react";
import bike from "./bike";

export default function Bikes() {
  return (
    <div>
      {bike.map((b, index) => (
        <div key={index}>
          <h2>
            {b.name} {b.model}
          </h2>
          <p>Color: {b.color}</p>
          <img
            src={b.url}
            alt={b.name}
            width="300px"
            height="200px"|
          />
        </div>
      ))}
    </div>
  );
}
```

first-project > src > Component > JS bike.js > bike > url

```
1 const bike = [
2   {
3     name: "repsol",
4     model: "2018",
5     color: "red",
6     url: "https://images.pexels.com/photos/167569/pexels-photo-167569.jpeg?w=500"
7   },
8   {
9     name: "skywithoutlimits",
10    model: "2020",
11    color: "blue",
12    url: "https://images.pexels.com/photos/33175733/pexels-photo-33175733.jpeg?w=500"
13  },
14  {
15    name: "yamaha",
16    model: "2019",
17    color: "black",
18    url: "https://images.pexels.com/photos/16101795/pexels-photo-16101795.jpeg?w=500"
19  }
20 ];
21
22 export default bike;
```

```
first-project > src > Component > JS truck.js > truck
1  const truck = [
2    { name : "volvo", model: "2020", color: "white", url: "https://images.pexels.com/photos/17824889/pexels-photo-17824889.jpeg" },
3    { name : "scania", model: "2019", color: "red", url: "https://images.pexels.com/photos/4320464/pexels-photo-4320464.jpeg" },
4    { name : "man", model: "2021", color: "blue", url: "https://images.pexels.com/photos/2199293/pexels-photo-2199293.jpeg" }
5  ]
6
7  export default truck;
```

```
first-project > src > Component > JS car.js > car > url
1  const car = [
2    { name : "wagonR", model: "2018", color: "white", url: "https://images.pexels.com/photos/37514219/pexels-photo-37514219.jpeg" },
3    { name : "swift", model: "2019", color: "red", url: "https://images.pexels.com/photos/37514222/pexels-photo-37514222.jpeg" },
4    { name : "i20", model: "2020", color: "blue", url: "https://images.pexels.com/photos/14401745/pexels-photo-14401745.jpeg" }
5  ]
6  export default car;
```



NAVIGATE OPTIONS ARE AVAILABLE TO NAVIGATE BETWEEN EACH PAGES.

DAY 10 - PLACEMENT

28 May 2026 09:23 AM

DAY 11 - PLACEMENT

01 June 2026 09:34 AM

DBMS QUERIES PRACTICE :

1) DISPLAY job_id, avg salary, and count of employees for jobs having more than 3 employees

Select job_id, avg(salary), count(employee_id) group by(job_id) having count employee_id>3;

2) Find the total commission department wise and sort the output

Select department_id, sum(commission_pct) from employees group by department_id order by sum(commission_pct);

3) Find avg salary for each job_id

Select job_id, avg(salary) from employees group by(job_id)

4) Find highest salary for each job_id

Select job_id, max(salary) from employee group by(job_id)

5) Display employee names and annual salary sorted by annual salary desc

select employee_name, salary*12 as salary from employees order by salary desc;

6) Find the number of employees in each job and sort alphabetically in job_id

Select job_id, count(employee_id) from employees group by(job_id) order by job_id;

7) Find the number of employees hired in each dept

Select department_id, count(employee_id) from employees group by department_id;

8) Find department_wise avg salary and display only depts where avg salary is b/w 5k and 10k

Select department_id, avg(salary) from employees group by department_id having avg(salary) between 5000 and 10000;