
Telegram




Discord

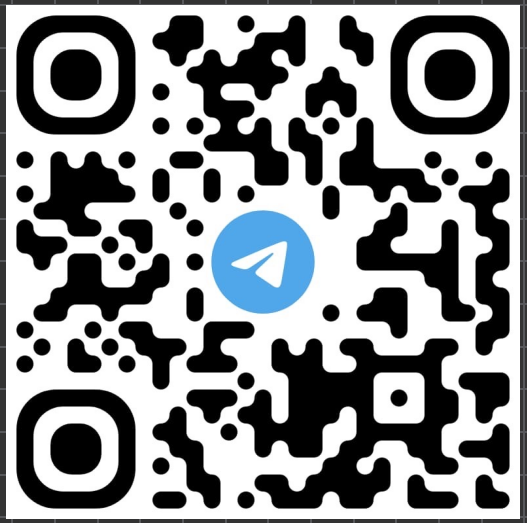

Coding & Web Development by Nishant Saini Sir
Lec - 59
Summary Notes

app ✗

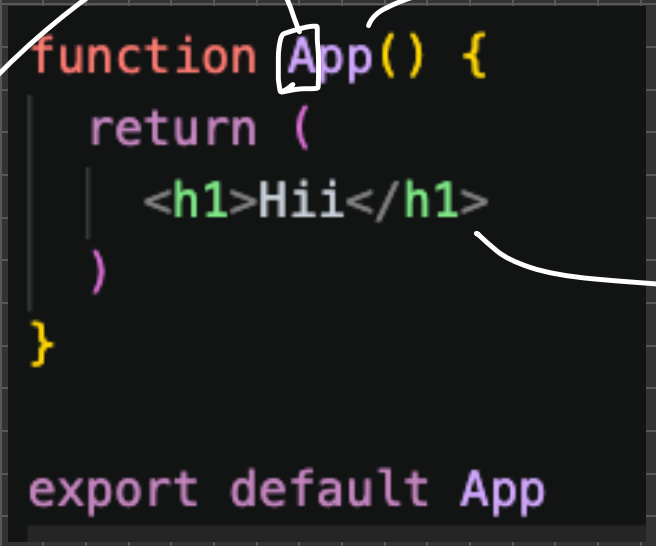

functional component

return UI

React should display

capital Name
or PascalCase

▶ The tag <navbar> is unrecognized in this browser. If you meant reac
to render a React component, start its name with an uppercase letter.

How to Render component

App() ✗

✓ <App /> ✓

Parent component & child component

→ parent component render the child component


```jsx
function Navbar() {
  return (
    <ul>
      <li>Home</li>
      <li>Shop</li>
      <li>About us</li>
      <li>Login</li>
    </ul>
  );
}

function App() {
  return (
    <div>
      <Navbar/>
      <h1>Hii</h1>
    </div>
  );
}

export default App;
```

Parent component


child component

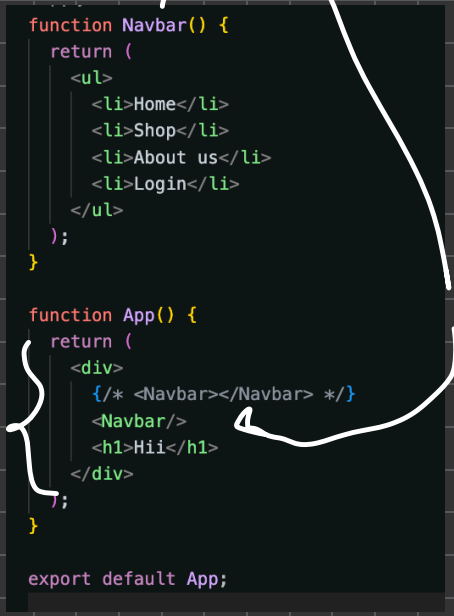

```
function Navbar() {
  return (
    <ul>
      <li>Home</li>
      <li>Shop</li>
      <li>About us</li>
      <li>Login</li>
    </ul>
  );
}

function App() {
  return (
    <div>
      {/* <Navbar></Navbar> */}
      <Navbar/>
      <h1>Hii</h1>
    </div>
  );
}

export default App;
```

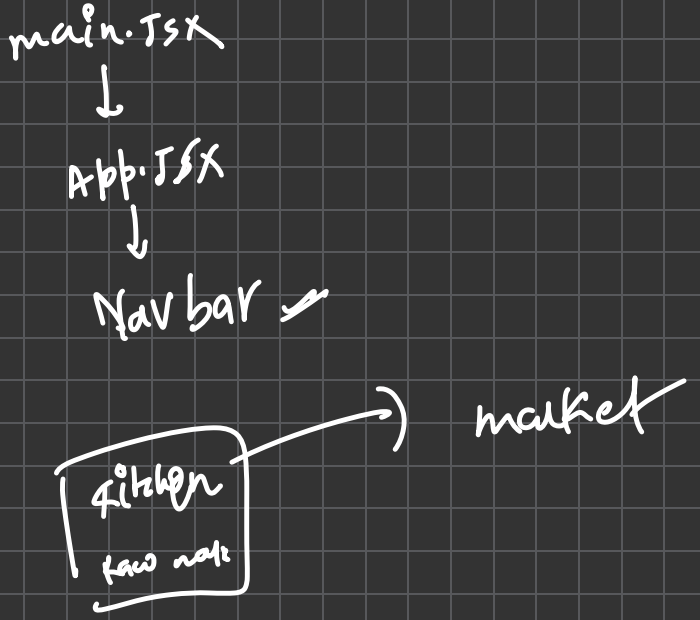

```tsx
export function Footer() {
  return (
    <div>Footer</div>
  )
}
```

named export

=

① import with curly braces { }

② Multiple named exports

```tsx
function Footer() {
  return (
    <div>Footer</div>
  )
}

export default Footer
```

default export

=

① import without curly braces

② one default export per file


3) you cannot directly rename import (unless rename with as)


3) We can rename during import

Props → passing data b/w components (parent to child)


flow → unidirectional


```
<Product key={i} title={title} price={price} />
```

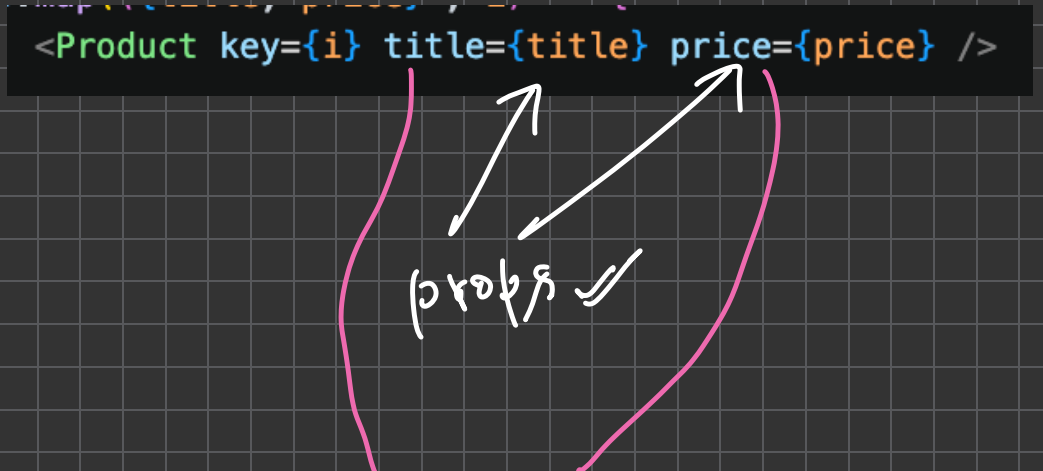

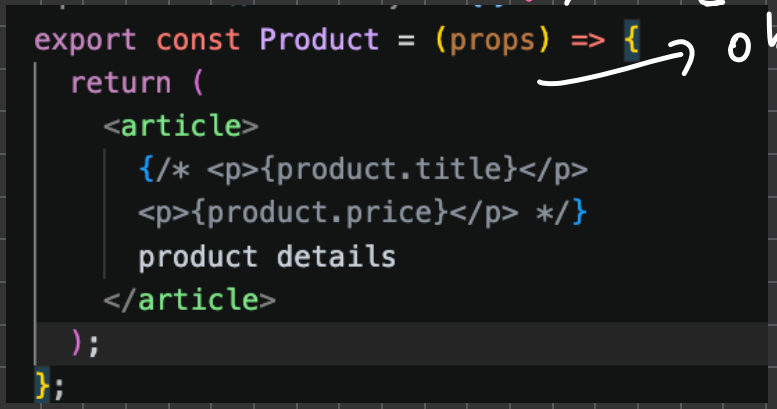

{ title, price }
object

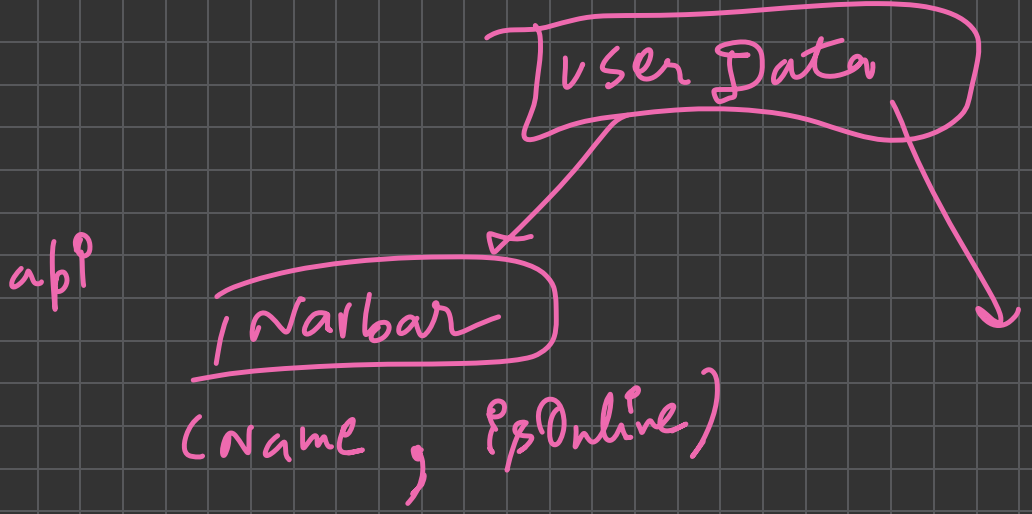
User Data
api
navbar
(name , isOnline)

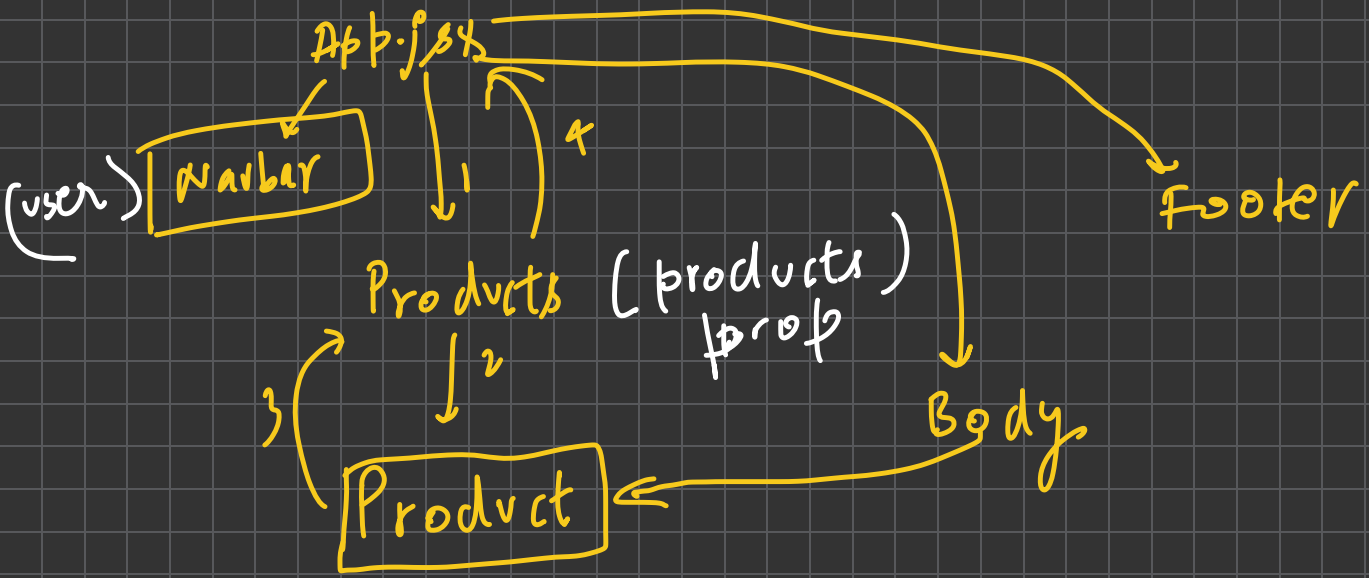
App.jsx
(user)
Navbar
1
4
Footer
Products
(products
prop
2
3
Body
Product