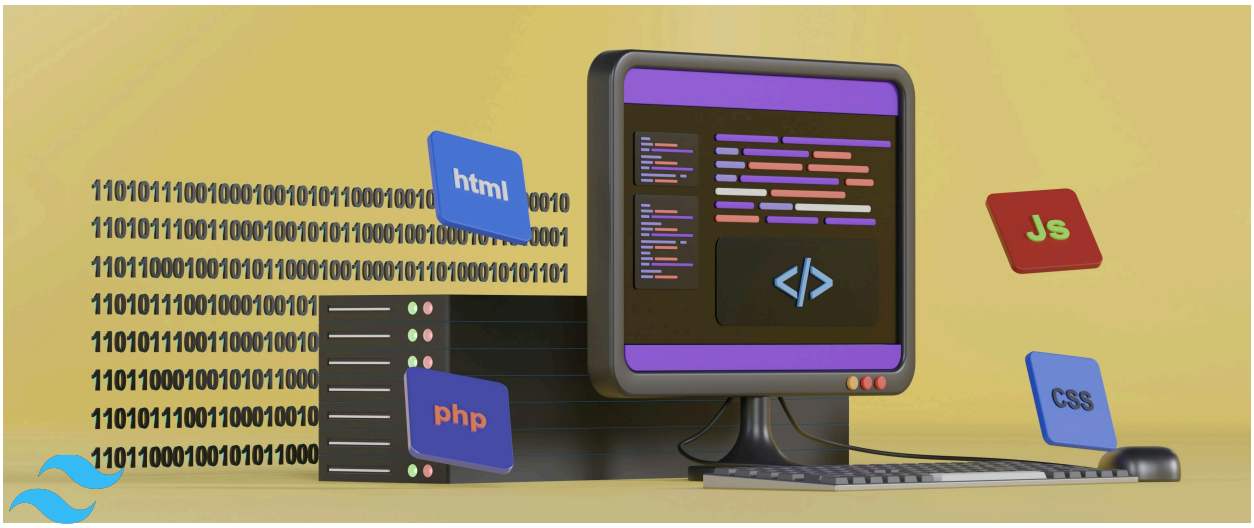


Tailwind Css

Tailwind CSS

→ Mobile first utility framework
→ based on classes
→ input → your utility
output CSS → ready to go CSS
→ bg-black → background black
→ Text-white → text white
→ m-0 → margin
→ flex → display flex
→ p3 → Padding
→ hover:bg-zinc-900 → change on hover
→ [&>*]:flex → सारे child पर flex add हो जाए
current → all

Colour tailwind css

→ text-blue (50-950) → Text colour
range of colour → जो इस list में नहीं है वो काम नहीं करेगा।
→ tailwind css में only black & white की shades नहीं होती है।
→ bg-red-700 → for background colour
→ border-green-50 → border colour
→ border-4 → border size
→ outline-yellow-50 outline outline-6

Margin & Padding

→ P-20,25 → 25 भी चलेगी अगर list में नहीं है ये dynamically generate होगा
→ M-10 {Margin-10}
Px-10 {left & Right}
Py-10 {top & bottom}
Pt-10 {Padding top}
Pl, Pr, Pb → bottom {text-right}
left Right
→ block → display block
→ pt-[1px] → custom pixel for padding

width, min-width & Max width

→ span → inline width
→ w-1 → width {1 rem = 16px}
→ Max-w-50 → Maximum width
→ Min-w-400
→ w-full → full width
→ w-1/2 → 50%.
→ w-xs, xl, 2xl
→ h-screen → for parent div
h-full → for full height child
→ + use combinedly

same width - height


→ w-50 h-50 → gives same output [] shape
→ size-50
↳ Min & Max size के साथ काम नहीं करेगा बस width & height के साथ काम करेगा।
→ hover: bg-red-300

Position

→ absolute bottom-0 right-0
→ relative
→ inset
  ↳ Parent से दूर भगाता है corners से
→ fixed

container → for Responsive nes

→ Manage width of responsiveness
→ give space on webpage on left & right to give space
→ zoom से different-2 screen size treat होते हैं
→ container mx-auto → for parent class

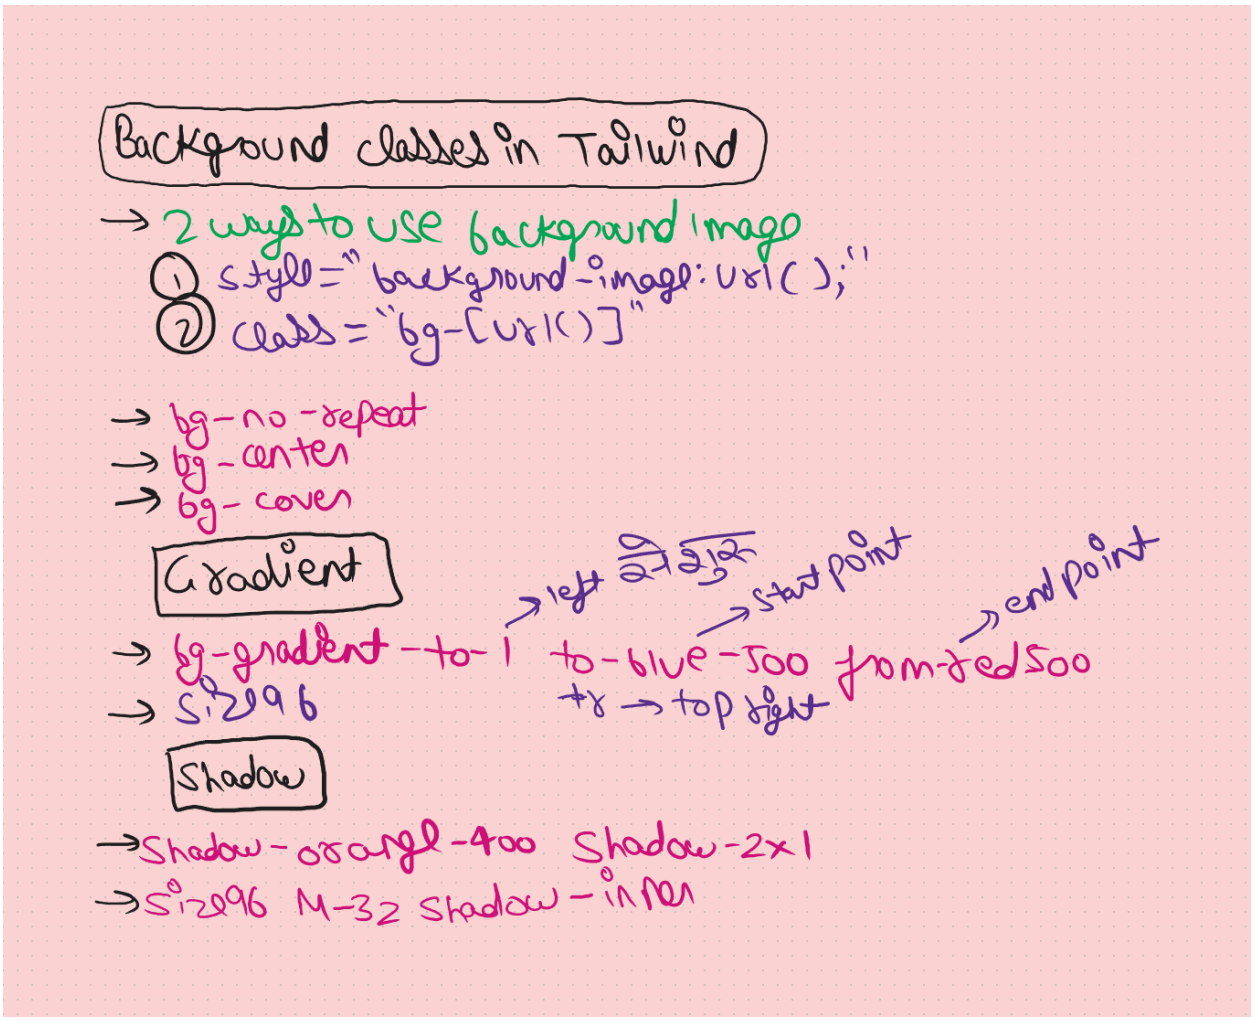
Background classes in Tailwind
→ 2 ways to use background image
① style="background-image: url( );"
② class="bg-[url()]"
→ bg-no-repeat
→ bg-center
→ bg-cover
Gradient
→ bg-gradient-to-l
left
start point
end point
to-blue-500 from-red500
+r → top right
→ size96
Shadow
→ shadow-orange-400 shadow-2xl
→ size96 M-32 shadow-inner

Filters with Images

- → blur-sm
- → brightness-50
- → contrast-0
- → grayscale
- → invert
- → hue-rotate-15

Interactivity with tailwind


- → for button
  - rounded-md p-2 m-4 text-white
- → hover: bg-blue-600
- → focus (click करके बाहर click नहीं किया)
- → Active (click होने जब तक)
- → Group hover
  - Parent → class → group
  - all child → group-hover

Media Query & break points → see on documentation of tailwind CSS

- → body → class → h-screen
- → div → class → bg-red-500 h-full lg:bg-green-400
- → zoom करने पर diff screen size treat होते हैं


columns


→ use to divide UI in equal parts 1 to 12 direct + others responsive



div Parent → column-2
child → normal class







→ columns-1 lg:columns-4 {Responsive}
→ columns-3xs gap-0
↳ set image size like

flex with tailwind

→ Parent → work on display → flex
- flex direction → flex-col, flex-col-reverse
- Justify center, items center
  Justify {between, around}

→ size full → for apply on all viewport like lg-colour
flex-wrap, content-start

Grid

→ Parent ⟶ grid
grid-cols-2
gap!


→ child ⟶ col-span-2 & take size of 2 column 3


Transition & Transform

→ Transition duration-1000 hover:opacity-5
→ hover: rotate-45
transition-transform duration-1000
→ hover:scale-75
scale-x-75
scale-y-75

Animation (bounce, spin, ping, pulse, image)

→ rounded full animate-bounce ex ball bounce
→ animate spin ex spinning circle or stick 360°
→ animate ping, pulse

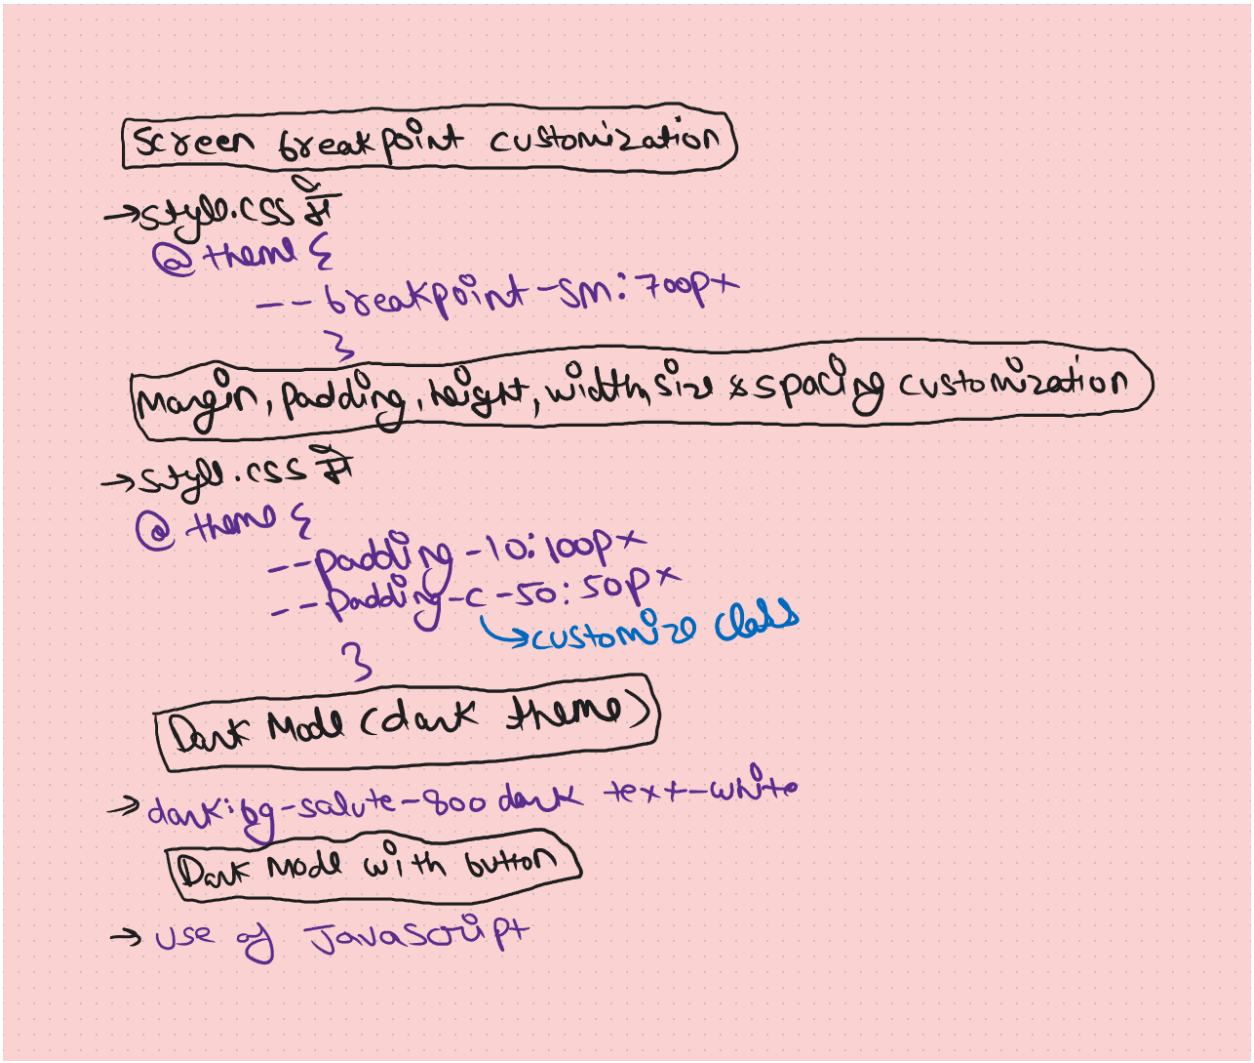
Screen breakpoint customization
→style.css #
@theme {
--breakpoint-sm: 700px
}
Margin, padding, height, width, size & spacing customization
→style.css #
@theme {
--padding-10: 100px
--padding-c-50: 50px
↳customize class
}
Dark Mode (dark theme)
→dark:bg-salute-800 dark text-white
Dark Mode with button
→ use of JavaScript

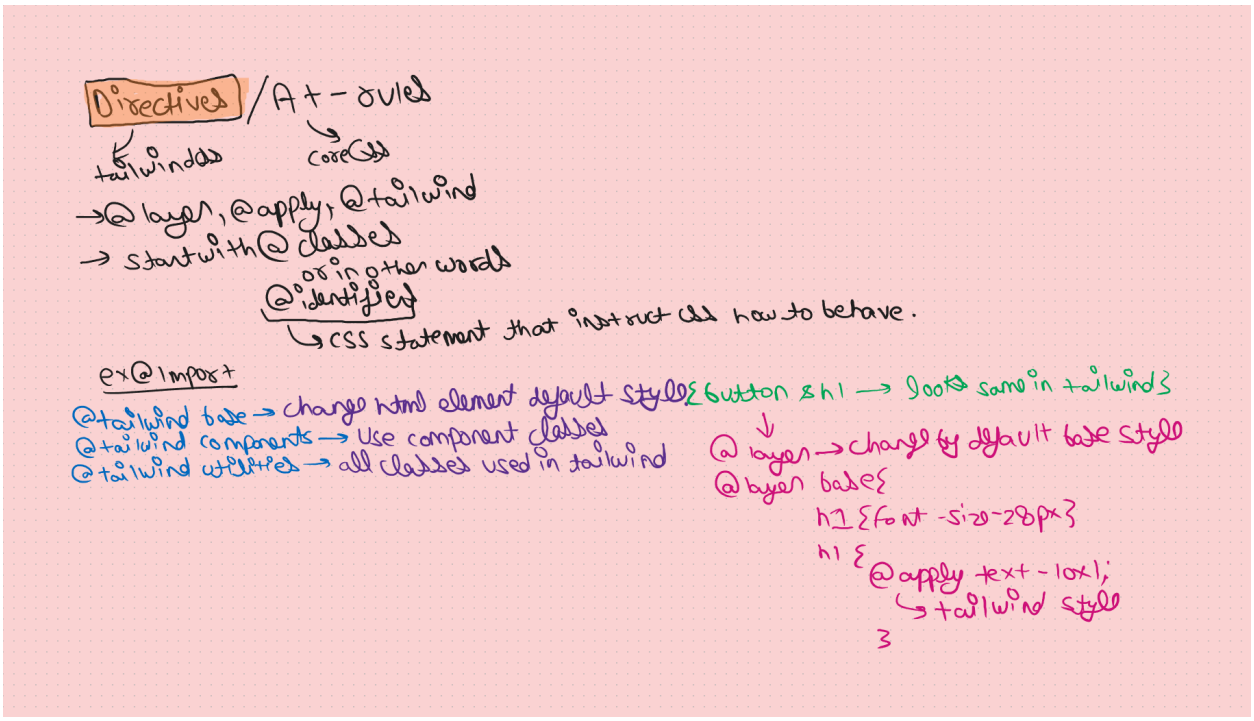
Directives / At-rules
tailwind
core CSS
→ @layer, @apply, @tailwind
→ start with @ classes
or in other words
@identifiers
↳ CSS statement that instruct css how to behave.
ex @import
@tailwind base → change html element default styles {button & h1 → look same in tailwind}
@tailwind components → use component classes
@tailwind utilities → all classes used in tailwind
@layer → change by default base style
@layer base{
h1 {font-size-28px}
h1 {
@apply text-10xl;
↳ tailwind style
}

Make custom classes tailwind

→ @ layer used

@ layer components {

.btn-primary {

@apply bg-blue-500 rounded text-white

hover: bg-blue-700 }

}

custom classes

Border

→ border m-10 w-96 p-4

→ border-4 border-blue-40

→ border-t-blue-600

↳ t→top, b→bottom, l→left, R→Right

border-t-2

→ for rounded border width & height must be same

→ rounded-full, rounded-t-full

→ rounded-3xl

→ rounded-ss-3xl, full, borderdashed, borderdotted

ss, se, ee

start, end

Tailwind css font

→ Tailwind css has by default 3 font family
↳ sen, sen-serif, mono serif

→ font-sans

text-xxt, text-sx, text-[1px]

→ font thin, medium, bold, black, normal

→ text-red-600

Tailwind css miscellaneous property

border-collapse → {in table}

border-separate →

border, border-gray-400 → on table, th, td

h-screen → 100vh

w-full → width 100%.

mx-16 → margin on x axis 16

hidden → hide visibility

block → make visible of tag

flex wrap → move to next row to protect overflow

grid → make anything grid

grid-cols-2 → make 2 column on grid

bg-[#ffffff] → will make custom color

→ Group concept

enable styling of child element based on the state of a Parent element. mainly used on hover and focus effect

Parent element → add group class on it.

on child element → we use group-hover:, group-focus, group-active.

object-cover →
object-contain →] → fit image size

uppercase → text transform uppercase

tracking → letter spacing

container & mx-auto → give margin or x axis



leading → line height

grid → make grid

grid-flow-row
grid-rows-1
> used in grid row

Tracking → letter spacing