

1. xWrite a program to print n natural number in descending order using a while loop

```
import java.util.Scanner;
class Pract1{
    public static void main(String agrs[]){
        int n;
        int i;
        Scanner sc=new Scanner(System.in);
        System.out.println("Enter a no: ");
        n=sc.nextInt();
        i=n;
        while(i>0){
            System.out.println(--i);
        }
    }
}
```

2. Write a program which counts vowels and consonant in a word.

```
class Pract2{
    public static void main(String args[]){
        int vowel=0,cons=0;
        String word="Rishabh";
        int i=0;
        word=word.toLowerCase();
        for(i=0;i<word.length();i++){
            if(word.charAt(i)=='a' || word.charAt(i)=='e' || word.charAt(i)=='i'
            || word.charAt(i)=='o' || word.charAt(i)=='u'){
                vowel++;
            }else if(word.charAt(i)>='a' && word.charAt(i)<= 'z'){
                cons++;
            }
        }
        System.out.println("No of vowels= "+vowel);
        System.out.println("No of consonants= "+cons);
    }
}
```

3. Write a program to check whether the input year is a leap year or not.

```
import java.util.Scanner;
class Pract3{
    public static void main(String args[]){
        int year,flag=0;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the year: ");
        year=s.nextInt();
        if(year%4==0){
            flag=1;
        }
        if(flag==1){
            System.out.println("Entered year is leap year");
        }else{
            System.out.println("Entered year is not a leap year");
        }
    }
}
```

6. Write a program that accepts radius and returns the area of a circle using function call.

```
import java.util.Scanner;
class Pract6{
    public static double CalculateArea(int r){
        return 3.14*r*r;
    }
    public static void main(String args[]){
        int r;
        double area;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the radius of Circle: ");
        r=s.nextInt();
        area=CalculateArea(r);
        System.out.println("The area of circle is :"+area);
    }
}
```

4. Write a program to print largest of three numbers with the help of the if-else.

```
import java.util.Scanner;
class Pract4{
    public static void main(String args[]){
        int a,b,c,largest;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the first no:");
        a=s.nextInt();
        System.out.println("Enter the second no:");
        b=s.nextInt();
        System.out.println("Enter the third no:");
        c=s.nextInt();
        if(a>=b && a>=c){
            System.out.println(a+" is the largest");
        }
        else if(b>=a && b>=c){
            System.out.println(b+" is the largest");
        }
        else{
            System.out.println(c+" is the largest");
        }
    }
}
```

5. Write a program to count the occurrence of each character in a word "Java Programming".

```
class Pract5{
    public static void main(String args[]){
        int i;
        char ch;
        int charcount[]=new int[256];
        String str="Java Programming";
        str=str.toLowerCase();
        for(i=0;i<str.length();i++){
            ch=str.charAt(i);
            charcount[ch]++;
        }
        for (i=0;i<charcount.length; i++) {
            if (charcount[i] > 0 && (char) i != ' ') {
                System.out.println((char) i + ": " + charcount[i]);
            }
        }
    }
}
```

7. Write a program to reverse the order of the items in the array using loop.

```
import java.util.Scanner;
class Pract7{
    public static void main(String args[]){
        int size;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter size of array: ");
        size=s.nextInt();
        int arr[]=new int[size];
        int i;
        for(i=0;i<size;i++){
            System.out.println("Enter the array element: ");
            arr[i]=s.nextInt();
        }
        System.out.println("Original array: ");
        for(i=0;i<size;i++){
            System.out.println(arr[i]);
        }
        System.out.println("Reversed array: ");
        for(i=size-1;i>=0;i--){
            System.out.println(arr[i]);
        }
    }
}
```

8. Write a program to find whether a given array of integers contains any duplicate element. Return true if any value appears at least twice in the said array and return false if every element is distinct

```
import java.util.Scanner;
class Pract8{
    public static void main(String args[]){
        boolean hasDuplicates=false;
        int size;
        int i,j;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter size of array: ");
        size=s.nextInt();
        int arr[]=new int[size];
        for(i=0;i<size;i++){
            System.out.println("Enter the array element: ");
            arr[i]=s.nextInt();
        }
        System.out.println("Array: ");
        for(i=0;i<size;i++){
            System.out.println(arr[i]);
        }
        for (i=0;i<size;i++) {
            for (j=i+1;j<size;j++) {
                if (arr[i]==arr[j]) {
                    hasDuplicates = true;
                }
            }
        }
        if(hasDuplicates){
            System.out.println("There is duplication");
        }else{
            System.out.println("There is no duplication");
        }
    }
}
```

9. Write a program to print the area of a rectangle using the concept of constructor.

```
import java.util.Scanner;
class Rectangle{
    double length,breadth;
    double area;
    Rectangle(double length,double breadth){
        this.length=length;
        this.breadth=breath;
        area=length*breath;
        System.out.println("Area of rectangle= "+area);
    }
}
class Pract9{
    public static void main(String args[]){
        double l,b;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the length of rectangle: ");
        l=s.nextDouble();
        System.out.println("Enter the breadth of rectangle: ");
        b=s.nextDouble();
        Rectangle R=new Rectangle(l,b);
    }
}
```

10. Write a program to find larger number from given two number

```
import java.util.Scanner;
class Pract10{
    public static void main(String args[]){
        int a,b;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the first Number: ");
        a=s.nextInt();
        System.out.println("Enter the second Number: ");
        b=s.nextInt();
        if(a>b){
            System.out.println(a+" is the larger number");
        }else if(b>a){
            System.out.println(b+" is the larger number");
        }else{
            System.out.println("Both the numbers are equal");
        }
    }
}
```

11. Write a Program to display days of Week using 'switch'

```
import java.util.Scanner;
class Pract11{
    public static void main(String args[]){
        int n;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the day (1-7) of the week");
        n=s.nextInt();
        switch(n){
            case 1:
                System.out.println("The Day is Monday");
                break;
            case 2:
                System.out.println("The Day is Tuesday");
                break;
            case 3:
                System.out.println("The Day is Wednesday");
                break;
            case 4:
                System.out.println("The Day is Thursday");
                break;
            case 5:
                System.out.println("The Day is Friday");
                break;
            case 6:
                System.out.println("The Day is Saturday");
                break;
            case 7:
                System.out.println("The Day is Sunday");
                break;
            default:
                System.out.println("Invalid entry");
                break;
        }
    }
}
```

12. Write a program to print first n Fibonacci Series

```
import java.util.Scanner;
class Pract12{
    public static void main(String args[]){
        int i,n;
        int first=0;
        int second=1;
        int next;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter the no of terms in Fibonacci Series: ");
        n=s.nextInt();
        System.out.println("Fibonacci Series :");
        for(i=1;i<=n;i++){
            System.out.println(first);
            next=first+second;
            first=second;
            second=next;
        }
    }
}
```

13. Write a program to check number is Armstrong Number

```
import java.util.Scanner;
class Pract13{
    public static void main(String args[]){
        int number;
        int d;
        Scanner s=new Scanner(System.in);
        System.out.println("Enter a number:");
        number=s.nextInt();
        int original=number;
        int sum=0;
        int digits=0;
        while(original!=0){
            original/=10;
            digits++;
        }
        original=number;
        while(number!=0){
            d=number%10;
            sum+=Math.pow(d,digits);
            number/=10;
        }
        if(sum==original){
            System.out.println("Number is Armstrong");
        }else{
            System.out.println("Number is not Armstrong");
        }
    }
}
```

14. Write a program to print Prime number between given range

```
import java.util.Scanner;

public class A {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        System.out.print("Enter the starting number of the range: ");
        int start = scanner.nextInt();
        System.out.print("Enter the ending number of the range: ");
        int end = scanner.nextInt();
        System.out.println("Prime numbers between " + start + " and " + end + ":");
        for (int number = start; number <= end; number++) {
            if (number <= 1) {
                continue;
            }
            int isPrime = 1;
            for (int i = 2; i <= Math.sqrt(number); i++) {
                if (number % i == 0) {
                    isPrime = 0;
                    break;
                }
            }
            if (isPrime==1) {
                System.out.print(number + " ");
            }
        }
    }
}
```

15. Write a program to calculate area of given object(use method overloading)

```
import java.util.Scanner;
class Pract15{
    public static void main(String args[]){
        int l,b,r;
        Scanner s=new Scanner(System.in);
        double RectArea,CircleArea;
        System.out.println("Enter the length of Rectangle: ");
        l=s.nextInt();
        System.out.println("Enter the breadth of Rectangle: ");
        b=s.nextInt();
        System.out.println("Enter the radius of circle: ");
        r=s.nextInt();
        RectArea=CalculateArea(l,b);
        CircleArea=CalculateArea(r);
        System.out.println("Area of rectangle= "+RectArea);
        System.out.println("Area of Circle= "+CircleArea);
    }
    public static double CalculateArea(int length,int breadth){
        return length*breadth;
    }
    public static double CalculateArea(int radius){
        return 3.14*radius*radius;
    }
}
```

16. Write a program to demonstrate concept of constructor chaining

```
class Employee{
    String name;
    String Dept;
    int id;
    Employee(){
        this("Rishabh");
    }
    Employee(String name){
        this("Rishabh","IT");
    }
    Employee(String name,String Dept){
        this("Rishabh","IT",48);
    }
    Employee(String name,String Dept,int id){
        System.out.println("Details of Employee:");
        System.out.println("Name of Employee: "+name);
        System.out.println("Department of Employee: "+Dept);
        System.out.println("ID of Employee: "+id);
    }
}
class Pract16{
    public static void main(String args[]){
        Employee E=new Employee();
    }
}
```

17. Write a program to print the names of students by creating a Student class. If no name is passed while creating an object of Student class, then the name should be "Unknown", otherwise the name should be equal to the String value passed while creating object of Student class (use constructor concept).

```
class Student{
    String name;
    Student(){
        this.name="Unknown";
    }
    Student(String name){
        this.name=name;
    }
    void display(){
        System.out.println("Name of Student: "+name);
    }
}
class Pract17{
    public static void main(String args[]){
        Student s1=new Student("Rishabh");
        s1.display();
        Student s2=new Student();
        s2.display();
    }
}
```

18. Write a program to create an interface vehicle and implement it in classes like bicycle, car, bike etc.


```
interface Vehicle{
    void model();
    void color();
}
class Bicycle implements Vehicle{
    public void model(){System.out.println("Kross K40");}
    public void color(){System.out.println("Black and Green");}
}
class Bike implements Vehicle{
    public void model(){System.out.println("GT650");}
    public void color(){System.out.println("Chrome");}
}
class Car implements Vehicle{
    public void model(){System.out.println("Mustang");}
    public void color(){System.out.println("Black and Yellow");}
}
class Pract18{
    public static void main(String args[]){
        Bicycle Bi=new Bicycle();
        Bike B=new Bike();
        Car C=new Car();
        System.out.println("Bicycle Description:");
        Bi.model();
        Bi.color();
        System.out.println("Bike Description:");
        B.model();
        B.color();
        System.out.println("Car Description:");
        C.model();
        C.color();
    }
}
```

19. Write a program for abstract class shape and abstract method draw. Create class rectangle and circle that will inherit method from Shape class. Make necessary assumptions.

```
import java.util.Scanner;
abstract class Shape{
    abstract void draw();
    abstract void area();
}
class Rectangle extends Shape{
    void draw(){System.out.println("Rectangle:");}
    void area(){
        Scanner s=new Scanner(System.in);
        int l,b;
        double area;
        System.out.println("Enter length of rectangle: ");
        l=s.nextInt();
        System.out.println("Enter breadth of rectangle: ");
        b=s.nextInt();
        area=l*b;
        System.out.println("Area of Rectangle= "+area);
    }
}
class Circle extends Shape{
    void draw(){System.out.println("Circle:");}
    void area(){
        Scanner s=new Scanner(System.in);
        int r;
        double area;
        System.out.println("Enter radius of circle: ");
        r=s.nextInt();
        area=3.14*r*r;
        System.out.println("Area of Circle= "+area);
    }
}
class Pract19{
    public static void main(String args[]){
        Shape R=new Rectangle();
        Shape C=new Circle();
        R.draw();
        R.area();
        C.draw();
        C.area();
    }
}
```


20. Write a program that creates a user defined package and import that package in another package.

```
package example;
public class Pract20A{
    public void display(){
        System.out.println("This is an example package");
    }
}
```

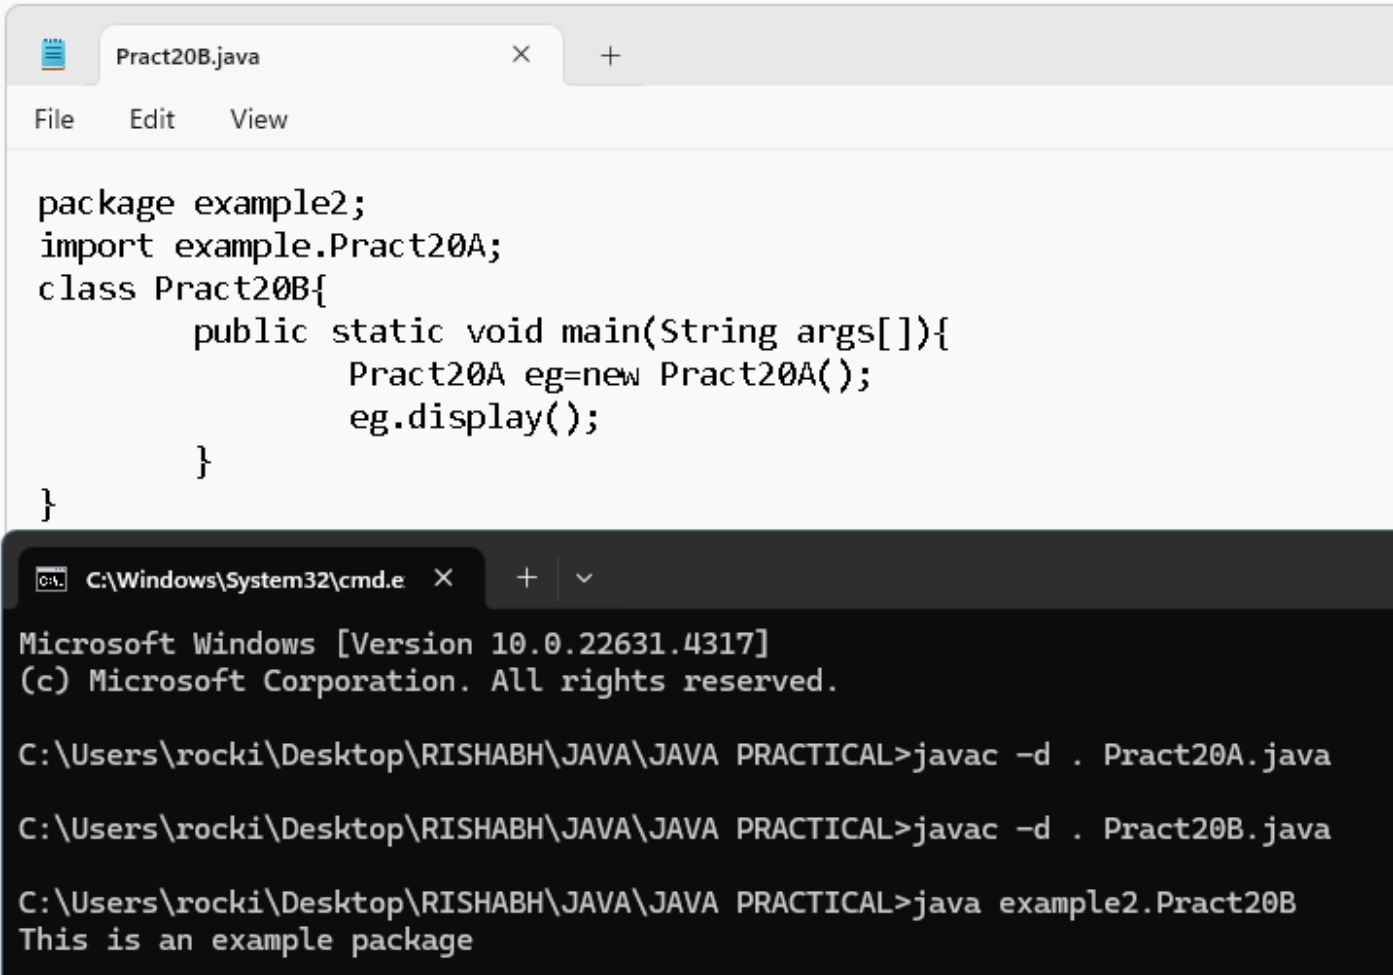

```
Pract20B.java
File Edit View

package example2;
import example.Pract20A;
class Pract20B{
    public static void main(String args[]){
        Pract20A eg=new Pract20A();
        eg.display();
    }
}
```

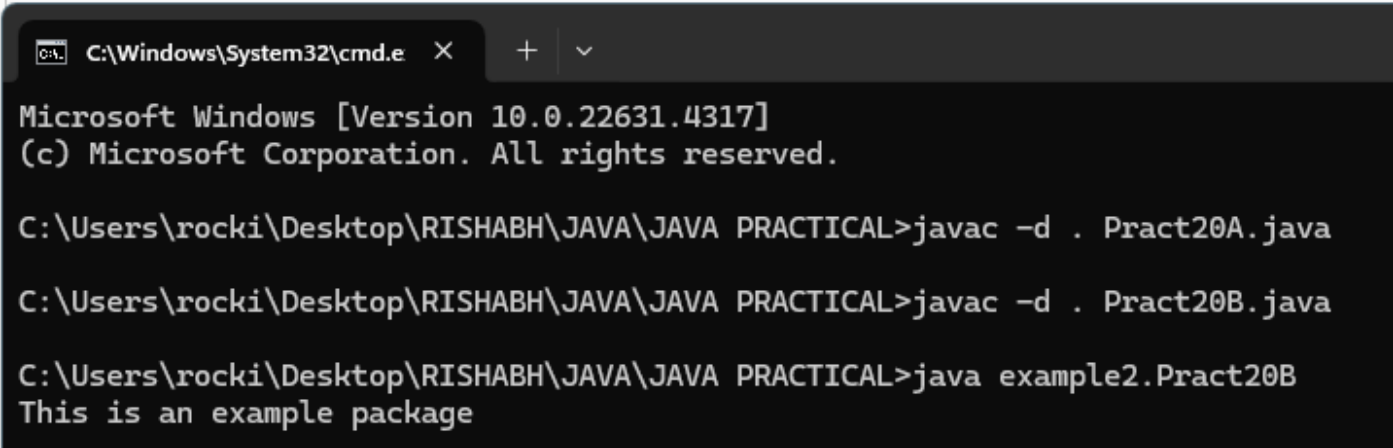

```
C:\Windows\System32\cmd.e
Microsoft Windows [Version 10.0.22631.4317]
(c) Microsoft Corporation. All rights reserved.

C:\Users\rocki\Desktop\RISHABH\JAVA\JAVA PRACTICAL>javac -d . Pract20A.java

C:\Users\rocki\Desktop\RISHABH\JAVA\JAVA PRACTICAL>javac -d . Pract20B.java


C:\Users\rocki\Desktop\RISHABH\JAVA\JAVA PRACTICAL>java example2.Pract20B
This is an example package
```

21. Write a program to implement multiple inheritance

```
interface Course{
    void CourseDetails();
}
interface Instructor{
    void InstructorDetails();
}
class Education implements Course,Instructor{
    String CourseName;
    String InstructorName;
    Education(String CourseName,String InstructorName){
        this.CourseName=CourseName;
        this.InstructorName=InstructorName;
    }
    public void CourseDetails(){
        System.out.println("Course Name: "+CourseName);
    }
    public void InstructorDetails(){
        System.out.println("Instructor Name: "+InstructorName);
    }
}
class Pract21{
    public static void main(String args[]){
        Education e=new Education("JAVA","Priyanka Patil");
        e.CourseDetails();
        e.InstructorDetails();
    }
}
```

22. Write a program in java using FileInputStream, FileOutputStream class to read/ write the file.

```
package com.javatpoint;
import java.io.FileInputStream;
public class Pract22A{
    public static void main(String args[]){
        try{
            FileInputStream fin=new FileInputStream("C:/Users/rocki/Desktop/RISHABH/JAVA/JAVA PRACTICAL/RISHABH.txt");
            int i=0;
            while((i=fin.read())!=-1){
                System.out.print((char)i);
            }
            fin.close();
        }catch(Exception e){
            System.out.println(e);
        }
    }
}
```

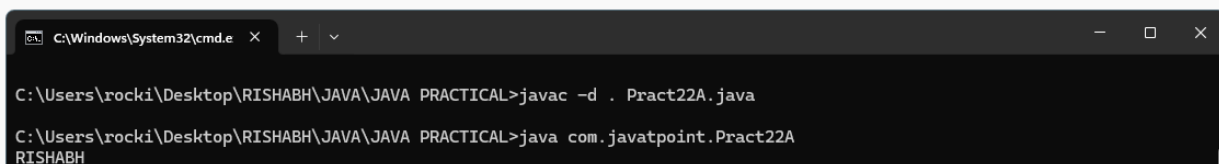


```
C:\Windows\System32\cmd.e  X  +  v
C:\Users\rocki\Desktop\RISHABH\JAVA\JAVA PRACTICAL>javac -d . Pract22A.java
C:\Users\rocki\Desktop\RISHABH\JAVA\JAVA PRACTICAL>java com.javatpoint.Pract22A
RISHABH
```

```

import java.io.FileOutputStream;
class Pract22B{
    public static void main(String args[]){
        try{
            FileOutputStream fout=new FileOutputStream("C:/Users/rocki/Desktop/RISHABH/JAVA/JAVA PRACTICAL/RISHAB.txt");
            String S="Welcome Home";
            byte b[]=S.getBytes();
            fout.write(b);
            fout.close();
            System.out.println("Success");
        }catch(Exception e){
            System.out.println(e);
        }
    }
}

```

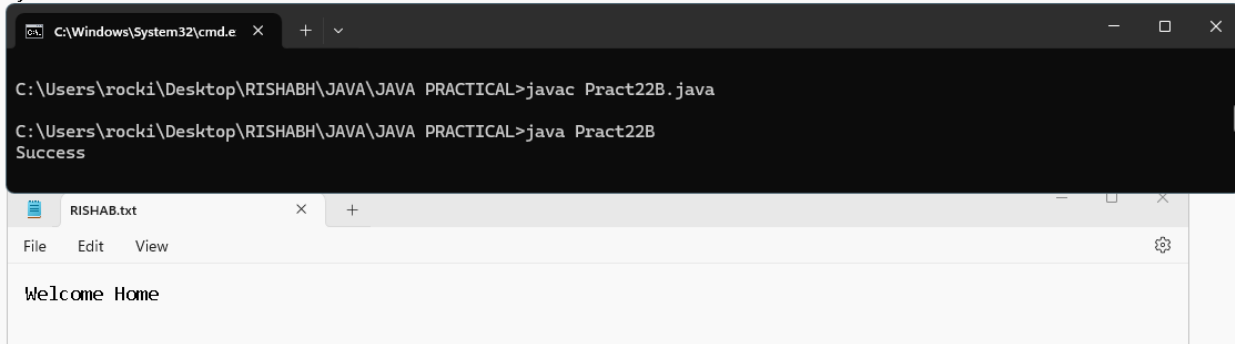

25. Write a program to demonstrate checked Exception Handling using nested try, catch statements.

```

public class Pract25{
    public static void main(String args[]){
        try{
            int a[]=new int[5];
            a[5]=30/0;
        }
        catch(ArithmeticException e){
            System.out.println("Arithmetic Exception occurs");
        }
        catch(ArrayIndexOutOfBoundsException e){
            System.out.println("ArrayIndexOutOfBoundsException Exception occurs");
        }
        catch(Exception e){
            System.out.println("Parent Exception occurs");
        }
        finally{
            System.out.println("rest of the code");
        }
    }
}

```

26. Write a program that validate username and password using user defined exception.

```
import java.util.Scanner;
class InvalidPasswordException extends Exception{
    public InvalidPasswordException(String message){
        super(message);
    }
}
public class Pract26{
    public static void main(String args[]){
        Scanner s=new Scanner(System.in);
        System.out.println("Enter Login ID: ");
        String Login=s.nextLine();
        System.out.println("Enter Password: ");
        String Password=s.nextLine();
        try{
            validatePassword(Password);
            System.out.println("Login Successfull!");
        }catch(InvalidPasswordException e){
            System.err.println(e.getMessage());
        }
    }
    public static void validatePassword(String Password) throws InvalidPasswordException{
        if(Password.length()!=8){
            throw new InvalidPasswordException("The Password must consist of 8 characters");
        }
        boolean hasDigit=false;
        boolean hasSpecialSymbol=false;
        for(char ch : Password.toCharArray()){
            if(Character.isDigit(ch)){
                hasDigit=true;
            }else if(isSpecialSymbol(ch)){
                hasSpecialSymbol=true;
            }
        }
        if(!hasDigit || !hasSpecialSymbol){
            throw new InvalidPasswordException("Enter a valid password of "+
"length 8 containing on digit and one Special Symbol");
        }
    }
    private static boolean isSpecialSymbol(char ch){
        String SpecialSymbol="!@#$%^&*()_+==><";
        for(char symbol:SpecialSymbol.toCharArray()){
            if(ch==symbol){
                return true;
            }
        }return false;
    }
}
```

27. Write a program to create a user defined exception class MarksOutOfBoundsException to validate marks entry .

```
import java.util.Scanner;
class MarksOutOfBoundException extends Exception{
    MarksOutOfBoundException(String Message){
        super(Message);
    }
}
class Pract27{
    public static void main(String args[]){
        Scanner s=new Scanner(System.in);
        System.out.println("Enter your marks: ");
        double marks=s.nextDouble();
        try{
            validateMarks(marks);
        }catch(MarksOutOfBoundException e){
            System.out.println(e.getMessage());
        }
    }
    static void validateMarks(double marks) throws MarksOutOfBoundException{
        if(marks<0 || marks>100){
            throw new MarksOutOfBoundException("Marks must be between 0 to 100");
        }
    }
}
```

30. Create two threads such that one thread will print even number and another will print odd number in an ordered fashion.

```
class Even implements Runnable{
    int i;
    public synchronized void run(){
        for(i=2;i<=20;i+=2){
            System.out.println(i);
            try{
                Thread.sleep(100);
            }
            catch(Exception e){}
        }
    }
}
class Odd implements Runnable{
    int i;
    public synchronized void run(){
        for(i=1;i<=20;i+=2){
            System.out.println(i);
            try{
                Thread.sleep(100);
            }
            catch(Exception e){}
        }
    }
}
class Pract30{
    public static void main(String args[]){
        Even e=new Even();
        Odd o=new Odd();
        Thread t1=new Thread(o);
        Thread t2=new Thread(e);
        t1.start();
        t2.start();
    }
}
```

31. Write java program to print Table of Five, Seven and Thirteen using Multithreading (Use Runnable Interface).

```
class TableofFive implements Runnable{
    public void run(){
        System.out.println("\nTable of Five:");
        for(int i=1;i<=10;i++){
            System.out.println("5 x "+i+" = "+5*i);
            try{
                Thread.sleep(1000);
            }catch(InterruptedException e){
            }
        }
    }
}
class TableofSeven implements Runnable{
    public void run(){
        System.out.println("\nTable of Seven:");
        for(int i=1;i<=10;i++){
            System.out.println("7 x "+i+" = "+7*i);
            try{
                Thread.sleep(1000);
            }catch(InterruptedException e){
            }
        }
    }
}
class TableofThirteen implements Runnable{
    public void run(){
        System.out.println("\nTable of Thirteen:");
        for(int i=1;i<=10;i++){
            System.out.println("13 x "+i+" = "+13*i);
            try{
                Thread.sleep(1000);
            }catch(InterruptedException e){
            }
        }
    }
}
}
class Pract31{
    public static void main(String args[]){
        TableofFive tableFive=new TableofFive();
        TableofSeven tableSeven=new TableofSeven();
        TableofThirteen tableThirteen=new TableofThirteen();
        Thread threadFive=new Thread(tableFive);
        Thread threadSeven=new Thread(tableSeven);
        Thread threadThirteen=new Thread(tableThirteen);
        try{
            threadFive.start();
            threadFive.join();
            threadSeven.start();
            threadSeven.join();
            threadThirteen.start();
            threadThirteen.join();
        }catch(InterruptedException e){
            e.printStackTrace();
        }
    }
}
```

32. Write a program to implement TextArea with ActionListener

```
import java.awt.*;
import java.awt.event.*;
class Pract32 extends Frame implements ActionListener{
    TextField tf;
    Pract32(){
        Frame F=new Frame("Practical QB 32");
        Button B=new Button("Click Me");
        Label L=new Label("JAVA PROGRAMMING");
        tf=new TextField();

        B.setBounds(160,50,80,30);
        L.setBounds(125,100,150,30);
        tf.setBounds(150,150,100,30);

        F.add(B);
        F.add(L);
        F.add(tf);

        B.addActionListener(this);

        F.setSize(400,300);
        F.setLayout(null);
        tf.setVisible(true);
        F.setVisible(true);

        F.addWindowListener(new WindowAdapter() {
            public void windowClosing(WindowEvent we){
                System.exit(0);
            }
        });
    }
    public void actionPerformed(ActionEvent e){
        tf.setText("Welcome");
    }
    public static void main(String args[]){
        new Pract32();
    }
}
```

33. Write a program calling any 5 methods of vector class.

```
import java.util.Vector;
class Pract33{
    public static void main(String args[]){
        Vector<Integer> V = new Vector<>();

        V.add(10);
        V.add(20);
        V.add(30);
        System.out.println("Vector: "+V);

        boolean containsElement = V.contains(30);
        System.out.println("Does the Vector contain 30? " + containsElement);

        V.remove((Integer)20);
        System.out.println("Vector after removal of 20: "+V);

        int size=V.size();
        System.out.println("Size of Vector= "+size);

        boolean isEmpty = V.isEmpty();
        System.out.println("Is the Vector empty? " + isEmpty);
    }
}
```

34. Write a program where thread sleeps for 500 ms.

```
class Pract34 implements Runnable{
    public void run(){
        try{
            System.out.println("Thread "+Thread.currentThread().getName()+" is sleeping");
            Thread.sleep(500);
            System.out.println("Thread "+Thread.currentThread().getName()+" has woken up");
        }catch(InterruptedException e){
            System.out.println("Thread " + Thread.currentThread().getName() + " was interrupted.");
            Thread.currentThread().interrupt();
        }
    }
    public static void main(String args[]){
        Pract34 A1=new Pract34();
        Pract34 A2=new Pract34();
        Thread t1=new Thread(A1,"Thread 1");
        Thread t2=new Thread(A2,"Thread 2");
        t1.start();
        t2.start();
    }
}
```

35. Write a program demonstrating "this" keyword. & 36. Write a program demonstrating "super" keyword.

```
class Animal{
    String name;
    Animal(String name){
        this.name=name;
    }
    void eat(){
        System.out.println("Animal is eating");
    }
}
class Dog extends Animal{
    Dog(String name){
        super(name);
    }
    void eat(){
        super.eat();
        System.out.println("Eating Food");
    }
    void display(){
        System.out.println("Animal Name: "+super.name);
    }
}
class Pract3536{
    public static void main(String args[]){
        Dog D=new Dog("Tom");
        D.eat();
        D.display();
    }
}
```

37. Implement a java program to calculate gross salary & net salary taking the following data. Input: empno, empname, basic Process: DA=70% of basic HRA=30% of basic CCA=Rs240/- PF=10% of basic PT= Rs100/-

```
import java.util.Scanner;
class Pract37{
    public static void main(String args[]){
        Scanner s=new Scanner(System.in);
        int empno;
        String empname;
        double Basic,DA,HRA,CCA=240,PF,PT=100,gross,net;
        System.out.println("Enter Employee No: ");
        empno=s.nextInt();
        System.out.println("Enter Employee Name: ");
        empname=s.next();
        System.out.println("Enter Basic Salary: ");
        Basic=s.nextDouble();
        DA=0.7*Basic;
        HRA=0.3*Basic;
        PF=0.1*Basic;
        gross=Basic+DA+HRA+CCA;
        net=gross-PF-PT;
        System.out.println("Employee Details: ");
        System.out.println("Employee No: "+empno);
        System.out.println("Employee Name: "+empname);
        System.out.println("Employee Gross Salary: "+gross);
        System.out.println("Employee Net Salary: "+net);
    }
}
```