

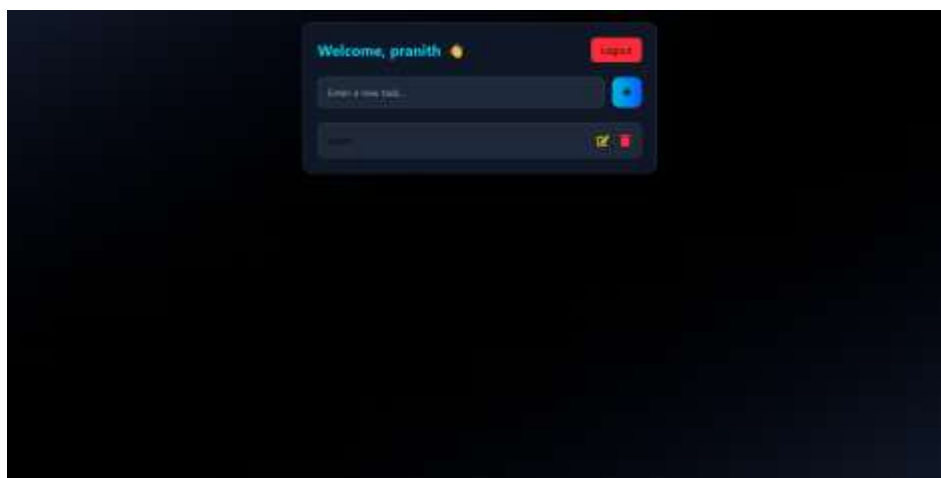
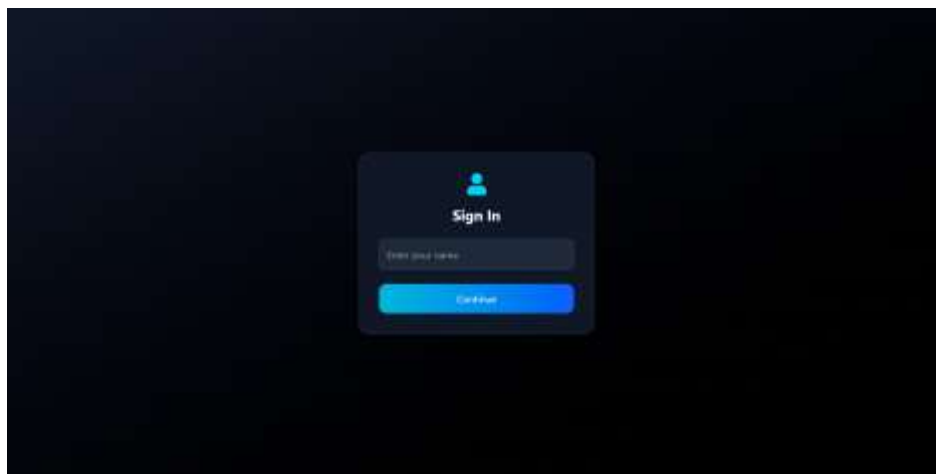


Task3

Screenshots:

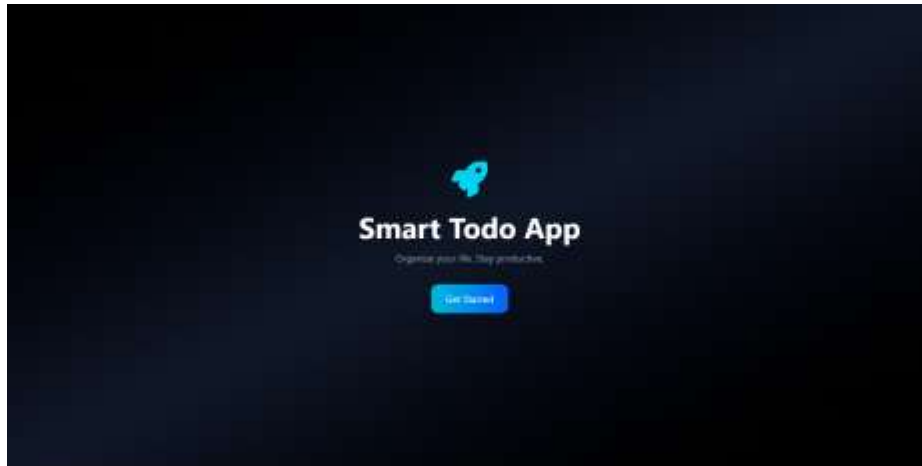

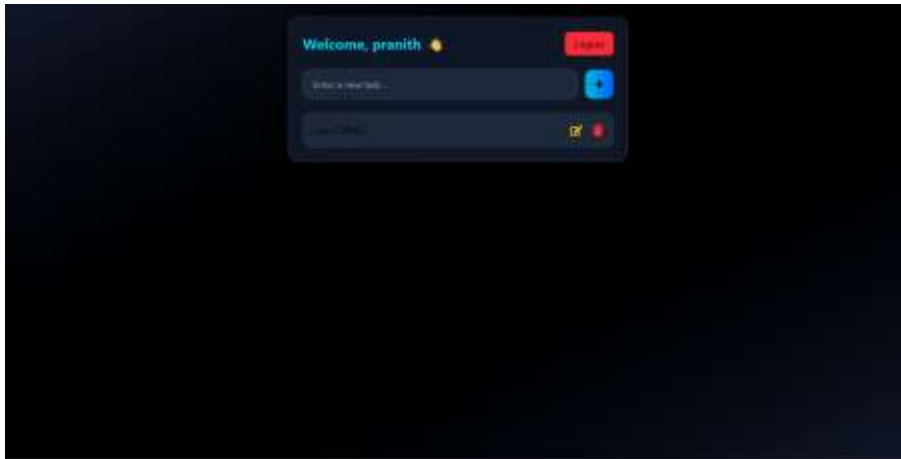

Live Hosted link: <https://todo-kokm.vercel.app/>

Github repo: <https://github.com/pranitha080511/todo>

```
import TodoItem from "../TodoItem";

const TodoList = ({ todos, deleteTodo, toggleComplete, editTodo }) => {
  return (
    <div className="space-y-4">
      {todos.length === 0 && (
        <p className="text-center text-gray-500">
          No tasks yet. Add something 🚀
        </p>
      )}

      {todos.map((todo) => (
        <TodoItem
          key={todo.id}
          todo={todo}
          deleteTodo={deleteTodo}
          toggleComplete={toggleComplete}
          editTodo={editTodo}
        />
      ))}
    </div>
  );
};

export default TodoList;
import { useState, useRef, useEffect } from "react";
import { FaTrash, FaEdit, FaCheck } from "react-icons/fa";
import { gsap } from "gsap";

const TodoItem = ({ todo, deleteTodo, toggleComplete, editTodo }) => {
  const [isEditing, setIsEditing] = useState(false);
  const [newText, setNewText] = useState(todo.text);
  const itemRef = useRef(null);

  useEffect(() => {
    gsap.fromTo(
      itemRef.current,
      { opacity: 0, y: -10 },
```

```

    { opacity: 1, y: 0, duration: 0.4 }
  );
}, []);

const handleSave = () => {
  if (!newText.trim()) return;

  editTodo(todo.id, newText); // 🔥 This updates App state
  setIsEditing(false);
};

return (
  <div
    ref={itemRef}
    className="flex items-center justify-between bg-gray-800 p-4 rounded-xl border border-gray-700"
  >
    {isEditing ? (
      <input
        value={newText}
        onChange={(e) => setNewText(e.target.value)}
        className="flex-1 bg-gray-700 px-3 py-2 rounded-lg mr-3 outline-none"
      />
    ) : (
      <span
        onClick={() => toggleComplete(todo.id)}
        className={`flex-1 cursor-pointer ${
          todo.completed ? "line-through text-gray-500" : ""
        }`}
      >
        {todo.text}
      </span>
    )}
  >

  <div className="flex gap-4 ml-3 text-xl">
    {isEditing ? (
      <FaCheck
        onClick={handleSave}
        className="cursor-pointer text-green-400 hover:scale-110 transition"
      />
    ) : (
      <FaEdit
        onClick={() => setIsEditing(true)}
        className="cursor-pointer text-yellow-400 hover:scale-110 transition"
      />
    )}

    <FaTrash
      onClick={() => deleteTodo(todo.id)}
      className="cursor-pointer text-red-500 hover:scale-110 transition"
    />
  </div>
</div>
);
};

export default TodoItem;
import { useState } from "react";
import { FaPlus } from "react-icons/fa";

const TodoForm = ({ addTodo }) => {

```

```

const [input, setInput] = useState("");

const handleSubmit = (e) => {
  e.preventDefault();
  if (!input.trim()) return;
  addToDo(input);
  setInput("");
};

return (
  <form
    onSubmit={handleSubmit}
    className="flex gap-3 mb-6"
  >
    <input
      type="text"
      value={input}
      onChange={(e) => setInput(e.target.value)}
      placeholder="Enter a new task..."
      className="flex-1 px-4 py-3 rounded-xl bg-gray-800 text-white border border-gray-600 focus:outline-
none focus:ring-2 focus:ring-cyan-500 transition duration-300"
    />

    <button
      type="submit"
      className="px-4 py-3 rounded-xl bg-gradient-to-r from-cyan-500 to-blue-600 hover:scale-105
active:scale-95 transition duration-200 shadow-lg"
    >
      <FaPlus />
    </button>
  </form>
);
};

```

```
export default TodoForm;
```

```

import { useState } from "react";
import { FaUser } from "react-icons/fa";
import { gsap } from "gsap";
import { useEffect, useRef } from "react";

```

```

const SignIn = ({ onLogin }) => {
  const [username, setUsername] = useState("");
  const ref = useRef(null);

  useEffect(() => {
    gsap.fromTo(ref.current, { opacity: 0, scale: 0.8 }, { opacity: 1, scale: 1, duration: 0.6 });
  }, []);

  const handleSubmit = (e) => {
    e.preventDefault();
    if (!username.trim()) return;
    onLogin(username);
  };

  return (
    <div className="min-h-screen flex items-center justify-center bg-gradient-to-br from-gray-900 to-black
text-white">
      <div

```

```

    ref={ref}
    className="bg-gray-900 border border-gray-700 p-8 rounded-2xl shadow-2xl w-96"
  >
    <FaUser className="text-4xl text-cyan-400 mx-auto mb-4" />

    <h2 className="text-2xl font-bold text-center mb-6">
      Sign In
    </h2>

    <form onSubmit={handleSubmit}>
      <input
        type="text"
        placeholder="Enter your name"
        value={username}
        onChange={(e) => setUsername(e.target.value)}
        className="w-full p-3 rounded-lg bg-gray-800 border border-gray-600 focus:ring-2 focus:ring-cyan-
500 outline-none mb-6"
      />

      <button
        type="submit"
        className="w-full py-3 bg-gradient-to-r from-cyan-500 to-blue-600 rounded-xl hover:scale-105
transition duration-300"
      >
        Continue
      </button>
    </form>
  </div>
</div>
);
};

export default SignIn;

import { gsap } from "gsap";
import { useEffect, useRef } from "react";
import { FaRocket } from "react-icons/fa";

const Landing = ({ onStart }) => {
  const ref = useRef(null);

  useEffect(() => {
    gsap.fromTo(ref.current, { opacity: 0, y: 40 }, { opacity: 1, y: 0, duration: 1 });
  }, []);

  return (
    <div className="min-h-screen flex flex-col items-center justify-center bg-gradient-to-br from-black via-
gray-900 to-black text-white">
      <div ref={ref} className="text-center">
        <FaRocket className="text-6xl text-cyan-400 mx-auto mb-6" />

        <h1 className="text-5xl font-bold mb-4">
          Smart Todo App
        </h1>

        <p className="text-gray-400 mb-8">
          Organize your life. Stay productive.
        </p>

        <button

```

```
        onClick={onStart}
        className="px-6 py-3 bg-gradient-to-r from-cyan-500 to-blue-600 rounded-xl hover:scale-110 transition
duration-300 shadow-xl"
      >
        Get Started
      </button>
    </div>
  </div>
);
};

export default Landing;
```