

Course 10 – Admin Functions

Module 1 – Transport

(One of the Most Important Admin Features for Migration & Deployment)

Introduction

In every Saviynt implementation, organizations maintain multiple environments such as:

- Development (DEV)
- Testing (TEST)
- User Acceptance Testing (UAT)
- Production (PROD)

Suppose you create:

- A Workflow
- A Security System
- A Role
- A Connection
- An Email Template

in the **Development** environment.

Should you recreate all of them manually in Testing and Production?

No.

Saviynt provides the **Transport** feature to migrate configurations safely between environments.

What is Transport?

Definition

Transport is a Saviynt feature used to export and import configurations and objects between different Saviynt environments.

Simple Definition

Transport is used to move Saviynt configurations from one environment to another without rebuilding them manually.

Why is Transport Needed?

Without Transport

↓

Manual configuration

↓

Time consuming

↓

Human errors

↓

Configuration mismatch

With Transport

↓

Export Package

↓

Import Package



Consistent configuration



Faster deployment

Example

Developer creates:

- Workflow
- Connection
- Role
- Email Template

in DEV.

Instead of creating them again,

Administrator exports them.



Imports into TEST.



After testing,


Imports into PROD.

Benefits of Transport

- Saves implementation time.
- Eliminates manual configuration.
- Ensures consistency.

- Supports change management.
 - Supports audit requirements.
 - Reduces deployment errors.
-

Transport Workflow

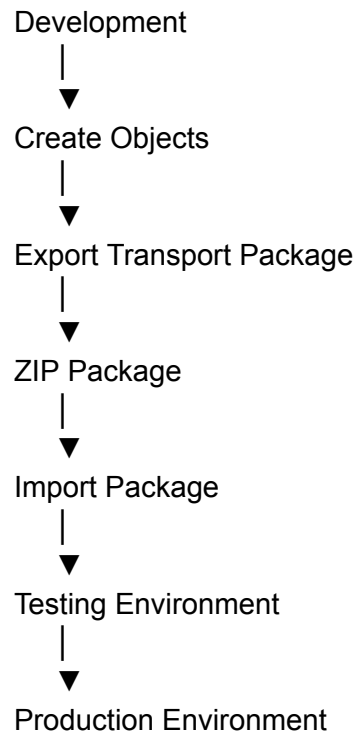

Objects Supported by Transport

Saviynt can transport many configuration objects.

Common objects include:

- SAV Roles
- Email Templates
- Analytics V1
- Analytics V2
- Global Configurations
- Workflows
- Security Systems

- User Groups
 - Scan Rules
 - Organizations
 - Roles
 - Password Policies
 - Connections
 - Application Onboarding Configurations
-

Transport Package

What is a Transport Package?

A Transport Package is a ZIP file containing:

- Configuration metadata
 - Object definitions
 - Dependencies
-

Simple Definition

Transport Package = ZIP file containing Saviynt configurations

Export Package

Navigation

Admin



Transport



Export Package

Export Steps

1. Open **Export Package**.
 2. Select required objects.
 3. Choose whether to include dependencies.
 4. Generate the ZIP file.
 5. Review the export summary.
 6. Download the package.
-

Why Include Dependencies?

Suppose you export a Workflow.

That workflow references:

- Email Templates
- Roles
- Connections

If dependencies are not included,

the import may fail because the referenced objects do not exist.

Import Package

Navigation

Admin



Transport



Import Package

Import Steps

1. Browse and upload the ZIP package.
 2. Review imported objects.
 3. Choose:
 - Activate Immediately
 - Keep in Composing State
 4. Complete the import.
-

Activate Immediately vs Composing State

Activate Immediately

- Object becomes active immediately.
 - Used in Production after validation.
-

Composing State

- Imported but not activated.
 - Administrator reviews or edits configuration first.
 - Commonly used in Development and Testing.
-

Enhanced Transport

Saviynt uses **Enhanced Transport** by default.

Features:

- Better scalability
- Improved stability
- Improved design
- Queue management

Location:

Admin



Global Configuration



Preferences



Enable Enhanced Transport

Queue Processing

Only **one** transport request executes at a time.

Example

Request 1

Running



Request 2

Queue



Request 3

Queue

When Request 1 completes,

Request 2 starts automatically.

Transport APIs

Transport can also be managed using APIs.

This allows:

- Automated deployments
 - CI/CD integrations
 - Scripted migrations
 - Deployment pipelines
-

Transport History

Administrators can review:

- Export History
- Import History

Navigation

Admin



Transport



View History


History helps with:

- Auditing
 - Troubleshooting
 - Change tracking
-

Internal Workflow

Create Configuration



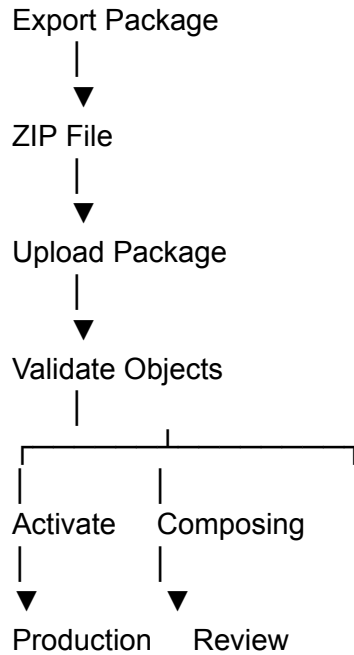

Real Project Example

Company

ABC Bank

Developer creates:

- Active Directory Connection
- Provisioning Workflow
- Email Templates
- Password Policy

in DEV.

Administrator:

- Exports a Transport Package.
- Imports into TEST.
- Validates functionality.
- Imports into PROD.
- Activates immediately.

Deployment completed without rebuilding configurations.

Best Practices

- Always test transports in DEV/UAT before Production.
 - Include dependencies whenever related objects are required.
 - Review the export summary before downloading.
 - Keep transport packages version-controlled.
 - Use **Composing State** for complex configurations.
 - Review Transport History after every deployment.
 - Clean up unused transport packages to save storage.
 - Automate deployments with APIs where appropriate.
-

Common Issues

Issue	Cause	Solution
Import fails	Missing dependency	Export again with dependencies
Object not visible	Imported in Composing state	Review and activate
Transport queued	Another transport running	Wait until the current request completes
Configuration mismatch	Wrong package version	Use the correct export package
Missing object after import	Object not selected during export	Re-export including the missing object

Troubleshooting

Transport Import Failed

Check:

- ZIP package validity
- Missing dependencies

- Import logs
 - Object compatibility
-

Object Missing After Import

Verify:

- Object included during export
 - Import completed successfully
 - Object activated (not left in Composing state)
-

Queue Not Moving

Check:

- Previous transport status
 - Transport service
 - Import/export history
-

Wrong Configuration Imported

Verify:

- Package version
 - Environment
 - Export summary
 - Change documentation
-

Difference Between Export and Import

Export	Import
Creates ZIP package	Uploads ZIP package

Source environment	Destination environment
Packages configurations	Deploys configurations
Downloads objects	Activates objects

Interview Questions

Q1. What is Transport?

Transport is the Saviynt feature used to migrate configurations between environments.

Q2. Why is Transport required?

To avoid manual recreation of configurations and ensure consistency across DEV, TEST, UAT, and PROD.

Q3. What objects can be transported?

- Workflows
 - Roles
 - Security Systems
 - Connections
 - Email Templates
 - Analytics
 - Global Configurations
 - Password Policies
 - Application Onboarding configurations
 - And other supported configuration objects.
-

Q4. What is a Transport Package?

A ZIP file containing object definitions, metadata, and optionally their dependencies.

Q5. Why should dependencies be included?

To ensure referenced objects are also migrated so the imported configuration works correctly.

Q6. What is the difference between Activate Immediately and Composing State?

- **Activate Immediately** makes the imported configuration active immediately.
 - **Composing State** imports the configuration for review before activation.
-

Q7. What is Enhanced Transport?

An improved transport mechanism that provides scalability, stability, and queue management, processing one transport request at a time.

Q8. Why is Transport History important?

It provides traceability, auditing, and troubleshooting for all import and export operations.

Q9. Can Transport be automated?

Yes. Transport supports APIs for automated deployments and CI/CD integration.

Q10. What are the best practices for using Transport?

- Test in lower environments first.
 - Include dependencies.
 - Review export summaries.
 - Use version control.
 - Check Transport History.
 - Clean up unused packages.
-

Lab 10 Scenario Questions

Scenario 1

Question:

You imported a workflow into TEST, but it fails because an email template is missing.

Root Cause:

The email template dependency was not included in the export package.

Solution:

Re-export the workflow with **Include Dependencies** enabled and import it again.

Scenario 2

Question:

Your transport request stays in **In Queue** status for a long time.

Answer:

Enhanced Transport processes only one request at a time. Verify whether another import or export is currently running and wait for it to complete.

Scenario 3

Question:

After importing, the configuration is not visible to users.

Answer:

Check whether the object was imported in **Composing State** instead of being activated. Activate it after validation.

Quick Revision

- **Transport** migrates Saviynt configurations between environments.
- Typical flow: **DEV** → **TEST/UAT** → **PROD**.
- Configurations are exported as **ZIP packages**.
- Always include dependencies when related objects are required.
- Imported objects can be:
 - **Activated Immediately**
 - Left in **Composing State** for review.
- **Enhanced Transport** processes one request at a time and queues additional requests.
- **Transport History** provides auditing and troubleshooting information.
- APIs can be used to automate transport in deployment pipelines.
- Best practice: always validate transports in lower environments before promoting them to Production.

Module 2 – Log Viewer

(One of the Most Important Production Support Tools in Saviynt)

Introduction

In a production environment, issues happen every day.

Examples:

- User Import failed
- Provisioning failed
- Access Request failed
- Workflow failed
- Email notification not sent
- Connector authentication failed
- Job execution failed

When these issues occur, administrators need to determine the **root cause** quickly.

Saviynt provides **Log Viewer**, a centralized tool for viewing and analyzing application logs.

What is Log Viewer?

Definition

Log Viewer is a built-in Saviynt administrative tool used to search, filter, analyze, and download application logs for troubleshooting and diagnostics.

Simple Definition

Log Viewer helps administrators find errors and identify the root cause of issues by analyzing system logs.

Why is Log Viewer Needed?

Without Log Viewer



Guesswork



Slow troubleshooting



Long resolution time



Poor user experience

With Log Viewer



Search logs



Find errors



Identify root cause



Resolve issue quickly

Real Example

A user requests SAP access.

Approval completes successfully.

However,

SAP account is not created.

Administrator opens **Log Viewer**, searches using the Request ID and Task ID, finds a connector authentication error, fixes the connection, and reruns provisioning.

Navigation

There are two ways to access Log Viewer.

Method 1

Search

Log Viewer

Method 2

Admin



Admin Functions



Log Viewer

Features of Log Viewer

Log Viewer provides several powerful features.

1. Keyword Search

Administrators can search logs using keywords.

Examples:

- Username
 - Request Number
 - Account ID
 - Task ID
 - Job Name
 - Error Message
 - Endpoint Name
-

2. Infinite Scroll

Instead of loading logs page by page,

Log Viewer supports continuous scrolling through log entries.

Useful for investigating long-running jobs.

3. Quick Time Range

Quick filters include:

- Last 15 Minutes
- Last Hour
- Today
- Yesterday
- Last 24 Hours

This reduces search time.

4. Specific Time Range

Administrators can specify an exact start and end time.

Example

10:00 AM

↓

11:30 AM

Only logs from that period are displayed.

5. Contextual Search

Contextual Search displays logs related to the same request or process.

Example

Provisioning Request

↓

Related connector logs

↓

Related workflow logs

↓

Related API logs

6. Download Logs

Logs can be downloaded in CSV format for:

- Audit
 - Analysis
 - Vendor support
 - Offline troubleshooting
-

7. Download Contextual Logs

Downloads only logs related to a specific process instead of all logs.

Useful for support cases.

Common Search Keywords

Saviynt recommends searching using:

- WSRETRY
 - Request Number
 - Username
 - Account ID
 - Task ID
 - Import Job Name
 - Target Application URL/Hostname
 - Provisioning Error Message
 - Thread ID
-

Logging Levels

Saviynt categorizes logs into different levels.

1. Error

Highest severity.

Contains critical failures.

Examples:

- Connector failure
- Provisioning failure
- Authentication failure

2. Warning

Potential issues.

Process may continue but requires attention.

Example

Missing optional attribute.

3. Info

General operational information.

Examples:

- Job started
 - Job completed
 - Request submitted
-

4. Debug

Detailed technical information used during troubleshooting.

Includes execution flow and diagnostic details.

5. Custom

Organizations can configure custom logging based on business needs.

Threading in Saviynt

Every process runs on one or more **threads**.

Examples:

- User Import
- Provisioning
- Reconciliation
- Access Request

Each log entry contains a Thread Name.

Why Thread Name is Important?

While troubleshooting,

follow the same Thread ID.

This allows administrators to trace the complete execution path.

Example

Request Submitted

↓

Thread 82

↓

Workflow Started

↓

Thread 82

↓

Connector Executed

↓

Thread 82

↓

Provisioning Failed

↓

Thread 82

By filtering on Thread 82, the complete process is visible.

Microservices That Generate Logs

Saviynt consists of multiple services.

Common ones include:

Service	Purpose
ECM	Access requests, approvals, transactions
ECM Worker	Background jobs
UserMS	Endpoint synchronization jobs
ConnectorMS	Connector framework logs
ARSMS	Forms, approvals, request history

Each service writes its own logs.

Selecting the correct **Service Name** greatly speeds troubleshooting.

Provisioning Comments

One of the most important troubleshooting areas.

Navigation

Pending Tasks



Select Task



Action



View

Why Provisioning Comments Matter

Provisioning Comments show:

For completed tasks:

Provisioning Successful

For failed tasks:

Examples:


- Invalid credentials
- Missing mandatory attribute
- Connector timeout
- User not found
- Endpoint unavailable

These comments often reveal the root cause before checking logs.

Log Investigation Workflow

Issue Reported



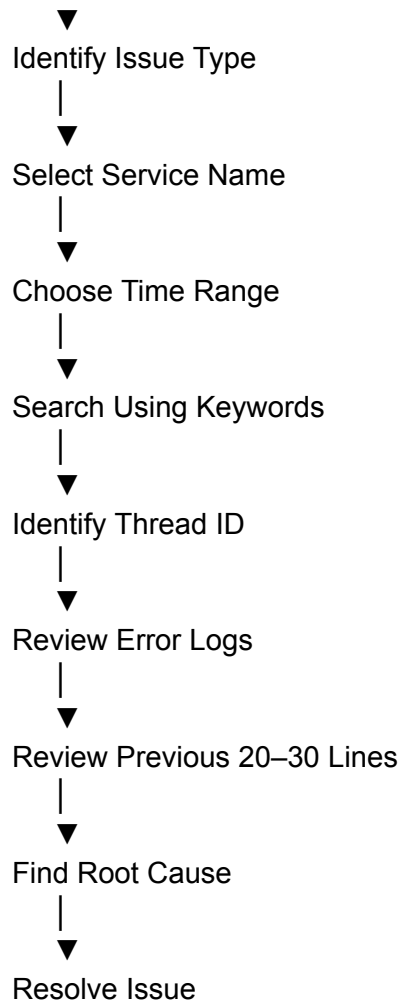

This follows Saviynt's recommended troubleshooting process.

Real Project Example

Company

ABC Bank

Problem:

User requests Active Directory access.

Approval completes.

Provisioning fails.

Support Engineer:

- Opens Log Viewer.
- Selects **ConnectorMS**.
- Searches using Task ID.
- Filters by the Thread ID.
- Finds **Invalid LDAP credentials**.
- Updates connector credentials.
- Runs WSRETRY.

Provisioning succeeds.

Issue resolved.

Best Practices

- Always start with the correct **Service Name**.
 - Use **Request Number**, **Task ID**, or **Username** as search keywords.
 - Narrow searches with a specific time range.
 - Follow the **Thread ID** for complete execution flow.
 - Review provisioning comments before analyzing logs.
 - Download contextual logs for vendor or escalation support.
 - Review the **20–30 lines before an error** because the root cause often appears before the actual exception.
 - Avoid searching all services at once; narrow the scope first.
-

Common Issues

Issue	Possible Cause	Solution
No logs found	Wrong time range	Adjust the time filter
Too many logs	Broad search	Use keywords and Service Name filters
Provisioning failure	Connector issue	Review Provisioning Comments and ConnectorMS logs
Import failure	Authentication or mapping issue	Check UserMS or ECM Worker logs

Troubleshooting Scenarios

Scenario 1 – Provisioning Failed

Check

- Pending Task
 - Provisioning Comments
 - ConnectorMS Logs
 - Thread ID
 - WSRETRY Job
-

Scenario 2 – User Import Failed

Check

- UserMS Logs
 - Import Job Name
 - Authentication
 - Mapping
 - CSV or Connector errors
-

Scenario 3 – Access Request Failed

Check

- ECM Logs
 - Request Number
 - Workflow
 - Approval history
-

Scenario 4 – Email Not Sent

Check

- Email Template
 - SMTP configuration
 - ECM Worker logs
-

Scenario 5 – Connector Authentication Failed

Check

- ConnectorMS
 - Target URL
 - Username
 - Password/API Token
 - SSL Certificate
 - Network connectivity
-

Difference Between Log Levels

Log Level	Purpose
Error	Critical failures
Warning	Potential issues
Info	General execution details
Debug	Detailed troubleshooting information
Custom	User-defined logging

Interview Questions

Q1. What is Log Viewer?

Log Viewer is a Saviynt tool used to search, filter, and analyze application logs for troubleshooting.

Q2. Why is Log Viewer important?

It helps administrators quickly identify the root cause of issues related to provisioning, imports, workflows, connectors, and access requests.

Q3. What search filters are available?

- Keywords
 - Service Name
 - Thread ID
 - Quick Time Range
 - Specific Time Range
 - Contextual Search
-

Q4. Which log level has the highest severity?

Error logs.

Q5. Why is Thread ID important?

It links all log entries belonging to the same process, making it easier to trace end-to-end execution.

Q6. Which microservice should you check for connector issues?

ConnectorMS.

Q7. What should you review before opening Log Viewer for provisioning failures?

Provisioning Comments in the Pending Task, because they often contain the failure reason.

Q8. What are commonly used keywords while searching logs?

- Request Number
 - Username
 - Task ID
 - Account ID
 - WSRETRY
 - Import Job Name
 - Error Message
 - Thread ID
-

Q9. Why should you review the lines before an error?

Because the actual root cause often appears **20–30 log lines before** the final exception.

Q10. What are the best practices for Log Viewer?

- Select the correct Service Name.
 - Filter by time.
 - Use precise keywords.
 - Follow the Thread ID.
 - Review Provisioning Comments first.
 - Download contextual logs when escalating issues.
-

Scenario-Based Interview Questions

Scenario 1

Question:

A provisioning task remains open after the provisioning job completes. How would you troubleshoot?

Answer:

1. Open **Pending Tasks**.
 2. Review **Provisioning Comments**.
 3. Identify the **Thread ID**.
 4. Open **ConnectorMS** logs.
 5. Search using Task ID or Thread ID.
 6. Fix the underlying issue and rerun **WSRETRY** if appropriate.
-

Scenario 2

Question:

Your log search returns thousands of records. What should you do?

Answer:

- Select the appropriate Service Name.
 - Narrow the time range.
 - Search using Request Number, Task ID, or Username.
 - Filter by Thread ID.
-

Scenario 3

Question:

An import job failed. Which logs will you check first?

Answer:

- UserMS (or the service responsible for the import)
 - Import Job Name
 - Authentication errors
 - Mapping issues
 - Error messages in Job History
-

Scenario 4

Question:

You cannot identify the root cause from the error message. What next?

Answer:

Review the **20–30 log lines before the error** because the triggering event usually appears before the final exception.

Quick Revision

- **Log Viewer** is the primary troubleshooting tool in Saviynt.
- Access it through **Admin → Admin Functions → Log Viewer** or by searching for **Log Viewer**.
- Key features:
 - Keyword Search
 - Infinite Scroll
 - Quick & Specific Time Range
 - Contextual Search
 - Log Downloads
- Common log levels:
 - Error
 - Warning
 - Info
 - Debug
 - Custom
- Always investigate using:
 - Service Name
 - Thread ID
 - Request Number
 - Task ID
 - Username
- Review **Provisioning Comments** before diving into logs.
- Follow the troubleshooting flow:
Issue → Service → Time Range → Keywords → Thread ID → Error → Previous Log Lines → Root Cause.