

Course 7 – Identity Lifecycle Policies (Rules)

Module 1 – Introduction to Policies

Introduction

After:

- Users are imported
- Applications are onboarded
- Access Request System (ARS) is configured

organizations still need to automate the **Identity Lifecycle**.

Imagine a new employee joins today.

Questions arise:

- Should HR manually create all accounts?
- Should IT manually assign AD Groups?
- Should managers manually remove access when an employee leaves?

Doing everything manually is:

- Time-consuming
- Error-prone
- Difficult to audit
- Security risk

Saviynt solves this using **Identity Lifecycle Policies (Rules)**.

Policies automatically assign, update, or revoke access whenever a user's identity changes.

What are Policies?

Definition

Policies are automated rules that assign, update, or revoke accounts, roles, and entitlements based on changes in a user's identity or lifecycle.

Simple Definition

A **Policy** is an automation rule that tells Saviynt:

"When this condition happens, automatically perform this action."

Why are Policies Needed?

Without Policies:

- IT manually creates accounts.
- Managers manually assign roles.
- Access removal is often delayed.
- Former employees may still retain access.

With Policies:

- Everything happens automatically.
 - Less manual work.
 - Faster onboarding.
 - Better security.
 - Easier compliance.
-

Real-Life Example

Rahul joins ABC Bank as a Finance Analyst.

Without Policies:

IT Administrator manually:

- Creates Active Directory account.
- Creates Outlook account.
- Creates SAP account.
- Adds Finance AD Group.
- Assigns Finance Role.

This may take hours or even days.

With Policies:

HR imports Rahul into Saviynt.

Saviynt automatically:

- Creates accounts.
- Assigns Finance Role.
- Assigns AD Groups.
- Grants SAP access.

No manual work.

Identity Lifecycle

Every employee goes through an Identity Lifecycle.

The three main lifecycle events are:

- Joiner
- Mover
- Leaver

These events are commonly called the **JML Process**.

Identity Lifecycle Events

1. Joiner (Onboarding)

A new employee joins the organization.

Examples:

- New Hire
- Rehire

Required actions:

- Create user identity.
 - Create application accounts.
 - Assign birthright access.
 - Send welcome email.
-

Example

Rahul joins Finance.

Saviynt automatically:

- Creates AD account.
 - Creates Office 365 account.
 - Assigns Finance Enterprise Role.
 - Grants SAP Finance access.
-

2. Mover (Updates)

A user changes roles or attributes.

Examples:

- Department change
- Promotion
- Transfer

- Location change
- Manager change
- Employment type change
- Leave of Absence

Required actions:

- Remove old access.
 - Assign new access.
 - Update accounts.
-

Example

Rahul moves from Finance to HR.

Saviynt automatically:

Removes:

- SAP Finance
- Finance AD Group

Assigns:

- HR Role
 - HR AD Group
 - HR Applications
-

3. Leaver (Offboarding)

Employee leaves the organization.

Examples:

- Resignation
- Retirement
- Contract End
- Emergency Termination

Required actions:

- Disable accounts.
 - Remove roles.
 - Revoke application access.
 - Remove group memberships.
 - Archive identity (if required).
-


Example


Rahul resigns.

Saviynt automatically:

- Disables Active Directory account.
 - Removes SAP access.
 - Removes Office 365 license.
 - Removes VPN access.
 - Updates audit logs.
-

Identity Lifecycle Diagram

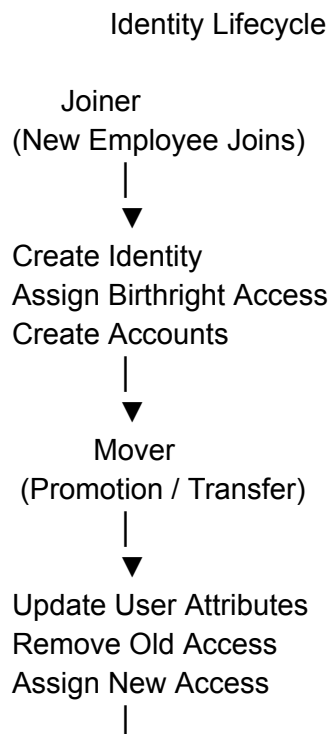



Identity Offboarding

Offboarding means securely removing access when a user leaves.

Without proper offboarding:

Former employees may still have:

- VPN Access
- Email
- Database Access
- Cloud Access

This creates a serious security risk.

Change of Identity

A user's identity continuously changes.

Examples:

- Department
- Manager
- Job Title
- Employee Type
- Cost Center
- Location

Policies detect these changes and automatically update access.

Advantages of Policies

1. Automatically Assign Access

Example:

Department = Finance

↓

Automatically assign

Finance Enterprise Role

2. Automatically Revoke Access

Example:

Department changes from Finance to HR

↓

Automatically remove

Finance Role

3. Execute Event-Based Actions

Policies can trigger:

- Account creation
- Role assignment
- Access removal
- Notifications
- Provisioning

Joiner-Mover-Leaver (JML)

This is one of the most important Identity Governance concepts.

Joiner

New employee joins.

Example:

Rahul joins Finance.

Automatically:

- Create accounts.
 - Assign birthright access.
 - Provision applications.
-

Mover

Employee changes role.

Example:

Finance → HR

Automatically:

- Remove Finance access.
 - Assign HR access.
-

Leaver

Employee exits.

Automatically:

- Disable accounts.
 - Remove access.
 - Complete deprovisioning.
-

Functional Capabilities of Rules

Saviynt Rules provide several powerful capabilities.

Event-Based Automation

Rules are triggered automatically when identity events occur.

Examples:

- New user created.
 - Department changes.
 - User terminated.
-

Different Rule Types

Saviynt supports multiple rule types for different use cases.

Birthright Access

Automatically grant default access for new users.

Example:

Every Finance employee receives:

- SAP
- Outlook
- AD Group

Automatic Access Removal

When conditions no longer match, Saviynt removes access automatically.

Example:

Department changes.

↓

Finance Role removed.

Types of Rules in Saviynt

Saviynt provides different rule engines.

1. Technical Rules

Used mainly for **Joiner (Birthright Access)**.

Example:

If Department = Finance

↓

Assign Finance Enterprise Role.

2. User Update Rules

Used for **Mover and Leaver** scenarios.

Example:

Department changes.

↓

Remove old role.

Assign new role.

3. Entitlement Update Rules

Triggered when entitlement information changes.

Example:

AD Group renamed.

↓

Update entitlement information.

4. Organization Update Rules

Triggered when organization-level information changes.

Example:

Business Unit restructuring.

5. Request Rules

Triggered during Access Requests.

Example:

If Location = Delhi

↓

Automatically assign


Delhi Printer Group

during access request.

Event-Based Rules vs Access Request Rules

Event-Based Rules	Access Request Rules
Triggered by identity changes	Triggered during access requests
Automatic	Runs only when a request is submitted
Used for JML lifecycle	Used for ARS customization
Examples: Technical Rules, User Update Rules	Example: Request Rules

How Policies Work

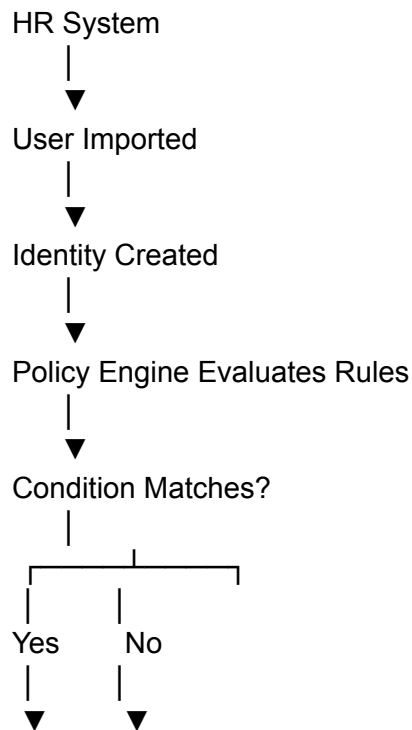

Assign/Remove Access



Provisioning Task



Target Applications

Real Project Example

Company: ABC Bank

Applications:

- Active Directory
- SAP
- Salesforce
- Office 365

Scenario:

Rahul joins as a Finance Analyst.

HR imports Rahul.

Saviynt evaluates policies.

Condition:

Department = Finance

Technical Rule triggers.

Automatically:

- AD account created.
- SAP account created.
- Office 365 account created.
- Finance Enterprise Role assigned.
- Finance AD Group assigned.

No manual intervention is required.

Benefits of Policies

- Fully automated identity lifecycle.
 - Reduced manual effort.
 - Faster onboarding.
 - Automatic access updates.
 - Automatic access removal.
 - Improved compliance.
 - Strong audit trail.
 - Reduced human error.
 - Better security.
-

Best Practices

- Use Technical Rules for Joiner (birthright) access.
 - Use User Update Rules for Mover and Leaver events.
 - Keep HR data accurate because rules depend on user attributes.
 - Test policies in Development/UAT before Production.
 - Regularly review and update rules as business requirements change.
 - Keep rule logic simple and easy to maintain.
 - Monitor provisioning tasks and logs after rule execution.
-

Interview Questions

Q1. What are Policies in Saviynt?

Policies are automated rules that assign, update, or revoke accounts, roles, and entitlements based on changes in a user's identity or lifecycle.

Q2. What is Identity Lifecycle Management (ILM)?

Identity Lifecycle Management manages user identities from onboarding (Joiner) through updates (Mover) to offboarding (Leaver), ensuring the correct access is provided throughout the employee lifecycle.

Q3. What is the Joiner-Mover-Leaver (JML) process?

JML represents the three major identity lifecycle events:

- Joiner – New employee
 - Mover – Employee changes role or department
 - Leaver – Employee leaves the organization
-

Q4. Why are Policies important?

Policies automate access management, reduce manual work, improve security, and ensure compliance by assigning and removing access automatically.

Q5. What are the different types of rules in Saviynt?

- Technical Rules
 - User Update Rules
 - Entitlement Update Rules
 - Organization Update Rules
 - Request Rules
-

Q6. Which rule is mainly used for Joiner scenarios?

Technical Rules are mainly used to assign birthright access to new users.

Q7. Which rule is mainly used for Mover and Leaver scenarios?

User Update Rules manage access changes when user attributes change or when users leave the organization.

Q8. What is birthright access?

Birthright access is the default access automatically assigned to a new employee based on attributes such as department, job title, or location.

Q9. What happens during offboarding?

Saviynt disables user accounts, removes roles and entitlements, revokes application access, and updates audit records.

Q10. Why is automating the JML process important?

Automation reduces manual effort, minimizes human error, improves security, accelerates onboarding/offboarding, and ensures compliance with organizational policies.

Quick Revision

- **Policies** automate access assignment, updates, and revocation.
- **Identity Lifecycle** consists of **Joiner, Mover, and Leaver (JML)** events.
- **Technical Rules** provide birthright access for new users.
- **User Update Rules** handle access changes for movers and leavers.
- **Request Rules** execute during Access Request workflows.
- Policies are triggered by **identity events** and execute provisioning or deprovisioning automatically.
- Automating the JML lifecycle reduces manual work, improves security, and strengthens compliance.

Module 2 – Technical Rules

(One of the Most Important Saviynt Interview Topics)

Introduction

One of the biggest challenges in Identity Governance is **automatically giving new employees the correct access**.

Imagine a new employee joins the company.

Should the IT team manually:

- Create Active Directory account?
- Create Office 365 account?
- Assign SAP Role?
- Add AD Groups?

If an organization hires **200 employees every month**, this becomes a huge manual effort.

Saviynt solves this using **Technical Rules**.

Technical Rules automatically assign **Birthright Access (Zero-Day Provisioning)** based on user attributes.

What is a Technical Rule?

Definition

A **Technical Rule** is an event-based policy that automatically provisions or removes accounts, roles, and entitlements based on predefined user conditions.

Simple Definition

A Technical Rule tells Saviynt:

"If a user matches this condition, automatically give them this access."

Why are Technical Rules Needed?

Without Technical Rules:

- IT manually creates accounts.
- Managers manually assign roles.
- Access assignment takes time.
- Human errors increase.

With Technical Rules:

- Automatic account creation.
 - Automatic role assignment.
 - Automatic entitlement assignment.
 - Faster onboarding.
 - Better compliance.
-

Main Purpose of Technical Rules

Technical Rules are mainly used for:

- Birthright Access
 - Zero-Day Provisioning
 - Automatic Account Creation
 - Automatic Role Assignment
 - Automatic Entitlement Assignment
 - Automatic Access Removal (if configured)
-

What is Birthright Access?

Definition

Birthright Access is the **default access automatically assigned to every employee based on business attributes** such as department, job title, or location.

Example

Every Finance employee should automatically receive:

- Active Directory Account
- Outlook Account
- SAP Finance Role
- Finance AD Group

Instead of manually assigning these, Technical Rules assign them automatically.

What is Zero-Day Provisioning?

Definition

Zero-Day Provisioning means **the user receives all required access on the very first day of joining**, without waiting for manual requests.

Example

Rahul joins on Monday morning.

As soon as HR imports Rahul,

Saviynt automatically:

- Creates AD account.
- Creates Office 365 account.
- Creates SAP account.
- Assigns Finance Role.

Rahul can start working immediately.

How Technical Rules Work

Every Technical Rule has two main parts.

1. Condition

Defines **who should receive access**.

Example:

Department = Finance

Location = Hyderabad

Employee Type = Permanent

2. Action

Defines **what access should be assigned**.

Example:

Assign:

- Finance Enterprise Role
 - SAP Account
 - Finance AD Group
-

Simple Rule Example

Condition

Department = Finance

↓

Action

Assign Finance Enterprise Role

Another Example

Condition

Location = Hyderabad

↓

Action

Assign Hyderabad Printer Group

Internal Working of Technical Rules

HR Imports User

|



Identity Created

|




Technical Rule Engine

|



Evaluate Condition

|



|

Match

|



Perform Action

|



Provisioning Task

|

No Match

|



No Action



Target Application

Technical Rule Trigger Scenarios

Technical Rules can execute in several situations.

1. New User Created

When a new user is created in Saviynt,

Technical Rules automatically execute.

Example

Rahul joins.



HR imports Rahul.



Technical Rule runs.



Finance Role assigned.

2. Bulk User Import

When hundreds of users are imported through:

- CSV
- HRMS
- Database

Technical Rules evaluate every user.

Example

500 new employees imported.

↓

Finance users receive Finance Role.

↓

HR users receive HR Role.

↓

IT users receive IT Role.

3. User Imported from External Source

Users imported from:

- Workday
- SAP HR
- Oracle HRMS
- CSV
- REST API

also trigger Technical Rules.

4. User Attribute Updated

Sometimes existing users are updated.

Example

Department changes.

Technical Rule may execute again if configured through User Update Rules.

Remove Birthright Access

One important option is:

Remove Birthright Access if Condition Fails

What does it mean?

If a user no longer satisfies the Technical Rule condition,

Saviynt automatically removes only the access granted by that rule.

Example

Technical Rule

Department = Finance

↓

Assign Finance Role

Rahul belongs to Finance.

↓

Finance Role assigned.

Later,

Rahul moves to HR.

Now,

Department $\neq$ Finance.

Technical Rule condition fails.

Saviynt automatically removes:

Finance Role.

Important Point

Only the access assigned **by that Technical Rule** is removed.

Access assigned manually or through another rule is **not** removed.

Auto Trigger of Technical Rules

Technical Rules automatically execute when:

- User created.
 - User imported.
 - Detective Rule Job runs.
 - User Update Rule reruns provisioning.
-

Technical Rule Execution Scenarios

Scenario 1

Bulk Import

CSV Import

↓

User Created

↓

Condition Matches

↓

Technical Rule Executes

Scenario 2

New User from UI

Administrator creates user manually.

↓

Condition matches.

↓

Rule executes.

Scenario 3

User Updated

Department changes.

↓

User Update Rule triggers.

↓

Technical Rule re-evaluated.

Scenario 4

Condition Fails

Department changed.

↓

Finance condition fails.

↓

Birthright access removed.

Detective Provisioning Rules Job

This is a very important interview topic.

What is DetectiveProvisioningRulesJob?

It is a scheduled job that evaluates Technical Rules against existing users and creates provisioning or deprovisioning tasks when conditions match or fail.

Why is it Needed?

Not every Technical Rule executes immediately.

The Detective Provisioning Rules Job scans users and checks:

- Does the condition match?
 - Did the condition fail?
 - Should access be assigned?
 - Should access be removed?
-

Workflow


Run DetectiveProvisioningRulesJob

|



Evaluate Technical Rules

|



WSRETRY Job

Definition

WSRETRY processes pending provisioning tasks created by Technical Rules.

Why is it Required?


Technical Rules create tasks.

WSRETRY executes them.

Without WSRETRY,

tasks remain pending.

Complete Internal Workflow



DetectiveProvisioningRulesJob



Provisioning Task Created



Pending Task



WSRETRY Job



Provisioning



Target Application

Real Project Example

ABC Bank

Applications

- Active Directory
- SAP
- Office 365

Technical Rule

Department = Finance



Assign

Finance Enterprise Role

Rahul joins Finance.

HR imports Rahul.

Technical Rule executes.

Provisioning Tasks created.

WSRETRY runs.

Automatically

- AD account created.
- Office 365 account created.
- SAP account created.
- Finance Role assigned.

No manual work required.

Advantages of Technical Rules

- Automatic onboarding.
 - Zero-Day Provisioning.
 - Birthright access.
 - Consistent access assignment.
 - Reduced manual work.
 - Better security.
 - Improved compliance.
 - Faster user productivity.
-

Limitations

- Depends on accurate HR/user data.
 - Incorrect conditions can assign wrong access.
 - Complex rules may affect performance.
 - Requires scheduled jobs (DetectiveProvisioningRulesJob and WSRETRY) to complete provisioning.
-

Best Practices

- Use Technical Rules only for **birthright (default)** access.

- Keep rule conditions simple and easy to understand.
 - Test rules in Development/UAT before Production.
 - Enable **Remove Birthright Access if Condition Fails** where appropriate.
 - Regularly monitor DetectiveProvisioningRulesJob and WSRETRY job execution.
 - Review rule logic whenever organizational structures (departments, job codes, etc.) change.
 - Document every Technical Rule with its purpose and owner.
-

Common Issues

Rule Not Executing

Possible Causes

- Condition does not match.
- Rule inactive.
- DetectiveProvisioningRulesJob not running.

Resolution

Verify the rule condition, activate the rule, and check the scheduled job.

Access Not Assigned

Possible Causes

- Provisioning task not created.
- WSRETRY not executed.
- Connector failure.

Resolution

Review pending tasks, WSRETRY job status, and connector logs.

Access Not Removed

Possible Causes

- "Remove Birthright Access if Condition Fails" not enabled.
- User attributes not updated.
- Rule-user mapping issue.

Resolution

Enable the removal option, verify user attributes, and repair rule mappings if necessary.

Interview Questions

Q1. What is a Technical Rule?

A Technical Rule is an event-based policy that automatically assigns or removes accounts, roles, and entitlements based on predefined user conditions.

Q2. What is the main purpose of Technical Rules?

The primary purpose is to provide **Birthright Access (Zero-Day Provisioning)** to new users based on business attributes.

Q3. What is Birthright Access?

Birthright Access is the default access automatically granted to users based on attributes like department, job title, or location.

Q4. What is Zero-Day Provisioning?

Zero-Day Provisioning ensures that a new employee receives all required accounts and access on their first day without manual intervention.

Q5. When are Technical Rules triggered?

Technical Rules can be triggered when:

- A new user is created.
 - Users are imported from HRMS, CSV, or other sources.
 - DetectiveProvisioningRulesJob runs.
 - User Update Rules rerun provisioning after user attribute changes.
-

Q6. What happens when "Remove Birthright Access if Condition Fails" is enabled?

If the user no longer meets the rule condition, Saviynt automatically removes only the access granted by that Technical Rule.

Q7. What is DetectiveProvisioningRulesJob?

It is a scheduled job that evaluates Technical Rules, creates provisioning or deprovisioning tasks, and identifies users whose conditions match or fail.

Q8. What is the purpose of the WSRETRY Job?

WSRETRY processes pending provisioning tasks created by Technical Rules and executes them against target applications.

Q9. Can Technical Rules remove manually assigned access?

No. Technical Rules remove only the access that they originally assigned. Manually assigned access or access granted by other rules is unaffected.

Q10. What are the benefits of Technical Rules?

- Automatic onboarding
- Birthright access
- Zero-Day Provisioning
- Reduced manual work
- Improved consistency
- Better security
- Stronger compliance

- Faster employee productivity
-

Quick Revision

- **Technical Rules** automate **Birthright Access** and **Zero-Day Provisioning**.
- Every Technical Rule consists of a **Condition** and an **Action**.
- They trigger on **new user creation**, **user imports**, **DetectiveProvisioningRulesJob**, and can be rerun after user updates.
- **Remove Birthright Access if Condition Fails** automatically revokes access previously granted by the rule when the condition is no longer true.
- **DetectiveProvisioningRulesJob** evaluates rules and creates provisioning tasks.
- **WSRETRY** executes pending provisioning tasks.
- Technical Rules are best suited for **Joiner scenarios**, while **User Update Rules** handle most **Mover** and **Leaver** scenarios.

Module 3 – Setting Up Technical Rules

Introduction

In Module 2, we learned **what Technical Rules are** and **why they are used**.

In this module, we will learn:

- How to create Technical Rules
 - How Saviynt evaluates rule conditions
 - How actions are configured
 - How provisioning happens
 - Common configuration settings
 - Best practices
-

What is Technical Rule Configuration?

Definition

Technical Rule Configuration is the process of defining:

- **Conditions** (When should the rule run?)
 - **Actions** (What access should be assigned or removed?)
-

Simple Definition

A Technical Rule tells Saviynt:

"If this condition is true, automatically perform this action."

Purpose of Setting Up Technical Rules

Technical Rules automate:

- Birthright access
 - Zero-Day provisioning
 - Enterprise Role assignment
 - Account creation
 - Entitlement assignment
 - Automatic access removal
-

Where to Configure Technical Rules?

Navigate to:

Admin



Identity Repository



Technical Rules

Administrators create, edit, activate, or deactivate Technical Rules from this section.

Components of a Technical Rule

Every Technical Rule has several configuration sections.

1. Rule Name

A meaningful name for the rule.

Example:

- Finance Birthright Rule
 - HR Enterprise Role Rule
 - India Employees Rule
-

2. Description

Explains the purpose of the rule.

Example:

Automatically assigns Finance Enterprise Role to Finance employees.

3. Status

Determines whether the rule is active.

Options:

- Active
- Inactive

Only **Active** rules are evaluated.

4. Priority

When multiple rules match,

Priority determines which rule executes first.

Example:

Rule	Priority
Finance Rule	1
Location Rule	2

Lower number = Higher priority.

Rule Conditions

Conditions determine **who should receive access**.

Common attributes:

- Department
 - Job Title
 - Location
 - Country
 - Business Unit
 - Cost Center
 - Employee Type
 - Manager
 - Organization
 - Status
-

Example Condition

Department = Finance

Another example:

Department = Finance

AND

Location = Hyderabad

Only Finance employees in Hyderabad receive access.

Logical Operators

Saviynt supports logical operators.

AND

All conditions must be true.

Example:

Department = Finance

AND

Location = Hyderabad

OR

At least one condition must be true.

Example:

Department = Finance

OR

Department = Accounting

NOT

Condition must not match.

Example:

Department != Contractor

Rule Actions

Actions specify what Saviynt should do.

Common actions:

- Assign Enterprise Role
 - Assign Business Role
 - Create Account
 - Assign Entitlement
 - Remove Entitlement
 - Disable Account
 - Enable Account
-


Example Action

Assign Enterprise Role

↓

Finance Enterprise Role

Rule Evaluation Process

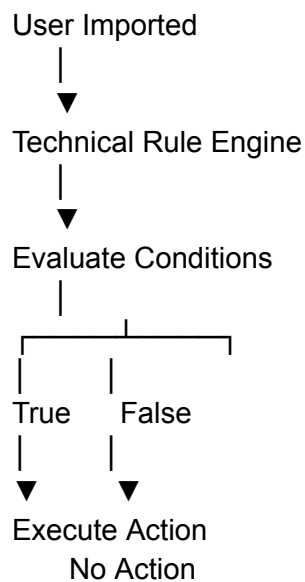

Multiple Conditions Example

Suppose:

Rahul

Department = Finance

Location = Hyderabad

Employee Type = Permanent

Technical Rule:

Department = Finance

AND

Location = Hyderabad

AND

Employee Type = Permanent

Result:

Finance Enterprise Role assigned.

Multiple Actions

One rule can perform several actions.

Example

Condition:

Department = Finance

Actions:

- Create AD Account
- Create Office 365 Account
- Assign SAP Role
- Assign Finance Enterprise Role
- Add Finance AD Group

One rule performs all actions.

Enterprise Role Assignment

Technical Rules commonly assign **Enterprise Roles**.

Example:

Department = HR



Assign HR Enterprise Role

The Enterprise Role then provisions:

- AD Groups
 - SAP Roles
 - Office 365 License
-

Account Creation

Technical Rules can automatically create accounts.

Example:

Department = IT



Create Active Directory Account

Entitlement Assignment

Technical Rules can directly assign entitlements.

Example:

Department = Sales



Assign Sales Shared Drive Group

Remove Birthright Access

One important setting is:

Remove Birthright Access if Condition Fails

Example

Rule:

Department = Finance

Rahul belongs to Finance.

↓

Finance Role assigned.

Later,

Department changes to HR.

↓

Finance condition no longer matches.

↓

Saviynt automatically removes the Finance Role.

Rule Activation

After configuration,

the rule must be activated.

Inactive rules are ignored by the rule engine.


Rule Testing

Before Production:

- Create test users.
- Verify conditions.
- Confirm provisioning tasks.
- Validate assigned roles.
- Check logs.

Never deploy an untested Technical Rule.

Internal Workflow

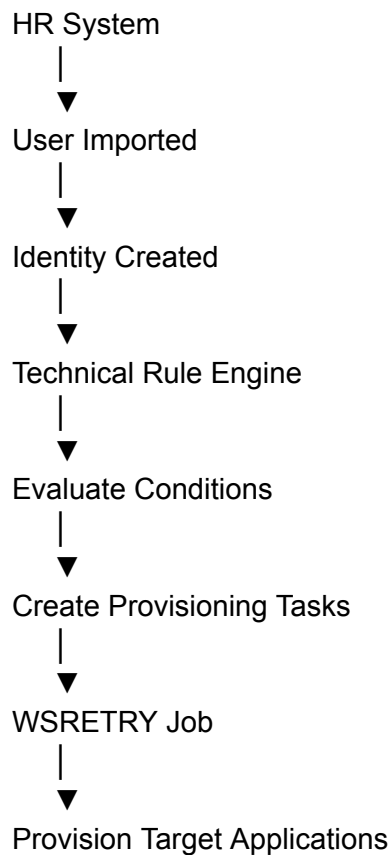

Real Project Example

Company: ABC Bank

Technical Rule:

Condition:

Department = Finance

Actions:

- Create Active Directory Account
- Create Office 365 Account
- Assign Finance Enterprise Role
- Assign SAP Finance Role

Rahul joins Finance.

HR imports Rahul.

Saviynt evaluates the rule.

All conditions match.

Provisioning Tasks are created.

WSRETRY executes them.

Result:

- AD Account created.
- Office 365 Account created.
- SAP Account created.
- Finance Enterprise Role assigned.

Rahul starts work on Day 1.

Best Practices

- Use meaningful rule names.
- Keep rule logic simple.
- Use business attributes (department, job title, location) instead of hard-coded usernames.
- Use Enterprise Roles instead of assigning many individual entitlements.
- Enable "Remove Birthright Access if Condition Fails" where appropriate.
- Test rules thoroughly in Development/UAT.

- Avoid duplicate Technical Rules with overlapping conditions.
 - Monitor DetectiveProvisioningRulesJob and WSRETRY.
 - Document every Technical Rule.
-

Common Configuration Mistakes

Mistake	Result
Rule inactive	Rule never executes
Wrong condition	Incorrect users receive access
Incorrect priority	Unexpected rule execution
Hard-coded usernames	Poor scalability
Overlapping rules	Duplicate or conflicting access
No testing	Production failures

Troubleshooting

Rule Not Executing

Check:

- Rule is Active.
 - Condition matches.
 - DetectiveProvisioningRulesJob is running.
-

Wrong User Receives Access

Check:

- Rule conditions.
- HR attributes.
- Priority.

Access Not Provisioned

Check:

- Provisioning Tasks.
- WSRETRY Job.
- Connector logs.

Access Not Removed

Check:

- Remove Birthright Access option.
- User attributes.
- Rule evaluation logs.

Interview Questions

Q1. What is the purpose of setting up a Technical Rule?

To automate access assignment or removal based on user attributes such as department, location, or job title.

Q2. What are the two main parts of a Technical Rule?

- **Condition** – Determines when the rule applies.
- **Action** – Defines what access should be granted or removed.

Q3. Which user attributes are commonly used in Technical Rules?

Department, Job Title, Location, Employee Type, Cost Center, Business Unit, Manager, and Organization.

Q4. Can one Technical Rule perform multiple actions?

Yes. A single Technical Rule can create accounts, assign Enterprise Roles, assign entitlements, and perform other provisioning actions.

Q5. Why are Enterprise Roles commonly assigned through Technical Rules?

Because Enterprise Roles bundle multiple permissions together, simplifying administration and ensuring consistent access.

Q6. What happens if a Technical Rule is inactive?

Inactive rules are ignored and never evaluated by the rule engine.

Q7. Why should hard-coded usernames be avoided in Technical Rules?

Hard-coded usernames do not scale and require constant maintenance. Business attributes make rules reusable and dynamic.

Q8. Why is rule priority important?

When multiple rules match the same user, priority determines the order in which they are evaluated and executed.

Q9. How do you test a Technical Rule?

Create test users, verify rule conditions, confirm provisioning tasks, validate assigned access, review logs, and test access removal if applicable.

Q10. What jobs are involved after configuring a Technical Rule?

- **DetectiveProvisioningRulesJob** evaluates Technical Rules and creates provisioning tasks.
 - **WSRETRY Job** executes pending provisioning tasks against target applications.
-

Quick Revision

- Technical Rules are configured under **Admin → Identity Repository → Technical Rules**.
- Every rule has **Name, Description, Status, Priority, Conditions, and Actions**.
- Conditions determine **who receives access**.
- Actions determine **what access is assigned or removed**.
- Rules commonly assign **Enterprise Roles, Accounts, and Entitlements**.
- Use logical operators **AND, OR, and NOT** to build rule conditions.
- Activate and thoroughly test rules before production deployment.
- **DetectiveProvisioningRulesJob** evaluates Technical Rules and creates tasks.
- **WSRETRY** processes those tasks and provisions access.
- Keep rules simple, reusable, and based on business attributes rather than individual users.

Module 4 – User Update Rules

Introduction

Technical Rules mainly work during **Joiner (Onboarding)**.

But what happens if an employee:

- Gets promoted?
- Changes department?
- Moves to another country?
- Changes manager?
- Leaves the organization?

The user's identity changes.

If access is not updated, the user may:

- Keep old access.
- Receive incorrect access.
- Create security risks.

Saviynt solves this using **User Update Rules**.

What are User Update Rules?

Definition

User Update Rules are policies that automatically update or remove user access whenever user attributes change.

Simple Definition

A **User Update Rule** tells Saviynt:

"When a user's information changes, automatically update their access."

Why are User Update Rules Needed?

Without User Update Rules:

- IT manually removes old access.
- IT manually assigns new access.
- Former permissions remain active.
- Security risks increase.

With User Update Rules:

- Automatic access updates.
 - Automatic role changes.
 - Automatic account updates.
 - Automatic access removal.
-

Identity Lifecycle Events

User Update Rules mainly support:

- Mover
 - Leaver
-

Mover Scenario

A user changes:

- Department
- Job Title
- Manager
- Location
- Cost Center
- Business Unit

- Employee Type

Access must also change.

Example

Rahul moves from:

Finance

↓

HR

Old Access

- SAP Finance
- Finance AD Group

New Access

- HR Enterprise Role
- HR Shared Drive
- HR Applications

Saviynt performs these changes automatically.

Leaver Scenario

Employee leaves the organization.

Examples:

- Resignation
- Retirement
- Contract End
- Termination

User Update Rules automatically:

- Disable accounts.

- Remove roles.
 - Remove entitlements.
 - Remove group memberships.
 - Start deprovisioning.
-

Joiner vs User Update Rules

Technical Rules	User Update Rules
Used mainly for Joiners	Used mainly for Movers and Leavers
Assign Birthright Access	Modify existing access
Create accounts	Update or remove access
Runs during onboarding	Runs whenever user attributes change

What Triggers User Update Rules?

User Update Rules execute whenever monitored user attributes change.

Common triggers include:

- Department
 - Job Title
 - Manager
 - Employee Status
 - Employee Type
 - Cost Center
 - Business Unit
 - Location
 - Country
-

Example Trigger

Old Department

Finance



New Department

HR



User Update Rule executes.

Internal Workflow

User Attribute Updated




Identity Repository Updated



User Update Rule Engine



Evaluate Conditions



Create Provisioning Tasks



Provision / Deprovision

Components of User Update Rules

Every User Update Rule contains:

- Rule Name
 - Description
 - Status
 - Trigger Attribute
 - Condition
 - Action
 - Priority
-

Trigger Attributes

These determine **which user changes activate the rule.**

Examples:

- Department
 - Manager
 - Title
 - Location
 - Status
 - Employee Type
-

Rule Conditions

Conditions determine whether the rule should execute.

Example:

Department = HR

Another example:

Department = HR

AND

Location = Hyderabad

Rule Actions

Actions define what Saviynt should do.

Examples:

- Assign Enterprise Role
 - Remove Enterprise Role
 - Assign Entitlement
 - Remove Entitlement
 - Disable Account
 - Enable Account
 - Update Account Attribute
-

Example Rule

Condition

Department = HR

Action

Assign HR Enterprise Role

Remove Finance Enterprise Role

Account Updates

User Update Rules can update account information.

Examples:

- Manager
- Department
- Email
- Title
- Phone Number

Instead of recreating the account,

Saviynt simply updates it.

Role Updates

Suppose Rahul is promoted.

Old Role

Junior Analyst

↓

New Role

Senior Analyst

Saviynt removes:

Junior Role

Assigns:

Senior Role

Manager Update

Manager changes.

Old Manager

John

↓

New Manager

Priya

Saviynt updates:

- Manager field
 - Approval hierarchy
 - Reporting structure
-

Location Update

Employee transfers.

Old Location

Delhi

↓

New Location

Hyderabad

Old Access Removed:

Delhi Printer Group

New Access Assigned:

Hyderabad Printer Group

Status Change

Employee status changes.

Examples:


- Active
- Leave
- Suspended
- Terminated

User Update Rules automatically:

- Disable account.

- Remove access.
 - Start deprovisioning.
-

Complete Workflow

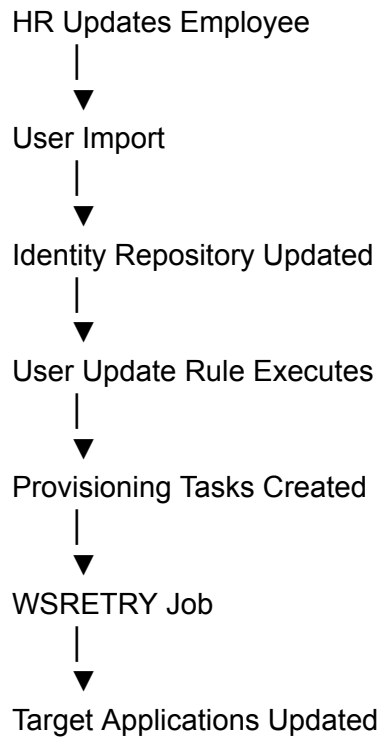

Difference Between Technical Rules and User Update Rules

Technical Rules	User Update Rules
Runs during onboarding	Runs after user changes
Assigns birthright access	Updates existing access
Primarily Joiner	Mover & Leaver

Creates new accounts

Updates or disables
accounts

Real Project Example

Company:

ABC Bank

Employee:

Rahul

Old Department:

Finance

New Department:

HR

HR updates Workday.

↓

User Import Job updates Saviynt.

↓

User Update Rule detects:

Department changed.

↓

Automatically:

- Removes Finance Enterprise Role
- Removes SAP Finance
- Removes Finance AD Group
- Assigns HR Enterprise Role
- Assigns HR Shared Drive
- Assigns HR Applications

↓

Provisioning Tasks created.

↓

WSRETRY executes tasks.

↓

Target systems updated.

No manual intervention required.

Advantages

- Automatic access updates.
 - Better security.
 - Supports Joiner-Mover-Leaver lifecycle.
 - Prevents excessive access.
 - Reduces manual work.
 - Improves compliance.
 - Maintains accurate user information.
-

Best Practices

- Use User Update Rules only for **Mover** and **Leaver** events.
 - Monitor critical attributes such as department, manager, and employee status.
 - Keep rule conditions simple and based on business attributes.
 - Always remove obsolete access before assigning new access.
 - Test User Update Rules in Development/UAT before Production.
 - Coordinate User Update Rules with Technical Rules to avoid conflicting access assignments.
 - Review provisioning results after rule execution.
-

Common Issues

Issue	Cause	Solution
Rule not executing	Attribute change not detected	Verify user import and monitored attributes
Old access not removed	Removal action missing	Add remove action to the rule
Wrong role assigned	Incorrect condition	Review rule logic
Provisioning failed	Connector issue	Check provisioning logs
Account not updated	WSRETRY not running	Verify pending provisioning tasks

Troubleshooting

User Update Rule Not Running

Check:

- Was the user attribute actually updated?
 - Is the rule active?
 - Does the condition match?
-

Wrong Access Assigned

Check:

- Rule conditions.
 - Priority.
 - Technical Rule conflicts.
-

Old Access Still Exists

Check:

- Remove action configured.

- Provisioning completed successfully.
 - Connector logs.
-

Account Not Updated

Verify:

- Provisioning Tasks.
 - WSRETRY Job.
 - Endpoint connectivity.
-

Interview Questions

Q1. What is a User Update Rule?

A User Update Rule automatically updates or removes user access when user attributes change.

Q2. Why are User Update Rules needed?

They automate access changes during the **Mover** and **Leaver** stages of the Identity Lifecycle.

Q3. What events trigger User Update Rules?

Changes in attributes such as:

- Department
 - Job Title
 - Manager
 - Employee Status
 - Employee Type
 - Location
 - Cost Center
 - Business Unit
-

Q4. What is the difference between Technical Rules and User Update Rules?

Technical Rules mainly assign birthright access during onboarding, while User Update Rules update or remove access when user information changes after onboarding.

Q5. Can User Update Rules remove access?

Yes. They can automatically remove roles, entitlements, and group memberships when conditions no longer apply.

Q6. Can User Update Rules update account attributes?

Yes. They can update attributes such as manager, department, title, location, and other account information.

Q7. What happens when an employee transfers from Finance to HR?

User Update Rules remove Finance-related access and assign HR-related access automatically.

Q8. How do User Update Rules support the Joiner-Mover-Leaver process?

They handle **Mover** and **Leaver** events by updating or removing access based on identity changes.

Q9. What happens when an employee leaves the organization?

User Update Rules can disable accounts, remove roles and entitlements, trigger deprovisioning, and update audit records.

Q10. What are the benefits of User Update Rules?

- Automatic access updates
 - Improved security
 - Reduced manual effort
 - Better compliance
 - Accurate user access
 - Support for the complete Identity Lifecycle
-

Quick Revision

- **User Update Rules** automate access changes when user attributes change.
- Mainly used for **Mover** and **Leaver** scenarios.
- Triggered by changes in **Department**, **Manager**, **Job Title**, **Location**, **Status**, and similar attributes.
- Can **assign**, **remove**, or **update** roles, entitlements, accounts, and account attributes.
- Work together with **Technical Rules** to support the complete **Joiner-Mover-Leaver (JML)** lifecycle.
- Always test rules before production and verify provisioning results after execution.

Module 5 – Setting Up User Update Rules

(One of the Most Practical Identity Lifecycle Modules)

Introduction

In Module 4, we learned **what User Update Rules are** and **why they are needed**.

In this module, we will learn:

- How to configure User Update Rules
- How Saviynt detects user attribute changes
- How rules are evaluated
- How provisioning tasks are created
- How updates are applied to target applications
- Best practices and troubleshooting

This module is mainly used in **Mover** and **Leaver** scenarios.

What is Setting Up User Update Rules?

Definition

Setting Up User Update Rules is the process of configuring rules that automatically update or remove user access whenever user attributes change.

Simple Definition

A User Update Rule tells Saviynt:

"If a user's information changes, automatically update their access accordingly."

Why are User Update Rules Configured?

Organizations frequently experience changes such as:

- Department transfers
- Promotions
- Manager changes
- Office relocations
- Employment status updates
- Employee resignations

Without User Update Rules,

administrators must manually update every application.

User Update Rules automate this entire process.

Where to Configure User Update Rules?

Navigate to:

Admin



Identity Repository



User Update Rules

Administrators create, modify, activate, or deactivate User Update Rules from this section.

Components of a User Update Rule

Each User Update Rule contains the following sections.

1. Rule Name

A meaningful name that clearly identifies the rule.

Examples

- Finance to HR Update Rule
 - Manager Change Rule
 - Employee Termination Rule
 - Location Change Rule
-

2. Description

Describes the purpose of the rule.

Example

Automatically removes Finance access and assigns HR access when Department changes to HR.

3. Status

Determines whether the rule is active.

Values

- Active
- Inactive

Only active rules are evaluated.

4. Priority

If multiple rules match,

Priority determines which executes first.

Example

Rule	Priority
Termination Rule	1
Department Update Rule	2
Manager Update Rule	3

Smaller number = Higher priority.

Trigger Attributes

A User Update Rule executes only when selected attributes change.

Common trigger attributes include:

- Department
 - Job Title
 - Manager
 - Location
 - Employee Status
 - Employee Type
 - Cost Center
 - Business Unit
 - Country
-

Example

Old Department

Finance

↓

New Department

HR

↓

Department attribute changed

↓

User Update Rule executes.

Rule Conditions

Conditions determine whether the rule should run.

Example

Department = HR

Another Example

Department = HR

AND

Location = Hyderabad

Only HR employees in Hyderabad receive the action.

Logical Operators

Saviynt supports:

AND

All conditions must be true.

Example

Department = Finance

AND

Employee Type = Permanent

OR

Any one condition must match.

Example

Department = HR

OR

Department = Finance

NOT

Condition must not match.

Example

Employee Type != Contractor

Rule Actions

Actions define what Saviynt should perform.

Examples

- Assign Enterprise Role
- Remove Enterprise Role
- Assign Business Role
- Remove Business Role
- Create Account
- Disable Account
- Enable Account
- Assign Entitlement
- Remove Entitlement

- Update Account Attributes
-

Example Rule

Condition

Department = HR

Action

Remove Finance Enterprise Role

Assign HR Enterprise Role

Updating Account Attributes

User Update Rules can update account information without recreating the account.

Examples

- Department
 - Manager
 - Title
 - Email
 - Phone Number
 - Office Location
-

Manager Change Example

Old Manager

John

↓

New Manager

Priya

Saviynt automatically updates:

- Reporting Manager
 - Approval Workflow
 - Manager attribute in connected applications
-

Department Change Example

Old Department

Finance

↓

New Department

HR

Saviynt automatically:

Removes

- Finance Enterprise Role
- Finance AD Group
- SAP Finance Role

Assigns

- HR Enterprise Role
 - HR AD Group
 - HR Applications
-

Location Change Example

Old Location

Delhi

↓

New Location

Hyderabad

Automatically

Remove

Delhi Printer Group

Assign

Hyderabad Printer Group

Employee Status Change

Status changes may include:

- Active
- On Leave
- Suspended
- Terminated

Example

Status

Active

↓

Terminated

Saviynt automatically:

- Disable Active Directory account
 - Remove Office 365 License
 - Remove VPN Access
 - Disable SAP Account
-

Internal Workflow

HR Updates User Information



User Import Job



Identity Repository Updated




User Update Rule Engine



Check Trigger Attribute



Evaluate Rule Condition



Match



Execute Actions



Provisioning Tasks Created



WSRETRY Job



Target Applications Updated

Provisioning Process

After the rule executes,

Saviynt creates provisioning tasks.

Example

Remove

Finance Enterprise Role

↓

Provisioning Task Created

↓

WSRETRY executes task

↓

Finance Role removed from SAP

Multiple Rules

Sometimes multiple rules execute together.

Example

Department changes

↓

Department Rule executes

Manager changes

↓

Manager Rule executes


Location changes

↓

Location Rule executes

Saviynt processes them according to priority.

Rule Evaluation Order

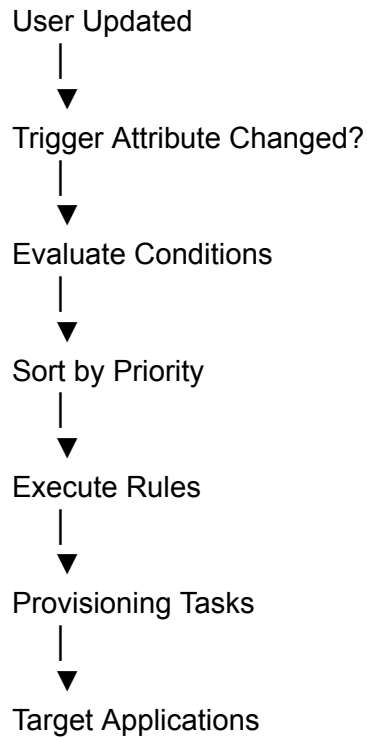

Real Project Example

Company

ABC Bank

Employee

Rahul

Current Department

Finance

New Department

HR

HR updates Workday.



User Import Job runs.



Saviynt detects Department change.



User Update Rule executes.



Actions

Remove

- Finance Enterprise Role
- SAP Finance Role
- Finance AD Group

Assign

- HR Enterprise Role
- HR AD Group
- HR Shared Drive



Provisioning Tasks created.



WSRETRY executes.



HR access available immediately.

Difference Between Technical Rules and User Update Rules

Technical Rules	User Update Rules
Runs during onboarding	Runs after user information changes
Provides Birthright Access	Updates existing access
Mainly Joiner	Mainly Mover & Leaver
Creates new accounts	Updates, disables, or removes access

Best Practices

- Use **Technical Rules** for Joiner scenarios and **User Update Rules** for Mover and Leaver scenarios.
 - Monitor important attributes such as department, manager, location, and employee status.
 - Remove old access before assigning new access.
 - Keep rule conditions simple and easy to understand.
 - Avoid duplicate User Update Rules with overlapping conditions.
 - Test rules thoroughly before production deployment.
 - Monitor provisioning jobs (WSRETRY) after rule execution.
 - Review audit logs after major user updates.
-

Common Configuration Mistakes

Mistake	Impact
Rule inactive	Rule never executes
Wrong trigger attribute	Rule never starts
Incorrect condition	Wrong users receive updates

No remove action	Old access remains
Priority conflict	Unexpected rule execution
No testing	Production failures

Troubleshooting

Rule Not Executing

Check:

- Rule is Active.
 - Trigger attribute changed.
 - Condition matches.
 - User Import completed.
-

Wrong Access Assigned

Verify:

- Rule condition.
 - User attributes.
 - Rule priority.
-

Old Access Not Removed

Check:

- Remove action configured.
 - Provisioning Task completed.
 - Connector logs.
-

Target Application Not Updated

Verify:

- WSRETRY Job
 - Provisioning Task status
 - Endpoint
 - Connector
-

Manager Not Updated

Check:

- HR import
 - Manager mapping
 - User Update Rule condition
-

Interview Questions

Q1. What is a User Update Rule?

A User Update Rule automatically updates or removes user access when monitored user attributes change.

Q2. What is the purpose of configuring User Update Rules?

To automate access changes during Mover and Leaver events, reducing manual effort and improving security.

Q3. Which user attributes commonly trigger User Update Rules?

Department, Manager, Job Title, Employee Status, Employee Type, Location, Cost Center, and Business Unit.

Q4. What are the two main parts of a User Update Rule?

- **Condition** – Determines when the rule applies.
 - **Action** – Defines what changes Saviynt should make.
-

Q5. Can one User Update Rule perform multiple actions?

Yes. It can remove old roles, assign new roles, update account attributes, and disable or enable accounts within a single rule.

Q6. What happens when an employee changes departments?

Saviynt removes access associated with the old department and assigns access associated with the new department according to the configured User Update Rules.

Q7. Why is rule priority important?

When multiple User Update Rules match, priority determines the order in which they are evaluated and executed.

Q8. What happens after a User Update Rule executes?

Saviynt creates provisioning tasks, and the **WSRETRY Job** processes those tasks to update the target applications.

Q9. How do you test a User Update Rule?

Update a test user's attributes, verify that the rule executes, confirm provisioning tasks are created, validate the access changes in target systems, and review the logs.

Q10. What are the benefits of User Update Rules?

- Automatic access updates
- Faster implementation of user changes
- Improved security

- Better compliance
 - Reduced manual administration
 - Accurate identity lifecycle management
-

Quick Revision

- **User Update Rules** automate access updates after user information changes.
- Configure them under **Admin → Identity Repository → User Update Rules**.
- Common trigger attributes include **Department, Manager, Job Title, Location, Status, Employee Type, and Cost Center**.
- Each rule contains **Name, Status, Priority, Trigger Attributes, Conditions, and Actions**.
- They support actions such as **Assign/Remove Roles, Update Account Attributes, Enable/Disable Accounts, and Assign/Remove Entitlements**.
- After execution, **Provisioning Tasks** are created and processed by **WSRETRY**.
- User Update Rules are essential for **Mover** and **Leaver** scenarios and complement **Technical Rules**, which primarily handle **Joiner** scenarios.

Module 6 – Common Use Cases

(Most Important Practical & Interview Module)

Introduction

In real projects, Identity Lifecycle Policies are not created randomly.

They are created to solve **business problems** that occur during an employee's lifecycle.

Examples:

- New employee joins
- Employee changes department
- Employee gets promoted
- Employee transfers to another country
- Employee resigns
- Contractor becomes permanent employee

Instead of performing these tasks manually,

Saviynt automatically executes them using **Technical Rules** and **User Update Rules**.

This module explains the **most common real-world use cases**.

Use Case 1 – New Employee Joins (Joiner)

Scenario

Rahul joins ABC Bank as a **Finance Analyst**.

HR enters Rahul's information into Workday.

The User Import Job imports Rahul into Saviynt.

Technical Rules evaluate the user.

Condition:

Department = Finance

Actions:

- Create Active Directory Account
- Create Office 365 Account
- Create SAP Account
- Assign Finance Enterprise Role
- Assign Finance AD Group

Result:

Rahul receives all required access before joining.

This is called **Zero-Day Provisioning**.

Workflow

HR Creates Employee

↓

User Import

↓

Identity Created

↓

Technical Rule

↓

Provisioning Task

↓

WSRETRY

↓

Use Case 2 – Department Transfer (Mover)

Scenario

Rahul transfers from Finance to HR.

HR updates Workday.

Department changes:

Finance

↓

HR

Saviynt detects the change.

User Update Rule executes.

Actions:

Remove

- Finance Enterprise Role
- SAP Finance
- Finance AD Group

Assign

- HR Enterprise Role
- HR Shared Drive
- HR Applications

Workflow

Department Changed

↓

User Import

↓

User Update Rule

↓

Remove Old Access

↓

Assign New Access

↓

Provisioning

Use Case 3 – Promotion

Scenario

Rahul is promoted.

Old Title

Junior Analyst

↓

New Title

Senior Analyst

Actions:

Remove

Junior Role

Assign

Senior Role

Update

Job Title

Manager

Reporting Structure

Benefits

- Correct access
 - Updated approval hierarchy
 - Better security
-

Use Case 4 – Manager Change

Scenario

Old Manager

John

↓

New Manager

Priya

Saviynt automatically updates:

- Manager field
- Approval workflow
- Reporting hierarchy

Future access requests now go to Priya instead of John.

Use Case 5 – Office Location Change

Scenario

Rahul moves from:

Delhi

↓

Hyderabad

Actions

Remove

- Delhi Printer Group
- Delhi Shared Drive

Assign

- Hyderabad Printer Group
 - Hyderabad Shared Drive
-

Use Case 6 – Employee Type Change

Scenario

Employee changes from:

Contractor

↓

Permanent Employee

Actions

Remove

Contractor Access

Assign

Permanent Employee Enterprise Role

Create:

- Office 365 License
- VPN Access
- Corporate Email

Use Case 7 – Employee Termination (Leaver)

Scenario

Rahul resigns.

HR updates:

Status

↓

Terminated

User Update Rule executes.

Actions

- Disable Active Directory Account
 - Disable SAP Account
 - Remove Office 365 License
 - Remove VPN Access
 - Remove Enterprise Roles
 - Remove AD Groups
-

Workflow

Employee Terminated



Status Updated



User Update Rule



Provisioning Tasks



Disable Accounts



Remove Access



Audit Updated

Use Case 8 – Employee Rehire

Scenario

Rahul rejoins the company after one year.

Status

Inactive



Active

Technical Rules execute again.

Actions

- Recreate Active Directory Account
 - Assign Enterprise Role
 - Provision applications
-

Use Case 9 – Leave of Absence

Scenario

Employee goes on maternity leave or long-term leave.

Status

Active

↓

Leave

Actions

- Disable VPN
- Disable privileged accounts
- Keep identity active

After returning,

Status

Leave

↓

Active

Saviynt restores the required access.

Use Case 10 – Country Transfer

Scenario

Employee transfers from:

India

↓

USA

Actions

Remove

- India Printer Group
- India VPN

Assign

- USA Printer Group
 - USA Applications
 - USA Policies
-

Use Case 11 – Cost Center Change

Scenario

Cost Center

1001

↓

2005

Actions

- Remove old business applications
- Assign applications related to the new cost center

Use Case 12 – Business Unit Change

Scenario

Employee transfers from:

Retail Banking

↓

Corporate Banking

Actions

- Remove Retail Banking roles
 - Assign Corporate Banking roles
 - Update application access
-

Use Case 13 – Enterprise Role Assignment

Scenario

Condition

Department = IT

Action

Assign

IT Enterprise Role

The Enterprise Role automatically provisions:

- Active Directory Groups

- Office 365 License
 - ServiceNow
 - Jira
 - VPN
-

Use Case 14 – Automatic Birthright Access

Every HR employee receives:

- Outlook
- Teams
- HR Portal
- HR Shared Drive

No access request is required.

Technical Rules assign this automatically.

Use Case 15 – Automatic Access Removal

Finance employee changes department.

Technical Rule

Remove Birthright Access if Condition Fails

Enabled

Finance access automatically removed.

Complete Identity Lifecycle Example

Rahul joins ABC Bank.

Step 1

Joiner

Technical Rule

Creates:

- AD
 - SAP
 - Office 365
-

Step 2

Promotion

User Update Rule

Assigns:

Senior Role

Step 3

Department Change

Finance

↓

HR

Finance access removed.

HR access assigned.

Step 4

Location Change

Delhi

↓

Hyderabad

Printer groups updated.

Step 5

Resignation

Accounts disabled.

Access removed.

Audit updated.

Complete Workflow

HR Updates User

↓

User Import

↓

Identity Repository

↓

Technical Rule

OR

User Update Rule

↓

Provisioning Task

↓

WSRETRY

↓

Target Applications

↓

Audit Logs

Real Project Example

Company: ABC Bank

Applications

- Active Directory
- SAP
- Salesforce
- Office 365
- ServiceNow

Employee

Rahul

Day 1

Joins Finance.

↓

Technical Rule

Creates

- AD
 - SAP
 - Office 365
-

Six Months Later

Promotion



User Update Rule

Assigns

Senior Enterprise Role

One Year Later

Moves to HR



Finance access removed.

HR access assigned.

Two Years Later

Leaves Company



Disable

- AD
- SAP
- Office 365
- VPN



Audit completed.

Benefits

- Fully automated Joiner-Mover-Leaver process.
 - Faster onboarding.
 - Automatic access updates.
 - Automatic deprovisioning.
 - Reduced manual effort.
 - Better security.
 - Improved compliance.
 - Consistent access across the organization.
 - Strong audit trail.
-

Best Practices

- Use **Technical Rules** for Joiner scenarios.
 - Use **User Update Rules** for Mover and Leaver scenarios.
 - Always remove obsolete access before assigning new access.
 - Keep HR data accurate because policies depend on identity attributes.
 - Test every use case in Development/UAT before Production.
 - Monitor provisioning jobs and logs after rule execution.
 - Use Enterprise Roles to simplify access management.
 - Review lifecycle rules regularly as business processes evolve.
-

Common Issues

Issue	Cause	Solution
Birthright access not assigned	Technical Rule condition incorrect	Review rule conditions
Old access not removed	Remove action missing	Add remove action to User Update Rule
Manager approvals incorrect	Manager attribute not updated	Verify HR import and manager mapping

Provisioning failed	Connector or WSRETRY issue	Review provisioning logs and job status
Access still active after termination	Termination rule not configured or failed	Check status mapping, User Update Rule, and deprovisioning jobs

Troubleshooting

Joiner Not Receiving Access

Check:

- User Import completed successfully.
 - Technical Rule is active.
 - Rule conditions match.
 - Provisioning task created.
 - WSRETRY executed.
-

Mover Not Receiving New Access

Verify:

- Updated attributes imported.
 - User Update Rule active.
 - Correct trigger attribute.
 - Rule conditions.
 - Provisioning task status.
-

Old Access Not Removed

Review:

- Remove action.
 - Remove Birthright Access setting (if applicable).
 - Connector logs.
 - Target application.
-

Leaver Still Has Access

Check:

- Status updated correctly.
 - User Update Rule executed.
 - Deprovisioning task completed.
 - Accounts disabled in target systems.
-

Interview Questions

Q1. What is the most common use case for Technical Rules?

Automatically providing **Birthright Access (Zero-Day Provisioning)** to new employees during onboarding.

Q2. Which rules are mainly used for Mover and Leaver scenarios?

User Update Rules are primarily used to update or remove access when user information changes.

Q3. What happens when an employee changes departments?

Saviynt removes access associated with the old department and assigns access associated with the new department according to the configured User Update Rules.

Q4. What happens during employee termination?

User Update Rules disable accounts, remove roles and entitlements, revoke application access, and update audit records.

Q5. What is Zero-Day Provisioning?

Zero-Day Provisioning ensures that all required accounts and access are automatically provisioned before or on the employee's first working day.

Q6. How are promotions handled?

User Update Rules detect changes in job title or role and automatically update roles, entitlements, and approval hierarchies.

Q7. How does Saviynt handle location changes?

It removes location-specific access (such as printer groups or regional applications) and assigns access appropriate for the new location.

Q8. What happens when a contractor becomes a permanent employee?

Contractor-specific access is removed, and permanent employee access—such as enterprise roles, corporate email, VPN, and licenses—is assigned automatically.

Q9. What is the benefit of automating the Joiner-Mover-Leaver lifecycle?

Automation reduces manual effort, improves security, speeds up onboarding, ensures timely deprovisioning, and supports compliance.

Q10. What should you verify if lifecycle policies do not work?

Check:

- User Import
 - Identity attributes
 - Technical/User Update Rule configuration
 - Provisioning Tasks
 - WSRETRY Job
 - Connector logs
 - Target application
-

Quick Revision

- **Technical Rules** automate **Joiner** scenarios (Birthright Access and Zero-Day Provisioning).
- **User Update Rules** automate **Mover** and **Leaver** scenarios.
- Common real-world use cases include **new hires, department transfers, promotions, manager changes, location changes, employee type changes, terminations, rehiring, leave of absence, country transfers, and business unit changes.**
- Lifecycle automation ensures users always have the **right access at the right time.**
- The typical execution flow is: **HR Update → User Import → Rule Evaluation → Provisioning Task → WSRETRY → Target Application → Audit Logs.**
- Always test lifecycle scenarios thoroughly and monitor provisioning results after execution.

Module 7 – Best Practices & Troubleshooting

(Most Important Project & Interview Module)

Introduction

Technical Rules and User Update Rules are powerful automation tools in Saviynt.

However, if they are not configured properly, organizations may face issues such as:

- Wrong users receiving access
- Missing birthright access
- Duplicate accounts
- Access not removed after termination
- Provisioning failures
- Compliance violations

To avoid these problems, organizations follow **Best Practices** and use a structured **Troubleshooting process**.

Best Practices

1. Use the Right Rule for the Right Purpose

Do not use one rule for everything.

Use:

- **Technical Rules** → Joiner (New Employee)
- **User Update Rules** → Mover (Transfers, Promotions)

- **User Update Rules** → Leaver (Termination)

Example

Rahul joins the company.

Use:

Technical Rule

Department = Finance

↓

Assign Finance Enterprise Role

Later Rahul moves to HR.

Use:

User Update Rule

↓

Remove Finance Role

↓

Assign HR Role

2. Keep Rule Conditions Simple

Avoid very complicated conditions.

Good Example

Department = Finance

Bad Example

Department = Finance

AND

Location = Hyderabad

AND

Employee Type = Permanent

AND

Business Unit = Corporate Banking

AND

Grade = G7

AND

Manager = John

Too many conditions make rules difficult to maintain.

3. Use Business Attributes

Always use HR attributes like:

- Department
- Job Title
- Location
- Cost Center
- Business Unit

Avoid using usernames.

Wrong

Username = Rahul

Correct

Department = Finance

Business attributes automatically work for every employee.

4. Use Enterprise Roles

Instead of assigning:

- SAP Role
- AD Group
- VPN
- Outlook

one by one,

assign one Enterprise Role.

Example

Finance Enterprise Role

↓

Automatically provisions

- SAP
- AD Group
- Outlook
- VPN

Benefits:

- Easy maintenance
- Better scalability
- Fewer rules

5. Enable Remove Birthright Access

One important setting is:

Remove Birthright Access if Condition Fails

Example

Department

Finance

↓

HR

Saviynt automatically removes

Finance Role

without administrator intervention.

6. Test Rules Before Production

Always test in:

- Development
- UAT

Never directly configure rules in Production.

Test:

- Joiner
- Mover
- Leaver

Verify:

- Provisioning
 - Deprovisioning
 - Role Assignment
 - Account Updates
-

7. Keep Rule Names Meaningful

Avoid names like:

Rule1

Test

New Rule

Use names like:

- Finance Birthright Rule
- HR Department Update Rule
- Employee Termination Rule

This helps administrators quickly understand the rule's purpose.

8. Avoid Duplicate Rules

Bad Example

Rule A

Department = Finance

↓

Assign Finance Role

Rule B

Department = Finance

↓

Assign Finance Role

Result

Duplicate provisioning.

9. Monitor Scheduled Jobs

Important Jobs

- User Import Job
- DetectiveProvisioningRulesJob
- WSRETRY
- Reconciliation Job

If these jobs fail,

rules will not execute correctly.

10. Review Rules Regularly

Business structures change.

Departments merge.

Applications change.

Rules should also be reviewed regularly.

Common Issues

Issue 1

Technical Rule Not Executing

Possible Causes

- Rule inactive
 - Condition not matching
 - DetectiveProvisioningRulesJob not running
 - User not imported
-

Resolution

Check

- Rule Status
 - Rule Condition
 - User Attributes
 - Job Control
-

Issue 2

Birthright Access Not Assigned

Possible Causes

- Incorrect Department
 - Enterprise Role missing
 - Provisioning Task failed
-

Resolution

Verify

- Department
 - Enterprise Role Mapping
 - Provisioning Task
 - WSRETRY
-

Issue 3

Wrong User Receives Access

Possible Causes

- Incorrect condition
 - Wrong HR data
 - Wrong attribute mapping
-

Resolution

Review

- User attributes
 - Rule condition
 - Attribute mapping
-

Issue 4

Old Access Not Removed

Example

Finance

↓

HR

Finance Role still exists.

Possible Causes

- Remove action missing
 - Remove Birthright disabled
 - Provisioning failure
-

Resolution

Enable

Remove Birthright Access

Verify

Provisioning Tasks

Connector

WSRETRY

Issue 5

Provisioning Failed

Possible Causes

- Connector issue
 - Authentication failure
 - Endpoint unavailable
 - Invalid credentials
-

Resolution

Check

- Connector Logs
 - Endpoint
 - Authentication
 - Target Application
-

Issue 6

Duplicate Access

Possible Causes

- Duplicate Technical Rules
 - Duplicate Enterprise Roles
 - Duplicate provisioning
-

Resolution

Remove duplicate rules.

Review Enterprise Role assignments.

Issue 7

User Update Rule Not Executing

Possible Causes

- Trigger attribute unchanged
 - Rule inactive
 - Incorrect condition
-

Resolution

Verify

- Trigger Attribute
 - User Import
 - Rule Status
-

Issue 8

Termination Not Removing Access

Possible Causes

- Status mapping incorrect
 - User Update Rule missing
 - Deprovisioning failed
-

Resolution

Check

Employee Status

↓

User Update Rule

↓

Provisioning Tasks

↓

Connector Logs

Issue 9

Manager Not Updated

Possible Causes

- HR import failed
 - Manager mapping incorrect
 - User Update Rule failed
-

Resolution

Verify

- HR Data
 - Manager Mapping
 - User Import Logs
-

Issue 10

WSRETRY Pending

Provisioning Tasks remain Pending.

Possible Causes

- WSRETRY stopped
 - Connector failure
 - Endpoint unavailable
-

Resolution

Restart

WSRETRY Job

Check Connector


Review Provisioning Queue

Troubleshooting Workflow

Always troubleshoot in the following order:

User Reports Issue

|

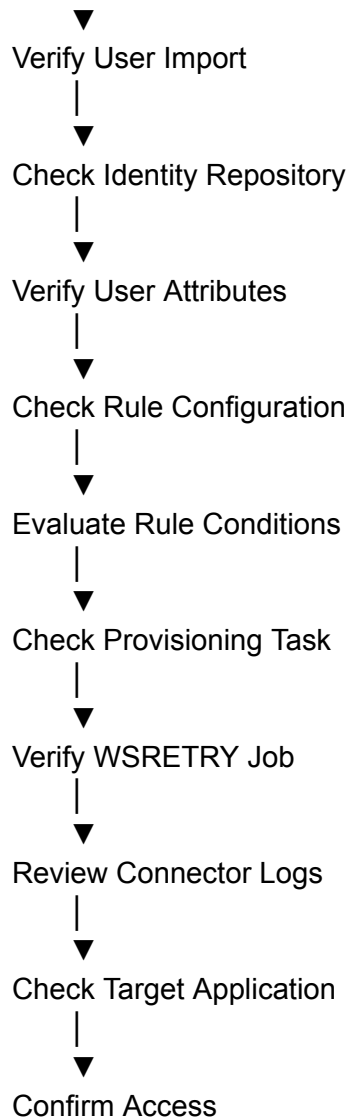

Important Jobs to Verify

Whenever rules fail, verify these jobs:

Job	Purpose
User Import Job	Imports users from HR source
DetectiveProvisioningRulesJob	Evaluates Technical Rules and creates provisioning tasks
WSRETRY	Executes provisioning tasks

Real Project Example

Company

ABC Bank

Problem

Rahul joins Finance.

Expected

- AD Account
- SAP Account
- Finance Role

None are created.

Investigation

Step 1

User Import

✓ Successful

Step 2

Identity Repository

✓ User Exists

Step 3

Technical Rule

✓ Active

Step 4

Rule Condition

Department

Expected

Finance

Actual

FIN

Condition failed.

Solution

Update rule:

Department = FIN

OR

Correct HR mapping to

Finance

Run:

DetectiveProvisioningRulesJob

↓

WSRETRY

↓

Accounts created successfully.

Real Project Example 2

Problem

Employee transferred to HR.

Finance Role still exists.

Investigation

Department Updated

✓

User Update Rule

✓

Provisioning Task

Failed

Reason

SAP connector authentication failed.

Solution

Update connector credentials.

Retry provisioning.

Finance Role removed.

HR Role assigned.

Best Practices Checklist

- ✓ Use Technical Rules for Joiners.
 - ✓ Use User Update Rules for Movers and Leavers.
 - ✓ Use business attributes instead of usernames.
 - ✓ Keep rule conditions simple.
 - ✓ Use Enterprise Roles.
 - ✓ Enable **Remove Birthright Access if Condition Fails** where appropriate.
 - ✓ Test every rule in Development/UAT.
 - ✓ Avoid duplicate rules.
 - ✓ Monitor scheduled jobs.
 - ✓ Review provisioning logs regularly.
 - ✓ Keep HR data accurate.
 - ✓ Maintain clear documentation for all rules.
-

Interview Questions

Q1. What are the best practices for Technical Rules?

Use them for Joiner scenarios, keep conditions simple, use business attributes, assign Enterprise Roles, and test thoroughly before production.

Q2. Why should business attributes be used instead of usernames?

Business attributes make rules reusable, scalable, and automatically applicable to all users with similar characteristics.

Q3. Why are Enterprise Roles recommended?

Enterprise Roles group multiple permissions into a single assignment, simplifying administration and reducing the number of rules.

Q4. What happens if "Remove Birthright Access if Condition Fails" is disabled?

Users may retain access that they should no longer have after changes such as department transfers, creating security and compliance risks.

Q5. What should you check if a Technical Rule does not execute?

Verify:

- Rule status
 - Rule conditions
 - User attributes
 - DetectiveProvisioningRulesJob
 - Provisioning tasks
-

Q6. What should you verify if a User Update Rule does not work?

Check the trigger attribute, user import results, rule configuration, rule status, provisioning tasks, and connector logs.

Q7. What are common provisioning failures?

- Connector authentication issues
 - Invalid credentials
 - Endpoint unavailable
 - Network failures
 - Provisioning queue issues
-

Q8. Why is WSRETRY important?

WSRETRY processes pending provisioning tasks and sends provisioning or deprovisioning requests to target applications.

Q9. What should you do if an employee still has access after termination?

Verify the employee status update, User Update Rule configuration, deprovisioning tasks, WSRETRY execution, and target application status.

Q10. What is the recommended troubleshooting order?

1. Verify User Import.
 2. Check Identity Repository.
 3. Verify user attributes.
 4. Review rule configuration.
 5. Evaluate rule conditions.
 6. Check provisioning tasks.
 7. Verify WSRETRY.
 8. Review connector logs.
 9. Confirm changes in the target application.
-

Quick Revision

- Use **Technical Rules** for **Joiners** and **User Update Rules** for **Movers** and **Leavers**.
- Build rules using **business attributes** (department, location, job title) instead of usernames.
- Prefer **Enterprise Roles** over assigning many individual entitlements.
- Enable **Remove Birthright Access if Condition Fails** to automatically revoke outdated access.
- Always test rules in **Development/UAT** before production.
- Monitor critical jobs:
 - **User Import Job**
 - **DetectiveProvisioningRulesJob**
 - **WSRETRY**
 - **Reconciliation Job**
- Follow a structured troubleshooting process:
User Import → **Identity Repository** → **Rule Configuration** → **Provisioning Task** → **WSRETRY** → **Connector** → **Target Application**.

- Keep HR data accurate, avoid duplicate rules, and regularly review lifecycle policies to ensure secure and compliant access management.