

Course 7 – Identity Lifecycle Policies (Rules)

Exact Course Reference & Complete Curriculum

Consolidated, Neatly Formatted & Numbered Reference Guide
All Examples, Diagrams, Questions, and Answers Preserved Verbatim

Course 7 – Identity Lifecycle Policies (Rules)

Module 1 – Introduction to Policies

Introduction

After:

- Users are imported
- Applications are onboarded
- Access Request System (ARS) is configured

organizations still need to automate the **Identity Lifecycle**.

Imagine a new employee joins today.

Questions arise:

- Should HR manually create all accounts?
- Should IT manually assign AD Groups?
- Should managers manually remove access when an employee leaves?

Doing everything manually is:

- Time-consuming
- Error-prone
- Difficult to audit
- Security risk

Saviynt solves this using **Identity Lifecycle Policies (Rules)**.

Policies automatically assign, update, or revoke access whenever a user's identity changes.

What are Policies?

Definition

Policies are automated rules that assign, update, or revoke accounts, roles, and entitlements based on changes in a user's identity or lifecycle.

Simple Definition

A Policy is an automation rule that tells Saviynt:

"When this condition happens, automatically perform this action."

Why are Policies Needed?

Without Policies:

- IT manually creates accounts.
- Managers manually assign roles.
- Access removal is often delayed.
- Former employees may still retain access.

With Policies:

- Everything happens automatically.
- Less manual work.
- Faster onboarding.
- Better security.
- Easier compliance.

Real-Life Example

Rahul joins ABC Bank as a Finance Analyst.

Without Policies:

IT Administrator manually:

- Creates Active Directory account.
- Creates Outlook account.
- Creates SAP account.
- Adds Finance AD Group.
- Assigns Finance Role.

This may take hours or even days.

With Policies:

HR imports Rahul into Saviynt.

Saviynt automatically:

- Creates accounts.
- Assigns Finance Role.
- Assigns AD Groups.

- Grants SAP access.

No manual work.

Identity Lifecycle

Every employee goes through an Identity Lifecycle.

The three main lifecycle events are:

- Joiner
- Mover
- Leaver

These events are commonly called the **JML Process**.

Identity Lifecycle Events

1. Joiner (Onboarding)

A new employee joins the organization.

Examples:

- New Hire
- Rehire

Required actions:

- Create user identity.
- Create application accounts.
- Assign birthright access.
- Send welcome email.

Example

Rahul joins Finance.

Saviynt automatically:

- Creates AD account.
- Creates Office 365 account.
- Assigns Finance Enterprise Role.
- Grants SAP Finance access.

2. Mover (Updates)

A user changes roles or attributes.

Examples:

- Department change
- Promotion
- Transfer
- Location change
- Manager change
- Employment type change
- Leave of Absence

Required actions:

- Remove old access.
- Assign new access.
- Update accounts.

Example

Rahul moves from Finance to HR.

Saviynt automatically:

Removes:

- SAP Finance
- Finance AD Group

Assigns:

- HR Role
- HR AD Group
- HR Applications

3. Leaver (Offboarding)

Employee leaves the organization.

Examples:

- Resignation
- Retirement

- Contract End
- Emergency Termination

Required actions:

- Disable accounts.
- Remove roles.
- Revoke application access.
- Remove group memberships.
- Archive identity (if required).

Example

Rahul resigns.

Saviynt automatically:

- Disables Active Directory account.
- Removes SAP access.
- Removes Office 365 license.
- Removes VPN access.
- Updates audit logs.

Identity Lifecycle Diagram

```
Identity Lifecycle

Joiner
(New Employee Joins)
|
▼
Create Identity
Assign Birthright Access
Create Accounts
|
▼
Mover
(Promotion / Transfer)
|
▼
Update User Attributes
Remove Old Access
Assign New Access
|
▼
Leaver
(Employee Leaves)
|
▼
Disable Accounts
Remove Roles
Revoke Access
Archive Identity
```

Identity Offboarding

Offboarding means securely removing access when a user leaves.

Without proper offboarding:

Former employees may still have:

- VPN Access
- Email
- Database Access
- Cloud Access

This creates a serious security risk.

Change of Identity

A user's identity continuously changes.

Examples:

- Department
- Manager
- Job Title
- Employee Type
- Cost Center
- Location

Policies detect these changes and automatically update access.

Advantages of Policies

1. Automatically Assign Access

Example:

Department = Finance

↓

Automatically assign

Finance Enterprise Role

2. Automatically Revoke Access

Example:

Department changes from Finance to HR

↓

Automatically remove

Finance Role

3. Execute Event-Based Actions

Policies can trigger:

- Account creation
- Role assignment
- Access removal
- Notifications
- Provisioning

Joiner-Mover-Leaver (JML)

This is one of the most important Identity Governance concepts.

Joiner

New employee joins.

Example: Rahul joins Finance.

Automatically:

- Create accounts.
- Assign birthright access.
- Provision applications.

Mover

Employee changes role.

Example: Finance → HR

Automatically:

- Remove Finance access.
- Assign HR access.

Leaver

Employee exits.

Automatically:

- Disable accounts.
- Remove access.
- Complete deprovisioning.

Functional Capabilities of Rules

Saviynt Rules provide several powerful capabilities.

Event-Based Automation

Rules are triggered automatically when identity events occur.

Examples:

- New user created.
- Department changes.
- User terminated.

Different Rule Types

Saviynt supports multiple rule types for different use cases.

Birthright Access

Automatically grant default access for new users.

Example: Every Finance employee receives:

- SAP
- Outlook
- AD Group

Automatic Access Removal

When conditions no longer match, Saviynt removes access automatically.

Example:

Department changes.

↓

Finance Role removed.

Types of Rules in Saviynt

Saviynt provides different rule engines.

1. Technical Rules

Used mainly for **Joiner (Birthright Access)**.

Example: If Department = Finance

↓

Assign Finance Enterprise Role.

2. User Update Rules

Used for **Mover and Leaver** scenarios.

Example: Department changes.

↓

Remove old role.

Assign new role.

3. Entitlement Update Rules

Triggered when entitlement information changes.

Example: AD Group renamed.

↓

Update entitlement information.

4. Organization Update Rules

Triggered when organization-level information changes.

Example: Business Unit restructuring.

5. Request Rules

Triggered during Access Requests.

Example: If Location = Delhi

↓

Automatically assign

Delhi Printer Group

during access request.

Event-Based Rules vs Access Request Rules

Event-Based Rules	Access Request Rules
Triggered by identity changes	Triggered during access requests
Automatic	Runs only when a request is submitted
Used for JML lifecycle	Used for ARS customization
Examples: Technical Rules, User Update Rules	Example: Request Rules

1. Primary Account Type in Technical Rules

What is Primary Account Type?

An endpoint (application) can have multiple account types.

Example:

- Endpoint = Active Directory
- Account Type 1 = Employee (P1)
- Account Type 2 = Contractor (P2)

A user may have accounts in both account types.

The **Primary Account Type** tells Saviynt which account type should receive access when a Technical Rule is triggered.

Scenario 1: Primary Account Type is Selected

Example

Endpoint EP1 has:

- P1 (Primary)
- P2

User has:

- P1 account 
- P2 account 

Technical Rule becomes true.

Result:

-  Add Access Task is created only for P1.

No task is created for P2.

```
Technical Rule Triggered
|
▼
User has P1 and P2 Accounts
|
▼
Primary = P1
|
▼
Add Access Task only for P1
```

Scenario 2: Primary Account Type is NOT Selected

Endpoint EP1

- P1
- P2

No Primary Account Type.

Technical Rule executes.

Result

Add Access Tasks are created for

- P1 
- P2 

(as long as account status is Active or Manually Provisioned)

```
Technical Rule
|
▼
No Primary Account Type
|
▼
Create Tasks for ALL Active Accounts
```

What about Remove Access?

Suppose

Yesterday

Rule matched

Finance user

Finance group assigned.

Today

User department changes.

Rule no longer matches.

Saviynt removes access **only from the accounts that originally received that access.**

Interview Question**What is the purpose of Primary Account Type?**

Answer: Primary Account Type controls where Add Access Tasks are created when a Technical Rule executes. If it is configured, provisioning happens only for that account type. If it is not configured, provisioning happens for all Active or Manually Provisioned account types.

2. Repair Rule-User Mappings (Rule Retrofit)

Why is it needed?

Technical Rules maintain a mapping between



```
graph TD; Rule[Rule] --> User[User]
```

Sometimes this mapping gets broken.

Example:

User import fails.

Later user import succeeds.

Now Saviynt may lose track of

Finance Rule

↓

John

Although John still has Finance access.

Problem:

Department changes

Finance → HR

Rule should remove Finance access.

But mapping is broken.

Rule doesn't know John was assigned through it.

Result:

✗ Finance access stays.

Security risk.

Solution:

Saviynt provides **Rule Retrofit**.

It repairs

- Rule → User mapping
- Rule → Role mapping

After repair, Rules work correctly again.

How to Enable?

Admin



Global Configurations



Rules



Settings



Enable Rule Retrofit

How to Repair Existing Rules?

Admin



Policies



Technical Rules



Actions



Repair Rule to User Mappings

Then

Run the Retrofit Job.

Interview Answer

What is Rule Retrofit?

Rule Retrofit repairs broken mappings between Technical Rules and users (and roles). It ensures rules continue to add or remove access correctly when user attributes change.

3. Attribute-Based Provisioning

This means

Instead of manually assigning access,

Saviynt checks user attributes like

- Department
- Location
- Job Title
- Country

and provisions access automatically.

A. Provision Enterprise Role

Most common method.

Rule:

Department = Finance

↓

Assign

Finance Enterprise Role

That role contains

- AD account
- Oracle account
- SAP access
- Shared folders

Everything is assigned together.

Example:

Department = HR

|

▼

Assign HR Enterprise Role

|

▼

All HR Access Assigned

B. Provision Entitlements

Instead of a whole role,

Assign one permission.

Example:

Location = Hyderabad

↓

Assign

Hyderabad Printer Group

Only one entitlement.

C. Provision Account + Access

Creates account and grants permissions together.

Example:

Job Title = Developer

↓

Create Jira Account

↓

Assign Developer Group

D. Custom Query for Dynamic Entitlements

Most advanced.

Instead of fixed value,

Saviynt calculates entitlement.

Example:

Department = Finance

Rule:

Group_\${Department}

Finance user

↓

Group_Finance

Sales user

↓

Group_Sales

One rule works for everyone.

Interview Question**Difference between Enterprise Role and Entitlement?****Enterprise Role:**

- Collection of access
- Contains multiple entitlements
- Easier to manage

Entitlement:

- Single permission
- Example: AD Group, SAP Role, Oracle Privilege

4. Execution Trail

Execution Trail helps troubleshoot Technical Rule execution.

It stores:

- Rule execution
- Failures
- Retry information

A. Action Trail

Shows Failed actions.

Example:

Rule:

- Create AD account 
- Assign AD group 

Action Trail shows:

Assign AD Group

Status : Failed

Reason : Group not found

Very useful for debugging.

B. Current Rule Trail

Shows Rules that failed recently.

Example:

Rule Executed

↓

Database timeout

↓

Status = Failed

You can rerun the rule.

C. Archived Rule Trail

Shows Successfully completed rules.

Useful for:

- Audit
- History
- Verification

Execution Trail Flow

Technical Rule Runs

|

▼

Any Failure?

|

|

|

Yes

|

▼

Action Trail

|

▼

Current Rule Trail

|

▼

Fix Issue

|

▼

Re-run Rule

No

|

▼

Archived Rule Trail

Interview Questions

Q1. What happens if Primary Account Type is not configured?

Answer: Add Access Tasks are created for all Active or Manually Provisioned account types.

Q2. Why is Rule Retrofit required?

Answer: It repairs broken rule-to-user and rule-to-role mappings so Technical Rules can correctly add or remove access when user attributes change.

Q3. What is the difference between Enterprise Role provisioning and Entitlement provisioning?

Enterprise Role	Entitlement
Grants multiple accesses together	Grants one permission
Used for birthright access	Used for specific access
Easier to manage	More granular

Q4. What is Action Trail?

Answer: Action Trail displays failed actions performed by Technical Rules, along with the reason for failure, making troubleshooting easier.

Q5. What is Current Rule Trail?

Answer: It shows Technical Rules that failed during execution and allows administrators to investigate and rerun them.

Q6. What is Archived Rule Trail?

Answer: It stores the history of successfully executed Technical Rules for auditing and verification purposes.

Troubleshoot Use Case 2: Delegating Inactive Users for Access Review

Scenario

A certification campaign has already been launched.

Example:

- Manager John is the certifier.

- John receives 50 access review items.
- The next day, John leaves the company or becomes inactive.

Problem

John is inactive, so he cannot log in and complete the access review.
The certification tasks remain pending.

Why is this a problem?

```
Imagine:  
Campaign Launched  
|  
▼  
John is Certifier  
|  
▼  
John Leaves Company  
|  
▼  
Nobody Reviews Access
```

This can lead to:

- **✗** Delayed certification
- **✗** Compliance issues
- **✗** Audit findings

Important Limitation

Saviynt does not automatically delegate certification tasks for an inactive certifier after the campaign has been launched.

So you need another approach.

Solution 1: Use User Update Rule (Transfer Ownership)

If the certifier becomes inactive after the campaign starts:

Navigate to:

Admin

↓

User Update Rules

↓

Transfer Ownership

Replace:

Old Certifier (John)

↓

New Certifier (Mary)

Now Mary receives the certification tasks and can complete the review.

Solution 2: Don't Launch Campaigns for Inactive Certifiers

Before launching a campaign:

✓ Verify that managers/certifiers are active.

If a manager is already inactive:

- Do not assign the campaign to them.
- Choose another active certifier.

This avoids missed certifications.

Solution 3: Configure a Default Certifier

This is the recommended approach.

During campaign creation, configure a **Default Certifier**.

If the intended certifier is inactive at the time the campaign is launched, Saviynt automatically assigns those certification items to the Default Certifier.

Example:

Manager = John

John = Inactive

↓

Default Certifier = Admin User

↓

Admin receives the certification tasks.

What is a Default Certifier?

A Default Certifier is a backup reviewer.

If the original certifier:

- is inactive,
- has left the company,
- or is unavailable at campaign launch,

Saviynt automatically assigns the certification items to the Default Certifier.

Where is Default Certifier Used?

It applies when creating campaigns using:

1. Select All Certifier

Example:

Service Account 1 → Owner Active

Service Account 2 → Owner Inactive

↓

Service Account 2 assigned to Default Certifier.

It also handles entitlements with no owner by assigning them to the Default Certifier.

2. Select From Manual Query

Suppose your manual query returns:

Entitlement	Owner
Finance	John (Active)
Payroll	David (Inactive)
HR	Lisa (Active)

Result:

- Finance → John
- Payroll → Default Certifier
- HR → Lisa

Only the inactive owner's items are redirected.

3. Select Certifier from List

In this option, Saviynt displays only active users as certifiers.

Since inactive users cannot be selected, the Default Certifier is **not applicable** here.

Interview Scenario

Interviewer: A certification campaign was launched yesterday. Today the manager responsible for certification resigned. What would you do?

Answer:

1. Use the Transfer Ownership option in User Update Rules to assign the certification tasks to another active user.
2. To avoid similar issues in the future, configure a Default Certifier during campaign creation.
3. Before launching campaigns, ensure that the selected certifiers are active.

Easy Flow Diagram


Campaign Created



Certifier Selected



Is Certifier Active?

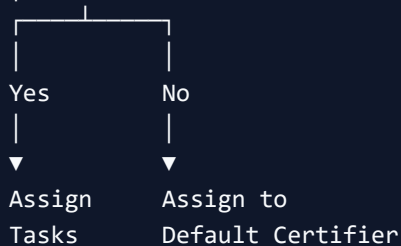

If the certifier becomes inactive after the campaign is launched:

Campaign Running



Certifier Becomes Inactive



Use Transfer Ownership



New Certifier Continues Review

Frequently Asked Interview Questions

1. Can Saviynt automatically delegate certification tasks if a certifier becomes inactive after a campaign has started?

Answer: No. Automatic delegation after launch is not supported. Administrators should use Transfer Ownership to reassign the tasks.

2. What is the purpose of the Default Certifier?

Answer: The Default Certifier acts as a fallback reviewer. If the intended certifier is inactive or unavailable at the time the campaign is launched, Saviynt automatically assigns those certification items to the Default Certifier.

3. When is the Default Certifier applicable?

Answer: It is used with Select All Certifier and Select From Manual Query. It is not applicable with Select Certifier from List because that option only allows active users to be selected.

4. What is Transfer Ownership?

Answer: Transfer Ownership is a feature in User Update Rules that replaces an existing certifier with another active user in campaigns and attestations, allowing certification work to continue if the original certifier becomes inactive.

Pre-Start Day Provisioning or Zero-Day Provisioning

Provision Active Directory (AD) accounts for new joiners 7 days before their start date.

Also assign a Global AD Group to those users.

This is called **Pre-Start Day Provisioning** or **Zero-Day Provisioning**.

Why is this needed?

Suppose:

- Employee: Alice
- Joining Date: 10th July

HR enters Alice's details into Workday on 3rd July.

Instead of waiting until 10th July, Saviynt creates her AD account 7 days earlier.

So when Alice joins on 10th July:

- ☒ AD account already exists
- ☒ Email works
- ☒ Laptop login works
- ☒ VPN works
- ☒ Global AD Group is already assigned

This provides a smooth onboarding experience.

```

Workflow
HR creates Alice in Workday
|
▼
Start Date = 10 July
|
▼
Today's Date = 3 July
|
▼
Technical Rule checks
(Start Date - Today = 7 days)
|
▼
Condition Matches
|
▼
Create AD Account
|
▼
Assign Global AD Group
|
▼
Alice joins on Day 1 with everything ready

```

What is provisioned?

1. Active Directory Account

Saviynt creates an account such as:

Username : alice.smith

Password : Generated

2. Global AD Group

After creating the account, Saviynt automatically assigns a common AD group.

Example:

AD Account

|



Member of

Global_Employees

This group gives all employees basic permissions such as:

- Login to domain

- Company network access
- Common shared resources

How is it implemented in Saviynt?

A Technical Rule checks:

Current Date = Start Date - 7 days

If true:

- Provision AD Account
- Assign Global AD Group

How Policies Work

HR System

|

▼

User Imported

|

▼

Identity Created

|

▼

Policy Engine Evaluates Rules

|

▼

Condition Matches?

|

|

Yes

|

▼

Assign/Remove Access

|

▼

Provisioning Task

|

▼

Target Applications

Real Project Example

Company: ABC Bank

Applications:

- Active Directory
- SAP

- Salesforce
- Office 365

Scenario:

Rahul joins as a Finance Analyst.

HR imports Rahul.

Saviynt evaluates policies.

Condition: Department = Finance

Technical Rule triggers.

Automatically:

- AD account created.
- SAP account created.
- Office 365 account created.
- Finance Enterprise Role assigned.
- Finance AD Group assigned.

No manual intervention is required.

Benefits of Policies

- Fully automated identity lifecycle.
- Reduced manual effort.
- Faster onboarding.
- Automatic access updates.
- Automatic access removal.
- Improved compliance.
- Strong audit trail.
- Reduced human error.
- Better security.

Best Practices

- Use Technical Rules for Joiner (birthright) access.
- Use User Update Rules for Mover and Leaver events.
- Keep HR data accurate because rules depend on user attributes.
- Test policies in Development/UAT before Production.
- Regularly review and update rules as business requirements change.
- Keep rule logic simple and easy to maintain.
- Monitor provisioning tasks and logs after rule execution.

Interview Questions

Q1. What are Policies in Saviynt?

Policies are automated rules that assign, update, or revoke accounts, roles, and entitlements based on changes in a user's identity or lifecycle.

Q2. What is Identity Lifecycle Management (ILM)?

Identity Lifecycle Management manages user identities from onboarding (Joiner) through updates (Mover) to offboarding (Leaver), ensuring the correct access is provided throughout the employee lifecycle.

Q3. What is the Joiner-Mover-Leaver (JML) process?

JML represents the three major identity lifecycle events:

- Joiner – New employee
- Mover – Employee changes role or department
- Leaver – Employee leaves the organization

Q4. Why are Policies important?

Policies automate access management, reduce manual work, improve security, and ensure compliance by assigning and removing access automatically.

Q5. What are the different types of rules in Saviynt?

- Technical Rules
- User Update Rules
- Entitlement Update Rules
- Organization Update Rules
- Request Rules

Q6. Which rule is mainly used for Joiner scenarios?

Technical Rules are mainly used to assign birthright access to new users.

Q7. Which rule is mainly used for Mover and Leaver scenarios?

User Update Rules manage access changes when user attributes change or when users leave the organization.

Q8. What is birthright access?

Birthright access is the default access automatically assigned to a new employee based on attributes such as department, job title, or location.

Q9. What happens during offboarding?

Saviynt disables user accounts, removes roles and entitlements, revokes application access, and updates audit records.

Q10. Why is automating the JML process important?

Automation reduces manual effort, minimizes human error, improves security, accelerates onboarding/offboarding, and ensures compliance with organizational policies.

Quick Revision

- Policies automate access assignment, updates, and revocation.
- Identity Lifecycle consists of Joiner, Mover, and Leaver (JML) events.
- Technical Rules provide birthright access for new users.
- User Update Rules handle access changes for movers and leavers.
- Request Rules execute during Access Request workflows.
- Policies are triggered by identity events and execute provisioning or deprovisioning automatically.
- Automating the JML lifecycle reduces manual work, improves security, and strengthens compliance.

Module 2 – Technical Rules

(One of the Most Important Saviynt Interview Topics)

Introduction

One of the biggest challenges in Identity Governance is automatically giving new employees the correct access.

Imagine a new employee joins the company.

Should the IT team manually:

- Create Active Directory account?
- Create Office 365 account?
- Assign SAP Role?
- Add AD Groups?

If an organization hires 200 employees every month, this becomes a huge manual effort.

Saviynt solves this using **Technical Rules**.

Technical Rules automatically assign Birthright Access (Zero-Day Provisioning) based on user attributes.

What is a Technical Rule?

Definition

A Technical Rule is an event-based policy that automatically provisions or removes accounts, roles, and entitlements based on predefined user conditions.

Simple Definition

A Technical Rule tells Saviynt:

"If a user matches this condition, automatically give them this access."

Why are Technical Rules Needed?

Without Technical Rules:

- IT manually creates accounts.
- Managers manually assign roles.

- Access assignment takes time.
- Human errors increase.

With Technical Rules:

- Automatic account creation.
- Automatic role assignment.
- Automatic entitlement assignment.
- Faster onboarding.
- Better compliance.

Main Purpose of Technical Rules

Technical Rules are mainly used for:

- Birthright Access
- Zero-Day Provisioning
- Automatic Account Creation
- Automatic Role Assignment
- Automatic Entitlement Assignment
- Automatic Access Removal (if configured)

What is Birthright Access?

Definition

Birthright Access is the default access automatically assigned to every employee based on business attributes such as department, job title, or location.

Example

Every Finance employee should automatically receive:

- Active Directory Account
- Outlook Account
- SAP Finance Role
- Finance AD Group

Instead of manually assigning these, Technical Rules assign them automatically.

What is Zero-Day Provisioning?

Definition

Zero-Day Provisioning means the user receives all required access on the very first day of joining, without waiting for manual requests.

Example

Rahul joins on Monday morning.

As soon as HR imports Rahul,

Saviynt automatically:

- Creates AD account.
- Creates Office 365 account.
- Creates SAP account.
- Assigns Finance Role.

Rahul can start working immediately.

How Technical Rules Work

Every Technical Rule has two main parts.

1. Condition

Defines who should receive access.

Example:

Department = Finance

Location = Hyderabad

Employee Type = Permanent

2. Action

Defines what access should be assigned.

Example:

Assign:

- Finance Enterprise Role
- SAP Account
- Finance AD Group

Technical Rule Features (Brief & Interview Notes)

1. **Preview Data:** Shows which users will be affected before saving the rule. Helps verify the rule and avoid incorrect access assignments.
2. **Rule Creation & Modification Approval:** New or modified technical rules can go through an approval workflow before becoming active. Ensures governance and control.
3. **Advanced Query:** Used to create complex rule conditions with multiple AND/OR operators. Supports many user attributes like department, jobCode, location, employeeType, etc.
4. **Retry Failed Rules:** Allows administrators to rerun failed provisioning tasks without executing the entire rule again. Useful when failures occur due to application or network issues.
5. **Rule Ownership:** Every rule can have a designated owner. The owner is responsible for maintaining and approving the rule.
6. **Delegated Administration:** Allows specific users (e.g., application owners or business managers) to manage technical rules without giving them full administrator access.
7. **Auto Removal of Access:** Automatically removes access when a user no longer satisfies the rule condition. Example: User moves from Finance to Marketing, so Finance access is automatically revoked.
8. **Dynamic Access Assignment:** Assigns access dynamically using user attributes. Example: Group_`\${department}` assigns Group_Finance to Finance users and Group_HR to HR users.
9. **Update Active Technical Rules:** Allows administrators to modify rules that are already active. Changes may require approval before taking effect.
10. **Preview Option:** Displays impacted users before saving or submitting the rule. Used to validate the rule logic.
11. **Send for Approval:** Submits the rule for approval. If a Rule Add Workflow is configured, a Request ID is created. The rule becomes active only after approval.
12. **Advanced Config:** Enable Advanced Config when writing complex SQL-like conditions using multiple AND/OR operators. Recommended for advanced scenarios.
13. **Case Sensitivity:** User attributes used in Advanced Config are case-sensitive. Example: Finance and finance are treated as different values.
14. **Supported Attributes:** Technical Rules can use many user attributes, including: Username, Employee ID, Email, Department, Job Code, Job Description, Title, Location, Manager, Company, Cost Center, Country, Region, Status, Start Date / End Date, Custom Properties (customproperty1–customproperty65).

Examples & Internal Working

Simple Rule Example

Condition:

Department = Finance

↓

Action:

Assign Finance Enterprise Role

Another Example

Condition:


Location = Hyderabad

↓

Action:

Assign Hyderabad Printer Group

Internal Working of Technical Rules

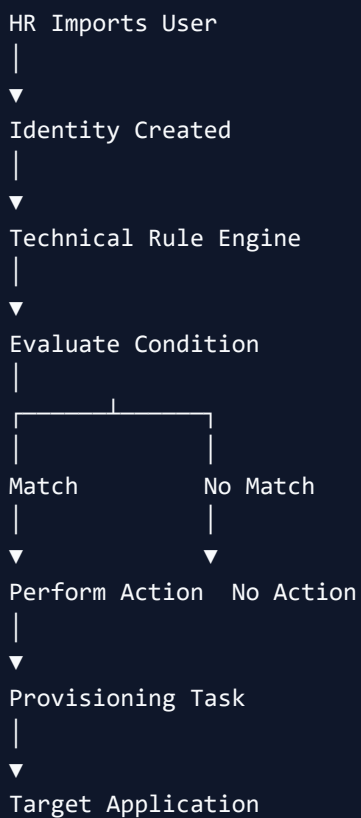

Technical Rule Trigger Scenarios

Technical Rules can execute in several situations.

1. New User Created

When a new user is created in Saviynt, Technical Rules automatically execute.

Example: Rahul joins. ↓ HR imports Rahul. ↓ Technical Rule runs. ↓ Finance Role assigned.

2. Bulk User Import

When hundreds of users are imported through CSV, HRMS, or Database, Technical Rules evaluate every user.

Example: 500 new employees imported. ↓ Finance users receive Finance Role. ↓ HR users receive HR Role. ↓ IT users receive IT Role.

3. User Imported from External Source

Users imported from Workday, SAP HR, Oracle HRMS, CSV, or REST API also trigger Technical Rules.

4. User Attribute Updated

Sometimes existing users are updated. Example: Department changes. Technical Rule may execute again if configured through User Update Rules.

Remove Birthright Access

One important option is: **Remove Birthright Access if Condition Fails.**

What does it mean?

If a user no longer satisfies the Technical Rule condition, Saviynt automatically removes only the access granted by that rule.

Example

Technical Rule: Department = Finance ↓ Assign Finance Role

Rahul belongs to Finance. ↓ Finance Role assigned.

Later, Rahul moves to HR. Now, Department ≠ Finance.

Technical Rule condition fails.

Saviynt automatically removes: Finance Role.

Important Point: Only the access assigned by that Technical Rule is removed. Access assigned manually or through another rule is not removed.

Auto Trigger of Technical Rules

Technical Rules automatically execute when:

- User created.
- User imported.
- Detective Rule Job runs.
- User Update Rule reruns provisioning.

Technical Rule Execution Scenarios

Scenario 1: Bulk Import

CSV Import ↓ User Created ↓ Condition Matches ↓ Technical Rule Executes

Scenario 2: New User from UI

Administrator creates user manually. ↓ Condition matches. ↓ Rule executes.

Scenario 3: User Updated

Department changes. ↓ User Update Rule triggers. ↓ Technical Rule re-evaluated.

Scenario 4: Condition Fails

Department changed. ↓ Finance condition fails. ↓ Birthright access removed.

Detective Provisioning Rules Job

This is a very important interview topic.

What is DetectiveProvisioningRulesJob?

It is a scheduled job that evaluates Technical Rules against existing users and creates provisioning or deprovisioning tasks when conditions match or fail.

Why is it Needed?

Not every Technical Rule executes immediately.

The Detective Provisioning Rules Job scans users and checks:

- Does the condition match?
- Did the condition fail?
- Should access be assigned?
- Should access be removed?

Workflow: Run DetectiveProvisioningRulesJob | ▼ Evaluate Technical Rules | ▼ Create Pending Tasks | ▼ Run WSRETRY Job | ▼ Provisioning Completed

WSRETRY Job

Definition

WSRETRY processes pending provisioning tasks created by Technical Rules.

Why is it Required?

Technical Rules create tasks. WSRETRY executes them. Without WSRETRY, tasks remain pending.

Complete Internal Workflow:
User Imported | ▼ Technical Rule Triggered | ▼ Condition Evaluated | ▼ DetectiveProvisioningRulesJob | ▼ Provisioning Task Created | ▼ Pending Task | ▼ WSRETRY Job | ▼ Provisioning | ▼ Target Application

Real Project Example

ABC Bank

Applications: Active Directory, SAP, Office 365

Technical Rule: Department = Finance ↓ Assign Finance Enterprise Role

Rahul joins Finance. HR imports Rahul. Technical Rule executes. Provisioning Tasks created. WSRETRY runs.

Automatically: AD account created, Office 365 account created, SAP account created, Finance Role assigned.

No manual work required.

Advantages of Technical Rules

- Automatic onboarding.
- Zero-Day Provisioning.
- Birthright access.
- Consistent access assignment.
- Reduced manual work.

- Better security.
- Improved compliance.
- Faster user productivity.

Limitations

- Depends on accurate HR/user data.
- Incorrect conditions can assign wrong access.
- Complex rules may affect performance.
- Requires scheduled jobs (DetectiveProvisioningRulesJob and WSRETRY) to complete provisioning.

Best Practices

- Use Technical Rules only for birthright (default) access.
- Keep rule conditions simple and easy to understand.
- Test rules in Development/UAT before Production.
- Enable Remove Birthright Access if Condition Fails where appropriate.
- Regularly monitor DetectiveProvisioningRulesJob and WSRETRY job execution.
- Review rule logic whenever organizational structures (departments, job codes, etc.) change.
- Document every Technical Rule with its purpose and owner.

Common Issues

Issue	Possible Causes	Resolution
Rule Not Executing	Condition does not match. Rule inactive. DetectiveProvisioningRulesJob not running.	Verify the rule condition, activate the rule, and check the scheduled job.
Access Not Assigned	Provisioning task not created. WSRETRY not executed. Connector failure.	Review pending tasks, WSRETRY job status, and connector logs.
Access Not Removed	"Remove Birthright Access if Condition Fails" not enabled. User attributes not updated. Rule-user mapping issue.	Enable the removal option, verify user attributes, and repair rule mappings if necessary.

Interview Questions

Q1. What is a Technical Rule?

A Technical Rule is an event-based policy that automatically assigns or removes accounts, roles, and entitlements based on predefined user conditions.

Q2. What is the main purpose of Technical Rules?

The primary purpose is to provide Birthright Access (Zero-Day Provisioning) to new users based on business attributes.

Q3. What is Birthright Access?

Birthright Access is the default access automatically granted to users based on attributes like department, job title, or location.

Q4. What is Zero-Day Provisioning?

Zero-Day Provisioning ensures that a new employee receives all required accounts and access on their first day without manual intervention.

Q5. When are Technical Rules triggered?

Technical Rules can be triggered when:

- A new user is created.
- Users are imported from HRMS, CSV, or other sources.
- DetectiveProvisioningRulesJob runs.
- User Update Rules rerun provisioning after user attribute changes.

Q6. What happens when "Remove Birthright Access if Condition Fails" is enabled?

If the user no longer meets the rule condition, Saviynt automatically removes only the access granted by that Technical Rule.

Q7. What is DetectiveProvisioningRulesJob?

It is a scheduled job that evaluates Technical Rules, creates provisioning or deprovisioning tasks, and identifies users whose conditions match or fail.

Q8. What is the purpose of the WSRETRY Job?

WSRETRY processes pending provisioning tasks created by Technical Rules and executes them against target applications.

Q9. Can Technical Rules remove manually assigned access?

No. Technical Rules remove only the access that they originally assigned. Manually assigned access or access granted by other rules is unaffected.

Q10. What are the benefits of Technical Rules?

- Automatic onboarding
- Birthright access
- Zero-Day Provisioning
- Reduced manual work
- Improved consistency
- Better security
- Stronger compliance
- Faster employee productivity

Quick Revision

- Technical Rules automate Birthright Access and Zero-Day Provisioning.
- Every Technical Rule consists of a Condition and an Action.
- They trigger on new user creation, user imports, DetectiveProvisioningRulesJob, and can be rerun after user updates.
- Remove Birthright Access if Condition Fails automatically revokes access previously granted by the rule when the condition is no longer true.
- DetectiveProvisioningRulesJob evaluates rules and creates provisioning tasks.
- WSRETRY executes pending provisioning tasks.

- Technical Rules are best suited for Joiner scenarios, while User Update Rules handle most Mover and Leaver scenarios.

Module 3 – Setting Up Technical Rules

Introduction

In Module 2, we learned what Technical Rules are and why they are used.

In this module, we will learn:

- How to create Technical Rules
- How Saviynt evaluates rule conditions
- How actions are configured
- How provisioning happens
- Common configuration settings
- Best practices

What is Technical Rule Configuration?

Definition

Technical Rule Configuration is the process of defining:

- Conditions (When should the rule run?)
- Actions (What access should be assigned or removed?)

Simple Definition

A Technical Rule tells Saviynt: *"If this condition is true, automatically perform this action."*

Purpose of Setting Up Technical Rules

Technical Rules automate: Birthright access, Zero-Day provisioning, Enterprise Role assignment, Account creation, Entitlement assignment, Automatic access removal.

Where to Configure Technical Rules?

Navigate to: Admin ↓ Identity Repository ↓ Technical Rules.

Administrators create, edit, activate, or deactivate Technical Rules from this section.

Components of a Technical Rule

Every Technical Rule has several configuration sections.

1. Rule Name

A meaningful name for the rule. Example: Finance Birthright Rule, HR Enterprise Role Rule, India Employees Rule.

2. Description

Explains the purpose of the rule. Example: Automatically assigns Finance Enterprise Role to Finance employees.

3. Status

Determines whether the rule is active. Options: Active, Inactive. Only Active rules are evaluated.

4. Priority

When multiple rules match, Priority determines which rule executes first.

Example: Finance Rule (Priority 1), Location Rule (Priority 2). Lower number = Higher priority.

Rule Conditions & Logical Operators

Conditions determine who should receive access. Common attributes: Department, Job Title, Location, Country, Business Unit, Cost Center, Employee Type, Manager, Organization, Status.

Example Condition: Department = Finance.

Another example: Department = Finance AND Location = Hyderabad. Only Finance employees in Hyderabad receive access.

Logical Operators supported:

- **AND:** All conditions must be true. Example: Department = Finance AND Location = Hyderabad.
- **OR:** At least one condition must be true. Example: Department = Finance OR Department = Accounting.
- **NOT:** Condition must not match. Example: Department != Contractor.

Rule Actions

Actions specify what Saviynt should do. Common actions: Assign Enterprise Role, Assign Business Role, Create Account, Assign Entitlement, Remove Entitlement, Disable Account, Enable Account.

Example Action: Assign Enterprise Role ↓ Finance Enterprise Role.

Rule Evaluation Process: User Imported | ▼ Technical Rule Engine | ▼ Evaluate Conditions |
True / False | ▼ Execute Action / No Action

Multiple Conditions & Multiple Actions

Multiple Conditions Example: Suppose Rahul has Department = Finance, Location = Hyderabad, Employee Type = Permanent. Technical Rule: Department = Finance AND Location = Hyderabad AND Employee Type = Permanent. Result: Finance Enterprise Role assigned.

Multiple Actions Example: Condition: Department = Finance. Actions: Create AD Account, Create Office 365 Account, Assign SAP Role, Assign Finance Enterprise Role, Add Finance AD Group. One rule performs all actions.

Enterprise Role, Account & Entitlement Assignment

Enterprise Role Assignment: Department = HR ↓ Assign HR Enterprise Role. The Enterprise Role then provisions: AD Groups, SAP Roles, Office 365 License.

Account Creation: Department = IT ↓ Create Active Directory Account.

Entitlement Assignment: Department = Sales ↓ Assign Sales Shared Drive Group.

Remove Birthright Access & Rule Activation

Remove Birthright Access if Condition Fails: Rule: Department = Finance. Rahul belongs to Finance ↓ Finance Role assigned. Later, Department changes to HR ↓ Finance condition no longer matches ↓ Saviynt automatically removes the Finance Role.

Rule Activation: After configuration, the rule must be activated. Inactive rules are ignored by the rule engine.

Rule Testing & Internal Workflow

Before Production: Create test users, verify conditions, confirm provisioning tasks, validate assigned roles, check logs. Never deploy an untested Technical Rule.

```
Internal Workflow: HR System | ▼ User Imported | ▼ Identity Created | ▼ Technical Rule Engine  
| ▼ Evaluate Conditions | ▼ Create Provisioning Tasks | ▼ WSRETRY Job | ▼ Provision Target  
Applications
```

Real Project Example

Company: ABC Bank. Technical Rule Condition: Department = Finance. Actions: Create Active Directory Account, Create Office 365 Account, Assign Finance Enterprise Role, Assign SAP Finance Role. Rahul joins Finance. HR imports Rahul. Saviynt evaluates the rule. All conditions match. Provisioning Tasks are created. WSRETRY executes them. Result: AD Account created, Office 365 Account created, SAP Account created, Finance Enterprise Role assigned. Rahul starts work on Day 1.

Best Practices

- Use meaningful rule names.
- Keep rule logic simple.
- Use business attributes (department, job title, location) instead of hard-coded usernames.
- Use Enterprise Roles instead of assigning many individual entitlements.
- Enable "Remove Birthright Access if Condition Fails" where appropriate.
- Test rules thoroughly in Development/UAT.
- Avoid duplicate Technical Rules with overlapping conditions.
- Monitor DetectiveProvisioningRulesJob and WSRETRY.
- Document every Technical Rule.

Common Configuration Mistakes

Mistake	Result
Rule inactive	Rule never executes
Wrong condition	Incorrect users receive access
Incorrect priority	Unexpected rule execution
Hard-coded usernames	Poor scalability
Overlapping rules	Duplicate or conflicting access
No testing	Production failures

Troubleshooting Guide

- **Rule Not Executing:** Check Rule is Active, Condition matches, DetectiveProvisioningRulesJob is running.
- **Wrong User Receives Access:** Check Rule conditions, HR attributes, Priority.
- **Access Not Provisioned:** Check Provisioning Tasks, WSRETRY Job, Connector logs.
- **Access Not Removed:** Check Remove Birthright Access option, User attributes, Rule evaluation logs.

Interview Questions

Q1. What is the purpose of setting up a Technical Rule?

To automate access assignment or removal based on user attributes such as department, location, or job title.

Q2. What are the two main parts of a Technical Rule?

- Condition – Determines when the rule applies.
- Action – Defines what access should be granted or removed.

Q3. Which user attributes are commonly used in Technical Rules?

Department, Job Title, Location, Employee Type, Cost Center, Business Unit, Manager, and Organization.

Q4. Can one Technical Rule perform multiple actions?

Yes. A single Technical Rule can create accounts, assign Enterprise Roles, assign entitlements, and perform other provisioning actions.

Q5. Why are Enterprise Roles commonly assigned through Technical Rules?

Because Enterprise Roles bundle multiple permissions together, simplifying administration and ensuring consistent access.

Q6. What happens if a Technical Rule is inactive?

Inactive rules are ignored and never evaluated by the rule engine.

Q7. Why should hard-coded usernames be avoided in Technical Rules?

Hard-coded usernames do not scale and require constant maintenance. Business attributes make rules reusable and dynamic.

Q8. Why is rule priority important?

When multiple rules match the same user, priority determines the order in which they are evaluated and executed.

Q9. How do you test a Technical Rule?

Create test users, verify rule conditions, confirm provisioning tasks, validate assigned access, review logs, and test access removal if applicable.

Q10. What jobs are involved after configuring a Technical Rule?

- DetectiveProvisioningRulesJob evaluates Technical Rules and creates provisioning tasks.
- WSRETRY Job executes pending provisioning tasks against target applications.

Quick Revision

- Technical Rules are configured under Admin → Identity Repository → Technical Rules.
- Every rule has Name, Description, Status, Priority, Conditions, and Actions.
- Conditions determine who receives access. Actions determine what access is assigned or removed.
- Rules commonly assign Enterprise Roles, Accounts, and Entitlements.
- Use logical operators AND, OR, and NOT to build rule conditions.
- Activate and thoroughly test rules before production deployment.
- DetectiveProvisioningRulesJob evaluates Technical Rules and creates tasks. WSRETRY processes those tasks and provisions access.
- Keep rules simple, reusable, and based on business attributes rather than individual users.

Module 4 – User Update Rules

Introduction

Technical Rules mainly work during Joiner (Onboarding). But what happens if an employee: Gets promoted? Changes department? Moves to another country? Changes manager? Leaves the organization?

The user's identity changes. If access is not updated, the user may: Keep old access, Receive incorrect access, Create security risks.

Saviynt solves this using **User Update Rules**.

What are User Update Rules?

Definition

User Update Rules are policies that automatically update or remove user access whenever user attributes change.

Simple Definition

A User Update Rule tells Saviynt: *"When a user's information changes, automatically update their access."*

Why are User Update Rules Needed?

Without User Update Rules: IT manually removes old access, IT manually assigns new access, Former permissions remain active, Security risks increase.

With User Update Rules: Automatic access updates, Automatic role changes, Automatic account updates, Automatic access removal.

Identity Lifecycle Events & Scenarios

User Update Rules mainly support: **Mover** and **Leaver**.

Mover Scenario

A user changes: Department, Job Title, Manager, Location, Cost Center, Business Unit, Employee Type. Access must also change.

Example: Rahul moves from Finance to HR. Old Access: SAP Finance, Finance AD Group. New Access: HR Enterprise Role, HR Shared Drive, HR Applications. Saviynt performs these changes automatically.

Leaver Scenario

Employee leaves the organization. Examples: Resignation, Retirement, Contract End, Termination. User Update Rules automatically: Disable accounts, Remove roles, Remove entitlements, Remove group memberships, Start deprovisioning.

Joiner vs User Update Rules

Technical Rules	User Update Rules
Used mainly for Joiners	Used mainly for Movers and Leavers
Assign Birthright Access	Modify existing access
Create accounts	Update or remove access
Runs during onboarding	Runs whenever user attributes change

What Triggers User Update Rules?

User Update Rules execute whenever monitored user attributes change. Common triggers include: Department, Job Title, Manager, Employee Status, Employee Type, Cost Center, Business Unit, Location, Country.

Example Trigger: Old Department = Finance ↓ New Department = HR ↓ User Update Rule executes.

Internal Workflow: User Attribute Updated | ▼ Identity Repository Updated | ▼ User Update Rule Engine | ▼ Evaluate Conditions |  Match / No Match | ▼ Create Provisioning Tasks | ▼ Provision / Deprovision

Components of User Update Rules

Every User Update Rule contains: Rule Name, Description, Status, Trigger Attribute, Condition, Action, Priority.

Trigger Attributes determine which user changes activate the rule. Examples: Department, Manager, Title, Location, Status, Employee Type.

Rule Conditions determine whether the rule should execute. Example: Department = HR. Another example: Department = HR AND Location = Hyderabad.

Rule Actions define what Saviynt should do. Examples: Assign Enterprise Role, Remove Enterprise Role, Assign Entitlement, Remove Entitlement, Disable Account, Enable Account, Update Account Attribute.

Example Rule: Condition = Department = HR. Action = Assign HR Enterprise Role, Remove Finance Enterprise Role.

Account & Role Updates

Account Updates: Can update account information like Manager, Department, Email, Title, Phone Number. Instead of recreating the account, Saviynt simply updates it.

Role Updates: Suppose Rahul is promoted. Old Role = Junior Analyst ↓ New Role = Senior Analyst. Saviynt removes Junior Role and assigns Senior Role.

Manager Update: Old Manager = John ↓ New Manager = Priya. Saviynt updates Manager field, Approval hierarchy, Reporting structure.

Location Update: Employee transfers. Old Location = Delhi ↓ New Location = Hyderabad. Old Access Removed = Delhi Printer Group. New Access Assigned = Hyderabad Printer Group.

Status Change: Status changes may include Active, Leave, Suspended, Terminated. User Update Rules automatically Disable account, Remove access, Start deprovisioning.

Complete Workflow: HR Updates Employee | ▼ User Import | ▼ Identity Repository Updated | ▼ User Update Rule Executes | ▼ Provisioning Tasks Created | ▼ WSRETRY Job | ▼ Target Applications Updated

Ways to Trigger User Update Rules in Saviynt (Simple Explanation)

What is a User Update Rule?

A User Update Rule is a rule that executes whenever a user's information is created, updated, or removed in Saviynt.

For example: Department changes → Assign a new role. Manager changes → Update approvals. Status changes to inactive → Disable accounts.

How are User Update Rules Triggered?

There are two main ways:

1. **Auto Trigger:** The rule runs automatically whenever a user is created or updated.

Example: HR updates John's department in Workday | ▼ User Import Job runs | ▼ Saviynt updates John's profile | ▼ User Update Rule executes automatically. No manual action is required.

2. **API Trigger:** A third-party application or administrator calls a Saviynt REST API.

Example: External Application | ▼ REST API Call | ▼ Saviynt | ▼ User Update Rule Executes.

Event Sources (EVENTSOURCE Values)

Saviynt stores a number in the EVENTSOURCE column to indicate how the rule was triggered.

Event Source	Trigger	EVENTSOURCE Value
User created from UI	Admin manually creates a user in Saviynt	1
User created from Import	User created through HRMS/CSV import	2
User created from API	User created using REST API	3
User updated from UI	Admin edits a user in Saviynt	4
User updated from Import	HRMS/CSV updates the user	5
User updated from API	REST API updates the user	6
User removed (One Click Disable)	User disabled from UI	7

Detailed Triggers 1 to 7

- **1. Trigger when User is Created from UI (EVENTSOURCE = 1):** Admin manually creates user in Saviynt UI. Example: Admin creates John. Rule assigns a Birthright Role.
- **2. Trigger when User is Created from Import (EVENTSOURCE = 2):** Users imported from Workday, SAP HR, CSV, or other HRMS. Example: Workday | ▼ Import Job | ▼ Saviynt | ▼ User Created | ▼ User Update Rule Runs. This is one of the most common triggers in production.
- **3. Trigger when User is Created from API (EVENTSOURCE = 3):** A REST API creates a new user. Useful when another system integrates directly with Saviynt.
- **4. Trigger when User is Updated from UI (EVENTSOURCE = 4):** Admin edits a user manually. Before: Department = Sales. Admin changes it to: Department = Finance. The rule runs automatically. Possible action: Remove Sales Role, Assign Finance Role.
- **5. Trigger when User is Updated from Import (EVENTSOURCE = 5):** HR updates employee data in Workday. Workday Manager Changed ↓ Import Job ↓ Saviynt updates the manager ↓ User Update Rule executes. This is another very common production scenario.
- **6. Trigger when User is Updated from API (EVENTSOURCE = 6):** A REST API updates user details. External System ↓ Update User API ↓ Saviynt ↓ User Update Rule.

- **7. Trigger when User is Removed (One Click Disable) (EVENTSOURCE = 7):** An administrator uses One Click Disable. Employee Resigns ↓ Admin clicks One Click Disable ↓ Saviynt disables user ↓ User Update Rule executes ↓ Disable AD, Disable SAP, Disable Oracle. Commonly used during offboarding.

Overall Flow: User Event |  Create / Update / Disable | ▼ UI / Import / API / One Click Disable | ▼ User Update Rule Executes

Real-Time Example

Suppose Alice is promoted from Developer to Manager.

1. HR updates Alice's job title in Workday.
2. User Import Job runs.
3. Saviynt updates Alice's profile.
4. Since this is an Update from Import, EVENTSOURCE = 5.
5. The User Update Rule runs and: ○ Removes the Developer role. ○ Assigns the Manager role. ○ Updates reporting relationships.

Advantages & Best Practices

Advantages: Automatic access updates, Better security, Supports Joiner-Mover-Leaver lifecycle, Prevents excessive access, Reduced manual work, Improves compliance, Maintains accurate user information.

Best Practices: Use User Update Rules only for Mover and Leaver events. Monitor critical attributes such as department, manager, and employee status. Keep rule conditions simple and based on business attributes. Always remove obsolete access before assigning new access. Test User Update Rules in Development/UAT before Production. Coordinate User Update Rules with Technical Rules to avoid conflicting access assignments. Review provisioning results after rule execution.

Common Issues & Troubleshooting

Issue	Cause	Solution
Rule not executing	Attribute change not detected	Verify user import and monitored attributes
Old access not removed	Removal action missing	Add remove action to the rule
Wrong role assigned	Incorrect condition	Review rule logic
Provisioning failed	Connector issue	Check provisioning logs
Account not updated	WSRETRY not running	Verify pending provisioning tasks

Interview Questions

Q1. What is a User Update Rule?

A User Update Rule automatically updates or removes user access when user attributes change.

Q2. What are the common ways to trigger a User Update Rule?

A User Update Rule can be triggered when a user is: • Created from the UI, Import, or API. • Updated from the UI, Import, or API. • Removed using One Click Disable.

Q3. What is the difference between "Updated from Import" and "Updated from UI"?

- Updated from Import (EVENTSOURCE = 5): Changes come from an external source such as Workday, SAP HR, or a CSV import.
- Updated from UI (EVENTSOURCE = 4): Changes are made manually by an administrator in the Saviynt interface.

Q4. Which trigger is most commonly used in production?

User Updated from Import (EVENTSOURCE = 5) is the most common because employee information (department, manager, job title, status, etc.) is usually synchronized from HR systems like Workday or SAP HR into Saviynt.

Q5. Can User Update Rules remove access?

Yes. They can automatically remove roles, entitlements, and group memberships when conditions no longer apply.

Q6. Can User Update Rules update account attributes?

Yes. They can update attributes such as manager, department, title, location, and other account information.

Q7. What happens when an employee transfers from Finance to HR?

User Update Rules remove Finance-related access and assign HR-related access automatically.

Q8. How do User Update Rules support the Joiner-Mover-Leaver process?

They handle Mover and Leaver events by updating or removing access based on identity changes.

Q9. What happens when an employee leaves the organization?

User Update Rules can disable accounts, remove roles and entitlements, trigger deprovisioning, and update audit records.

Q10. What are the benefits of User Update Rules?

• Automatic access updates • Improved security • Reduced manual effort • Better compliance • Accurate user access • Support for the complete Identity Lifecycle

Quick Revision

- User Update Rules automate access changes when user attributes change.
- Mainly used for Mover and Leaver scenarios.
- Triggered by changes in Department, Manager, Job Title, Location, Status, and similar attributes.
- Can assign, remove, or update roles, entitlements, accounts, and account attributes.
- Work together with Technical Rules to support the complete Joiner-Mover-Leaver (JML) lifecycle.
- Always test rules before production and verify provisioning results after execution.

Module 5 – Setting Up User Update Rules

(One of the Most Practical Identity Lifecycle Modules)

Introduction

In Module 4, we learned what User Update Rules are and why they are needed.

In this module, we will learn: How to configure User Update Rules, How Saviynt detects user attribute changes, How rules are evaluated, How provisioning tasks are created, How updates are applied to target applications, Best practices and troubleshooting.

This module is mainly used in Mover and Leaver scenarios.

What is Setting Up User Update Rules?

Definition

Setting Up User Update Rules is the process of configuring rules that automatically update or remove user access whenever user attributes change.

Simple Definition

A User Update Rule tells Saviynt: *"If a user's information changes, automatically update their access accordingly."*

Why Configured & Where to Configure?

Organizations frequently experience changes such as: Department transfers, Promotions, Manager changes, Office relocations, Employment status updates, Employee resignations. Without User Update Rules, administrators must manually update every application. User Update Rules automate this entire process.

Navigate to: Admin ↓ Identity Repository ↓ User Update Rules.

Components of a User Update Rule

1. **Rule Name:** A meaningful name that clearly identifies the rule. Examples: Finance to HR Update Rule, Manager Change Rule, Employee Termination Rule, Location Change Rule.
2. **Description:** Describes the purpose of the rule. Example: Automatically removes Finance access and assigns HR access when Department changes to HR.
3. **Status:** Determines whether the rule is active. Values: Active, Inactive. Only active rules are evaluated.

4. **Priority:** If multiple rules match, Priority determines which executes first. Example: Termination Rule (Priority 1), Department Update Rule (Priority 2), Manager Update Rule (Priority 3). Smaller number = Higher priority.
5. **Trigger Attributes:** A User Update Rule executes only when selected attributes change. Common trigger attributes include: Department, Job Title, Manager, Location, Employee Status, Employee Type, Cost Center, Business Unit, Country. Example: Old Department = Finance ↓ New Department = HR ↓ Department attribute changed ↓ User Update Rule executes.
6. **Rule Conditions:** Conditions determine whether the rule should run. Example: Department = HR. Another Example: Department = HR AND Location = Hyderabad. Logical Operators supported: AND, OR, NOT.
7. **Rule Actions:** Actions define what Saviynt should perform. Examples: Assign/Remove Enterprise Role, Assign/Remove Business Role, Create/Disable/Enable Account, Assign/Remove Entitlement, Update Account Attributes.

Updating Account Attributes & Examples

User Update Rules can update account information without recreating the account. Examples:

Department, Manager, Title, Email, Phone Number, Office Location.

Manager Change Example: Old Manager = John ↓ New Manager = Priya. Saviynt automatically updates: Reporting Manager, Approval Workflow, Manager attribute in connected applications.

Department Change Example: Old Department = Finance ↓ New Department = HR. Saviynt automatically Removes: Finance Enterprise Role, Finance AD Group, SAP Finance Role. Assigns: HR Enterprise Role, HR AD Group, HR Applications.

Location Change Example: Old Location = Delhi ↓ New Location = Hyderabad. Automatically Remove: Delhi Printer Group. Assign: Hyderabad Printer Group.

Employee Status Change: Status changes may include Active, On Leave, Suspended, Terminated. Example: Active ↓ Terminated. Saviynt automatically: Disable Active Directory account, Remove Office 365 License, Remove VPN Access, Disable SAP Account.

```
Internal Workflow: HR Updates User Information | ▼ User Import Job | ▼ Identity Repository
Updated | ▼ User Update Rule Engine | ▼ Check Trigger Attribute | ▼ Evaluate Rule Condition |
└───┬───┘ Match / No Match | ▼ Execute Actions | ▼ Provisioning Tasks Created | ▼ WSRETRY
Job | ▼ Target Applications Updated
```

Provisioning Process & Multiple Rules

Provisioning Process: After the rule executes, Saviynt creates provisioning tasks. Example: Remove Finance Enterprise Role ↓ Provisioning Task Created ↓ WSRETRY executes task ↓ Finance Role removed from SAP.

Multiple Rules: Sometimes multiple rules execute together. Example: Department changes ↓ Department

Rule executes. Manager changes ↓ Manager Rule executes. Location changes ↓ Location Rule executes. Saviynt processes them according to priority.

Rule Evaluation Order: User Updated | ▼ Trigger Attribute Changed? | ▼ Evaluate Conditions | ▼ Sort by Priority | ▼ Execute Rules | ▼ Provisioning Tasks | ▼ Target Applications

Real Project Example

Company: ABC Bank. Employee: Rahul. Current Department: Finance. New Department: HR. HR updates Workday ↓ User Import Job runs ↓ Saviynt detects Department change ↓ User Update Rule executes ↓ Actions: Remove Finance Enterprise Role, SAP Finance Role, Finance AD Group; Assign HR Enterprise Role, HR AD Group, HR Shared Drive ↓ Provisioning Tasks created ↓ WSRETRY executes ↓ HR access available immediately.

Difference Between Technical Rules and User Update Rules

Technical Rules	User Update Rules
Runs during onboarding	Runs after user information changes
Provides Birthright Access	Updates existing access
Mainly Joiner	Mainly Mover & Leaver
Creates new accounts	Updates, disables, or removes access

Best Practices & Common Configuration Mistakes

Best Practices: Use Technical Rules for Joiner scenarios and User Update Rules for Mover and Leaver scenarios. Monitor important attributes. Remove old access before assigning new access. Keep conditions simple. Avoid duplicate rules. Test thoroughly before production deployment. Monitor provisioning jobs (WSRETRY). Review audit logs.

Common Configuration Mistakes: Rule inactive (never executes), Wrong trigger attribute (never starts), Incorrect condition (wrong users receive updates), No remove action (old access remains), Priority conflict (unexpected rule execution), No testing (production failures).

Troubleshooting Guide

- **Rule Not Executing:** Check Rule is Active, Trigger attribute changed, Condition matches, User Import completed.
- **Wrong Access Assigned:** Verify Rule condition, User attributes, Rule priority.
- **Old Access Not Removed:** Check Remove action configured, Provisioning Task completed, Connector logs.

- **Target Application Not Updated:** Verify WSRETRY Job, Provisioning Task status, Endpoint, Connector.
- **Manager Not Updated:** Check HR import, Manager mapping, User Update Rule condition.

Interview Questions

Q1. What is a User Update Rule?

A User Update Rule automatically updates or removes user access when monitored user attributes change.

Q2. What is the purpose of configuring User Update Rules?

To automate access changes during Mover and Leaver events, reducing manual effort and improving security.

Q3. Which user attributes commonly trigger User Update Rules?

Department, Manager, Job Title, Employee Status, Employee Type, Location, Cost Center, and Business Unit.

Q4. What are the two main parts of a User Update Rule?

- Condition – Determines when the rule applies.
- Action – Defines what changes Saviynt should make.

Q5. Can one User Update Rule perform multiple actions?

Yes. It can remove old roles, assign new roles, update account attributes, and disable or enable accounts within a single rule.

Q6. What happens when an employee changes departments?

Saviynt removes access associated with the old department and assigns access associated with the new department according to the configured User Update Rules.

Q7. Why is rule priority important?

When multiple User Update Rules match, priority determines the order in which they are evaluated and executed.

Q8. What happens after a User Update Rule executes?

Saviynt creates provisioning tasks, and the WSRETRY Job processes those tasks to update the target applications.

Q9. How do you test a User Update Rule?

Update a test user's attributes, verify that the rule executes, confirm provisioning tasks are created, validate the access changes in target systems, and review the logs.

Q10. What are the benefits of User Update Rules?

• Automatic access updates • Faster implementation of user changes • Improved security • Better compliance • Reduced manual administration • Accurate identity lifecycle management

Quick Revision

- User Update Rules automate access updates after user information changes.
- Configure them under Admin → Identity Repository → User Update Rules.
- Common trigger attributes include Department, Manager, Job Title, Location, Status, Employee Type, and Cost Center.
- Each rule contains Name, Status, Priority, Trigger Attributes, Conditions, and Actions.
- They support actions such as Assign/Remove Roles, Update Account Attributes, Enable/Disable Accounts, and Assign/Remove Entitlements.
- After execution, Provisioning Tasks are created and processed by WSRETRY.
- User Update Rules are essential for Mover and Leaver scenarios and complement Technical Rules, which primarily handle Joiner scenarios.

Module 6 – Common Use Cases

(Most Important Practical & Interview Module)

Introduction

In real projects, Identity Lifecycle Policies are not created randomly. They are created to solve business problems that occur during an employee's lifecycle.

Examples: New employee joins, Employee changes department, Employee gets promoted, Employee transfers to another country, Employee resigns, Contractor becomes permanent employee.

Instead of performing these tasks manually, Saviynt automatically executes them using Technical Rules and User Update Rules. This module explains the most common real-world use cases.

Detailed Use Cases 1 to 15

Use Case 1 – New Employee Joins (Joiner)

Scenario: Rahul joins ABC Bank as a Finance Analyst. HR enters Rahul's information into Workday. The User Import Job imports Rahul into Saviynt. Technical Rules evaluate the user. Condition: Department = Finance. Actions: Create Active Directory Account, Create Office 365 Account, Create SAP Account, Assign Finance Enterprise Role, Assign Finance AD Group. Result: Rahul receives all required access before joining. This is called Zero-Day Provisioning.

Workflow: HR Creates Employee ↓ User Import ↓ Identity Created ↓ Technical Rule ↓ Provisioning Task ↓ WSRETRY ↓ Applications Updated.

Use Case 2 – Department Transfer (Mover)

Scenario: Rahul transfers from Finance to HR. HR updates Workday. Department changes: Finance ↓ HR. Saviynt detects the change. User Update Rule executes. Actions: Remove Finance Enterprise Role, SAP Finance, Finance AD Group; Assign HR Enterprise Role, HR Shared Drive, HR Applications.

Workflow: Department Changed ↓ User Import ↓ User Update Rule ↓ Remove Old Access ↓ Assign New Access ↓ Provisioning.

Use Case 3 – Promotion

Scenario: Rahul is promoted. Old Title: Junior Analyst ↓ New Title: Senior Analyst. Actions: Remove Junior Role, Assign Senior Role, Update Job Title, Manager, Reporting Structure. Benefits: Correct access, Updated approval hierarchy, Better security.

Use Case 4 – Manager Change

Scenario: Old Manager: John ↓ New Manager: Priya. Saviynt automatically updates: Manager field, Approval workflow, Reporting hierarchy. Future access requests now go to Priya instead of John.

Use Case 5 – Office Location Change

Scenario: Rahul moves from: Delhi ↓ Hyderabad. Actions: Remove Delhi Printer Group, Delhi Shared Drive; Assign Hyderabad Printer Group, Hyderabad Shared Drive.

Use Case 6 – Employee Type Change

Scenario: Employee changes from: Contractor ↓ Permanent Employee. Actions: Remove Contractor Access; Assign Permanent Employee Enterprise Role; Create Office 365 License, VPN Access, Corporate Email.

Use Case 7 – Employee Termination (Leaver)

Scenario: Rahul resigns. HR updates Status ↓ Terminated. User Update Rule executes. Actions: Disable Active Directory Account, Disable SAP Account, Remove Office 365 License, Remove VPN Access, Remove Enterprise Roles, Remove AD Groups.

Workflow: Employee Terminated ↓ Status Updated ↓ User Update Rule ↓ Provisioning Tasks ↓ Disable Accounts ↓ Remove Access ↓ Audit Updated.

Use Case 8 – Employee Rehire

Scenario: Rahul rejoins the company after one year. Status: Inactive ↓ Active. Technical Rules execute again. Actions: Recreate Active Directory Account, Assign Enterprise Role, Provision applications.

Use Case 9 – Leave of Absence

Scenario: Employee goes on maternity leave or long-term leave. Status: Active ↓ Leave. Actions: Disable VPN, Disable privileged accounts, Keep identity active. After returning, Status: Leave ↓ Active. Saviynt restores the required access.

Use Case 10 – Country Transfer

Scenario: Employee transfers from India ↓ USA. Actions: Remove India Printer Group, India VPN; Assign USA Printer Group, USA Applications, USA Policies.

Use Case 11 – Cost Center Change

Scenario: Cost Center: 1001 ↓ 2005. Actions: Remove old business applications, Assign applications related to the new cost center.

Use Case 12 – Business Unit Change

Scenario: Employee transfers from Retail Banking ↓ Corporate Banking. Actions: Remove Retail Banking roles, Assign Corporate Banking roles, Update application access.

Use Case 13 – Enterprise Role Assignment

Scenario: Condition: Department = IT. Action: Assign IT Enterprise Role. The Enterprise Role automatically provisions: Active Directory Groups, Office 365 License, ServiceNow, Jira, VPN.

Use Case 14 – Automatic Birthright Access

Every HR employee receives: Outlook, Teams, HR Portal, HR Shared Drive. No access request is required. Technical Rules assign this automatically.

Use Case 15 – Automatic Access Removal

Finance employee changes department. Technical Rule: Remove Birthright Access if Condition Fails = Enabled. Finance access automatically removed.

Complete Identity Lifecycle Example

Rahul joins ABC Bank.

Step 1 (Joiner): Technical Rule creates AD, SAP, Office 365.

Step 2 (Promotion): User Update Rule assigns Senior Role.

Step 3 (Department Change): Finance ↓ HR. Finance access removed, HR access assigned.

Step 4 (Location Change): Delhi ↓ Hyderabad. Printer groups updated.

Step 5 (Resignation): Accounts disabled, access removed, audit updated.

Complete Workflow: HR Updates User ↓ User Import ↓ Identity Repository ↓ Technical Rule OR User Update Rule ↓ Provisioning Task ↓ WSRETRY ↓ Target Applications ↓ Audit Logs

Real Project Example Walkthrough

Company: ABC Bank. Applications: Active Directory, SAP, Salesforce, Office 365, ServiceNow. Employee: Rahul.

Day 1: Joins Finance ↓ Technical Rule Creates AD, SAP, Office 365.

Six Months Later: Promotion ↓ User Update Rule Assigns Senior Enterprise Role.

One Year Later: Moves to HR ↓ Finance access removed, HR access assigned.

Two Years Later: Leaves Company ↓ Disable AD, SAP, Office 365, VPN ↓ Audit completed.

Benefits, Best Practices & Common Issues

Benefits: Fully automated Joiner-Mover-Leaver process, Faster onboarding, Automatic access updates, Automatic deprovisioning, Reduced manual effort, Better security, Improved compliance, Consistent access across the organization, Strong audit trail.

Best Practices: Use Technical Rules for Joiner scenarios. Use User Update Rules for Mover and Leaver scenarios. Always remove obsolete access before assigning new access. Keep HR data accurate because policies depend on identity attributes. Test every use case in Development/UAT before Production.

Monitor provisioning jobs and logs after rule execution. Use Enterprise Roles to simplify access management. Review lifecycle rules regularly as business processes evolve.

Issue	Cause	Solution
Birthright access not assigned	Technical Rule condition incorrect	Review rule conditions
Old access not removed	Remove action missing	Add remove action to User Update Rule
Manager approvals incorrect	Manager attribute not updated	Verify HR import and manager mapping
Provisioning failed	Connector or WSRETRY issue	Review provisioning logs and job status
Access still active after termination	Termination rule not configured or failed	Check status mapping, User Update Rule, and deprovisioning jobs

Troubleshooting Checklists

- **Joiner Not Receiving Access:** User Import completed successfully, Technical Rule is active, Rule conditions match, Provisioning task created, WSRETRY executed.
- **Mover Not Receiving New Access:** Updated attributes imported, User Update Rule active, Correct trigger attribute, Rule conditions, Provisioning task status.
- **Old Access Not Removed:** Remove action, Remove Birthright Access setting, Connector logs, Target application.
- **Leaver Still Has Access:** Status updated correctly, User Update Rule executed, Deprovisioning task completed, Accounts disabled in target systems.

Interview Questions

Q1. What is the most common use case for Technical Rules?

Automatically providing Birthright Access (Zero-Day Provisioning) to new employees during onboarding.

Q2. Which rules are mainly used for Mover and Leaver scenarios?

User Update Rules are primarily used to update or remove access when user information changes.

Q3. What happens when an employee changes departments?

Saviynt removes access associated with the old department and assigns access associated with the new department according to the configured User Update Rules.

Q4. What happens during employee termination?

User Update Rules disable accounts, remove roles and entitlements, revoke application access, and update audit records.

Q5. What is Zero-Day Provisioning?

Zero-Day Provisioning ensures that all required accounts and access are automatically provisioned before or on the employee's first working day.

Q6. How are promotions handled?

User Update Rules detect changes in job title or role and automatically update roles, entitlements, and approval hierarchies.

Q7. How does Saviynt handle location changes?

It removes location-specific access (such as printer groups or regional applications) and assigns access appropriate for the new location.

Q8. What happens when a contractor becomes a permanent employee?

Contractor-specific access is removed, and permanent employee access—such as enterprise roles, corporate email, VPN, and licenses—is assigned automatically.

Q9. What is the benefit of automating the Joiner-Mover-Leaver lifecycle?

Automation reduces manual effort, improves security, speeds up onboarding, ensures timely deprovisioning, and supports compliance.

Q10. What should you verify if lifecycle policies do not work?

Check: User Import, Identity attributes, Technical/User Update Rule configuration, Provisioning Tasks, WSRETRY Job, Connector logs, Target application.

Quick Revision

- Technical Rules automate Joiner scenarios (Birthright Access and Zero-Day Provisioning).
- User Update Rules automate Mover and Leaver scenarios.
- Common real-world use cases include new hires, department transfers, promotions, manager changes, location changes, employee type changes, terminations, rehiring, leave of absence, country transfers, and business unit changes.
- Lifecycle automation ensures users always have the right access at the right time.
- The typical execution flow is: HR Update → User Import → Rule Evaluation → Provisioning Task → WSRETRY → Target Application → Audit Logs.
- Always test lifecycle scenarios thoroughly and monitor provisioning results after execution.

Module 7 – Best Practices & Troubleshooting

(Most Important Project & Interview Module)

Introduction

Technical Rules and User Update Rules are powerful automation tools in Saviynt. However, if they are not configured properly, organizations may face issues such as: Wrong users receiving access, Missing birthright access, Duplicate accounts, Access not removed after termination, Provisioning failures, Compliance violations.

To avoid these problems, organizations follow Best Practices and use a structured Troubleshooting process.

Best Practices 1 to 10

1. Use the Right Rule for the Right Purpose: Do not use one rule for everything. Use Technical Rules → Joiner (New Employee). Use User Update Rules → Mover (Transfers, Promotions). Use User Update Rules → Leaver (Termination).

Example: Rahul joins the company. Use Technical Rule: Department = Finance ↓ Assign Finance Enterprise Role. Later Rahul moves to HR. Use User Update Rule ↓ Remove Finance Role ↓ Assign HR Role.

2. Keep Rule Conditions Simple: Avoid very complicated conditions. Good Example: Department = Finance. Bad Example: Department = Finance AND Location = Hyderabad AND Employee Type = Permanent AND Business Unit = Corporate Banking AND Grade = G7 AND Manager = John. Too many conditions make rules difficult to maintain.

3. Use Business Attributes: Always use HR attributes like Department, Job Title, Location, Cost Center, Business Unit. Avoid using usernames. Wrong: Username = Rahul. Correct: Department = Finance. Business attributes automatically work for every employee.

4. Use Enterprise Roles: Instead of assigning SAP Role, AD Group, VPN, Outlook one by one, assign one Enterprise Role. Example: Finance Enterprise Role ↓ Automatically provisions SAP, AD Group, Outlook, VPN. Benefits: Easy maintenance, Better scalability, Fewer rules.

5. Enable Remove Birthright Access: One important setting is Remove Birthright Access if Condition Fails. Example: Department Finance ↓ HR. Saviynt automatically removes Finance Role without administrator intervention.

6. Test Rules Before Production: Always test in Development, UAT. Never directly configure rules in Production. Test: Joiner, Mover, Leaver. Verify: Provisioning, Deprovisioning, Role Assignment, Account Updates.

7. Keep Rule Names Meaningful: Avoid names like Rule1, Test, New Rule. Use names like Finance Birthright Rule, HR Department Update Rule, Employee Termination Rule. This helps administrators quickly understand the rule's purpose.

8. Avoid Duplicate Rules: Bad Example: Rule A: Department = Finance ↓ Assign Finance Role. Rule B: Department = Finance ↓ Assign Finance Role. Result: Duplicate provisioning.

9. Monitor Scheduled Jobs: Important Jobs: User Import Job, DetectiveProvisioningRulesJob, WSRETRY, Reconciliation Job. If these jobs fail, rules will not execute correctly.

10. Review Rules Regularly: Business structures change. Departments merge. Applications change. Rules should also be reviewed regularly.

Common Issues 1 to 10

- **Issue 1: Technical Rule Not Executing:** Possible Causes: Rule inactive, Condition not matching, DetectiveProvisioningRulesJob not running, User not imported. Resolution: Check Rule Status, Rule Condition, User Attributes, Job Control.

- **Issue 2: Birthright Access Not Assigned:** Possible Causes: Incorrect Department, Enterprise Role missing, Provisioning Task failed. Resolution: Verify Department, Enterprise Role Mapping, Provisioning Task, WSRETRY.
- **Issue 3: Wrong User Receives Access:** Possible Causes: Incorrect condition, Wrong HR data, Wrong attribute mapping. Resolution: Review User attributes, Rule condition, Attribute mapping.
- **Issue 4: Old Access Not Removed:** Example: Finance ↓ HR. Finance Role still exists. Possible Causes: Remove action missing, Remove Birthright disabled, Provisioning failure. Resolution: Enable Remove Birthright Access, Verify Provisioning Tasks, Connector, WSRETRY.
- **Issue 5: Provisioning Failed:** Possible Causes: Connector issue, Authentication failure, Endpoint unavailable, Invalid credentials. Resolution: Check Connector Logs, Endpoint, Authentication, Target Application.
- **Issue 6: Duplicate Access:** Possible Causes: Duplicate Technical Rules, Duplicate Enterprise Roles, Duplicate provisioning. Resolution: Remove duplicate rules. Review Enterprise Role assignments.
- **Issue 7: User Update Rule Not Executing:** Possible Causes: Trigger attribute unchanged, Rule inactive, Incorrect condition. Resolution: Verify Trigger Attribute, User Import, Rule Status.
- **Issue 8: Termination Not Removing Access:** Possible Causes: Status mapping incorrect, User Update Rule missing, Deprovisioning failed. Resolution: Check Employee Status ↓ User Update Rule ↓ Provisioning Tasks ↓ Connector Logs.
- **Issue 9: Manager Not Updated:** Possible Causes: HR import failed, Manager mapping incorrect, User Update Rule failed. Resolution: Verify HR Data, Manager Mapping, User Import Logs.
- **Issue 10: WSRETRY Pending:** Provisioning Tasks remain Pending. Possible Causes: WSRETRY stopped, Connector failure, Endpoint unavailable. Resolution: Restart WSRETRY Job, Check Connector, Review Provisioning Queue.

Troubleshooting Workflow & Important Jobs

Always troubleshoot in the following order:

User Reports Issue | ▼ Verify User Import | ▼ Check Identity Repository | ▼ Verify User Attributes | ▼ Check Rule Configuration | ▼ Evaluate Rule Conditions | ▼ Check Provisioning Task | ▼ Verify WSRETRY Job | ▼ Review Connector Logs | ▼ Check Target Application | ▼ Confirm Access

Job	Purpose
User Import Job	Imports users from HR source
DetectiveProvisioningRulesJob	Evaluates Technical Rules and creates provisioning tasks
WSRETRY	Executes provisioning tasks
Reconciliation Job	Synchronizes target application data back into Saviynt

Real Project Examples

Real Project Example 1

Company: ABC Bank. Problem: Rahul joins Finance. Expected: AD Account, SAP Account, Finance Role. None are created.

Investigation: Step 1 User Import ✓ Successful. Step 2 Identity Repository ✓ User Exists. Step 3 Technical Rule ✓ Active. Step 4 Rule Condition: Department Expected = Finance, Actual = FIN. Condition failed.

Solution: Update rule: Department = FIN OR Correct HR mapping to Finance. Run: DetectiveProvisioningRulesJob ↓ WSRETRY ↓ Accounts created successfully.

Real Project Example 2

Problem: Employee transferred to HR. Finance Role still exists.

Investigation: Department Updated ✓. User Update Rule ✓. Provisioning Task Failed. Reason: SAP connector authentication failed.

Solution: Update connector credentials. Retry provisioning. Finance Role removed. HR Role assigned.

Best Practices Checklist

- ✓ Use Technical Rules for Joiners.
- ✓ Use User Update Rules for Movers and Leavers.
- ✓ Use business attributes instead of usernames.
- ✓ Keep rule conditions simple.
- ✓ Use Enterprise Roles.
- ✓ Enable Remove Birthright Access if Condition Fails where appropriate.
- ✓ Test every rule in Development/UAT.

- ✓ Avoid duplicate rules.
- ✓ Monitor scheduled jobs.
- ✓ Review provisioning logs regularly.
- ✓ Keep HR data accurate.
- ✓ Maintain clear documentation for all rules.

Interview Questions

Q1. What are the best practices for Technical Rules?

Use them for Joiner scenarios, keep conditions simple, use business attributes, assign Enterprise Roles, and test thoroughly before production.

Q2. Why should business attributes be used instead of usernames?

Business attributes make rules reusable, scalable, and automatically applicable to all users with similar characteristics.

Q3. Why are Enterprise Roles recommended?

Enterprise Roles group multiple permissions into a single assignment, simplifying administration and reducing the number of rules.

Q4. What happens if "Remove Birthright Access if Condition Fails" is disabled?

Users may retain access that they should no longer have after changes such as department transfers, creating security and compliance risks.

Q5. What should you check if a Technical Rule does not execute?

Verify: Rule status, Rule conditions, User attributes, DetectiveProvisioningRulesJob, Provisioning tasks.

Q6. What should you verify if a User Update Rule does not work?

Check the trigger attribute, user import results, rule configuration, rule status, provisioning tasks, and connector logs.

Q7. What are common provisioning failures?

- Connector authentication issues
- Invalid credentials
- Endpoint unavailable
- Network failures
- Provisioning queue issues

Q8. Why is WSRETRY important?

WSRETRY processes pending provisioning tasks and sends provisioning or deprovisioning requests to target applications.

Q9. What should you do if an employee still has access after termination?

Verify the employee status update, User Update Rule configuration, deprovisioning tasks, WSRETRY execution, and target application status.

Q10. What is the recommended troubleshooting order?

1. Verify User Import. 2. Check Identity Repository. 3. Verify user attributes. 4. Review rule configuration. 5. Evaluate rule conditions. 6. Check provisioning tasks. 7. Verify WSRETRY. 8. Review connector logs. 9. Confirm changes in the target application.

Quick Revision

- Use Technical Rules for Joiners and User Update Rules for Movers and Leavers.
- Build rules using business attributes (department, location, job title) instead of usernames.
- Prefer Enterprise Roles over assigning many individual entitlements.
- Enable Remove Birthright Access if Condition Fails to automatically revoke outdated access.
- Always test rules in Development/UAT before production.
- Monitor critical jobs: User Import Job, DetectiveProvisioningRulesJob, WSRETRY, Reconciliation Job.
- Follow a structured troubleshooting process: User Import → Identity Repository → Rule Configuration → Provisioning Task → WSRETRY → Connector → Target Application.
- Keep HR data accurate, avoid duplicate rules, and regularly review lifecycle policies to ensure secure and compliant access management.