

Visitor Management System

- DB tables:

```
[mysql> desc departments;
```

Field	Type	Null	Key	Default	Extra
id	bigint	NO	PRI	NULL	auto_increment
name	varchar(255)	NO		NULL	
created_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED
updated_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED on update CURRENT_TIMESTAMP

```
4 rows in set (0.078 sec)
```

```
[mysql> desc employees;
```

Field	Type	Null	Key	Default	Extra
id	bigint	NO	PRI	NULL	auto_increment
full_name	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
phone	varchar(50)	NO		NULL	
department_id	bigint	NO	MUL	NULL	
created_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED
updated_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED on update CURRENT_TIMESTAMP

```
7 rows in set (0.046 sec)
```

```
[mysql> desc visitors;
```

Field	Type	Null	Key	Default	Extra
id	bigint	NO	PRI	NULL	auto_increment
full_name	varchar(255)	NO		NULL	
email	varchar(255)	NO		NULL	
phone	varchar(50)	NO		NULL	
purpose	varchar(500)	YES		NULL	
host_employee_id	bigint	YES	MUL	NULL	
id_proof	varchar(255)	YES		NULL	
created_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED
updated_at	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED on update CURRENT_TIMESTAMP

```
9 rows in set (0.090 sec)
```

```
[mysql> desc visit_logs;
```

Field	Type	Null	Key	Default	Extra
id	bigint	NO	PRI	NULL	auto_increment
visitor_id	bigint	NO	MUL	NULL	
host_employee_id	bigint	NO	MUL	NULL	
check_in	timestamp	NO		CURRENT_TIMESTAMP	DEFAULT_GENERATED
check_out	timestamp	YES		NULL	

```
5 rows in set (0.055 sec)
```

```
mysql> █
```

- Department Controller

The screenshot displays the Postman API client interface. On the left sidebar, the 'Collections' panel is open, showing a tree structure under 'Pranjal Srivastava's Workspace'. The 'Visitor Management' collection is expanded, and the 'Departments' folder is selected, containing a 'GET Get all departments' request. The main panel shows the details of this request, which is a GET method to the endpoint '({baseUrl})/api/departments'. The 'Params' tab is active, showing a table with 'Key' and 'Value' columns. The 'Body' tab is also active, showing a JSON response. The response status is '200 OK' with a response time of 250 ms and a size of 517 B. The JSON response is as follows:

```
1 [
2   {
3     "id": 1,
4     "name": "Reception",
5     "createdAt": "2025-11-21 12:19:01.0",
6     "updatedAt": "2025-11-21 12:19:01.0"
7   },
8   {
9     "id": 2,
10    "name": "HR",
11    "createdAt": "2025-11-21 12:19:01.0",
12    "updatedAt": "2025-11-21 12:19:01.0"
13  },
14  {
15    "id": 3,
16    "name": "IT Support",
17    "createdAt": "2025-11-21 12:19:01.0",
18    "updatedAt": "2025-11-21 12:19:01.0"
19  },
20  {
21    "id": 4,
22    "name": "Security",
23    "createdAt": "2025-11-21 12:19:01.0",
24    "updatedAt": "2025-11-21 12:19:01.0"
25  }
26 ]
```

Postman interface showing a GET request to `/api/departments/2` with a successful response (200 OK).

Request:

- Method: GET
- URL: `((baseURL)) /api/departments/2`

Response:

```
1 {
2   "id": 2,
3   "name": "HR",
4   "createdAt": "2025-11-21 12:19:01.0",
5   "updatedAt": "2025-11-21 12:19:01.0"
6 }
```

Postman interface showing a POST request to `/api/departments` with a successful response (201 Created).

Request:

- Method: POST
- URL: `((baseURL)) /api/departments`
- Body: raw
- Body Content:

```
1 {
2   "name": "Admin"
3 }
```

Response:

```
1 {
2   "message": "Department created",
3   "data": {
4     "id": 5,
5     "name": "Admin",
6     "createdAt": "2025-11-23 20:31:00.776",
7     "updatedAt": "2025-11-23 20:31:00.776"
8   }
9 }
```

- Employee Controller

The screenshot shows the Postman interface with a workspace named "Pranjal Srivastava's Workspace". The left sidebar shows a collection named "Visitor Management" with a sub-collection "Employees". The "POST Create Employee" request is selected. The request URL is "((baseURL)) /api/employees". The request body is a JSON object:

```
1 {
2   "fullName": "Ritik Koli",
3   "email": "ritik@gmail.com",
4   "phone": "9999955555",
5   "departmentId": 5
6 }
```

 The response status is "201 Created" with a response time of 186 ms and a body size of 338 B. The response body is a JSON object:

```
1 {
2   "message": "Employee created",
3   "data": {
4     "id": 5,
5     "fullName": "Ritik Koli",
6     "email": "ritik@gmail.com",
7     "phone": "9999955555",
8     "departmentId": 5,
9     "createdAt": "2025-11-23 20:37:54.761",
10    "updatedAt": "2025-11-23 20:37:54.761"
11  }
12 }
```

The screenshot shows the Postman interface with the same workspace. The "GET Get by id" request is selected. The request URL is "((baseURL)) /api/employees/2". The response status is "200 OK" with a response time of 182 ms and a body size of 305 B. The response body is a JSON object:

```
1 {
2   "id": 2,
3   "fullName": "Pranjal",
4   "email": "pranjal.srivastav.tech@gmail.com",
5   "phone": "9222222222",
6   "departmentId": 2,
7   "createdAt": "2025-11-21 12:26:47.0",
8   "updatedAt": "2025-11-23 14:38:18.0"
9 }
```

← → Home Workspaces ▾ API Network

🔍 Search Postman

Invite Upgrade ▾

Pranjal Srivastava's Workspace New Import

Collections

+

🔍 Search collections

▾ Visitor Management

▾ Visitors

GET Get all visitors

GET Get by id

▾ Departments

GET Get all departments

GET Get by id

▾ Employees

GET Get all employees

GET Get by id

▾ Visit Logs

GET Get all visit_logs

▾ Kafka

This folder is empty.

Add a request to start working.

POST Login

Environments

History

Flows

Files

BETA

GET Get all employees

Visitor Management / Employees / Get all employees

Save Share

GET ▾ ((baseURL)) /api/employees

Send ▾

Docs Params Authorization Headers (8) Body Scripts Settings

Query Params

Key	Value	Description
Key	Value	Description

Body Cookies Headers (4) Test Results ⓘ

200 OK · 393 ms · 843 B Save Response ⌵

{} JSON ▾ Preview Visualize ▾

```
1  [
2    {
3      "id": 1,
4      "fullName": "Reception Desk",
5      "email": "reception@company.com",
6      "phone": "9111111111",
7      "departmentId": 1,
8      "createdAt": "2025-11-21 12:20:47.0",
9      "updatedAt": "2025-11-21 12:20:47.0"
10   },
11   {
12     "id": 2,
13     "fullName": "Pranjal",
14     "email": "pranjal.srivastav.tech@gmail.com",
15     "phone": "9222222222",
16     "departmentId": 2,
17     "createdAt": "2025-11-21 12:20:47.0",
18     "updatedAt": "2025-11-23 14:38:18.0"
19   },
20   {
21     "id": 3,
22     "fullName": "IT Support Bot",
23     "email": "it.support@company.com",
24     "phone": "9193333333",
25     "departmentId": 3,
```

Cloud View Find and replace Console Terminal

Runner Start Proxy Cookies Vault Trash ⓘ

- Visitor Controller

The screenshot shows the Postman interface with a workspace named "Pranjal Srivastava's Workspace". The left sidebar shows a collection named "Visitor Management" with a sub-collection "Visitors". The "Create visitor" endpoint is selected, showing a POST request to `((baseURL)) /api/visitors`. The request body is a JSON object:

```
1 {
2   "fullName": "Pranjal",
3   "email": "5683pranjal@gmail.com",
4   "phone": "6727679273",
5   "purpose": "P2f Interview",
6   "idProof": "PAN-XXXX-XXX",
7   "hostEmployeeId": 2
8 }
```

The response is a 201 Created status with a JSON body:

```
1 {
2   "message": "Visitor created & check-in logged",
3   "data": {
4     "id": 4,
5     "fullName": "Pranjal",
6     "email": "5683pranjal@gmail.com",
7     "phone": "6727679273",
8     "purpose": "P2f Interview",
9     "hostEmployeeId": 2,
10    "idProof": "PAN-XXXX-XXX",
11    "createdAt": "2025-11-23 20:45:46.971",
12    "updatedAt": "2025-11-23 20:45:46.971"
13  }
14 }
```

The screenshot shows the Postman interface with the same workspace. The "Get all visitors" endpoint is selected, showing a GET request to `((baseURL)) /api/visitors`. The response is a 200 OK status with a JSON body:

```
1 [
2   {
3     "id": 1,
4     "fullName": "Suresh Kumar",
5     "email": "suresh.kumar@example.com",
6     "phone": "9876543210",
7     "purpose": "Job interview discussion",
8     "hostEmployeeId": 2,
9     "idProof": "AADHAR-XXXX-XXXX",
10    "createdAt": "2025-11-22 17:07:19.0",
11    "updatedAt": "2025-11-22 17:07:19.0"
12  },
13   {
14     "id": 2,
15     "fullName": "Sanket Dhole",
16     "email": "sanketjavahar.d@payoda.com",
17     "phone": "9876543210",
18     "purpose": "Job interview discussion",
19     "hostEmployeeId": 2,
20     "idProof": "AADHAR-XXXX-XXXX",
21     "createdAt": "2025-11-22 19:03:57.0",
22     "updatedAt": "2025-11-22 19:03:57.0"
23  },
24   {
25     "id": 3,
```

← → Home Workspaces ▾ API Network

🔍 Search Postman

Invite Upgrade ▾

Pranjal Srivastava's Workspace New Import

Collections

+

🔍 Search collections

▾ Visitor Management

▾ Visitors

GET Get all visitors

GET Get by id

▾ Departments

GET Get all departments

GET Get by id

▾ Employees

GET Get all employees

GET Get by id

▾ Visit Logs

GET Get all visit_logs

▾ Kafka

This folder is empty.

Add a request to start working.

POST Login

Environments

History

📄 Flows

📄 Files

BETA

GET Get by id

+

▾ No environment ▾

Visitor Management / Visitors / Get by id

Save ▾ Share

GET ▾ ((baseURL)) /api/visitors/1

Send ▾

Docs Params Authorization Headers (8) Body Scripts Settings

Query Params

Key	Value	Description
Key	Value	Description

Bulk Edit

Body Cookies Headers (4) Test Results ⓘ

200 OK · 1.11 s · 370 B

Save Response ⇄

JSON ▾ Preview Visualize ▾

```
1 {
2   "id": 1,
3   "fullName": "Suresh Kumar",
4   "email": "suresh.kumar@example.com",
5   "phone": "9876543210",
6   "purpose": "Job interview discussion",
7   "hostEmployeeId": 2,
8   "idProof": "AAB1AB-XXXX-XXXX",
9   "createdAt": "2025-11-22 17:07:19.0",
10  "updatedAt": "2025-11-22 17:07:19.0"
11 }
```

Cloud View 🔍 Find and replace 📄 Console 📄 Terminal

Runner ⚙️ Start Proxy 🍪 Cookies 🗑️ Vault 🗑️ Trash ⓘ

- VisitLogs Controller

The screenshot shows the Postman interface for a workspace named "Pranjal Srivastava's Workspace". The left sidebar displays a collection of API endpoints under "Visitor Management". The main panel shows a GET request to `((baseURL)) /api/visitlogs` with a status of **200 OK**. The response is a JSON array of three visit log entries.

Key	Value	Description
Key	Value	Description

```
1 [
2   {
3     "id": 3,
4     "visitorId": 3,
5     "hostEmployeeId": 2,
6     "checkIn": "2025-11-22 19:17:25.0",
7     "checkOut": "2025-11-22 19:18:57.0"
8   },
9   {
10    "id": 2,
11    "visitorId": 2,
12    "hostEmployeeId": 2,
13    "checkIn": "2025-11-22 19:03:58.0",
14    "checkOut": "2025-11-22 19:10:52.0"
15  },
16  {
17    "id": 1,
18    "visitorId": 1,
19    "hostEmployeeId": 2,
20    "checkIn": "2025-11-22 17:07:20.0"
21  }
22 ]
```

The screenshot shows the Postman interface for the same workspace. The main panel shows a GET request to `((baseURL)) /api/visitlogs/visitor/4` with a status of **200 OK**. The response is a JSON object containing one visit log entry.

```
1 {
2   {
3     "id": 4,
4     "visitorId": 4,
5     "hostEmployeeId": 2,
6     "checkIn": "2025-11-23 20:45:48.0"
7   }
8 }
```


- Kafka Controller

The screenshot shows the Postman interface for a workspace named "Pranjal Srivastava's Workspace". The left sidebar displays a collection of environments, including "Visitor Management", "Visitors", "Departments", "Employees", "Visit Logs", and "Kafka". The "Kafka" environment is selected, showing a "POST Check In" endpoint. The main panel displays the details of a POST request to the endpoint `((baseURL)) /api/kafka/checkin`. The request body is a JSON object with the following structure:

```
1 {
2   "visitorId": 4
3 }
```

The response is a 200 OK status, indicating a successful check-in event. The response body is a JSON object with the following structure:

```
1 {
2   "message": "Visitor CHECK-IN Kafka event sent",
3   "kafkaPayload": {
4     "event": "VISITOR_CHECK_IN",
5     "visitor": {
6       "id": 4,
7       "fullName": "Pranjal",
8       "email": "t68spranjal@gmail.com",
9       "phone": "6927679272",
10      "purpose": "F2f Interview",
11      "idProof": "PAN-XXXX-XXX"
12    },
13    "host": {
14      "id": 2,
15      "name": "Pranjal",
16      "email": "pranjal.srivastav.tech@gmail.com",
17      "departmentId": 2
18    }
19  }
20 }
```

The screenshot shows the Postman interface for a workspace named "Pranjal Srivastava's Workspace". The left sidebar displays a collection of environments, including "Visitor Management", "Visitors", "Departments", "Employees", "Visit Logs", and "Kafka". The "Kafka" environment is selected, showing a "POST Check Out" endpoint. The main panel displays the details of a POST request to the endpoint `((baseURL)) /api/kafka/checkout`. The request body is a JSON object with the following structure:

```
1 {
2   "visitorId": 4
3 }
```

The response is a 200 OK status, indicating a successful check-out event. The response body is a JSON object with the following structure:

```
1 {
2   "message": "Visitor CHECK-OUT Kafka event sent",
3   "kafkaPayload": {
4     "event": "VISITOR_CHECK_OUT",
5     "visitor": {
6       "id": 4,
7       "fullName": "Pranjal"
8     },
9     "visit": {
10      "visitlogId": 4,
11      "checkIn": "2025-11-23 20:45:48.0",
12      "checkOut": "2025-11-23 20:57:39.659317"
13    }
14  }
15 }
```

- Check-in logs

- Check-out logs

```
[Coordinator] Dispatching VISITOR_CHECK_IN
[HostActor] Email to host pranjai.srivastav.tech@gmail.com
[ITSupport] Sending WiFi credentials to 5683pranjal@gmail.com
[Security] Visitor ENTERED: Pranjai
📧 Email sent successfully to 5683pranjal@gmail.com
📧 Email sent successfully to pranjai.srivastav.tech@gmail.com



📧 Kafka Message Received:
{"event": "VISITOR_CHECK_OUT", "visitor": {"id": 4, "fullName": "Pranjai"}, "visit": {"visitLogId": 4, "checkIn": "2025-11-23 20:45:48.0", "checkOut": "2025-11-23 20:57:39.659317"}}

[Coordinator] Event JSON:
{
  "event": "VISITOR_CHECK_OUT",
  "visit": {
    "checkIn": "2025-11-23 20:45:48.0",
    "checkOut": "2025-11-23 20:57:39.659317",
    "visitLogId": 4
  },
  "visitor": {
    "fullName": "Pranjai",
    "id": 4
  }
}
[Coordinator] Dispatching VISITOR_CHECK_OUT
[Security] Visitor EXITED: Pranjai
```

```
📧 Kafka Message Received:
{"event": "VISITOR_CHECK_IN", "visitor": {"id": 4, "fullName": "Pranjai", "email": "5683pranjal@gmail.com", "phone": "6727679273", "purpose": "F2f Interview", "idProof": "PAN-XXXX-XXX"}, "host": {"id": 2, "name": "Pranjai", "email": "pranjai.srivastav.tech@gmail.com", "departmentId": 2}}

[Coordinator] Event JSON:
{
  "event": "VISITOR_CHECK_IN",
  "host": {
    "departmentId": 2,
    "email": "pranjai.srivastav.tech@gmail.com",
    "id": 2,
    "name": "Pranjai"
  },
  "visitor": {
    "email": "5683pranjal@gmail.com",
    "fullName": "Pranjai",
    "id": 4,
    "idProof": "PAN-XXXX-XXX",
    "phone": "6727679273",
    "purpose": "F2f Interview"
  }
}
[Coordinator] Dispatching VISITOR_CHECK_IN
[HostActor] Email to host pranjai.srivastav.tech@gmail.com
[ITSupport] Sending WiFi credentials to 5683pranjal@gmail.com
[Security] Visitor ENTERED: Pranjai
📧 Email sent successfully to 5683pranjal@gmail.com
📧 Email sent successfully to pranjai.srivastav.tech@gmail.com
```

- Emails to Host Employee of Visitor arrival and Visitor for Wifi Access

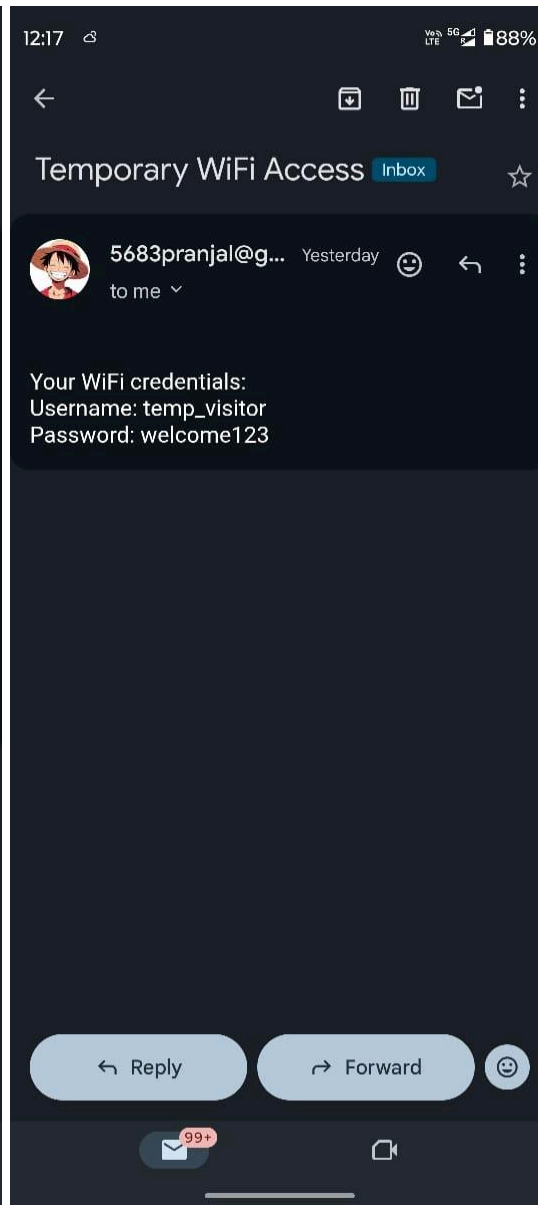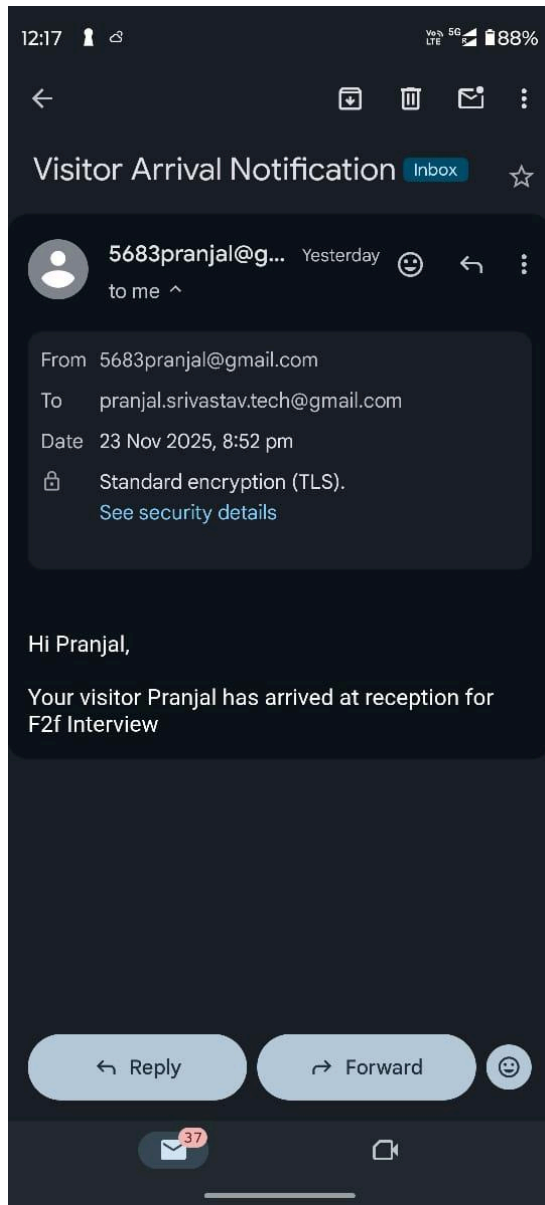

- DB tables data:

```
[mysql> select * from departments;
```

id	name	created_at	updated_at
1	Reception	2025-11-21 12:19:01	2025-11-21 12:19:01
2	HR	2025-11-21 12:19:01	2025-11-21 12:19:01
3	IT Support	2025-11-21 12:19:01	2025-11-21 12:19:01
4	Security	2025-11-21 12:19:01	2025-11-21 12:19:01
5	Admin	2025-11-23 20:31:01	2025-11-23 20:31:01

5 rows in set (0.058 sec)

```
[mysql> select * from employees;
```

id	full_name	email	phone	department_id	created_at	updated_at
1	Reception Desk	reception@company.com	9111111111	1	2025-11-21 12:20:47	2025-11-21 12:20:47
2	Pranjal	pranjal.srivastav.tech@gmail.com	9222222222	2	2025-11-21 12:20:47	2025-11-23 14:38:18
3	IT Support Bot	it.support@company.com	9333333333	3	2025-11-21 12:20:47	2025-11-21 12:20:47
4	Security Desk	security@company.com	9444444444	4	2025-11-21 12:20:47	2025-11-21 12:20:47
5	Ritik Koli	ritik@gmail.com	9999955555	5	2025-11-23 20:37:55	2025-11-23 20:37:55

5 rows in set (0.050 sec)

```
[mysql> select * from visitors;
```

id	full_name	email	phone	purpose	host_employee_id	id_proof	created_at	updated_at
1	Suresh Kumar	suresh.kumar@example.com	9876543210	Job interview discussion	2	AADHAR-XXXX-XXXX	2025-11-22 17:07:19	2025-11-22 17:07:19
2	Sanket Dhole	sanketjavahar.d@payoda.com	9876543210	Job interview discussion	2	AADHAR-XXXX-XXXX	2025-11-22 19:03:57	2025-11-22 19:03:57
3	Pranjal Srivastav	pranjal.s@payoda.com	8299631205	Client meeting	2	ABCDE1234F	2025-11-22 19:17:23	2025-11-22 19:17:23
4	Pranjal	5683pranjal@gmail.com	6727679273	F2f Interview	2	PAN-XXXX-XXX	2025-11-23 20:45:47	2025-11-23 20:45:47

4 rows in set (0.048 sec)

```
[mysql> select * from visit_logs;
```

id	visitor_id	host_employee_id	check_in	check_out
1	1	2	2025-11-22 17:07:20	NULL
2	2	2	2025-11-22 19:03:58	2025-11-22 19:10:52
3	3	2	2025-11-22 19:17:25	2025-11-22 19:18:57
4	4	2	2025-11-23 20:45:48	2025-11-23 20:57:40

4 rows in set (0.041 sec)