


# Operating System

Time : 1 hour

1. Which scheduling policy is most suitable for a time-shared operating system?

- a. Shortest Job First
- b. Round Robin
- c. First Come First Served
- d. Elevator

2. Which of the following system is represented by given figure

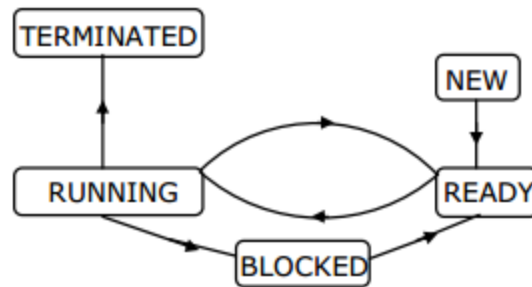

- a. Batch Operating System
- b. An OS with preemptive scheduler
- c. An OS with a non-preemptive scheduler
- d. A uni-programmed OS

3. System calls are usually invoked by using

- a. Software Interrupt
- b. Polling
- c. Indirect Jump
- d. Priviledged Instruction

4. Which of the following actions are **NOT** performed by the operating system when switching from process A to process B?

- a. Saving current register values and restoring saved register values for process B
- b. Changing address translation tables
- c. Swapping out memory image of process A to the disk
- d. Invalidating the translation look-aside buffer

5. Consider following code fragment:

```
if (fork() == 0)
    { a=a+5; printf("%d%d\n",a,&a); }
else { a=a-5; printf("%d%d\n",a,&a); }
```

let u,v be the values printed by the process and x,y be the values printed by child process then

which of the following is TRUE?

- a.  $u = x + 10$  and  $v = y$
- b.  $u = x + 10$  and  $v \neq y$
- c.  $u + 10 = x$  and  $v = y$
- d.  $u + 10 = x$  and  $v \neq y$

6. Consider following statements about user level threads and kernel level threads. Which one is FALSE?

- a. Context switch time is longer for kernel level threads than for user level threads
- b. User level threads do not need any hardware support
- c. related kernel level threads can be scheduled on different processors.
- d. Blocking one kernel level thread blocks all related threads.

7. A process executes following code

```
for ( i=0 ; i<n ; i++ ) fork( );
```

the total number of child process created is

- a.  $n$
- b.  $2^n - 1$
- c.  $2^n$
- d.  $2^{n+1} - 1$

8. A solution to dining philosophers problem which avoids deadlock is

- a. Ensure that all philosophers pick up the left fork before the right.
- b. Ensure that all philosophers pick up the right fork before the left.
- c. Ensure that one particular philosopher picks the left fork before the right fork, and that all other philosophers pick up the right fork before the left.
- d. None of the Above.

9.

Consider Peterson's algorithm for mutual exclusion between two concurrent processes  $i$  and  $j$ . The program executed by process  $i$  is shown below.

```
repeat
    flag[i]=true;
    turn=j;
    while (P) do no-op;
    Enter critical section, perform actions, then
    exit critical section
    Flag[i]=false;
    Perform other non-critical section actions.
Until false;
```

For the program to guarantee mutual exclusion, the predicate  $P$  in the while loop should be

- a. flag[ j ] = true and turn = i
- b. flag[ j ] = true and turn = j
- c. flag [ i ] = true and turn = j
- d. flag [ i ] = true and turn = i

10.

A system has  $n$  resources  $R_0, \dots, R_{n-1}$ , and  $k$  processes  $P_0, \dots, P_{k-1}$ . The implementation of the resource request logic of each process  $P_i$  is as follows:

```

if (i%2==0) {
    if (i<n) request  $R_i$ ;
    if (i+2<n) request  $R_{i+2}$ ;
}
else {
    if (i<n) request  $R_{n-i}$ ;
    if (i+2<n) request  $R_{n-i-2}$ ;
}

```

In which one of the following situations is a deadlock possible?

- a.  $n=40, k=26$
- b.  $n=21, k=12$
- c.  $n=20, k=10$
- d.  $n=41, k=19$

11. Suppose  $n$  processes  $P_1, \dots, P_n$  share  $m$  identical resource units which can be reserved and released one at a time. the maximum resource requirement of process  $P_i$  is  $S_i$  where  $S_i > 0$ . which one of the following is a sufficient condition for ensuring that deadlock does not occur.

- a.  $\forall i, S_i < m$
- b.  $\forall i, S_i < n$
- c.  $\sum_{i=1}^n S_i < (m + n)$
- d.  $\sum_{i=1}^n S_i < (m * n)$

12. Total size of address space in a virtual memory system is limited by

- a. the length of MAR
- b. the available secondary storage
- c. the available main memory
- d. None of the above

13. The capacity of memory units is defined by the number of words multiplied by the number of

bits/work, how many separate address and data lines are needed for memory of  $4K \times 16$

- a. 10 address, 16 data lines
- b. 11 address , 8 data lines
- c. 12 address, 16 data lines
- d. 12 address, 12 data lines

14. Thrashing

- a. Reduces page IO
- b. Decreases the degree of multi-programming
- c. Implies excessive page IO
- d. Improves system performance.

15. Locality of reference implies that the page reference being made by the process

- a. Will always be to the page used in previous page reference
- b. Is likely to be one of the pages used in last few page references
- c. Will always be to one of the pages existing in memory
- d. Will always lead to page fault

16. What is swap space in disk used for ?

- a. Saving temporary HTML pages
- b. Saving process data
- c. Storing the super-block
- d. Storing the device drivers

17. The root directory of a disk should be placed

- a. At a fixed address in main memory
- b. At fixed location on disk
- c. Any where on the disk
- d. Any where on system disk

18. Using the larger block size in a fixed block size file system leads to

- a. better disk throughput but poor disk space utilization
- b. better disk throughput and better disk space utilization
- c. poorer disk throughput and better disk space utilization
- d. poorer disk throughput and poorer disk space utilization

19. Which of the following is a real time system?

- a. On-line railway reservation system
- b. A process control system
- c. Aircraft control system
- d. Payroll processing system

20. A part of system software which under all circumstances must reside in main memory is
- Text Editor
  - Assembler
  - Linker
  - Loader
21. Banker's algorithm for resource allocation deals with
- Deadlock avoidance
  - Deadlock prevention
  - Deadlock recovery
  - Mutual exclusion
22. The size of virtual memory depends on
- Data Bus
  - Address Bus
  - Main Memory
  - None
23. An operating system contains 3 user processes each requiring 2 units of resource R. The minimum number of units of R required such that deadlock will never occur?
- 3
  - 4
  - 5
  - 6
24. Memory protection is of no use in a
- Single user system
  - non multi-programming system
  - non multi-tasking system
  - None
25. Fence register is used for
- CPU protection
  - memory protection
  - File protection
  - All of the above
26. Which of the following is/are single user operating system
- MS-DOS
  - UNIX
  - XENIX
  - both a and c
27. In a multi-user operating system, 20 requests are made to use a particular resource per hour, on an average. the probability that no request is made in 45 minutes is

- a.  $e^{-15}$
- b.  $e^{-5}$
- c.  $1 - e^{-5}$
- d.  $1 - e^{-10}$

28. To obtain better memory utilization dynamic loading is used, with dynamic loading a routine is not loaded until it is called for implementing dynamic loading

- a. special support from hardware is required
- b. special support from operating system is required
- c. special support from both hardware and operating system is required
- d. user program can implement dynamic loading without any special support from hardware or OS.

29. Which of the following is TRUE?

- a. Overlays are used to increase size of physical memory
- b. Overlays are used to increase the logical address space
- c. When Overlays are used the size of processes is not limited to size of physical memory
- d. Overlays are used whenever physical address space is smaller than logical address space.

30. The main function of shared memory is to

- a. Use primary memory efficiently
- b. do intra process communication
- c. do inter process communication
- d. None

31. If there are 32 segments of 1KB each then logical address should have

- a. 13 bits
- b. 14 bits
- c. 15 bits
- d. 16 bits

32. Dirty bit for a page in page table

- a. helps avoids unnecessary writes
- b. helps maintain LRU information
- c. allows only read on page
- d. None

33. Each process  $P_i$ ,  $i=1..9$  is coded as follows

repeat

```

P ( Mutex )
{ Critical Section }
V ( Mutex )

```

forever

the code for P10 is identical except that it uses V ( Mutex ) instead of P ( Mutex ). What is the largest number of processes that can be inside the critical section at any moment

- a. 1
- b. 2
- c. 3
- d. 0

34. Working set (r,k) at an instance of time t, is set of ?

- a. k future references that operating system will make
- b. Future references that the operating system will make in next 'k' time units
- c. k references with higher frequency
- d. Pages that have been referenced in the last k time units

35. Which of the following is TRUE?

- a. Fixed partition memory organization has a problem called external fragmentation.
- b. Dynamic partition memory organization has a problem called internal fragmentation
- c. Paging has a problem called internal fragmentation.
- d. Paging has a problem called external fragmentation.

36. Which one of the following is NOT an advantage of using shared, dynamically linked libraries as opposed to using statically linked libraries?

- a. Smaller sizes of executable files
- b. Lesser overall page fault rate in that system
- c. Faster program startup
- d. Existing program need not be re-linked to take advantage of newer version of libraries.

37. In Linux , what command is used used to count total number of lines, words and characters contained in a file

- a. countw
- b. wcount
- c. wc
- d. None

38. How many primary partitions can exist on one drive?

- a. 16
- b. 4
- c. 2
- d. 1

39. The exception to the fact that any process in UNIX, has a parent is

- a. Dev

- b. Sh
- c. Kernel
- d. Login

40. Kernel is not involved

- a. When a read operation is done
- b. When a pressed key is echoed on screen
- c. In resource allocation
- d. None