

Manual




Install Minikube Software Set for
OSX Platform

Prerequisite

Install brew for MACOS

1. Install brew module by command:l.

`/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"` and enter key stroke for continue

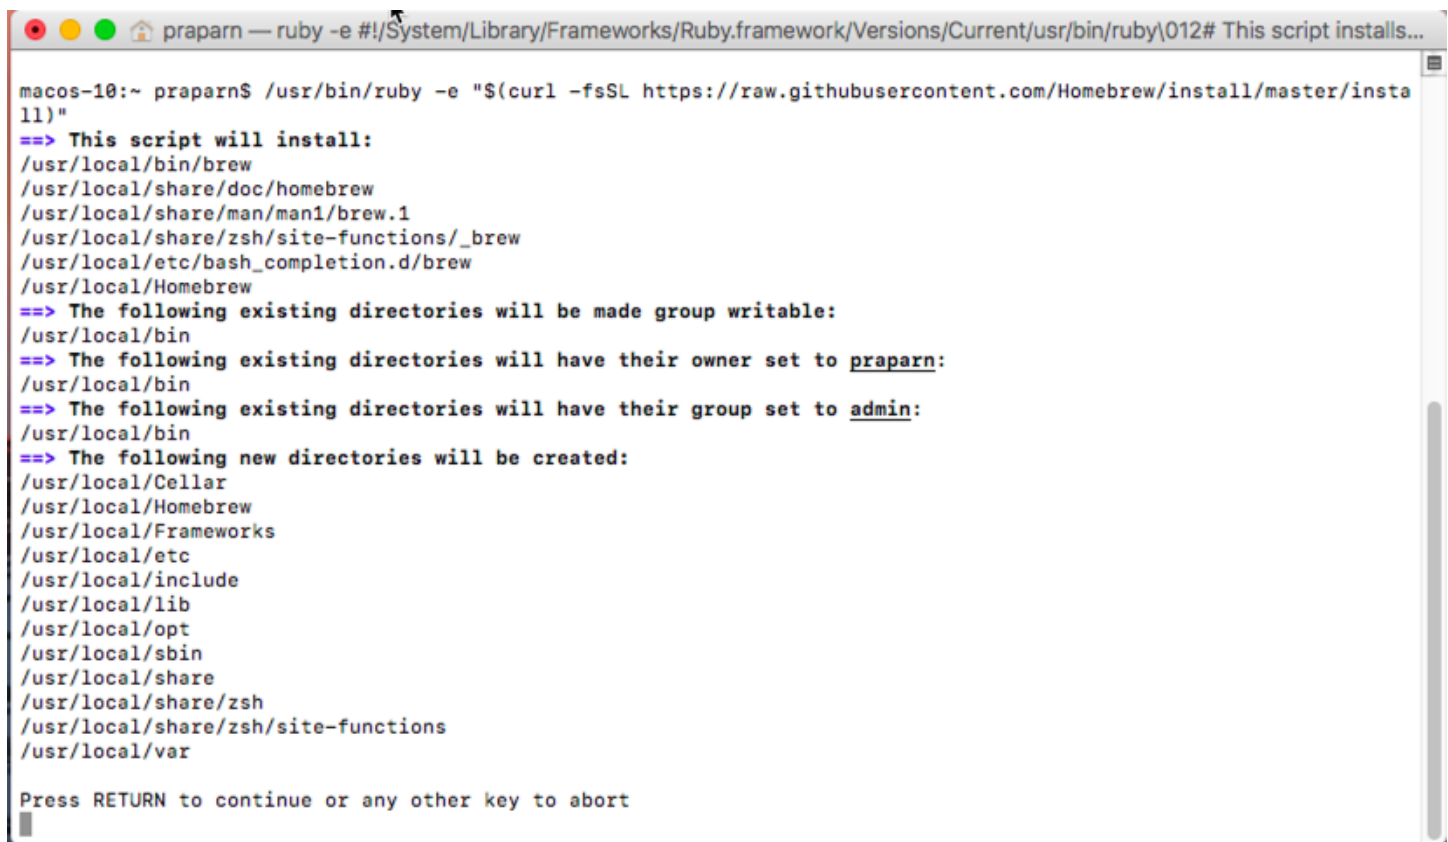A terminal window titled 'praparn — ruby -e #!/System/Library/Frameworks/Ruby.framework/Versions/Current/usr/bin/ruby\012# This script installs...' is shown. The terminal displays the output of the Homebrew installation script. The output lists the files and directories that will be installed, including /usr/local/bin/brew, /usr/local/share/doc/homebrew, /usr/local/share/man/man1/brew.1, /usr/local/share/zsh/site-functions/_brew, /usr/local/etc/bash_completion.d/brew, and /usr/local/Homebrew. It also lists existing directories that will be made group writable, have their owner set to 'praparn', or have their group set to 'admin'. Finally, it lists the new directories that will be created, such as /usr/local/Cellar, /usr/local/Homebrew, /usr/local/Frameworks, /usr/local/etc, /usr/local/include, /usr/local/lib, /usr/local/opt, /usr/local/sbin, /usr/local/share, /usr/local/share/zsh, /usr/local/share/zsh/site-functions, and /usr/local/var. The terminal ends with the prompt 'Press RETURN to continue or any other key to abort' and a cursor on the next line.

```
macos-10:~ praparn$ /usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
==> This script will install:
/usr/local/bin/brew
/usr/local/share/doc/homebrew
/usr/local/share/man/man1/brew.1
/usr/local/share/zsh/site-functions/_brew
/usr/local/etc/bash_completion.d/brew
/usr/local/Homebrew
==> The following existing directories will be made group writable:
/usr/local/bin
==> The following existing directories will have their owner set to praparn:
/usr/local/bin
==> The following existing directories will have their group set to admin:
/usr/local/bin
==> The following new directories will be created:
/usr/local/Cellar
/usr/local/Homebrew
/usr/local/Frameworks
/usr/local/etc
/usr/local/include
/usr/local/lib
/usr/local/opt
/usr/local/sbin
/usr/local/share
/usr/local/share/zsh
/usr/local/share/zsh/site-functions
/usr/local/var

Press RETURN to continue or any other key to abort
```

2. Input password for grant privilege for install and wait until all install process was done.

```
Press RETURN to continue or any other key to abort
==> /usr/bin/sudo /bin/chmod u+rw /usr/local/bin
Password: [?]
```

```
==> /usr/bin/sudo /bin/chmod g+rw /usr/local/bin
==> /usr/bin/sudo /usr/sbin/chown praparn /usr/local/bin
==> /usr/bin/sudo /usr/bin/chgrp admin /usr/local/bin
==> /usr/bin/sudo /bin/mkdir -p /usr/local/Cellar /usr/local/Homebrew /usr/local/Frameworks /usr/local/etc /usr/local/include /usr/local/lib /usr/local/opt /usr/local/sbin /usr/local/share /usr/local/share/zsh /usr/local/share/zsh/site-functions /usr/local/var
==> /usr/bin/sudo /bin/chmod g+rw /usr/local/Cellar /usr/local/Homebrew /usr/local/Frameworks /usr/local/etc /usr/local/include /usr/local/lib /usr/local/opt /usr/local/sbin /usr/local/share /usr/local/share/zsh /usr/local/share/zsh/site-functions /usr/local/var
==> /usr/bin/sudo /bin/chmod 755 /usr/local/share/zsh /usr/local/share/zsh/site-functions
==> /usr/bin/sudo /usr/sbin/chown praparn /usr/local/Cellar /usr/local/Homebrew /usr/local/Frameworks /usr/local/etc /usr/local/include /usr/local/lib /usr/local/opt /usr/local/sbin /usr/local/share /usr/local/share/zsh /usr/local/share/zsh/site-functions /usr/local/var
==> /usr/bin/sudo /usr/bin/chgrp admin /usr/local/Cellar /usr/local/Homebrew /usr/local/Frameworks /usr/local/etc /usr/local/include /usr/local/lib /usr/local/opt /usr/local/sbin /usr/local/share /usr/local/share/zsh /usr/local/share/zsh/site-functions /usr/local/var
==> /usr/bin/sudo /bin/mkdir -p /Users/praparn/Library/Caches/Homebrew
==> /usr/bin/sudo /bin/chmod g+rw /Users/praparn/Library/Caches/Homebrew
==> /usr/bin/sudo /usr/sbin/chown praparn /Users/praparn/Library/Caches/Homebrew
==> /usr/bin/sudo /bin/mkdir -p /Library/Caches/Homebrew
==> /usr/bin/sudo /bin/chmod g+rw /Library/Caches/Homebrew
==> /usr/bin/sudo /usr/sbin/chown praparn /Library/Caches/Homebrew
==> Searching online for the Command Line Tools
==> /usr/bin/sudo /usr/bin/touch /tmp/.com.apple.dt.CommandLineTools.installondemand.in-progress
```

3. After install brew have finished install. Check brew by command: brew update


```
==> Tapping homebrew/core
Cloning into '/usr/local/Homebrew/Library/Taps/homebrew/homebrew-core'...
remote: Counting objects: 4449, done.
remote: Compressing objects: 100% (4250/4250), done.
remote: Total 4449 (delta 34), reused 462 (delta 13), pack-reused 0
Receiving objects: 100% (4449/4449), 3.53 MiB | 1.16 MiB/s, done.
Resolving deltas: 100% (34/34), done.
Tapped 4248 formulae (4,492 files, 11MB)
==> Cleaning up /Library/Caches/Homebrew...
==> Migrating /Library/Caches/Homebrew to /Users/praparn/Library/Caches/Homebrew...
==> Deleting /Library/Caches/Homebrew...
Already up-to-date.
==> Installation successful!

==> Homebrew has enabled anonymous aggregate user behaviour analytics.
Read the analytics documentation (and how to opt-out) here:
http://docs.brew.sh/Analytics.html


==> Next steps:
- Run `brew help` to get started
- Further documentation:
http://docs.brew.sh
[macos-10:~ praparn$ brew update
Already up-to-date.
macos-10:~ praparn$ ]
```



Install Docker Toolbox

1. Right Click on "DockerToolbox.dmg" and select installer

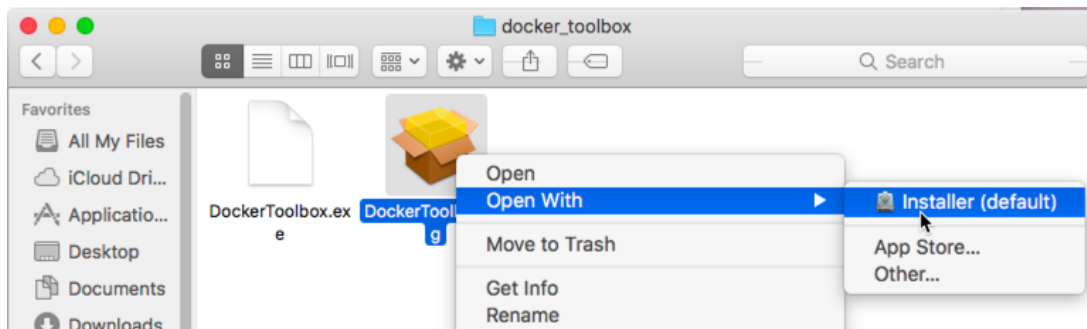

2. Following screen for setup

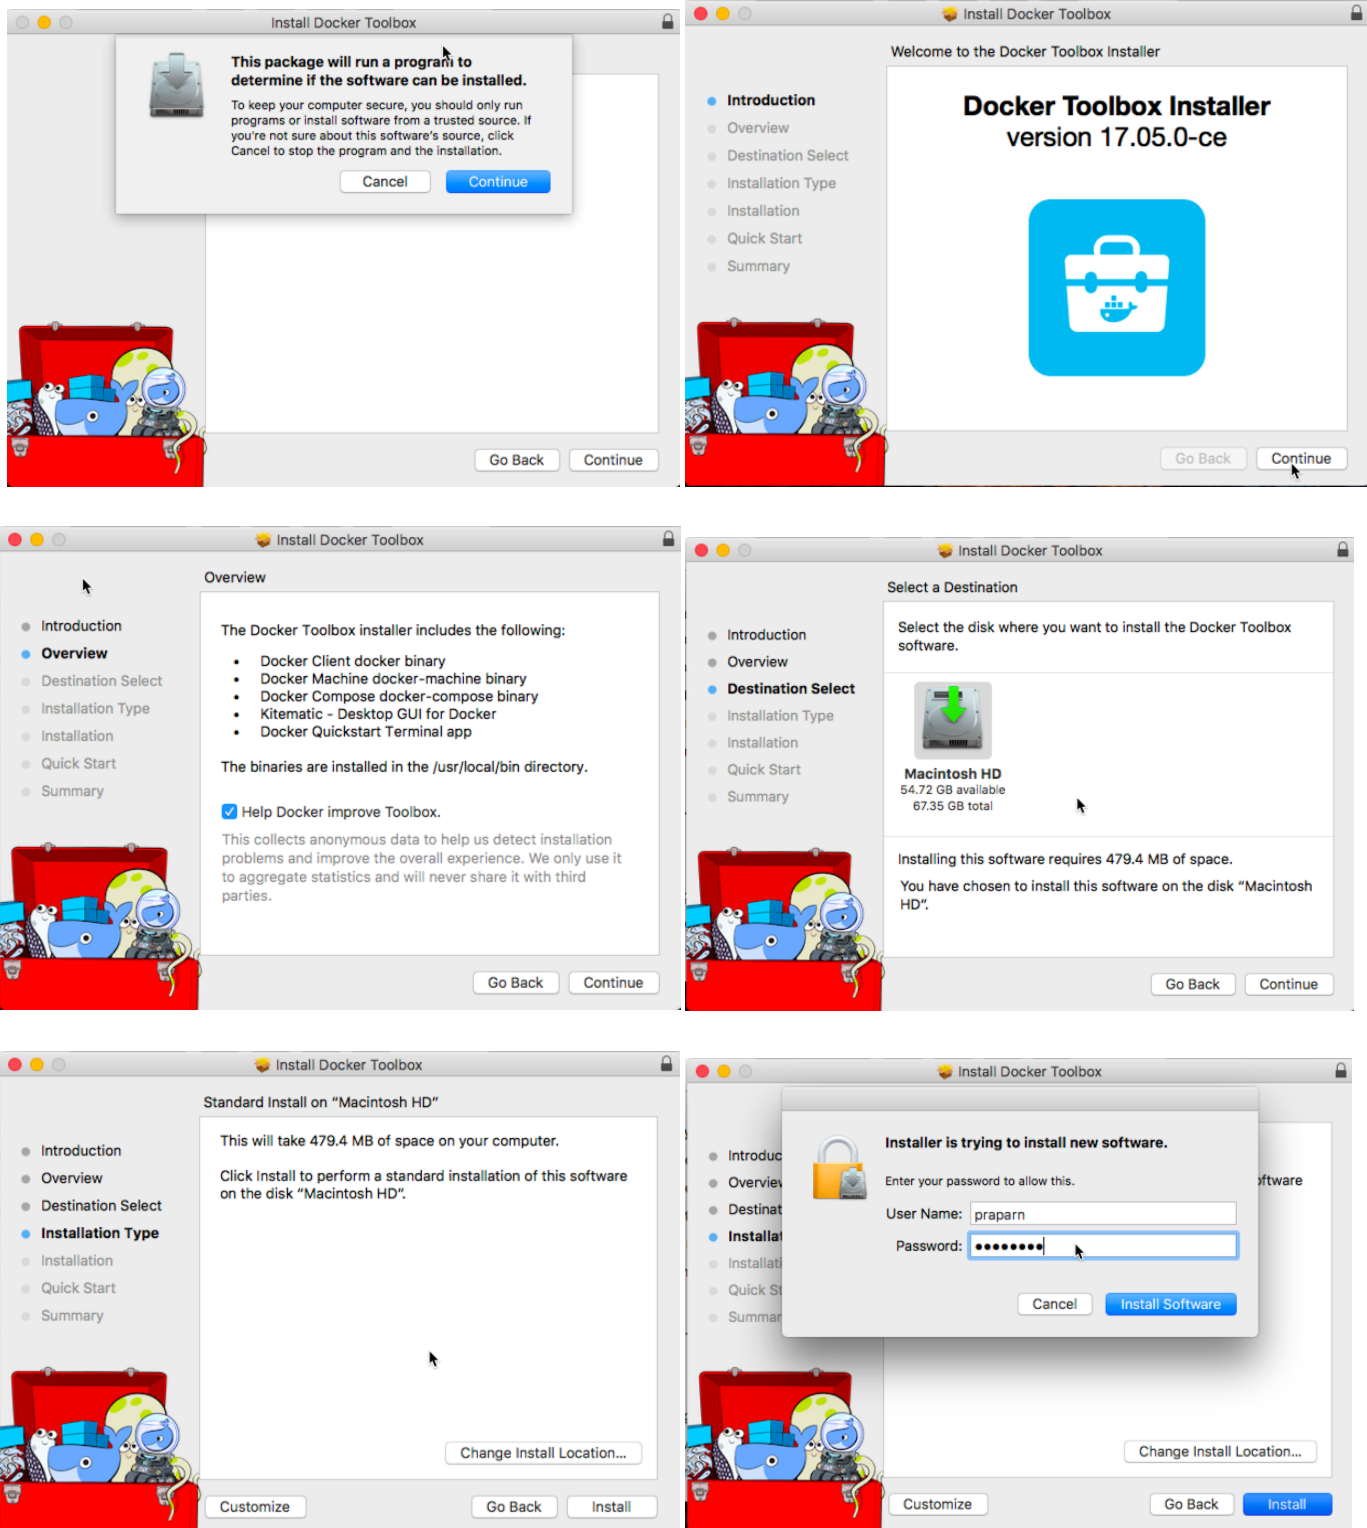

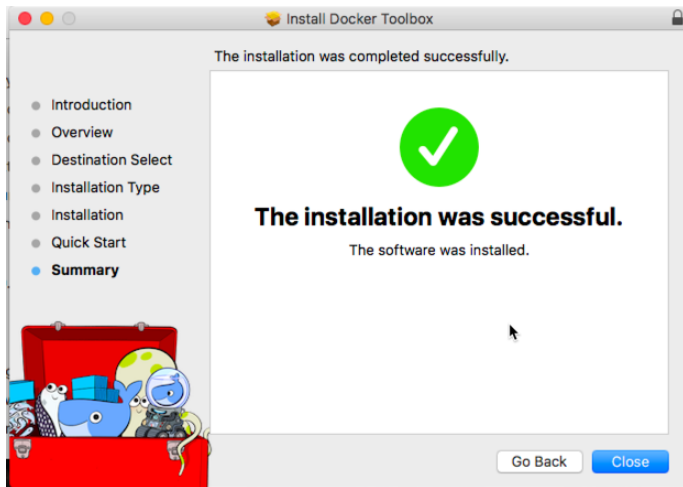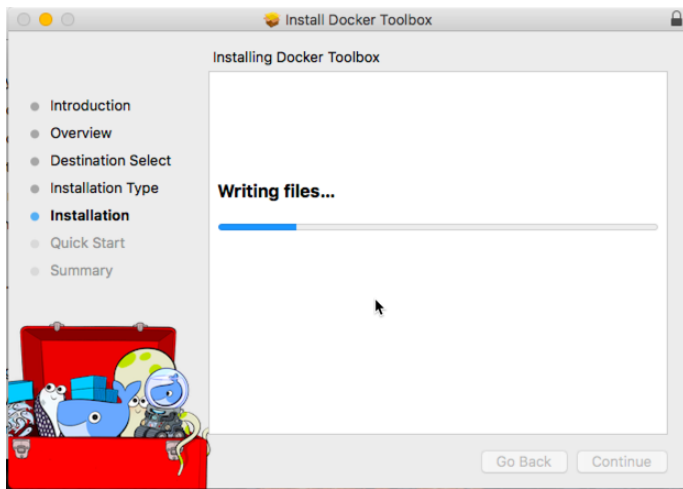

3. Check version of Docker Tools by command: `docker version`

A screenshot of a macOS terminal window. The title bar shows a home icon, the name 'praparn', and the command '-bash' with a window size of '114x32'. The terminal content shows the command 'docker version' being executed. The output lists client information: Version 17.05.0-ce, API version 1.29, Go version go1.7.5, Git commit 89658be, Built Fri May 5 15:36:11 2017, and OS/Arch darwin/amd64. It then displays an error message: 'Cannot connect to the Docker daemon at unix:///var/run/docker.sock. Is the docker daemon running?'. The prompt 'macos-10:~ praparn\$' is visible at the bottom.

```
macos-10:~ praparn$ docker version
Client:
 Version:      17.05.0-ce
 API version:  1.29
 Go version:   go1.7.5
 Git commit:   89658be
 Built:        Fri May  5 15:36:11 2017
 OS/Arch:      darwin/amd64
Cannot connect to the Docker daemon at unix:///var/run/docker.sock. Is the docker daemon running?
macos-10:~ praparn$
```

Install minikube / Initial minikube machine

1. Install minikube by command: `brew cask install minikube`

Or

```
curl -Lo minikube https://storage.googleapis.com/minikube/releases/v0.28.0/minikube-darwin-amd64 && chmod +x minikube &&
sudo mv minikube /usr/local/bin/
```

```
praparn — -bash — 114x32
[macos-10:~ praparn$ brew cask install minikube
==> Tapping caskroom/cask
Cloning into '/usr/local/Homebrew/Library/Taps/caskroom/homebrew-cask'...
remote: Counting objects: 3748, done.
remote: Compressing objects: 100% (3729/3729), done.
remote: Total 3748 (delta 34), reused 537 (delta 15), pack-reused 0
Receiving objects: 100% (3748/3748), 1.27 MiB | 1.18 MiB/s, done.
Resolving deltas: 100% (34/34), done.
Tapped 0 formulae (3,757 files, 4.0MB)
==> Creating Caskroom at /usr/local/Caskroom
==> We'll set permissions properly so we won't need sudo in the future
[Password:
==> Satisfying dependencies
==> Installing Formula dependencies from Homebrew
kubernetes-cli ... done
complete
==> Downloading https://storage.googleapis.com/minikube/releases/v0.20.0/minikube-darwin-amd64
##### 100.0%
==> Verifying checksum for Cask minikube
==> Installing Cask minikube
==> Linking Binary 'minikube-darwin-amd64' to '/usr/local/bin/minikube'.
🔧 minikube was successfully installed!
macos-10:~ praparn$
```

```
praparns-MacBook-Pro:~ praparn$ minikube version
minikube version: v0.19.0
praparns-MacBook-Pro:~ praparn$ curl -Lo minikube https://storage.googleapis.com/minikube/releases/v
0.24.1/minikube-darwin-amd64 && chmod +x minikube && sudo mv minikube /usr/local/bin/
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100 39.3M  100 39.3M    0     0  2201k      0  0:00:18  0:00:18 --:--:-- 2398k
praparns-MacBook-Pro:~ praparn$ minikube version
minikube version: v0.24.1
praparns-MacBook-Pro:~ praparn$
```


2. Check minikube interactive command

```
macos-10:~ praparn$ minikube
Minikube is a CLI tool that provisions and manages single-node Kubernetes clusters optimized for development workf
lows.

Usage:
  minikube [command]

Available Commands:
  addons          Modify minikube's kubernetes addons
  completion      Outputs minikube shell completion for the given shell (bash)
  config          Modify minikube config
  dashboard       Opens/displays the kubernetes dashboard URL for your local cluster
  delete          Deletes a local kubernetes cluster
  docker-env      Sets up docker env variables; similar to '$(docker-machine env)'
  get-k8s-versions Gets the list of available kubernetes versions available for minikube
  ip              Retrieves the IP address of the running cluster
  logs            Gets the logs of the running localkube instance, used for debugging minikube, not user code
  mount           Mounts the specified directory into minikube
  profile         Profile sets the current minikube profile
  service         Gets the kubernetes URL(s) for the specified service in your local cluster
  ssh             Log into or run a command on a machine with SSH; similar to 'docker-machine ssh'
  ssh-key         Retrieve the ssh identity key path of the specified cluster
  start           Starts a local kubernetes cluster
  status          Gets the status of a local kubernetes cluster
  stop            Stops a running local kubernetes cluster
  update-context  Verify the IP address of the running cluster in kubeconfig.
  version         Print the version of minikube
```

3. Install kubectl by command: brew install kubectl

Or

```
curl -LO https://storage.googleapis.com/kubernetes-release/release/`curl -s https://storage.googleapis.com/kubernetes-release/release/stable.txt`/bin/darwin/amd64/kubectl && chmod +x ./kubectl && sudo mv ./kubectl /usr/local/bin/kubectl
```

```
praparn — -bash — 114x32
[macos-10:~ praparn$ brew install kubectl
Updating Homebrew...
^[[C==> Auto-updated Homebrew!
Updated 2 taps (caskroom/cask, homebrew/core).
==> Updated Formulae
camlp4      menhir      ocamlbuild  perl        subversion  vim@7.4
compcert    ocaml       ocamlstdl   rex         vim
Warning: kubernetes-cli 1.6.6 is already installed
[macos-10:~ praparn$

praparns-MacBook-Pro:~ praparn$ curl -LO https://storage.googleapis.com/kubernetes-release/release/`curl -s https://storage.googleapis.com/kubernetes-release/release/stable.txt`/bin/darwin/amd64/kubectl && chmod +x ./kubectl && sudo mv ./kubectl /usr/local/bin/kubectl
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total   Spent    Left  Speed
100 63.7M  100 63.7M    0     0 1297k      0  0:00:50  0:00:50 --:--:-- 2355k
Password:
praparns-MacBook-Pro:~ praparn$
```

4. Check kubectl interactive command

```
praparn — -bash — 114x32
[macos-10:~ praparn$ kubectl
kubectl controls the Kubernetes cluster manager.

Find more information at https://github.com/kubernetes/kubernetes.

Basic Commands (Beginner):
  create      Create a resource by filename or stdin
  expose      Take a replication controller, service, deployment or pod and expose it as a new
Kubernetes Service
  run         Run a particular image on the cluster
  set         Set specific features on objects

Basic Commands (Intermediate):
  get         Display one or many resources
  explain     Documentation of resources
  edit        Edit a resource on the server
  delete      Delete resources by filenames, stdin, resources and names, or by resources and
label selector
```

5. Special for pilot "docker for mac with K8S" you need to switch context to minikube before start next

```
praparns-MacBook-Pro:~ praparn$ kubectl config get-contexts
CURRENT  NAME          CLUSTER          AUTHINFO          NAMESPACE
         local        default-cluster  default-admin
         minikube  minikube        minikube
         vagrant   vagrant         vagrant
*        docker-for-desktop  docker-for-desktop-cluster  docker-for-desktop
         first     first           first
praparns-MacBook-Pro:~ praparn$ kubectl config use-context minikube
Switched to context "minikube".
```

6. Configure minikube for use kubernetes version 1.10.0 by command: minikube config set kubernetes-version v1.10.0

```
praparns-MacBook-Pro% minikube config set kubernetes-version v1.10.0
praparns-MacBook-Pro% minikube get-k8s-versions
The following Kubernetes versions are available when using the localkube bootstrapper:
  - v1.10.0
  - v1.9.4
  - v1.9.0
  - v1.8.0
  - v1.7.5
  - v1.7.4
  - v1.7.3
  - v1.7.2
  - v1.7.0
  - v1.7.0-rc.1
  - v1.7.0-alpha.2
  - v1.6.4
  - v1.6.3
  - v1.6.0
  - v1.6.0-rc.1
  - v1.6.0-beta.4
  - v1.6.0-beta.3
  - v1.6.0-beta.2
  - v1.6.0-alpha.1
  - v1.6.0-alpha.0
  - v1.5.3
  - v1.5.2
  - v1.5.1
  - v1.4.5
  - v1.4.3
  - v1.4.2
  - v1.4.1
  - v1.4.0
  - v1.3.7
  - v1.3.6
  - v1.3.5
  - v1.3.4
  - v1.3.3
  - v1.3.0
praparns-MacBook-Pro% 
```

7. Create minikube machine by command:

```
minikube start --vm-driver=virtualbox profile=minikubelab1
```

```
praparns-MacBook-Pro% minikube start --vm-driver=virtualbox profile=minikubelab1
Starting local Kubernetes v1.10.0 cluster...
Starting VM...
Getting VM IP address...
Moving files into cluster...
Downloading localkube binary
 173.54 MB / 173.54 MB [=====] 100.00% 0s
  65 B / 65 B [=====] 100.00% 0s
Setting up certs...
Connecting to cluster...
Setting up kubeconfig...
Starting cluster components...
Kubectl is now configured to use the cluster.
Loading cached images from config file.
praparns-MacBook-Pro%
```

8. Check status of minikube's machine by command: "minikube status", "minikube ip"

```
praparns-MacBook-Pro% minikube status
minikube: Running
cluster: Running
kubectl: Correctly Configured: pointing to minikube-vm at 192.168.99.100
praparns-MacBook-Pro% minikube ip
192.168.99.100
praparns-MacBook-Pro%
```

- [illegible]

- ```
praparns-MacBook-Pro% kubectl get nodes
NAME STATUS ROLES AGE VERSION
minikube Ready <none> 1m v1.10.0

praparns-MacBook-Pro% kubectl get cs
NAME STATUS MESSAGE ERROR
scheduler Healthy ok
controller-manager Healthy ok
etcd-0 Healthy {"health": "true"}
praparns-MacBook-Pro%
```

11. Check status of kubernetes's elements by command

- a. `kubectl get pods` → check pods element
- b. `kubectl get deployment` → check deployment element
- c. `kubectl get svc` → check service deploy on kubernetes
- d. `kubectl describe svc` → check service description on kubernetes

```
praparns-MacBook-Pro% kubectl get pods
No resources found.
praparns-MacBook-Pro% kubectl get deployment
No resources found.
praparns-MacBook-Pro% kubectl get svc
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
kubernetes ClusterIP 10.96.0.1 <none> 443/TCP 2m
praparns-MacBook-Pro% kubectl describe svc
Name: kubernetes
Namespace: default
Labels: component=apiserver
 provider=kubernetes
Annotations: <none>
Selector: <none>
Type: ClusterIP
IP: 10.96.0.1
Port: https 443/TCP
TargetPort: 8443/TCP
Endpoints: 10.0.2.15:8443
Session Affinity: ClientIP
Events: <none>
praparns-MacBook-Pro% █
```

12. Test deployment "nginx" web server by command:

- a. `kubectl run webtest --image=labdocker/nginx:latest --port=80` → deployment nginx (image: labdocker/nginx:latest) with port 80 service
- b. `kubectl expose deployment webtest --target-port=80 --type=NodePort` → expose pods with service 80 (http)


```
praparns-MacBook-Pro% kubectl run webtest --image=labdocker/nginx:latest --port=80
deployment "webtest" created
praparns-MacBook-Pro% kubectl expose deployment webtest --target-port=80 --type=NodePort
service "webtest" exposed
praparns-MacBook-Pro% █
```



13. Check port mapping for service with host by command:
- kubectl get svc webtest → check mapping service
  - kubectl describe svc webtest → check description of service

```
praparns-MacBook-Pro% kubectl get svc webtest
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
webtest NodePort 10.102.248.172 <none> 80:30075/TCP 27s
praparns-MacBook-Pro% kubectl describe svc webtest
Name: webtest
Namespace: default
Labels: run=webtest
Annotations: <none>
Selector: run=webtest
Type: NodePort
IP: 10.102.248.172
Port: <unset> 80/TCP
TargetPort: 80/TCP
NodePort: <unset> 30075/TCP
Endpoints: <none>
Session Affinity: None
External Traffic Policy: Cluster
Events: <none>
praparns-MacBook-Pro%
```

14. Test open webpage with port describe on command above (This example: <http://192.168.99.101:30075>)

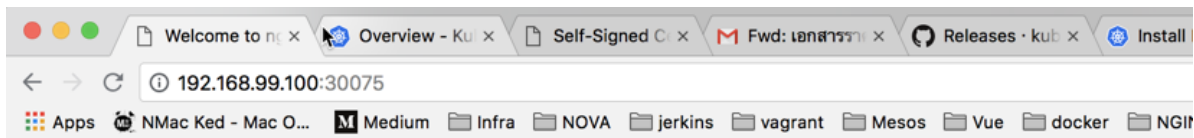

## Welcome to nginx!

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

For online documentation and support please refer to [nginx.org](http://nginx.org).  
Commercial support is available at [nginx.com](http://nginx.com).

*Thank you for using nginx.*

15. Stop deployment by command and recheck again
- kubectl delete svc webtest
  - kubectl delete deployment webtest

```
praparns-MacBook-Pro:localkube praparn$ kubectl delete svc webtest
service "webtest" deleted
praparns-MacBook-Pro:localkube praparn$ kubectl delete deployment webtest
deployment "webtest" deleted
praparns-MacBook-Pro:localkube praparn$
```