

Name :- Prasad Uttam Belote

Class :- TYCS / A

Roll No :- 8210

Final Year Project

Men Salon Management System

Title : Men Salon Management System

Objective :

- 1) The main objective of Men Salon Web App is to save time and complexity of work at salon.
- 2) Other than that it is to evaluate best solution for booking online appointments and manage the same
- 3) It is to manage the accounts of customers or saloon owners.
- 4) It is to replace existing system and move towards new era.

Project Description :

Men Salon management System is developed in HTML/CSS / Javascript / Bootstrap With JSP/MYSQL Database that will manage customer appointments, Total services, payments etc. It consist of three option . First is for Admin , second for user and third for employee. Admin can manages customers, employees, appointments, payments and services . User can view website , Home page ,Services, About us and Contact us and can be book their appointments and later on can do payment in online mode.Employee can only view appointments.

PROJECT OVERVIEW:

Admin : Manages customers, employees, appointments, payments and services.

Customer: can book appointments and do payments.

Employees: can view appointments.

Appointments: It include appointments details.

Payments: It includes payments details.

Services: It include all the services of salon.

Project Category :

Web Application

Structures:

Tools/Technology used-

Fronted : HTML/CSS/JAVASCRIPT/ BOOTSTRAP

Backened : JSP/MYSQL

Web browser : Chrome , Firefox, Opera etc.

Hardware Requirements:

1 GB ram , 200GB HDD , intel 1.6g GHZ Processor

Software Requirements:

Windows XP,Windows 7,8,9,10. Netbeans and Xampp.

Module Description :

Admin: This module allows the admin to manage the system. The admin can add/edit /delete users as well as employees. He can manage appointments, payments and other services also.

Customer : This module is also used for the registration of new members or customers of the salon.

Employee : This module is for employees works at salon. They can view all appointments data.

Services : This module includes all the services which is available on the salon.

Appointments : This module allows the user to manage the appointments. The information includes the appointment date, the appointment time, customer information, details of appointment etc.

Payment: This module allows the user to book their appointment by giving their payment.

Scope :


This web application is an efficient and very easy way of interaction with client. As we know that day by day people get conscious about their look , fashion and skin care .There is a huge amount of demand for grooming across all age groups. Our services will help to conserve their consciousness and build a satisfactory attachments between client and our service. Current system having some drawbacks which are affecting clients and our main focus is to replacing the existing system.

Conclusion:


This study was conducted to assess the current method used in the salon shop daily operations and transactions. The current system is not a proper system as per customers opinions because it has some drawbacks like we need to wait for longer time in salon on waiting list . As today's generation is growing so fast people are being more serious about their time and existing system is time consuming so we replace that by this new online appointment system which helps user to conserve their time .Working on this project will be good experience for me.

UML DIAGRAMS:


1) USE CASE DIAGRAM

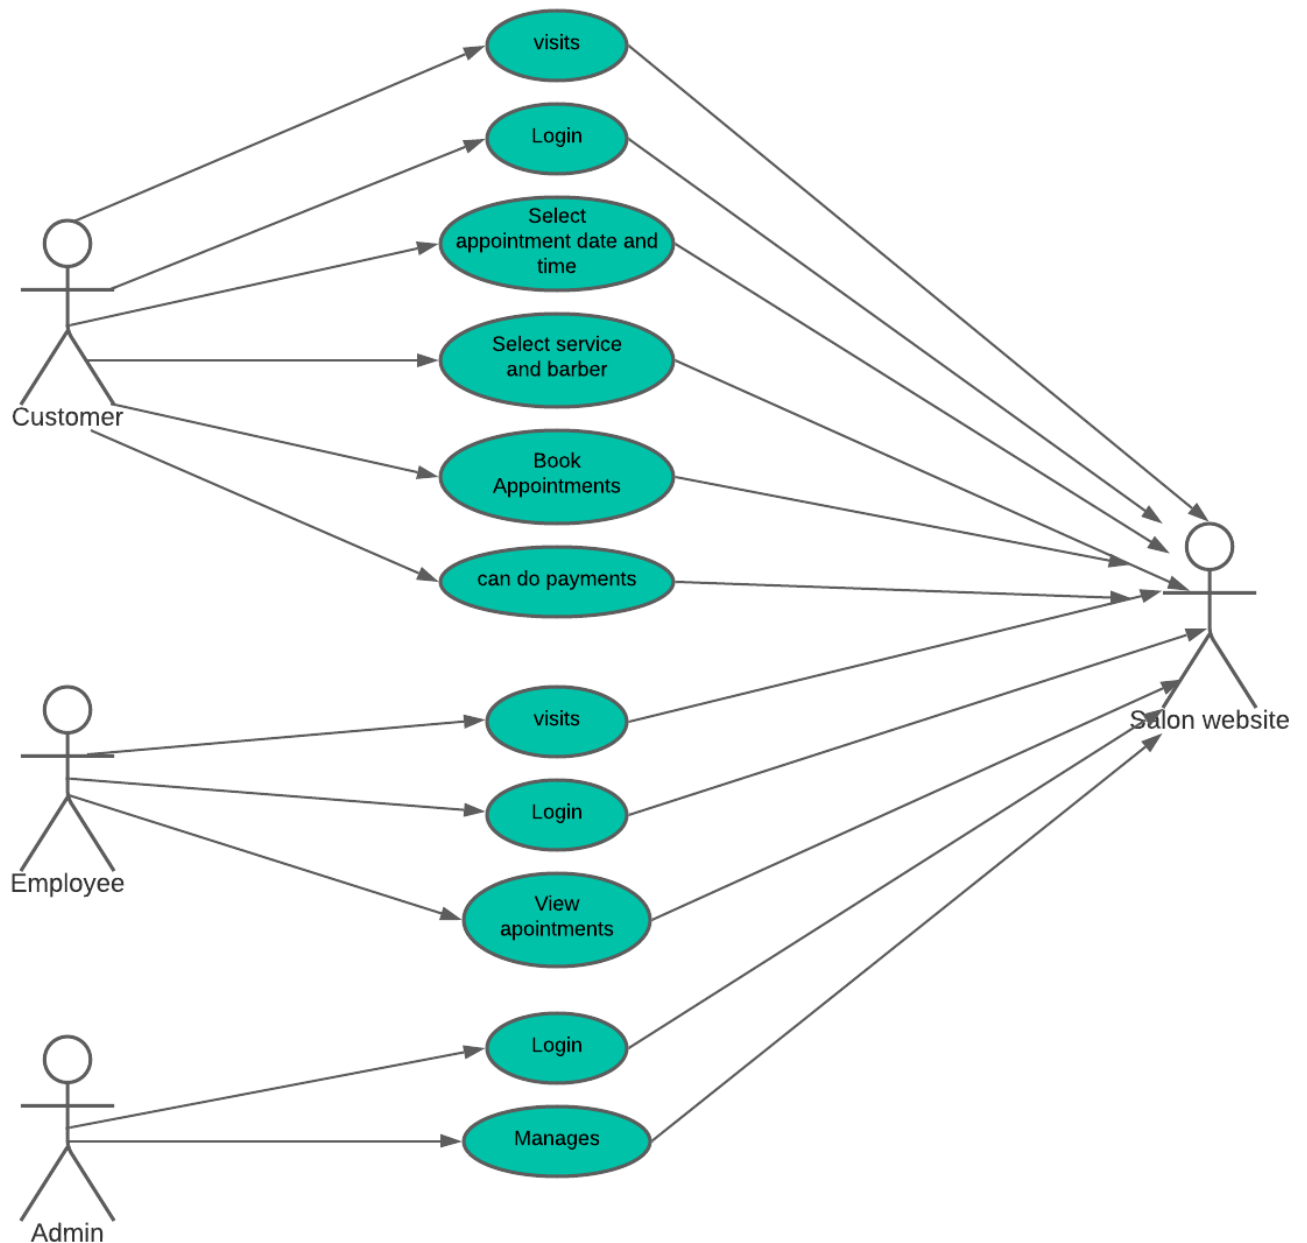


2) ER-DIAGRAM

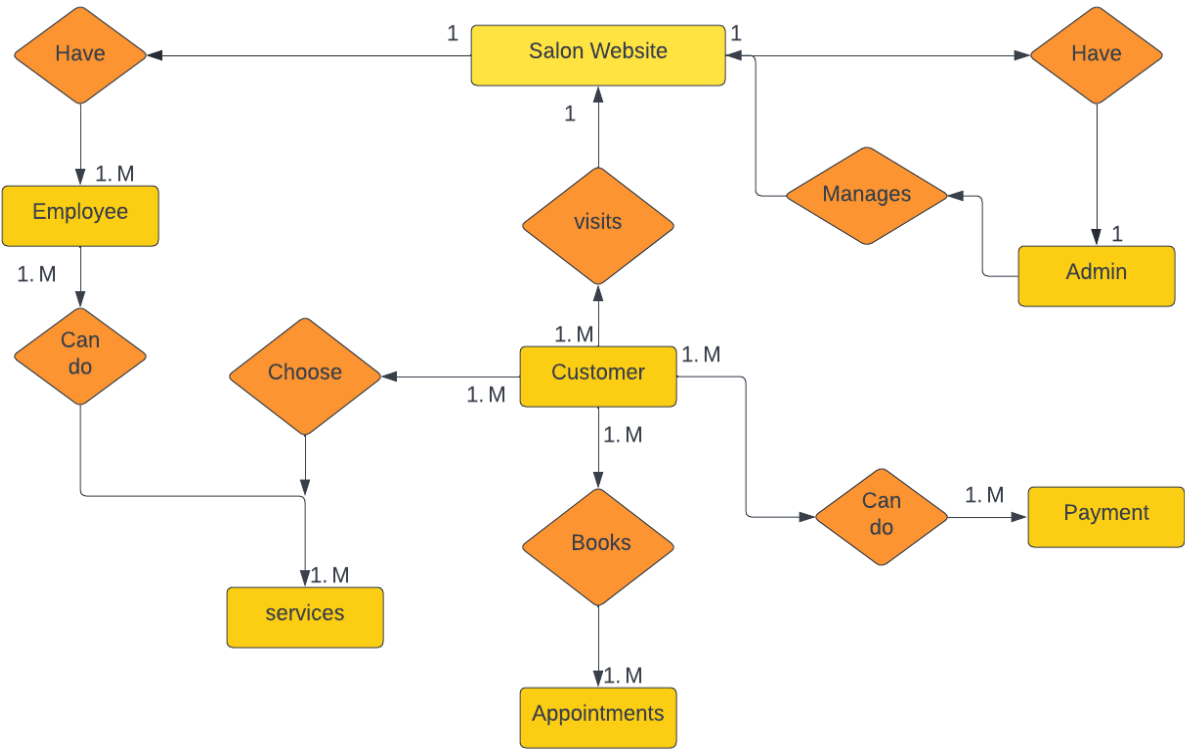

3) Sequence Diagram

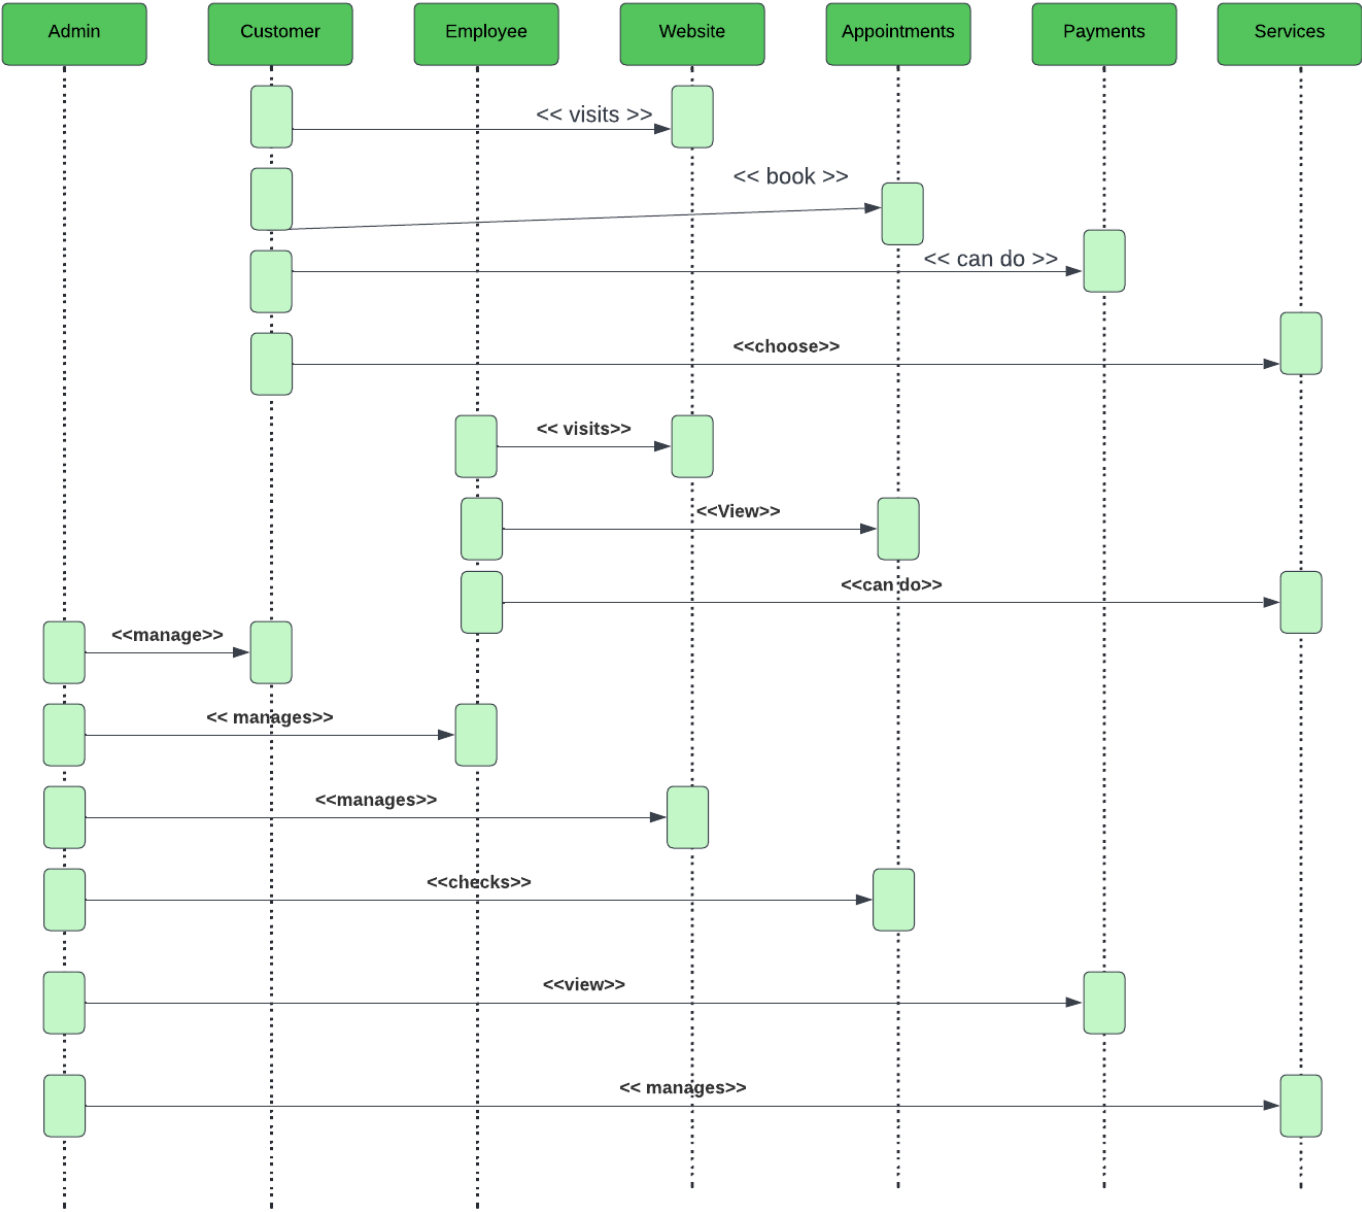

4) Class Diagram

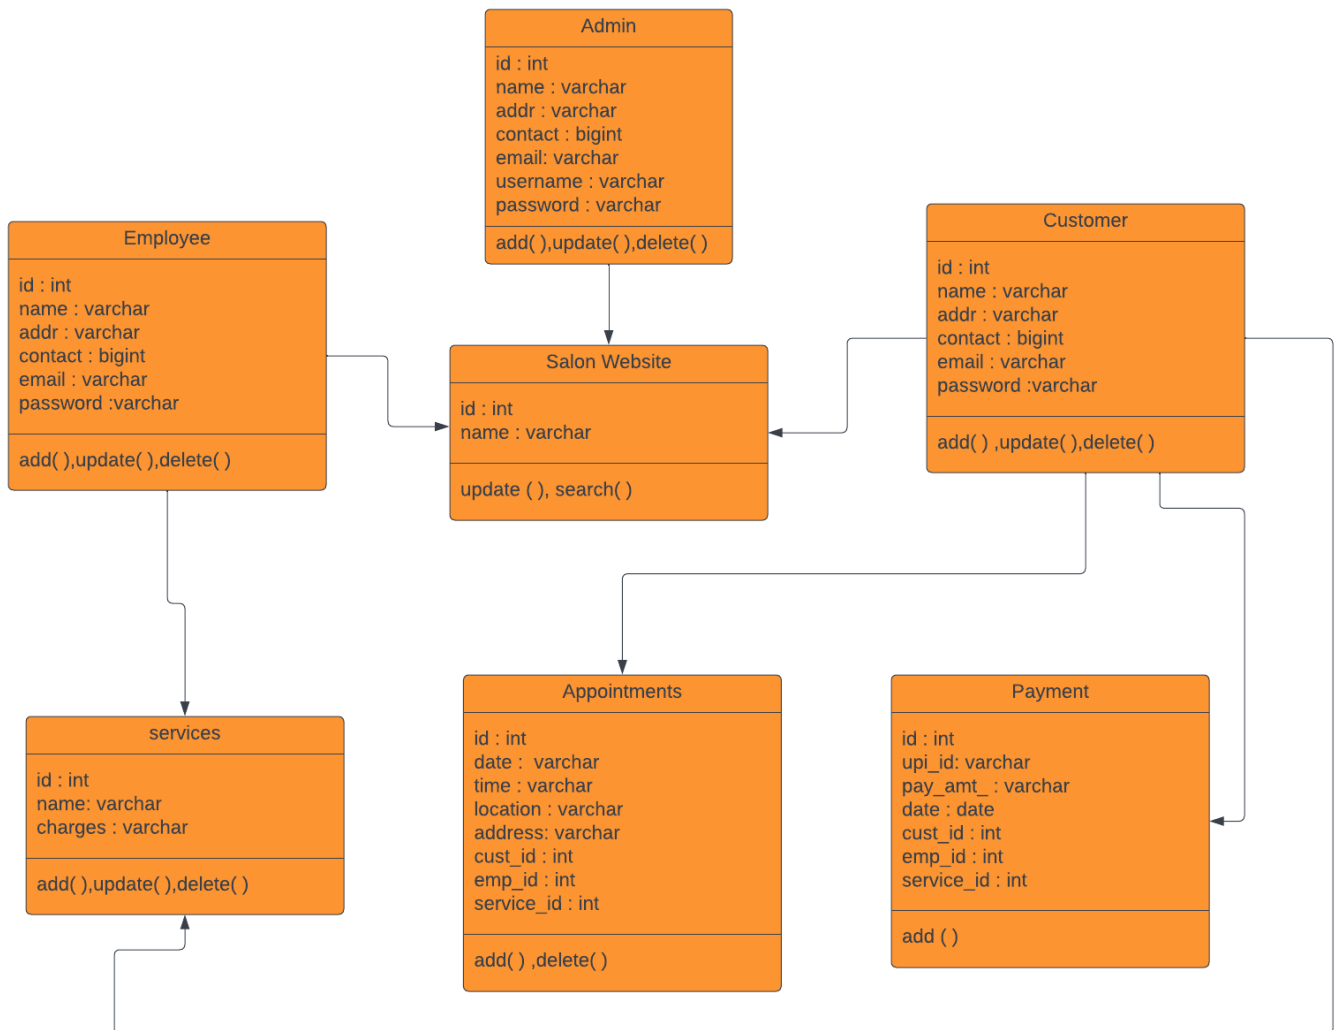

DATABASE

```
-- phpMyAdmin SQL Dump
-- version 5.2.0
-- https://www.phpmyadmin.net/
-- Host: 127.0.0.1:3307
-- Generation Time: Sep 18, 2022 at 08:58 PM
-- Server version: 10.4.24-MariaDB
-- PHP Version: 8.1.6
```

```
SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";
```

```
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;

-- Database: `msms`
```

```
-- Table structure for table `admin`
CREATE TABLE `admin` (
  `adm_id` int(11) NOT NULL,
  `adm_name` varchar(50) DEFAULT NULL,
  `adm_addr` varchar(100) DEFAULT NULL,
  `adm_contact` bigint(20) DEFAULT NULL,
  `adm_email` varchar(30) DEFAULT NULL,
  `adm_username` varchar(20) DEFAULT NULL,
  `adm_password` varchar(20) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
-- Dumping data for table `admin`
--
```

```
INSERT INTO `admin` (`adm_id`, `adm_name`, `adm_addr`, `adm_contact`, `adm_email`, `adm_username`,  
`adm_password`) VALUES  
(8210, 'Prasad Belote', 'Chembur', 9594651978, 'prasadbelote16@gmail.com', 'PrasadBelote16',  
'Prasad@123');
```

```
-- -----  
-- Table structure for table `appointment`  
--
```

```
CREATE TABLE `appointment` (  
  `a_id` int(11) NOT NULL,  
  `a_date` varchar(50) DEFAULT NULL,  
  `a_time` varchar(50) DEFAULT NULL,  
  `a_location` varchar(50) DEFAULT NULL,  
  `a_address` varchar(50) DEFAULT NULL,  
  `c_id` int(11) DEFAULT NULL,  
  `e_id` int(11) DEFAULT NULL,  
  `s_id` int(11) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `appointment`  
--
```

```
INSERT INTO `appointment` (`a_id`, `a_date`, `a_time`, `a_location`, `a_address`, `c_id`, `e_id`, `s_id`)  
VALUES  
(203, '2022-09-19', '02:09', 'In salon', '', 108, 604, 708);
```

```
-- Table structure for table `customer`  
--
```

```
CREATE TABLE `customer` (  
  `cust_id` int(11) NOT NULL,  
  `cust_name` varchar(50) NOT NULL,  
  `cust_addr` varchar(50) NOT NULL,  
  `cust_contact` bigint(20) NOT NULL,  
  `cust_email` varchar(50) NOT NULL,  
  `cust_password` varchar(50) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `customer`  
--
```

```
INSERT INTO `customer` (`cust_id`, `cust_name`, `cust_addr`, `cust_contact`, `cust_email`,  
`cust_password`) VALUES  
(104, 'Rahul', 'Nerul', 9594651978, 'rahul@gmail.com', 'rahul123'),  
(107, 'priya', 'Chembur', 9594507179, 'priya@gmail.com', 'priya12345'),  
(108, 'Elon Musk', 'Chembur', 4578912364, 'elon@gmail.com', 'elon123');
```

```
-- -----  
--
```

-- Table structure for table `employee`

--

```
CREATE TABLE `employee` (  
  `emp_id` int(11) NOT NULL,  
  `emp_name` varchar(50) NOT NULL,  
  `emp_addr` varchar(50) NOT NULL,  
  `emp_contact` bigint(50) NOT NULL,  
  `emp_email` varchar(50) NOT NULL,  
  `emp_password` varchar(50) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

--

-- Dumping data for table `employee`

--

```
INSERT INTO `employee` (`emp_id`, `emp_name`, `emp_addr`, `emp_contact`, `emp_email`,  
  `emp_password`) VALUES  
(604, 'Siddharth Bhoir', 'Panvel', 4875951265, 'sid@gmail.com', 'sid123'),  
(608, 'Vaibhav Gaikwad', 'Mankhurd', 4578912364, 'vaibhav@gmail.com', 'Vaibhav@123'),  
(610, 'Viraj Bhagat', 'Ulawe', 9154789652, 'viraj@gmail.com', 'viraj123');
```

-- -----

--

-- Table structure for table `payment`

--

```
CREATE TABLE `payment` (  
  `pay_id` int(11) NOT NULL,  
  `upi_id` varchar(50) NOT NULL,  
  `pay_amt` varchar(50) NOT NULL,  
  `pay_date` date NOT NULL,  
  `service_id` int(11) NOT NULL,  
  `cust_id` int(11) NOT NULL,  
  `emp_id` int(11) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

--

-- Dumping data for table `payment`

--

```
INSERT INTO `payment` (`pay_id`, `upi_id`, `pay_amt`, `pay_date`, `service_id`, `cust_id`, `emp_id`) VALUES  
(6504, 'elonmusk@ybl', '1500', '2022-09-19', 708, 108, 604);
```

-- -----

--

-- Table structure for table `salon website`

--

```

CREATE TABLE `salon website` (
  `salon_id` int(11) NOT NULL,
  `salon_name` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `salon website`
--

INSERT INTO `salon website` (`salon_id`, `salon_name`) VALUES
(5148, 'MEN SALON ');

-----
--
-- Table structure for table `service`
--

CREATE TABLE `service` (
  `service_id` int(11) NOT NULL,
  `service_name` varchar(50) NOT NULL,
  `service_charges` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `service`
--

INSERT INTO `service` (`service_id`, `service_name`, `service_charges`) VALUES
(701, 'Hair cutting', '150'),
(702, 'Facial', '250'),
(703, 'Femgold Cleanup', '720'),
(704, 'Body massage', '1220'),
(705, 'Hair Color', '500'),
(706, 'Oil Massage', '1200'),
(707, 'Madicure', '650'),
(708, 'Hair Straightening ', '1500'),
(709, 'Hair Rebonding', '4500'),
(710, 'Pedicure', '600');

--
-- Indexes for dumped tables
--

-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`adm_id`);

--

```

-- Indexes for table `appointment`

--

```
ALTER TABLE `appointment`  
  ADD PRIMARY KEY (`a_id`),  
  ADD KEY `FK_cid` (`c_id`),  
  ADD KEY `FK_eid` (`e_id`),  
  ADD KEY `FK_sid` (`s_id`);
```

--

-- Indexes for table `customer`

--

```
ALTER TABLE `customer`  
  ADD PRIMARY KEY (`cust_id`);
```

--

-- Indexes for table `employee`

--

```
ALTER TABLE `employee`  
  ADD PRIMARY KEY (`emp_id`);
```

--

-- Indexes for table `payment`

--

```
ALTER TABLE `payment`  
  ADD PRIMARY KEY (`pay_id`),  
  ADD KEY `cust_id` (`cust_id`),  
  ADD KEY `service_id` (`service_id`),  
  ADD KEY `emp_id` (`emp_id`);
```

--

-- Indexes for table `service`

--

```
ALTER TABLE `service`  
  ADD PRIMARY KEY (`service_id`);
```

--

-- AUTO_INCREMENT for dumped tables

--

--

-- AUTO_INCREMENT for table `admin`

--

```
ALTER TABLE `admin`  
  MODIFY `adm_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=8212;
```

--

-- AUTO_INCREMENT for table `appointment`

--

```

ALTER TABLE `appointment`
  MODIFY `a_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=204;

--
-- AUTO_INCREMENT for table `customer`
--
ALTER TABLE `customer`
  MODIFY `cust_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=109;
-- AUTO_INCREMENT for table `employee`
--
ALTER TABLE `employee`
  MODIFY `emp_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=611;
--
-- AUTO_INCREMENT for table `payment`
--
ALTER TABLE `payment`
  MODIFY `pay_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=6506;
--
-- AUTO_INCREMENT for table `service`
--
ALTER TABLE `service`
  MODIFY `service_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=711;
--
-- Constraints for dumped tables
--
-- Constraints for table `appointment`
--
ALTER TABLE `appointment`
  ADD CONSTRAINT `FK_cid` FOREIGN KEY (`c_id`) REFERENCES `customer` (`cust_id`) ON DELETE CASCADE,
  ADD CONSTRAINT `FK_eid` FOREIGN KEY (`e_id`) REFERENCES `employee` (`emp_id`) ON DELETE
  CASCADE,
  ADD CONSTRAINT `FK_sid` FOREIGN KEY (`s_id`) REFERENCES `service` (`service_id`) ON DELETE CASCADE;
--
-- Constraints for table `payment`
--
ALTER TABLE `payment`
  ADD CONSTRAINT `cust_id` FOREIGN KEY (`cust_id`) REFERENCES `customer` (`cust_id`) ON DELETE
  CASCADE ON UPDATE CASCADE,
  ADD CONSTRAINT `emp_id` FOREIGN KEY (`emp_id`) REFERENCES `employee` (`emp_id`) ON DELETE
  CASCADE ON UPDATE CASCADE,
  ADD CONSTRAINT `service_id` FOREIGN KEY (`service_id`) REFERENCES `service` (`service_id`) ON DELETE
  CASCADE ON UPDATE CASCADE;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;

```

Code:

Index.html

```
<!DOCTYPE html>
<html lang="en">
```

```
<head>
```

```
  <meta charset="utf-8">
```

```
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
```

```
  <meta name="viewport" content="width=device-width, initial-scale=1">
```

```
  <!-- The above 3 meta tags *must* come first in the head; any other head content must come *after*
these tags -->
```

```
  <meta name="description" content="Hair salon templates for mens hair cut service provider.">
```

```
  <meta name="keywords" content="hair salon website templates free download, html5 template, free
responsive website templates, website layout,html5 website templates, template for website design,
beauty HTML5 templates, cosmetics website templates free download">
```

```
  <title>Men Salon | Hair Salon Website Templates Free Download</title>
```

```
  <!-- Bootstrap -->
```

```
  <link href="css/bootstrap.min.css" rel="stylesheet">
```

```
  <!-- Google Fonts -->
```

```
  <link
```

```
href="https://fonts.googleapis.com/css?family=Roboto:300,300i,400,400i,500,500i,700,700i%7cMontserrat:300,300i,400,400i,500,500i,600,600i,700,700i" rel="stylesheet">
```

```
  <!-- Font Awesome -->
```

```
  <link href="css/font-awesome.min.css" rel="stylesheet">
```

```
  <!-- Style -->
```

```
  <link href="css/style.css" rel="stylesheet">
```

```
  <!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
```

```
  <!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
```

```
  <!--[if lt IE 9]>
```

```
    <script src="https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js"></script>
```

```
    <script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
```

```
<![endif]-->
```

```
</head>
```

```
<body>
```

```
  <div class="header">
```

```
    <div class="container">
```

```
      <div class="row">
```

```
        <div class="col-lg-4 col-md-4 col-sm-12 col-xs-12">
```

```
          <a href="index.html"></a>
```

```
        </div>
```

```
        <div class="col-lg-8 col-md-4 col-sm-12 col-xs-12">
```

```
          <div class="navigation">
```

```
            <div id="navigation">
```

```
              <ul>
```

```
                <li class="active"><a href="index.html" title="Home">Home</a></li>
```

```
                <li class="has-sub"><a href="service-list.jsp" title="Service List">Services</a></li>
```

```
                <li><a href="Features.html" title="Features">Features</a>
```

```
              </li>
```

```
<li><a href="contact.html" title="About Us">About Us</a> </li>  
<li><a href="#" title="Styleguide">Login/Signup</a>  
    <ul>  
        <li><a href="Admin_login.html" title="Service List">Admin</a></li>  
        <li><a href="Cust_login.html" title="Service Detail">Customer</a></li>  
        <li><a href="Employee_login.html" title="Service Detail">Employee</a></li>  
    </ul>  
</li>  
</ul>  
</div>  
</div>  
</div>  
</div>  
</div>  
</div>  
</div>  
  
<div class="hero-section">  
    <div class="container">  
        <div class="row">  
            <div class="col-lg-6 col-md-6 col-sm-6 col-xs-12">  
                <h1 class="hero-title">LIVE WITH STYLE</h1>  
                <p class="hero-text"><strong>Your Types. Your Style. Your Color.</strong> </p>  
                <a href="Cust_login.html" class="btn btn-default">Book Your Appointment</a> </div>  
            </div>  
        </div>  
    </div>  
</div>  
  
<div class="space-medium">  
    <div class="container">  
        <div class="row">  
            <div class="col-lg-offset-2 col-lg-8 col-md-offset-2 col-md-8 col-sm-12 col-xs-12">  
                <div class="section-title mb60 text-center">  
                    <!-- section title start-->  
                    <h1> Customer Reviews</h1>  
                    <h5 class="small-title">What Happy Client Say</h5>  
                </div>  
                <!-- /.section title start-->  
            </div>  
        </div>  
        <div class="row">  
  
            <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">  
  
                <div class="testimonial-block">  
  
                    <!-- testimonial block -->  
                    <div class="testimonial-content">  
                        <p class="testimonial-text">"Even geniuses can get things wrong. Look at Einstein's  
unfortunate choice of a hairstyle." </p>  
                    </div>  
                    <div class="testimonial-info">  
                        <h4 class="testimonial-name">Vinayak Babar</h4>
```



```

        <span class="testimonial-meta">20 Year</span> <span class="testimonial-
meta">Customer</span> </div>
    </div>
    <!--/. testimonial block -->
</div>
<div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">
    <div class="testimonial-block">
        <!-- testimonial block -->
        <div class="testimonial-content">
            <p class="testimonial-text">"Beauty comes from the inside. Inside the hair salon."</p>
        </div>
        <div class="testimonial-info">
            <h4 class="testimonial-name">Pankaj Matele</h4>
            <span class="testimonial-meta">20 Year</span> <span class="testimonial-meta
">Customer</span> </div>
        </div>
        <!--/. testimonial block -->
    </div>
    <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">
        <div class="testimonial-block">
            <!-- testimonial block -->
            <div class="testimonial-content">
                <p class="testimonial-text">"Good hair speaks louder than words."</p>
            </div>
            <div class="testimonial-info">
                <h4 class="testimonial-name">Aniket Gadage</h4>
                <span class="testimonial-meta">20 Year</span> <span class="testimonial-
meta">Customer</span> </div>
            </div>
            <!--/. testimonial block -->
        </div>
    </div>
</div>
</div>
</div>
<div class="footer">
    <!-- footer-->
    <div class="container">
        <div class="footer-block">
            <!-- footer block -->
            <div class="row">
                <div class="col-lg-4 col-md-4 col-sm-6 col-xs-12">
                    <div class="footer-widget">
                        <h2 class="widget-title">Salon Address</h2>
                        <ul class="listnone contact">
                            <li><i class="fa fa-map-marker"></i> Road NO:15,N.G.Acharya Marg,Chembur,Mumbai-
400071 </li>
                            <li><i class="fa fa-phone"></i> +91 (800) 123-4567</li>
                            <li><i class="fa fa-fax"></i> +91 (123) 456 7890</li>
                            <li><i class="fa fa-envelope-o"></i> mensalon@gmail.com</li>
                        </ul>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```
</div>
<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
  <div class="footer-widget footer-social">
    <!-- social block -->
    <h2 class="widget-title">Social Feed</h2>
    <ul class="listnone">
      <li>
        <a href="#"><i class="fa fa-facebook"></i> Facebook </a>
      </li>
      <li><a href="#"><i class="fa fa-twitter"></i> Twitter</a></li>
      <li><a href="#"><i class="fa fa-google-plus"></i> Google Plus</a></li>
      <li><a href="#"><i class="fa fa-linkedin"></i> Linked In</a></li>
      <li>
        <a href="#"><i class="fa fa-youtube"></i> Youtube</a>
      </li>
    </ul>
  </div>
  <!-- /.social block -->
</div>
```

```
<div class="col-lg-4 col-md-4 col-sm-12 col-xs-12">
  <div class="footer-widget widget-newsletter">
    <!-- newsletter block -->
    <h2 class="widget-title">Location</h2>
    
```

```
</div>
  <!-- /input-group -->
</div>
  <!-- newsletter block -->
```

```
</div>
</div>
<div class="tiny-footer">
  <!-- tiny footer block -->
  <div class="row">
    <div class="col-lg-12 col-md-12 col-sm-12 col-xs-12">
      <div class="copyright-content">
        <p>© Men Salon 2020 | all rights reserved</p>
      </div>
    </div>
  </div>
</div>
  <!-- /.tiny footer block -->
</div>
  <!-- /.footer block -->
</div>
</div>
```

```
<!-- /.footer-->
<!-- jQuery (necessary for Bootstrap's JavaScript plugins) -->
<script src="js/jquery.min.js"></script>
<!-- Include all compiled plugins (below), or include individual files as needed -->
<script src="js/bootstrap.min.js"></script>
<script src="js/nummaker.js"></script>
<!-- sticky header -->
<script src="js/jquery.sticky.js"></script>
<script src="js/sticky-header.js"></script>
</body>

</html>
```

Cust_signup.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1" pageEncoding="ISO-8859-1"%>
<%@page import="java.sql.*,java.util.*"%>
<%
String name=request.getParameter("name");
String address=request.getParameter("address");
String contact=request.getParameter("contact");
String email=request.getParameter("email");
String password=request.getParameter("Password");
try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");

String query = "insert into
customer(cust_name,cust_addr,cust_contact,cust_email,cust_password)values(?,?,?,?,?)";
PreparedStatement ps = conn.prepareStatement(query);
ps.setString(1, name);
ps.setString(2, address);
ps.setString(3, contact);
ps.setString(4, email);
ps.setString(5, password);
    int x=ps.executeUpdate();
    if(x!=0){
    }
    else{
        out.print("Something went wrong!");
    }

    out.print("<script>");
    out.print("alert('Signup Successful');");
    out.print("location='Cust_login.html'");
    out.print("</script>");
}
catch(Exception e){
    out.print(e);
}
%>
```

Customer_login.jsp

```
<%@page import="java.sql.*"%>
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<%@page import="javax.servlet.http.*"%>
<%
    String username = request.getParameter("GmailID");
    String pass = request.getParameter("Password");
    try {
        Class.forName("com.mysql.jdbc.Driver");
        Connection conn=DriverManager.getConnection("jdbc:mysql://127.0.0.1:3307/msms","root","");
        String query = "Select * from customer";
        CallableStatement cstmt = conn.prepareCall(query);
        ResultSet rs = cstmt.executeQuery();
        while (rs.next()) {
            if (rs.getString("cust_email").equals(username)) {
                if(rs.getString("cust_password").equals(pass)){

                    session.setAttribute("user", username);
                }
                else{
                    out.print("wrongg");
                }
            }
        }
        out.print("<script>");
        out.print("alert('Login Successful');");
        out.print("location='Appointment_finalmod1.jsp?name="+username+"'");
        out.print("</script>");

    } catch (Exception e) {
        e.printStackTrace();
        out.print(e.toString());
    }
%>
```

Appointment_finalmod1.jsp

<%--

Document : Appointment_finalmod1.jsp

Created on : 10 Sep, 2022, 9:04:54 PM

Author : dell

--%>

<%@page import="java.sql.ResultSet"%>

<%@page import="java.sql.PreparedStatement"%>

<%@page import="java.sql.DriverManager"%>

<%@page import="java.sql.Connection"%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>

<!DOCTYPE html>

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<meta http-equiv="X-UA-Compatible" content="IE=edge">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Appointment</title>

<link rel="stylesheet"

href="https://fonts.googleapis.com/css?family=Roboto|Varela+Round|Open+Sans">

<link rel="stylesheet"

href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/css/bootstrap.min.css">

<link rel="stylesheet" href="https://fonts.googleapis.com/icon?family=Material+Icons">

<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css">

<script src="https://code.jquery.com/jquery-3.5.1.min.js"></script>

<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.0/dist/umd/popper.min.js"></script>

<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/js/bootstrap.min.js"></script>

</head>

<body>

<%

Class.forName("com.mysql.jdbc.Driver");

Connection conn=DriverManager.getConnection("jdbc:mysql://127.0.0.1:3307/msms","root","");

String query1 = "Select * from employee";

String query2 = "Select * from service";

PreparedStatement stmt = conn.prepareStatement(query1);

PreparedStatement stm = conn.prepareStatement(query2);

ResultSet rst = stmt.executeQuery();

ResultSet rs = stm.executeQuery();

%>

<section class="py-5" style="background-color: #eee;">

<div class="container">

<div class="row d-flex justify-content-center align-items-center h-100">

<div class="col-lg-12 col-xl-11">

```

<div class="card text-black" style="border-radius: 25px;">
  <div class="card-body p-md-5">
    <div class="row justify-content-center">
      <div class="col-md-10 col-lg-6 col-xl-5 order-2 order-lg-1">
        <p class="text-center h1 fw-bold mb-5 mx-1 mt-4" style="width:100%;">Book
Appointment</p>

        <form class="mx-1 mx-md-4" action="Appointment_finalmod2.jsp">
          <div class="d-flex flex-row align-items-center mb-4">
            <div class="form-outline flex-fill mb-0">
              <input type="date" id="form3Example1c" placeholder="Appointment Date"
name="mydate" class="form-control" />
            </div>
          </div>

          <div class="d-flex flex-row align-items-center mb-4">
            <div class="form-outline flex-fill mb-0">
              <input type="time" id="form3Example3c" placeholder="time" name="myTime"
class="form-control" />
            </div>
          </div>

          <div class="d-flex flex-row align-items-center mb-4">
            <div class="form-outline flex-fill mb-0">
              <select class="form-select form-select-lg mb-3 form-control" name="location" aria-
label=".form-select-lg example" >
                <option selected>Enter Location</option>
                <option value="Home Visit">Home Visit</option>
                <option value="In salon">In salon</option>
              </select>
            </div>
          </div>

          <div class="d-flex flex-row align-items-center mb-4">
            <div class="form-outline flex-fill mb-0">
              <input type="address" id="form3Example3c" placeholder="address (if applicable)"
name="address" class="form-control" />
            </div>
          </div>

          <div class="d-flex flex-row align-items-center mb-4">
            <div class="form-outline flex-fill mb-0">
              <select class="form-select form-select-lg mb-3 form-control" aria-label=".form-select-lg
example" name="emp_name" >
                <option selected>Choose Barber</option>
                <%while(rst.next()){ %>
                <option value="<%=rst.getInt("emp_id") %>"><%=rst.getString("emp_name") %></option>
                <%} %>
              </select>
            </div>
          </div>
        </form>
      </div>
    </div>
  </div>
</div>

```

[illegible]

Appointment_finalmod2.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1" pageEncoding="ISO-8859-1"%>
<%@page import="java.sql.*,java.util.*"%>
<%
String myDate= request.getParameter("mydate");
String time = request.getParameter("myTime");
String location=request.getParameter("location");
String address=request.getParameter("address");
int empname=Integer.parseInt(request.getParameter("emp_name"));
int service=Integer.parseInt(request.getParameter("service_name"));

try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");
    String query = "insert into appointment (a_date,a_time,a_location,a_address,c_id,e_id,s_id)
values(?,?,?,?,?,?)";
    String query2= "select cust_id from customer where
cust_email='"+session.getAttribute("user").toString()+"'";

    PreparedStatement ps1 = conn.prepareStatement(query2);
    ResultSet rs=ps1.executeQuery();
    rs.next();
    int cid = rs.getInt(1);
    PreparedStatement ps = conn.prepareStatement(query);
    ps.setString(1, myDate);
    ps.setString(2, time);
    ps.setString(3, location);
    ps.setString(4, address);
    ps.setInt(5, cid);
    ps.setInt(6, empname);
    ps.setInt(7, service);
    ps.executeUpdate();
    String Redirect = "payment_finalmod1.jsp?cid=%s&service=%s&empId=%s";
    out.print("Hello");
    Redirect = String.format(Redirect,cid,service,empname);
    out.print(Redirect);
    response.sendRedirect(Redirect);
}
catch(Exception e){
    out.print(e.getLocalizedMessage());
}
%>
```

Payment_mod1.jsp

<%--

Document : payment_finalmod1

Created on : 10 Sep, 2022, 9:40:37 PM

Author : dell

--%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>

<%@page import="java.sql.*,java.util.*"%>

<%

int cid = Integer.parseInt(request.getParameter("cid"));

int service = Integer.parseInt(request.getParameter("service"));

int empId = Integer.parseInt(request.getParameter("empId"));

String query3 = "SELECT service.service_charges FROM service WHERE service_id= "+service;

Class.forName("com.mysql.jdbc.Driver");

Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");

Statement stmt = conn.createStatement();

ResultSet rs3 =stmt.executeQuery(query3);

rs3.next();

int price = rs3.getInt("service_charges");

%>

<!DOCTYPE html>

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<meta http-equiv="X-UA-Compatible" content="IE=edge">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Payment</title>

<link rel="stylesheet"

href="https://fonts.googleapis.com/css?family=Roboto|Varela+Round|Open+Sans">

<link rel="stylesheet"

href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/css/bootstrap.min.css">

<link rel="stylesheet" href="https://fonts.googleapis.com/icon?family=Material+Icons">

<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css">

<script src="https://code.jquery.com/jquery-3.5.1.min.js"></script>

<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.0/dist/umd/popper.min.js"></script>

<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/js/bootstrap.min.js"></script>

</head>

<body>

<section class="vh-100" style="background-color: #eee;">

<div class="container h-100">

<div class="row d-flex justify-content-center align-items-center h-100">

```
<div class="col-lg-12 col-xl-11">  
    <div class="card text-black" style="border-radius: 25px;">  
        <div class="card-body p-md-5">  
            <div class="row justify-content-center">  
                <div class="col-md-10 col-lg-6 col-xl-5 order-2 order-lg-1">  
                    <p class="text-center h1 fw-bold mb-5 mx-1 mx-md-4 mt-4">Payment</p>  
                    <form class="mx-1 mx-md-4" action="payment_finalmod2.jsp">  
                        <input type="hidden" name="cid" value="%= cid %">>  
                        <input type="hidden" name="service" value="%= service %" >  
                        <input type="hidden" name="empld" value="%= empld %" >  
                        <div class="d-flex flex-row align-items-center mb-4">  
                            <div class="form-outline flex-fill mb-0">  
                                <input type="text" id="form3Example3c" placeholder="Enter UPI ID" name="upi_ID"  
class="form-control" />  
                            </div>  
                        </div>  
                        <div class="d-flex flex-row align-items-center mb-4">  
                            <div class="form-outline flex-fill mb-0">  
                                <input type="number" id="form3Example3c" placeholder="Enter amount" value="%=  
price %%" name="amount" class="form-control" />  
                            </div>  
                        </div>  
                        <div class="d-flex flex-row align-items-center mb-4">  
                            <div class="form-outline flex-fill mb-0">  
                                <input type="date" id="form3Example3c" placeholder="Enter date" name="date"  
class="form-control" />  
                            </div>  
                        </div>  
                        <div class="d-flex justify-content-center mx-4 mb-3 mb-lg-4">  
                            <button type="submit" class="btn btn-primary btn-lg">Pay</button>  
                        </div>  
                    </form>  
                </div>  
                <div class="col-md-10 col-lg-6 col-xl-7 d-flex align-items-center order-1 order-lg-2">  
                      
                </div>  
            </div>  
        </div>  
    </div>  

```

Payment_mod2.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1" pageEncoding="ISO-8859-1"%>
<%@page import="java.sql.*,java.util.*"%>
<%
String upi=request.getParameter("upi_ID");
String amt=request.getParameter("amount");
String date=request.getParameter("date");
    int cid = Integer.parseInt(request.getParameter("cid"));
    int service = Integer.parseInt(request.getParameter("service"));
    int empld = Integer.parseInt(request.getParameter("empld"));
try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");

String query = "insert into payment(upi_id,pay_amt,pay_date,service_id,cust_id,emp_id)
values(?,?,?,?,?,?)";
PreparedStatement ps = conn.prepareStatement(query);
ps.setString(1, upi);
ps.setString(2, amt);
ps.setString(3, date);
ps.setInt(4, service);
ps.setInt(5, cid);
ps.setInt(6, empld);
out.print(ps);

    int x=ps.executeUpdate();
    if(x!=0){
        out.print("<script>");
        out.print("alert('Payment Successful');");
        out.print("location='index.html';");
        out.print("</script>");

    }
    else{
        out.print("Something went wrong!");
    }
}
catch(Exception e){
    out.print(e);
}
%>
```

Employee_signup.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1" pageEncoding="ISO-8859-1"%>
<%@page import="java.sql.*,java.util.*"%>
<%
String name=request.getParameter("name");
String address=request.getParameter("address");
String contact=request.getParameter("contact");
String email=request.getParameter("email");
String password=request.getParameter("Password");
try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");

String query = "insert into
employee(emp_name,emp_addr,emp_contact,emp_email,emp_password)values(?,?,?,?,?)";
PreparedStatement ps = conn.prepareStatement(query);
ps.setString(1, name);
ps.setString(2, address);
ps.setString(3, contact);
ps.setString(4, email);
ps.setString(5, password);
    int x=ps.executeUpdate();
    if(x!=0){
//        out.print("Signup Successfull success!!");
    }
    else{
        out.print("Something went wrong!");
    }
    out.print("<script>");
    out.print("alert('Signup Successful');");
    out.print("location='Employee_login.html';");
    out.print("</script>");
}
catch(Exception e){
    out.print(e);
}
%>
```

Employee_login.jsp

<%--

Document : Admlogin

Created on : 2 Sep, 2022, 11:54:15 PM

Author : dell

--%>

<%@page import="java.sql.*"%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>

<%

String username = request.getParameter("GmailID");

String pass = request.getParameter("Password");

try {

Class.forName("com.mysql.jdbc.Driver");

Connection conn=DriverManager.getConnection("jdbc:mysql://127.0.0.1:3307/msms","root","");

String query = "Select * from employee";

CallableStatement cstmt = conn.prepareCall(query);

ResultSet rs = cstmt.executeQuery();

while (rs.next()) {

if (rs.getString("emp_email").equals(username)) {

if(rs.getString("emp_password").equals(pass)){

out.print("Logiedn");

response.sendRedirect("empshowapt.jsp");

}

else{

out.print("wrongg");

}

}

}

out.print("<script>");

out.print("alert('Login Successful');");

out.print("location='empshowapt.jsp'");

out.print("</script>");

} catch (Exception e) {

e.printStackTrace();

out.print(e.toString());

}

%>

Empshow_appointment.jsp

```
<%@page import="java.sql.*"%>
<%@page contentType="text/html" pageEncoding="UTF-8"%>

<%
    try {

        Class.forName("com.mysql.jdbc.Driver");
        Connection conn = DriverManager.getConnection("jdbc:mysql://127.0.0.1:3307/msms", "root", "");
        Statement stmt = conn.createStatement();
        String Query = "SELECT * FROM `appointment`,customer,service,employee WHERE
appointment.c_id = customer.cust_id AND appointment.e_id = employee.emp_id AND
appointment.s_id = service.service_id";
        ResultSet rs = stmt.executeQuery(Query);
    }%>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="utf-8">
    <meta name="viewport"
        content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <title>Show Ticket</title>
    <link rel="stylesheet"
        href="https://fonts.googleapis.com/css?family=Roboto|Varela+Round|Open+Sans">
    <link rel="stylesheet"
        href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/css/bootstrap.min.css">
    <link rel="stylesheet"
        href="https://fonts.googleapis.com/icon?family=Material+Icons">
    <link rel="stylesheet"
        href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css">
    <script src="https://code.jquery.com/jquery-3.5.1.min.js"></script>
    <script
        src="https://cdn.jsdelivr.net/npm/popper.js@1.16.0/dist/umd/popper.min.js"></script>
    <script
        src="https://stackpath.bootstrapcdn.com/bootstrap/4.5.0/js/bootstrap.min.js"></script>
    <style>
        body {
            color: #404E67;
            background: url("images/client-doing-hair-cut-barber-shop-salon.jpg");
            font-family: 'Open Sans', sans-serif;
        }
    </style>
</head>
<body>
    <div class="container">
        <div class="row">
            <div class="col">
                <div class="card">
                    <div class="card-body">
                        <div class="text-center">
                            <h3>Show Ticket</h3>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</body>
</html>
```

```
.table-wrapper {  
  width: 1000px;  
  margin: 30px auto;  
  background: #fff;  
  padding: 20px;  
  box-shadow: 0 1px 1px rgba(0, 0, 0, .05);  
}
```

```
.table-title {  
  padding-bottom: 10px;  
  margin: 0 0 10px;  
}
```

```
.table-title h2 {  
  margin: 6px 0 0;  
  font-size: 22px;  
}
```

```
.table-title .add-new {  
  float: right;  
  height: 30px;  
  font-weight: bold;  
  font-size: 12px;  
  text-shadow: none;  
  min-width: 100px;  
  border-radius: 50px;  
  line-height: 13px;  
}
```

```
.table-title .add-new i {  
  margin-right: 4px;  
}
```

```
table.table {  
  table-layout: fixed;  
}
```

```
table.table tr th, table.table tr td {  
  border-color: #e9e9e9;  
}
```

```
table.table th i {  
  font-size: 13px;  
  margin: 0 5px;  
  cursor: pointer;  
}
```

```
table.table th:last-child {
```



```
    width: 100px;
}

table.table td a {
    cursor: pointer;
    display: inline-block;
    margin: 0 5px;
    min-width: 20px;
}

table.table td a.add {
    color: #27C46B;
}

table.table td a.edit {
    color: #FFC107;
}

table.table td a.delete {
    color: #E34724;
}

table.table td i {
    font-size: 15px;
}

table.table td a.add i {
    font-size: 24px;
    margin-right: -1px;
    position: relative;
    top: 3px;
}

table.table .form-control {
    height: 40px;
    line-height: 32px;
    box-shadow: none;
    border-radius: 2px;
}

table.table .form-control.error {
    border-color: #f50000;
}

table.table td .add {
    display: none;
}
```

```

.ba_btn {
    position: relative;
    left: 44%;
    margin-bottom: 25px;
    margin-top: -25px;
}

</style>
</head>
<body>
    <div class="container-lg">
        <div class="table-responsive">
            <div class="table-wrapper">
                <div class="table-title">
                    <div class="row">
                        <div class="col-sm-8">
                            <h2>
                                Appintments <b>Details</b>
                            </h2>
                        </div>
                    </div>
                </div>
            </div>
            <table class="table table-bordered">
                <thead>
                    <tr>
                        <th>Apt Date</th>
                        <th>Apt Time</th>
                        <th>Location</th>
                        <th>Apt address</th>
                        <th>Cust name</th>
                        <th>Emp Name</th>
                        <th>Service</th>
                    </tr>
                </thead>
                <tbody>
                    <%
                        while (rs.next()) {
                    %>
                    <tr>
                        <td><%=rs.getString("a_date")%></td>
                        <td><%=rs.getString("a_time")%></td>
                        <td><%=rs.getString("a_location")%></td>
                        <td><%=rs.getString("a_address")%></td>
                        <td><%=rs.getString("cust_name")%></td>
                        <td><%=rs.getString("emp_name")%></td>
                        <td><%=rs.getString("service_name")%></td>
                    </tr>
                </tbody>
            </table>
        </div>
    </div>

```

```
        <%}%>
    </tbody>
</table>
</div>
</div>
</div>
```

```
        <a href="index.html"> <button class="ba_btn btn btn-default" > Go Back to Home screen
</button> </a>
    </body>

</html>
```

```
<%
    } catch (Exception e) {
        e.printStackTrace();
        out.print(e.toString());
    }
%>
```

Admin_signup.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1" pageEncoding="ISO-8859-1"%>
<%@page import="java.sql.*,java.util.*"%>
<%
String name=request.getParameter("adm_name");
String address=request.getParameter("adm_addr");
String contact=request.getParameter("adm_contact");
String email=request.getParameter("adm_email");
String username=request.getParameter("adm_username");
String password=request.getParameter("adm_password");
try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection conn = DriverManager.getConnection("jdbc:mysql://localhost:3307/msms", "root", "");

String query = "insert into
admin(adm_name,adm_addr,adm_contact,adm_email,adm_username,adm_password)values(?,?,?,?,?,?)";
PreparedStatement ps = conn.prepareStatement(query);
ps.setString(1, name);
ps.setString(2, address);
ps.setString(3, contact);
ps.setString(4, email);
ps.setString(5, username);
ps.setString(6, password);
    int x=ps.executeUpdate();
    if(x!=0){
    }
    else{
        out.print("Something went wrong!");
    }
    out.print("<script>");
    out.print("alert('Signup Successful');");
    out.print("location='Admin_login.html';");
    out.print("</script>");
}
catch(Exception e){
    out.print(e);
}
%>
```

Admin_login.jsp

```
<%--
    Document : Admlogin
    Created on : 2 Sep, 2022, 11:54:15 PM
    Author : dell
--%>
<%@page import="java.sql.*"%>
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<%
    String username = request.getParameter("Username");
    String pass = request.getParameter("Password");
    try {
        Class.forName("com.mysql.jdbc.Driver");
        Connection conn=DriverManager.getConnection("jdbc:mysql://127.0.0.1:3307/msms","root","");
        String query = "Select * from admin";
        CallableStatement cstmt = conn.prepareCall(query);
        ResultSet rs = cstmt.executeQuery();
        while (rs.next()) {
            if (rs.getString("adm_username").equals(username)) {
                if(rs.getString("adm_password").equals(pass)){
                    out.print("");
                }
                else{
                    out.print("wrongg");
                }
            }
        }
        out.print("<script>");
        out.print("alert('Login Successful');");
        out.print("location='Admin_panel/index.jsp';");
        out.print("</script>");
    } catch (Exception e) {
        e.printStackTrace();
        out.print(e.toString());
    }
%>
```

Admin_Panel

Index.jsp

```
<!DOCTYPE html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <title>Saloon Admin</title>
  <!-- plugins:css -->
  <link rel="stylesheet" href="vendors/feather/feather.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
  <!-- endinject -->
  <!-- Plugin css for this page -->
  <link rel="stylesheet" href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" type="text/css" href="js/select.dataTables.min.css">
  <!-- End plugin css for this page -->
  <!-- inject:css -->
  <link rel="stylesheet" href="css/vertical-layout-light/style.css">
  <!-- endinject -->
  <link rel="shortcut icon" href="images/favicon.png" />
</head>
<body>
  <div class="container-scroller">
    <!-- partial:partials/_navbar.jsp -->
    <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
      <div class="text-center navbar-brand-wrapper d-flex align-items-center justify-content-center">
        <a class="navbar-brand brand-logo mr-5" href="index.jsp"></a>
<!--      <a class="navbar-brand brand-logo-mini" href="index.jsp"></a>-->
      </div>
      <div class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
        <button class="navbar-toggler navbar-toggler align-self-center" type="button" data-
toggle="minimize">
          <span class="icon-menu"></span>
        </button>
        <ul class="navbar-nav navbar-nav-right">
          <li class="nav-item dropdown">
            <a class="nav-link count-indicator dropdown-toggle" id="notificationDropdown" href="#" data-
toggle="dropdown">
              <i class="icon-bell mx-0"></i>
              <span class="count"></span>
            </a>
```

```

<li class="nav-item nav-profile dropdown">
  <a class="nav-link dropdown-toggle" href="#" data-toggle="dropdown" id="profileDropdown">
    
  </a>
  <div class="dropdown-menu dropdown-menu-right navbar-dropdown" aria-
labelledby="profileDropdown">
    </ul>
    <button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button" data-
toggle="offcanvas">
      <span class="icon-menu"></span>
    </button>
  </div>
</nav>
<!-- partial -->
<div class="container-fluid page-body-wrapper">
  <!-- partial:partials/_settings-panel.jsp -->
  <!-- partial -->
  <!-- partial:partials/_sidebar.jsp -->
  <nav class="sidebar sidebar-offcanvas" id="sidebar">
    <ul class="nav">
      <li class="nav-item">
        <a class="nav-link" href="index.jsp">
          <i class="icon-grid menu-icon"></i>
          <span class="menu-title">Dashboard</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Customer.jsp">
          <i class="icon-head menu-icon"></i>
          <span class="menu-title">Customer</span>
        </a>
      </li><li class="nav-item">
        <a class="nav-link" href="Employee.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Employee</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Appointment.jsp">
          <i class="icon-paper menu-icon"></i>
          <span class="menu-title">Appointment</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Payment.jsp">
          <i class="icon-paper menu-icon"></i>
          <span class="menu-title">Payment</span>
        </a>
      </li>
    </ul>
  </nav>

```

```

</li>
<li class="nav-item">
  <a class="nav-link" href="Service.jsp">
    <i class="icon-paper menu-icon"></i>
    <span class="menu-title">Service</span>
  </a>
</li>
</ul>
</nav>
<!-- partial -->
<div class="main-panel">
  <div class="content-wrapper">
    <div class="row">
      <div class="col-md-12 grid-margin">
        <div class="row">
          <div class="col-12 col-xl-8 mb-4 mb-xl-0">
            <h3 class="font-weight-bold">Welcome Prasad</h3>
          </div>
        </div>
      </div>
    </div>
    <div class="row">
      <div class="col-md-6 grid-margin stretch-card">
        <div class="card tale-bg">
          <div class="card-people mt-auto">
            
          <div class="weather-info">
        </div>
      </div>
    </div>
  </div>
</div>
<script src="vendors/js/vendor.bundle.base.js"></script>
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>

<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
</body>
</html>

```


Customer.jsp

```
<%@page import="java.sql.*"%>
<!DOCTYPE html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <title>Saloon Admin</title>
  <!-- plugins:css -->
  <link rel="stylesheet" href="vendors/feather/feather.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
  <!-- endinject -->
  <!-- Plugin css for this page -->
  <link rel="stylesheet" href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" type="text/css" href="js/select.dataTables.min.css">
  <!-- End plugin css for this page -->
  <!-- inject:css -->
  <link rel="stylesheet" href="css/vertical-layout-light/style.css">
  <!-- endinject -->
  <link rel="shortcut icon" href="images/favicon.png" />
</head>
<body>
  <%
  try
  {
    Class.forName("com.mysql.jdbc.Driver");
    Connection con=(Connection)DriverManager.getConnection(
      "jdbc:mysql://localhost:3307/msms","root","");
    Statement st=con.createStatement();
    String sql= "select * from customer";
    ResultSet rs =st.executeQuery(sql);
  %>
  <div class="container-scroller">
    <!-- partial:partials/_navbar.jsp -->
    <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
      <div class="text-center navbar-brand-wrapper d-flex align-items-center justify-content-center">
        <a class="navbar-brand brand-logo mr-5" href="index.jsp"></a>
        <a class="navbar-brand brand-logo-mini" href="index.jsp"></a></div>
      <div class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
        <button class="navbar-toggler navbar-toggler align-self-center" type="button" data-toggle="minimize">
          <span class="icon-menu"></span>
        </button>
      </div>
    </nav>
  </div>
  <%
  }
```

```

</button>
<ul class="navbar-nav mr-lg-2">
  <li class="nav-item nav-search d-none d-lg-block">
    <div class="input-group">
      <div class="input-group-prepend hover-cursor" id="navbar-search-icon">
        <span class="input-group-text" id="search">
          <i class="icon-search"></i>
        </span>
      </div>
      <input type="text" class="form-control" id="navbar-search-input" placeholder="Search now" aria-
label="search" aria-describedby="search">
    </div>
  </li>
</ul>
<button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button" data-
toggle="offcanvas">
  <span class="icon-menu"></span>
</button>
</div>
</nav>
<!-- partial -->
<div class="container-fluid page-body-wrapper">
  <nav class="sidebar sidebar-offcanvas" id="sidebar">
    <ul class="nav">
      <li class="nav-item">
        <a class="nav-link" href="index.jsp">
          <i class="icon-grid menu-icon"></i>
          <span class="menu-title">Dashboard</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Customer.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Customer</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Employee.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Employee</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Appointment.jsp">
          <i class="icon-paper menu-icon"></i>
          <span class="menu-title">Appointment</span>
        </a>
      </li>
      <li class="nav-item">

```

```

<a class="nav-link" href="Payment.jsp">
  <i class="icon-paper menu-icon"></i>
  <span class="menu-title">Payment</span>
</a>
</li>
<li class="nav-item">
  <a class="nav-link" href="Service.jsp">
    <i class="icon-paper menu-icon"></i>
    <span class="menu-title">Service</span>
  </a>
</li>
</ul>
</nav>
<!-- partial -->
<div class="col-lg-10 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <h4 class="card-title">Customer Table</h4>
      <button class="btn btn-success btn-rounded btn-fw" data-toggle="modal" data-
target="#addCustomer"><i class="icon-plus "></i> Add Customer</button>
      <div class="table-responsive">
      <div class="table-responsive">
        <table class="table table-hover">
          <thead>
            <tr>
              <th>Customer Id</th>
              <th>Name</th>
              <th>address</th>
              <th>Contact</th>
              <th>email </th>
              <th>Update</th>
              <th>Delete</th>
            </tr>
          </thead>
          <tbody>
            <%while(rs.next()){%>
            <tr>
              <td><%=rs.getString(1)%></td>
              <td><%=rs.getString(2)%></td>
              <td><%=rs.getString(3)%></td>
              <td><%=rs.getString(4)%></td>
              <td><%=rs.getString(5)%></td>
              <td>
                <a href="CustomeEdit.jsp?id=<%= rs.getInt(1) %>">
                  <button type="button" class="btn btn-primary btn-rounded btn-icon" >
                    <i class="ti-pencil"></i>
                  </button>
                </a>
              </td>
            </tr>
          </tbody>
        </table>
      </div>
    </div>
  </div>

```

```

</td>
<td>
  <a href="CustomerDel.jsp?id=<%=rs.getString(1)%>" >
    <button class="btn btn-danger btn-rounded btn-icon">
      <i class="ti-trash"></i>
    </button>
  </a>
</td>
</tr>
<%=}%>
</tbody>
</table>
<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" role="dialog" aria-
labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog" role="document">
    <div class="modal-content" style="width:600px">
      <div class="modal-header">
        <h5 class="modal-title" id="exampleModalLabel">Edit Customer</h5>
        <button type="button" class="close" data-dismiss="modal" aria-label="Close">
          <span aria-hidden="true">&times;</span>
        </button>
      </div>
      <div class="modal-body">
        <form action="">
          <div class="form-group row">
            <label for="inputName" class="col-sm-2 col-form-label" >Name</label>
            <div class="col-sm-10">
              <input type="text" class="form-control" id="inputEmail3" name="name"
placeholder="Enter Your Name Here" value="" >
            </div>
            <label for="inputName" class="col-sm-2 col-form-label">Address</label>
            <div class="col-sm-10">
              <input type="text" class="form-control" id="inputEmail3" name="addr"
placeholder="Enter Your Address Here" value="">
            </div>
            <label for="inputName" class="col-sm-2 col-form-label">Contact</label>
            <div class="col-sm-10">
              <input type="text" class="form-control" id="inputEmail3" name="con"
placeholder="Enter Your Contact Here" value="">
            </div>
            <label for="inputName" class="col-sm-2 col-form-label">Email</label>
            <div class="col-sm-10">
              <input type="text" class="form-control" id="inputEmail3" name="em"
placeholder="Enter Your Email Here" value="">
            </div>
          </div>
        </form>
      </div>
    </div>
  </div>
</div>

```

```

        <div class="modal-footer">
            <button type="button" class="btn btn-secondary" data-dismiss="modal">Close</button>
            <button type="button" class="btn btn-primary">Save changes</button>
        </div>
    </div>
</div>
</div>
</div>
<div class="modal fade" id="addCustomer" tabindex="-1" role="dialog" aria-
labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog" role="document">
        <div class="modal-content" style="width:600px">
            <div class="modal-header">
                <h5 class="modal-title" id="exampleModalLabel">Add Customer</h5>
                <button type="button" class="close" data-dismiss="modal" aria-label="Close">
                    <span aria-hidden="true">&times;</span>
                </button>
            </div>
            <div class="modal-body">
                <form id="formAdd" method="get" action="CustomerAdd.jsp">
                    <div class="form-group row">
                        <label for="inputName" class="col-sm-2 col-form-label">Customer Name</label>
                        <div class="col-sm-10">
                            <input type="text" class="form-control" id="inputEmail1" name="name"
placeholder="Enter Your Name Here" value="" >
                        </div>
                        <label for="inputAddress" class="col-sm-2 col-form-label">Address</label>
                        <div class="col-sm-10">
                            <input type="text" class="form-control" id="inputEmail2" name="addr"
placeholder="Enter Your Address Here" value="">
                        </div>
                        <label for="inputContact" class="col-sm-2 col-form-label">Contact</label>
                        <div class="col-sm-10">
                            <input type="text" class="form-control" id="inputEmail3" name="contact"
placeholder="Enter Your Contact Here" value="">
                        </div>
                        <label for="inputEmail" class="col-sm-2 col-form-label">Email</label>
                        <div class="col-sm-10">
                            <input type="text" class="form-control" id="inputEmail4" name="email"
placeholder="Enter Your Email Here" value="">
                        </div>
                        <label for="inputPassword" class="col-sm-2 col-form-label">Password</label>
                        <div class="col-sm-10">
                            <input type="password" class="form-control" id="inputEmail5" name="pass"
placeholder="Enter Your Email Here" value="">
                        </div>
                    </div>
                </form>
            </div>
        </div>
    </div>
</div>

```

```

        <div class="modal-footer">
            <button type="button" class="btn btn-secondary" data-dismiss="modal">Close</button>
            <button type="submit" class="btn btn-success" form="formAdd">Save changes</button>
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
<!-- plugins:js -->
<script src="vendors/js/vendor.bundle.base.js"></script>
<!-- endinject -->
<!-- Plugin js for this page -->
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>

<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<!-- Custom js for this page-->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
<%>catch(Exception e)
{
out.print(e.getMessage());%><%
}%>
<script>
    $('#myModal').on('shown.bs.modal', function () {
        $('#myInput').trigger('focus')
    })
</script>
</body>
</html>

```

Employee.jsp

```
<%@page import="java.sql.*"%>
<!DOCTYPE html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport"
      content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <title>Saloon Admin</title>
    <!-- plugins:css -->
    <link rel="stylesheet" href="vendors/feather/feather.css">
    <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
    <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
    <!-- endinject -->
    <!-- Plugin css for this page -->
    <link rel="stylesheet"
      href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
    <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
    <link rel="stylesheet" type="text/css"
      href="js/select.dataTables.min.css">
    <!-- End plugin css for this page -->
    <!-- inject:css -->
    <link rel="stylesheet" href="css/vertical-layout-light/style.css">
    <!-- endinject -->
    <link rel="shortcut icon" href="images/favicon.png" />
  </head>
  <body>
    <%
      try {
        Class.forName("com.mysql.jdbc.Driver");
        Connection con = (Connection) DriverManager.getConnection("jdbc:mysql://localhost:3307/msms",
"root", "");
        Statement st = con.createStatement();

        String sql = "select * from employee";
        ResultSet rs = st.executeQuery(sql);
      }%>
    <div class="container-scroller">
      <!-- partial:partials/_navbar.jsp -->
      <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
        <div
          class="text-center navbar-brand-wrapper d-flex align-items-center justify-content-center">
        </div>
        <div
          class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
          <button class="navbar-toggler navbar-toggler align-self-center"
            type="button" data-toggle="minimize">
```

```

        <span class="icon-menu"></span>
    </button>
    <ul class="navbar-nav mr-lg-2">
        <li class="nav-item nav-search d-none d-lg-block">
            <div class="input-group">
                <div class="input-group-prepend hover-cursor"
                    id="navbar-search-icon">
                    <span class="input-group-text" id="search"> <i
                        class="icon-search"></i>
                    </span>
                </div>
                <input type="text" class="form-control" id="navbar-search-input"
                    placeholder="Search now" aria-label="search"
                    aria-describedby="search">
            </div>
        </li>

        <div class="container-fluid page-body-wrapper">
            <!-- partial:partials/_settings-panel.jsp -->

            <!-- partial -->
            <!-- partial:partials/_sidebar.jsp -->
            <nav class="sidebar sidebar-offcanvas" id="sidebar">
                <ul class="nav">
                    <li class="nav-item"><a class="nav-link" href="index.jsp">
                        <i class="icon-grid menu-icon"></i> <span class="menu-title">Dashboard</span>
                    </a></li>
                    <li class="nav-item"><a class="nav-link" href="Customer.jsp">
                        <i class="icon-briefcase menu-icon"></i> <span class="menu-
title">Customer</span>
                    </a></li>
                    <li class="nav-item"><a class="nav-link" href="Employee.jsp">
                        <i class="icon-briefcase menu-icon"></i> <span class="menu-
title">Employee</span>
                    </a></li>
                    <li class="nav-item"><a class="nav-link"
                        href="Appointment.jsp"> <i class="icon-paper menu-icon"></i> <span
                        class="menu-title">Appointment</span>
                    </a></li>
                    <li class="nav-item"><a class="nav-link" href="Payment.jsp">
                        <i class="icon-paper menu-icon"></i> <span class="menu-title">Payment</span>
                    </a></li>
                    <li class="nav-item"><a class="nav-link" href="Service.jsp">
                        <i class="icon-paper menu-icon"></i> <span class="menu-title">Service</span>
                    </a></li>
                </ul>
            </nav>

```



```

<!-- partial -->
<div class="col-lg-10 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <h4 class="card-title">Emoloyee Table</h4>
      <a href="Employee_signup.html"
        class="btn btn-success btn-rounded btn-fw">Add Employee</a>

      <div class="table-responsive">
        <div class="table-responsive">
          <table class="table table-hover">
            <thead>
              <tr>
                <th>Employee Id</th>
                <th>Name</th>
                <th>address</th>
                <th>Contact</th>
                <th>email</th>
                <th>Update</th>
                <th>Delete</th>
              </tr>
            </thead>
            <tbody>
              <%
                while (rs.next()) {
              %>
              <tr>
                <td><%=rs.getString(1)%></td>
                <td><%=rs.getString(2)%></td>
                <td><%=rs.getString(3)%></td>
                <td><%=rs.getString(4)%></td>
                <td><%=rs.getString(5)%></td>
                <td><a href="EmployeeEdit.jsp?id=<%=rs.getString(1)%>">
                  <button class="btn btn-primary btn-rounded btn-icon">
                    <i class="ti-pencil"></i>
                  </button>
                </a></td>
                <td><a href="EmployeeDel.jsp?id=<%=rs.getString(1)%>">
                  <button class="btn btn-danger btn-rounded btn-icon">
                    <i class="ti-trash"></i>
                  </button>
                </a></td>
              </tr>
            <%}%>
          </tbody>
        </table>
      </div>
    </div>
  </div>

```

```

        </div>
    </div>

    </div>
</div>
</div>

<!-- page-body-wrapper ends -->
</div>
<!-- container-scroller -->

<!-- plugins:js -->
<script src="vendors/js/vendor.bundle.base.js"></script>
<!-- endinject -->
<!-- Plugin js for this page -->
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>

<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<!-- Custom js for this page-->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
<%
} catch (Exception e) {
out.print(e.getMessage());
}%>
<%
}%>
</body>

</html>

```

Appointment.jsp

```
<%@page import="java.sql.*"%>
<!DOCTYPE html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <title>Saloon Admin</title>
  <!-- plugins:css -->
  <link rel="stylesheet" href="vendors/feather/feather.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
  <!-- endinject -->
  <!-- Plugin css for this page -->
  <link rel="stylesheet" href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" type="text/css" href="js/select.dataTables.min.css">
  <!-- End plugin css for this page -->
  <!-- inject:css -->
  <link rel="stylesheet" href="css/vertical-layout-light/style.css">
  <!-- endinject -->
  <link rel="shortcut icon" href="images/favicon.png" />
</head>
<body>
  <%
  try
  {
    Class.forName("com.mysql.jdbc.Driver");
    Connection con=(Connection)DriverManager.getConnection(
      "jdbc:mysql://localhost:3307/msms","root","");
    Statement st=con.createStatement();
    String sql = "SELECT * FROM `appointment`,customer,service,employee WHERE appointment.c_id =
customer.cust_id AND appointment.e_id = employee.emp_id AND appointment.s_id =
service.service_id";
    ResultSet rs =st.executeQuery(sql);
  }
  %>
  <div class="container-scroller">
    <!-- partial:partials/_navbar.jsp -->
    <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
      <div class="text-center navbar-brand-wrapper d-flex align-items-center justify-content-center">
      </div>
      <div class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
        <button class="navbar-toggler navbar-toggler align-self-center" type="button" data-
toggle="minimize">
          <span class="icon-menu"></span>
        </button>
      </div>
    </nav>
  </div>
```

```
<ul class="navbar-nav mr-lg-2">
  <li class="nav-item nav-search d-none d-lg-block">
    <div class="input-group">
      <div class="input-group-prepend hover-cursor" id="navbar-search-icon">
        <span class="input-group-text" id="search">
          <i class="icon-search"></i>
        </span>
      </div>
      <input type="text" class="form-control" id="navbar-search-input" placeholder="Search now" aria-
label="search" aria-describedby="search">
    </div>
  </li>
</ul>
<button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button" data-
toggle="offcanvas">
  <span class="icon-menu"></span>
</button>
</div>
</nav>
<!-- partial -->
<div class="container-fluid page-body-wrapper">
  <!-- partial:partials/_settings-panel.jsp -->
  <!-- partial -->
  <!-- partial:partials/_sidebar.jsp -->
  <nav class="sidebar sidebar-offcanvas" id="sidebar">
    <ul class="nav">
      <li class="nav-item">
        <a class="nav-link" href="index.jsp">
          <i class="icon-grid menu-icon"></i>
          <span class="menu-title">Dashboard</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Customer.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Customer</span>
        </a>
      </li><li class="nav-item">
        <a class="nav-link" href="Employee.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Employee</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Appointment.jsp">
          <i class="icon-paper menu-icon"></i>
          <span class="menu-title">Appointment</span>
        </a>
      </li>
    </ul>
  </nav>
</div>
```

```

</li>
<li class="nav-item">
  <a class="nav-link" href="Payment.jsp">
    <i class="icon-paper menu-icon"></i>
    <span class="menu-title">Payment</span>
  </a>
</li>
<li class="nav-item">
  <a class="nav-link" href="Service.jsp">
    <i class="icon-paper menu-icon"></i>
    <span class="menu-title">Service</span>
  </a>
</li>
</ul>
</nav>
<!-- partial -->
<div class="col-lg-10 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <h4 class="card-title">Appointment Table</h4>
<!--      <button class="btn btn-success btn-rounded btn-fw">Add Appointments</button>-->
      <div class="table-responsive">
        <div class="table-responsive">
          <table class="table table-hover">
            <thead>
              <tr>
                <th>Apnt Id</th>
                <th>Apnt Date</th>
                <th>Apnt Time</th>
                <th>Location</th>
                <th>Apnt address</th>
                <th>Customer </th>
                <th>Employee </th>
                <th>Service </th>
                <th>Update</th>-->
                <th>Delete</th>
              </tr>
            </thead>
            <tbody>
              <%while(rs.next()){%>
              <tr>
                <td><%=rs.getString(1)%></td>
                <td><%=rs.getString(2)%></td>
                <td><%=rs.getString(3)%></td>
                <td><%=rs.getString(4)%></td>
                <td><%=rs.getString(5)%></td>
                <td><%=rs.getString("cust_name")%></td>
                <td><%=rs.getString("emp_name")%></td>

```

```

        <td><%=rs.getString("service_name")%></td>
<!--
        <td><a href="index.jsp">
        <button class="btn btn-primary btn-rounded btn-icon">
        <i class="ti-pencil"></i>
        </button></a>
        </td>-->
        <td><a href="Appointmentdel.jsp?id=<%=rs.getString(1)%>" >
        <button class="btn btn-danger btn-rounded btn-icon">
        <i class="ti-trash"></i>
        </button></a>
        </td>
    </tr>
    <%}%>
</tbody>
</table>
</div>
</div>
</div>
</div>
</div>
</div>
</div>

<!-- plugins:js -->
<script src="vendors/js/vendor.bundle.base.js"></script>
<!-- endinject -->
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>
<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<!-- Custom js for this page-->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
<%}catch(Exception e)
{
out.print(e.getMessage());%><%
}%>
</body>
</html>

```

Payment.jsp

```
<%@page import="java.sql.*"%>
<!DOCTYPE html>
<html lang="en">
<head>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <title>Saloon Admin</title>
  <!-- plugins:css -->
  <link rel="stylesheet" href="vendors/feather/feather.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
  <!-- endinject -->
  <!-- Plugin css for this page -->
  <link rel="stylesheet" href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
  <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
  <link rel="stylesheet" type="text/css" href="js/select.dataTables.min.css">
  <!-- End plugin css for this page -->
  <!-- inject:css -->
  <link rel="stylesheet" href="css/vertical-layout-light/style.css">
  <!-- endinject -->
  <link rel="shortcut icon" href="images/favicon.png" />
</head>
<body>
  <%
  try
  {
    Class.forName("com.mysql.jdbc.Driver");
    Connection con=(Connection)DriverManager.getConnection(
      "jdbc:mysql://localhost:3307/msms","root","");
    Statement st=con.createStatement();

    String sql= "select * from payment";
    ResultSet rs =st.executeQuery(sql);
  %>
  <div class="container-scroller">
    <!-- partial:partials/_navbar.jsp -->
    <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
      <div class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
        <button class="navbar-toggler navbar-toggler align-self-center" type="button" data-
toggle="minimize">
          <span class="icon-menu"></span>
        </button>
        <ul class="navbar-nav mr-lg-2">
          <li class="nav-item nav-search d-none d-lg-block">
            <div class="input-group">
```

```
<div class="input-group-prepend hover-cursor" id="navbar-search-icon">
  <span class="input-group-text" id="search">
    <i class="icon-search"></i>
  </span>
</div>
<input type="text" class="form-control" id="navbar-search-input" placeholder="Search now" aria-
label="search" aria-describedby="search">
</div>
</li>
</ul>
<button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button" data-
toggle="offcanvas">
  <span class="icon-menu"></span>
</button>
</div>
</nav>
<!-- partial -->
<div class="container-fluid page-body-wrapper">
  <!-- partial:partials/_settings-panel.jsp -->

  <!-- partial -->
  <!-- partial:partials/_sidebar.jsp -->
  <nav class="sidebar sidebar-offcanvas" id="sidebar">
    <ul class="nav">
      <li class="nav-item">
        <a class="nav-link" href="index.jsp">
          <i class="icon-grid menu-icon"></i>
          <span class="menu-title">Dashboard</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Customer.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Customer</span>
        </a>
      </li><li class="nav-item">
        <a class="nav-link" href="Employee.jsp">
          <i class="icon-briefcase menu-icon"></i>
          <span class="menu-title">Employee</span>
        </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="Appointment.jsp">
          <i class="icon-paper menu-icon"></i>
          <span class="menu-title">Appointment</span>
        </a>
      </li>
      <li class="nav-item">
```



```

    <a class="nav-link" href="Payment.jsp">
      <i class="icon-paper menu-icon"></i>
      <span class="menu-title">Payment</span>
    </a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="Service.jsp">
      <i class="icon-paper menu-icon"></i>
      <span class="menu-title">Service</span>
    </a>
  </li>
</ul>
</nav>
<!-- partial -->
<div class="col-lg-10 grid-margin stretch-card">
  <div class="card">
    <div class="card-body">
      <h4 class="card-title">Payment Table</h4>
<!--      <button class="btn btn-success btn-rounded btn-fw">Add Employee</button>-->
      <div class="table-responsive">
        <div class="table-responsive">
          <table class="table table-hover">
            <thead>
              <tr>
                <th>Payment Id</th>
                <th>Amount (Rs)</th>
                <th>Date</th>
                <th>Service Id</th>
                <th>Customer Id</th>
                <th>Employee Id</th>
<!--                <th>Update</th>-->
                <th>Delete</th>
              </tr>
            </thead>
            <%while(rs.next()){%>
              <tr>
                <td><%=rs.getString(1)%></td>
                <td><%=rs.getString(2)%></td>
                <td><%=rs.getString(3)%></td>
                <td><%=rs.getString(4)%></td>
                <td><%=rs.getString(5)%></td>
                <td><%=rs.getString(6)%></td>
<!--                <td>
                  <button class="btn btn-primary btn-rounded btn-icon">
                    <i class="ti-pencil"></i>
                  </button>
                </td>-->
                <td>

```

```

        <a href="PaymentDel.jsp?id=<%=rs.getString(1)%>" >
        <button class="btn btn-danger btn-rounded btn-icon">
        <i class="ti-trash"></i>
        </button>
        </a>
    </td>
</tr>
<%}%>
</table>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
<!-- page-body-wrapper ends -->
</div>
<!-- container-scroller -->
<!-- plugins:js -->
<script src="vendors/js/vendor.bundle.base.js"></script>
<!-- endinject -->
<!-- Plugin js for this page -->
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>
<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<!-- Custom js for this page-->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
<%>catch(Exception e)
{
out.print(e.getMessage());%><%
}%>
</body>
</html>

```

Service.jsp

```
<%@page import="java.sql.*"%>
<!DOCTYPE html>
<html lang="en">
<head>
    <%
    try
    {

        Class.forName("com.mysql.jdbc.Driver");
        Connection con=(Connection)DriverManager.getConnection(
            "jdbc:mysql://localhost:3307/msms","root","");
        Statement st=con.createStatement();

        String sql= "select * from service";
        ResultSet rs =st.executeQuery(sql);
    %>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <title>Saloon Admin</title>
    <!-- plugins:css -->
    <link rel="stylesheet" href="vendors/feather/feather.css">
    <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
    <link rel="stylesheet" href="vendors/css/vendor.bundle.base.css">
    <!-- endinject -->
    <!-- Plugin css for this page -->
    <link rel="stylesheet" href="vendors/datatables.net-bs4/dataTables.bootstrap4.css">
    <link rel="stylesheet" href="vendors/ti-icons/css/themify-icons.css">
    <link rel="stylesheet" type="text/css" href="js/select.dataTables.min.css">
    <!-- End plugin css for this page -->
    <!-- inject:css -->
    <link rel="stylesheet" href="css/vertical-layout-light/style.css">
    <!-- endinject -->
    <link rel="shortcut icon" href="images/favicon.png" />
</head>
<body>
    <div class="container-scroller">
        <!-- partial:partials/_navbar.jsp -->
        <nav class="navbar col-lg-12 col-12 p-0 fixed-top d-flex flex-row">
            <div class="navbar-menu-wrapper d-flex align-items-center justify-content-end">
                <button class="navbar-toggler navbar-toggler align-self-center" type="button" data-
toggle="minimize">
                    <span class="icon-menu"></span>
                </button>
            <!-- < not mandatory>-->
            <ul class="navbar-nav mr-lg-2">
```

```
<li class="nav-item nav-search d-none d-lg-block">
  <div class="input-group">
    <div class="input-group-prepend hover-cursor" id="navbar-search-icon">
      <span class="input-group-text" id="search">
        <i class="icon-search"></i>
      </span>
    </div>
    <input type="text" class="form-control" id="navbar-search-input" placeholder="Search now" aria-label="search" aria-describedby="search">
  </div>
</li>
</ul>
```

```
<button class="navbar-toggler navbar-toggler-right d-lg-none align-self-center" type="button" data-toggle="offcanvas">
  <span class="icon-menu"></span>
</button>
</div>
</nav>
<!-- partial -->
<div class="container-fluid page-body-wrapper">
  <!-- partial:partials/_settings-panel.jsp -->
```

```
<!-- partial -->
<!-- partial:partials/_sidebar.jsp -->
<nav class="sidebar sidebar-offcanvas" id="sidebar">
  <ul class="nav">
    <li class="nav-item">
      <a class="nav-link" href="index.jsp">
        <i class="icon-grid menu-icon"></i>
        <span class="menu-title">Dashboard</span>
      </a>
    </li>
    <li class="nav-item">
      <a class="nav-link" href="Customer.jsp">
        <i class="icon-briefcase menu-icon"></i>
        <span class="menu-title">Customer</span>
      </a>
    </li>
    <li class="nav-item">
      <a class="nav-link" href="Employee.jsp">
        <i class="icon-briefcase menu-icon"></i>
        <span class="menu-title">Employee</span>
      </a>
    </li>
    <li class="nav-item">
      <a class="nav-link" href="Appointment.jsp">
        <i class="icon-paper menu-icon"></i>
```

```

        <span class="menu-title">Appointment</span>
    </a>
</li>
<li class="nav-item">
    <a class="nav-link" href="Payment.jsp">
        <i class="icon-paper menu-icon"></i>
        <span class="menu-title">Payment</span>
    </a>
</li>
<li class="nav-item">
    <a class="nav-link" href="Service.jsp">
        <i class="icon-paper menu-icon"></i>
        <span class="menu-title">Service</span>
    </a>
</li>
</ul>
</nav>
<!-- partial -->
<div class="col-lg-auto grid-margin stretch-card ">
    <div class="card">
        <div class="card-body ">
            <h4 class="card-title">Service Table</h4>
<!--      <button class="btn btn-success btn-rounded btn-fw">Add Service</button>-->

        <div class="table-responsive">
        <div class="table-responsive">
            <table class="table table-hover">
                <thead>
                    <tr>
                        <th>Service Id</th>
                        <th>Name</th>
                        <th>Charges (In Rs)</th>
                    </tr>
                </thead>
                <tbody>
                    <%while(rs.next()){%>
                    <tr>
                        <td><%=rs.getString(1)%></td>
                        <td><%=rs.getString(2)%></td>
                        <td><%=rs.getString(3)%></td>
                        <td>
                            <a href="ServiceDel.jsp?id=<%=rs.getString(1)%>" >
                                <button class="btn btn-danger btn-rounded btn-icon">
                                    <i class="ti-trash"></i>
                                </button>
                            </a>
                        </td>
                    </tr>
                </tbody>
            </table>

```

```

        <%}%>
    </tbody>
</table>
</div>
</div>
</div>
</div>
    </div>
</div>
</div>
    <!-- page-body-wrapper ends -->
</div>
<!-- container-scroller --
<!-- plugins:js -->
<script src="vendors/js/vendor.bundle.base.js"></script>
<!-- endinject -->
<!-- Plugin js for this page -->
<script src="vendors/chart.js/Chart.min.js"></script>
<script src="vendors/datatables.net/jquery.dataTables.js"></script>
<script src="vendors/datatables.net-bs4/dataTables.bootstrap4.js"></script>
<script src="js/dataTables.select.min.js"></script>
<!-- End plugin js for this page -->
<!-- inject:js -->
<script src="js/off-canvas.js"></script>
<script src="js/hoverable-collapse.js"></script>
<script src="js/template.js"></script>
<script src="js/settings.js"></script>
<script src="js/todolist.js"></script>
<!-- endinject -->
<!-- Custom js for this page-->
<script src="js/dashboard.js"></script>
<script src="js/Chart.roundedBarCharts.js"></script>
<!-- End custom js for this page-->
<%}catch(Exception e)
{
out.print(e.getMessage());}%><%
}%>
</body>
</html>

```

THANK YOU!

Pillar

