


Control Statement

IF Statement

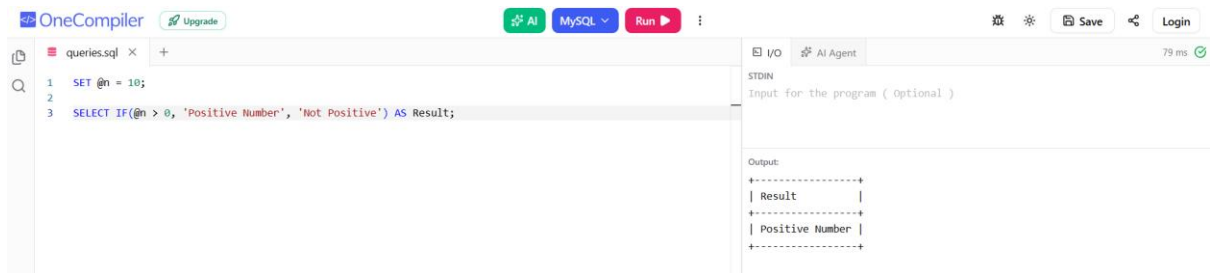


The screenshot shows the OneCompiler interface with a MySQL query editor. The query is as follows:

```
1 SET @n = 10;
2
3 SELECT IF(@n > 0, 'Positive Number', 'Not Positive') AS Result;
```

The output on the right shows the result of the query:

```
Output:
+-----+
| Result |
+-----+
| Positive Number |
+-----+
```

Else if statement

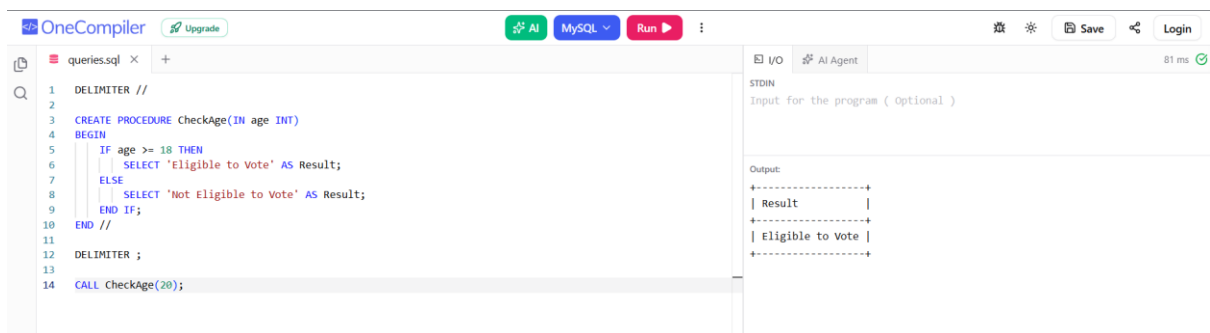


The screenshot shows the OneCompiler interface with a MySQL query editor. The query is as follows:

```
1 DELIMITER //
2
3 CREATE PROCEDURE CheckAge(IN age INT)
4 BEGIN
5     IF age >= 18 THEN
6         SELECT 'Eligible to vote' AS Result;
7     ELSE
8         SELECT 'Not Eligible to Vote' AS Result;
9     END IF;
10 END //
11
12 DELIMITER ;
13
14 CALL CheckAge(20);
```

The output on the right shows the result of the query:

```
Output:
+-----+
| Result |
+-----+
| Eligible to Vote |
+-----+
```

Else if else if statement

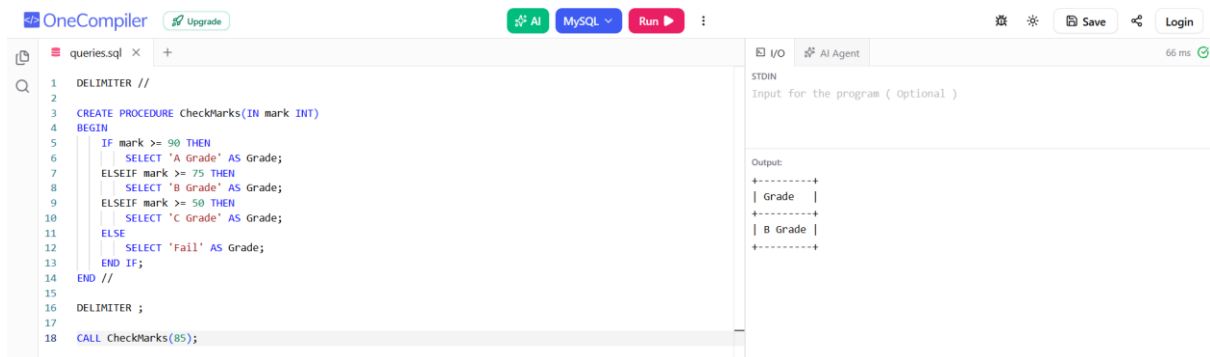


The screenshot shows the OneCompiler interface with a MySQL query editor. The query is as follows:

```
1 DELIMITER //
2
3 CREATE PROCEDURE CheckMarks(IN mark INT)
4 BEGIN
5     IF mark >= 90 THEN
6         SELECT 'A Grade' AS Grade;
7     ELSEIF mark >= 75 THEN
8         SELECT 'B Grade' AS Grade;
9     ELSEIF mark >= 50 THEN
10        SELECT 'C Grade' AS Grade;
11    ELSE
12        SELECT 'Fail' AS Grade;
13    END IF;
14 END //
15
16 DELIMITER ;
17
18 CALL CheckMarks(85);
```

The output on the right shows the result of the query:

```
Output:
+-----+
| Grade |
+-----+
| B Grade |
+-----+
```

Case Statement

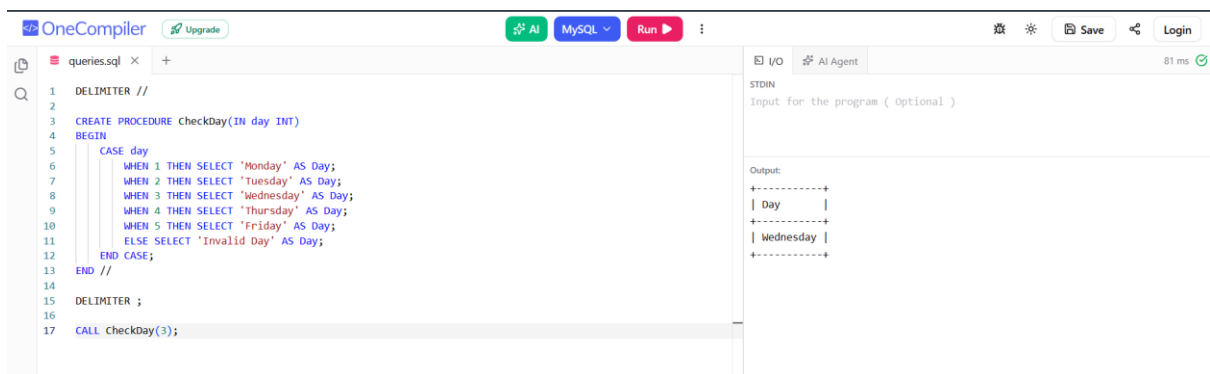

The screenshot shows the OneCompiler interface with a MySQL query editor. The query is as follows:

```
1 DELIMITER //
2
3 CREATE PROCEDURE CheckDay(IN day INT)
4 BEGIN
5     CASE day
6     WHEN 1 THEN SELECT 'Monday' AS Day;
7     WHEN 2 THEN SELECT 'Tuesday' AS Day;
8     WHEN 3 THEN SELECT 'Wednesday' AS Day;
9     WHEN 4 THEN SELECT 'Thursday' AS Day;
10    WHEN 5 THEN SELECT 'Friday' AS Day;
11    ELSE SELECT 'Invalid Day' AS Day;
12    END CASE;
13 END //
14
15 DELIMITER ;
16
17 CALL CheckDay(3);
```

The output on the right shows the result of the query:

```
Output:
+-----+
| Day |
+-----+
| Wednesday |
+-----+
```

While Loop statement

The screenshot shows the OneCompiler IDE with a MySQL query editor. The query defines a procedure `PrintNumbers()` that uses a `WHILE` loop to print numbers from 1 to 5. The output window shows the results of the procedure call, displaying the numbers 1 through 5, each on a new line, enclosed in a box labeled "Number".

```
1 DELIMITER //
2 CREATE PROCEDURE PrintNumbers()
3 BEGIN
4   DECLARE i INT DEFAULT 1;
5   WHILE i <= 5 DO
6     SELECT i AS Number;
7     SET i = i + 1;
8   END WHILE;
9 END //
10 DELIMITER ;
11 CALL PrintNumbers();
```

Output:

```
+-----+
| Number |
+-----+
| 1      |
+-----+
| Number |
+-----+
| 2      |
+-----+
| Number |
+-----+
| 3      |
+-----+
| Number |
+-----+
| 4      |
+-----+
| Number |
+-----+
| 5      |
+-----+
```

Loop Statement


The screenshot shows the OneCompiler IDE with a MySQL query editor. The query defines a procedure `PrintNumbersRepeat()` that uses a `REPEAT` loop to print numbers from 1 to 5. The output window shows the results of the procedure call, displaying the numbers 1 through 5, each on a new line, enclosed in a box labeled "Number".

```
1 DELIMITER //
2 CREATE PROCEDURE PrintNumbersRepeat()
3 BEGIN
4   DECLARE i INT DEFAULT 1;
5   REPEAT
6     SELECT i AS Number;
7     SET i = i + 1;
8   UNTIL i > 5
9   END REPEAT;
10 END //
11 DELIMITER ;
12 CALL PrintNumbersRepeat();
```

Output:

```
+-----+
| Number |
+-----+
| 1      |
+-----+
| Number |
+-----+
| 2      |
+-----+
| Number |
+-----+
| 3      |
+-----+
| Number |
+-----+
| 4      |
+-----+
| Number |
+-----+
| 5      |
+-----+
```

Repeat loop statement

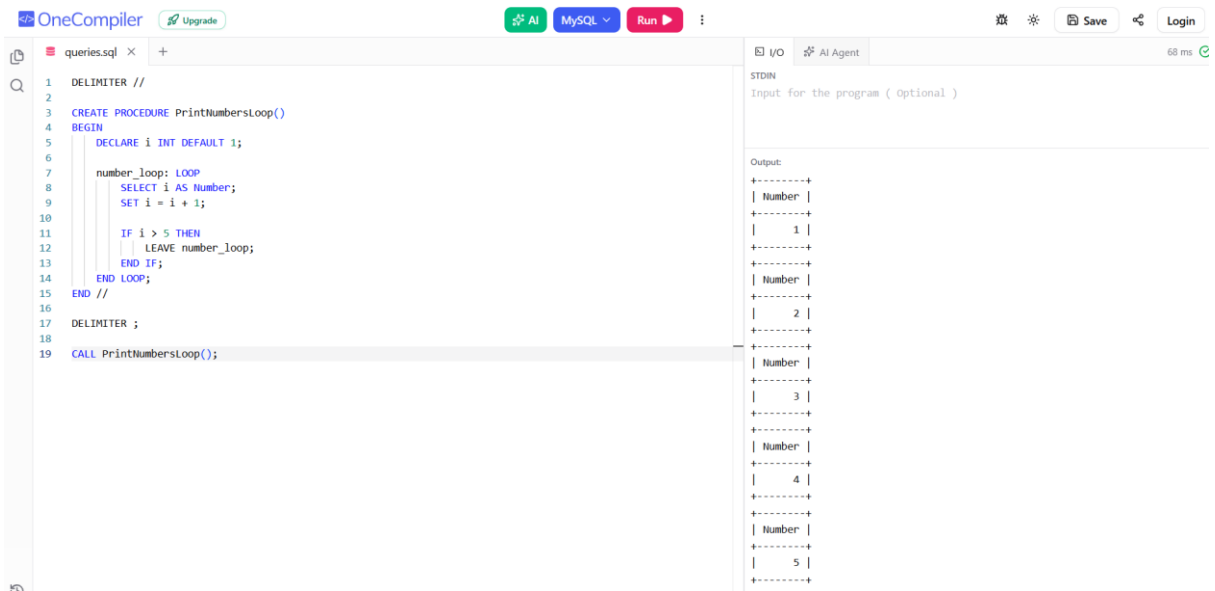

The screenshot shows the OneCompiler MySQL IDE interface. The left pane contains a MySQL script with a procedure named `PrintNumbersLoop()` that uses a `LOOP` statement to print numbers 1 through 5. The right pane shows the output of the script, which is a table with one column named `Number` containing the values 1, 2, 3, 4, and 5.

```
1 DELIMITER //
2
3 CREATE PROCEDURE PrintNumbersLoop()
4 BEGIN
5     DECLARE i INT DEFAULT 1;
6
7     number_loop: LOOP
8         SELECT i AS Number;
9         SET i = i + 1;
10
11         IF i > 5 THEN
12             LEAVE number_loop;
13         END IF;
14     END LOOP;
15 END //
16
17 DELIMITER ;
18
19 CALL PrintNumbersLoop();
```

Output:

Number
1
2
3
4
5