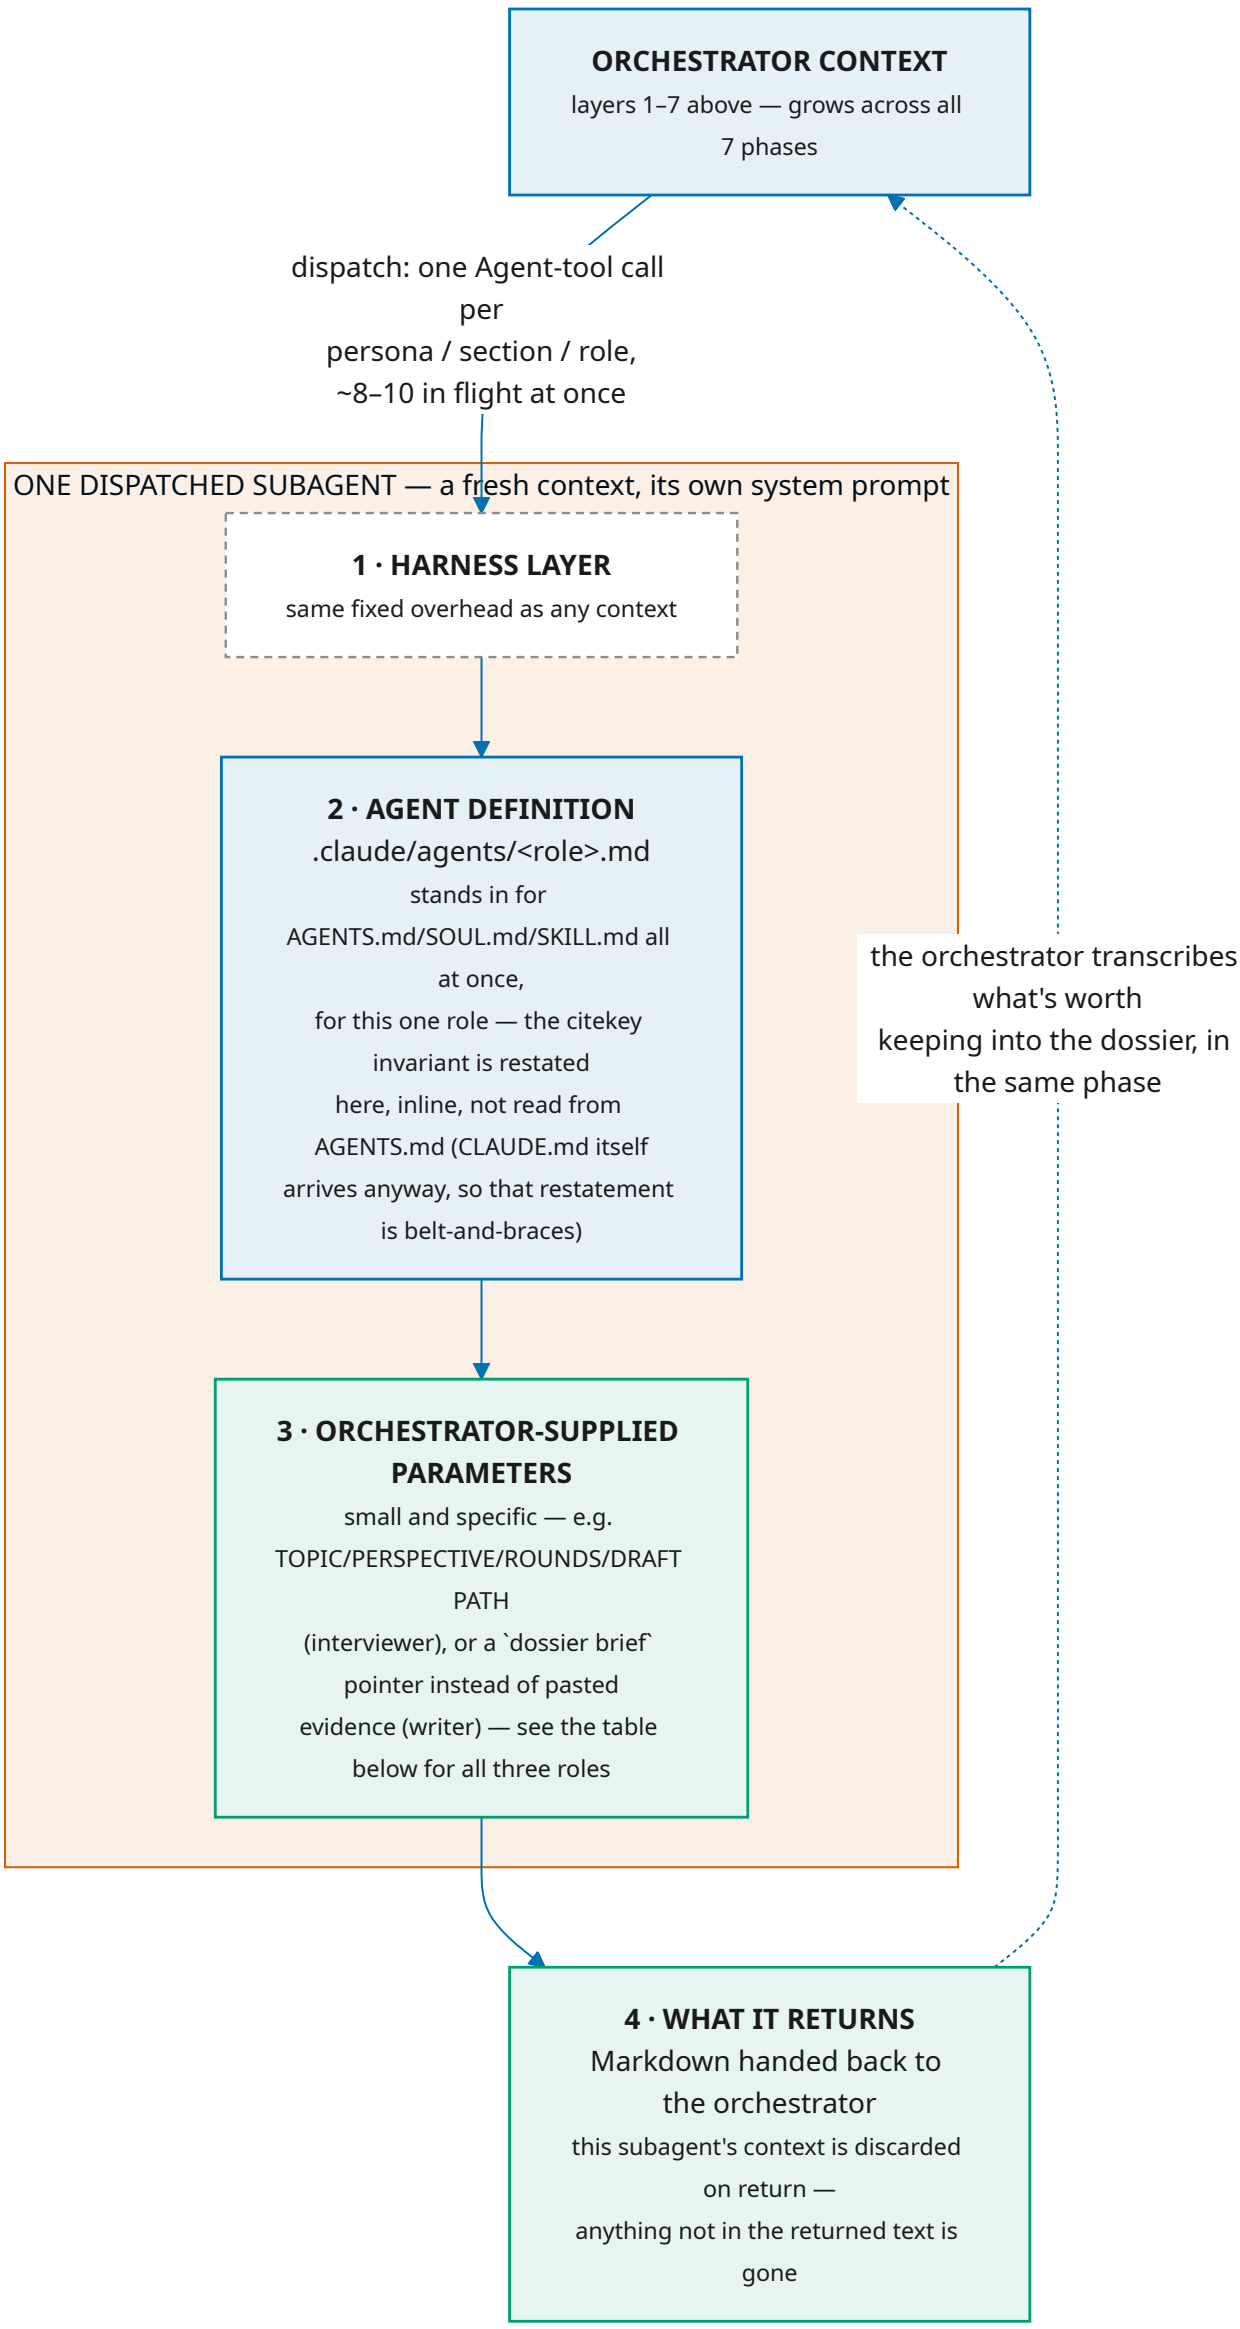
ORCHESTRATOR CONTEXT
layers 1–7 above — grows across all 7 phases
dispatch: one Agent-tool call per persona / section / role, ~8–10 in flight at once
ONE DISPATCHED SUBAGENT — a fresh context, its own system prompt
1 · HARNESS LAYER
same fixed overhead as any context
2 · AGENT DEFINITION
.claude/agents/<role>.md
stands in for AGENTS.md/SOUL.md/SKILL.md all at once, for this one role — the citekey invariant is restated here, inline, not read from AGENTS.md (CLAUDE.md itself arrives anyway, so that restatement is belt-and-braces)
3 · ORCHESTRATOR-SUPPLIED PARAMETERS
small and specific — e.g. TOPIC/PERSPECTIVE/ROUNDS/DRAFT PATH (interviewer), or a `dossier brief` pointer instead of pasted evidence (writer) — see the table below for all three roles
4 · WHAT IT RETURNS
Markdown handed back to the orchestrator
this subagent's context is discarded on return — anything not in the returned text is gone
the orchestrator transcribes what's worth keeping into the dossier, in the same phase