

HOSTEL OUTPASS GENERATION

A PROJECT REPORT

Submitted By

- **PRASANTH KC (4115118104072)**
- **PARTHIPAN M (411518104066)**
- **MUGESH P (411518104054)**

In partial fulfillment for the award of the degree

Of

BACHELOR OF ENGINEERING

IN

COMPUTER SCIENCE AND ENGINEERING



PERI INSTITUTE OF TECHNOLOGY,CHENNAI 600048

ANNA UNIVERSITY: CHENNAI 600 025

BONAFIDE CERTIFICATE

Certified that this project “**HOSTEL OUTPASS GENERATION**” is the Bonafide work of” **PRASANTH KC(411518104072), PARTHIPAN M(411517104078), and MUGESH P(411518104054)**” that carried out the project under my supervision.

SIGNATURE SIGNATURE

| | |
|--|------------------------------|
| Mrs. K. VARALAKSHMI, M.E. | Mrs. S. VINITHA, M.E. |
| HEAD OF THE DEPARTMENT | SUPERVISOR |
| Professor | Assistant |
| Assistant Professor Dept Of ComputerScience & Engg. | |
| Dept of Computer Science & Engg. PERI Institute of technology | |
| PERI Institute of technology Mannivakkam, Chennai 600 048 | |
| Mannivakkam, Chennai 600 048 | |

Submitted for the Viva-Voce examination held on

INTERNAL EXAMINER

EXTERNAL EXAMINER

ACKNOWLEDGEMENT

We express our deep sense of gratitude to our honorable and beloved **Chairman Mr. SARAVANAN PERIASMY, B.E., M.E., OUR** chief Operating officer **Mr. SASIKUMAR VEERARAJAN, B.E.,** and other management members for providing the infrastructure needed.

We express our gratitude to our **Principal Dr. R. PALSON KENNEDY, M.E., MBA, Ph.D.,** for his wholehearted encouragement for completing this project. We convey our thanks to **Mrs. K.VARALAKSHMI, M.E.,** Head of the Department, Department of Computer Science and Engineering, for her kind support and for providing necessary facilities to carry out the project work.

We thank **Mrs. S. Vinitha, M.E.** the Project coordinator of the Department of Computer Science and Engineering, for their constant guidance and support in the reviews.

We would like to express our sincere thanks and deep sense of gratitude to our guide **Mrs. S. Vinitha, M.E.,** Department of Computer Science and Engineering for her valuable guidance, suggestions and constant support paved for the successful completion of the project work.

We also extend our heartfelt thanks to all the **Staff Members** of **Computer Science and Engineering** Department who have rendered their valuable help in making this project successful.

We are very indebted to our **PARENTS** and **FRIENDS** for the continuous support and encouragement throughout the project successfully

ABSTRACT

As the name specifies “HOSTEL
MANAGEMENT SYSTEM” is a software developed

for managing various activities in the hostel. For the past few years the number of educational institutions are increasing rapidly. Thereby the number of hostels are also increasing for the accomodation of the students studying in this institution. And hence there is a lot of strain on the person who are running the hostel and

software's are not usually used in this context. This particular project deals with the problems on managing a hostel and avoids the problems which occur when carried manually.

Identification of the drawbacks of the existing system leads to the designing of computerized system that will be compatible to the existing system with the system Which is more user friendly and more GUI oriented. We can improve the efficiency of the system, thus overcome the drawbacks of the existing system.

- Less human error
- Strength and strain of manual labour can be reduced
- High security
- Data redundancy can be avoided to some extent
- Data consistency
- Easy to handle

- Easy data updating
- Easy record keeping
- Backup data can be easily generated

TABLE OF CONTENTS

CHAPTER 1

| | |
|---|----|
| INTRODUCTION..... | 01 |
| OBJECTIVES AND SCOPE OF THE STUDY | 03 |
| User panel | 03 |

CHAPTER 2

| | |
|------------------------|---|
| LITERATURE SURVEY..... | 6 |
|------------------------|---|

CHAPTER 3

| | |
|-----------------------|---|
| SYSTEM ANALYSIS | 6 |
|-----------------------|---|

| | |
|----------------------|---|
| PROPOSED SYSTEM..... | 6 |
| SUMMARY..... | 7 |
| EXISTING SYSTEM..... | 8 |

CHAPTER 4

| | |
|----------------------------|----|
| SYSTEM DESIGN..... | 10 |
| System requirements..... | 10 |
| Hardware requirements..... | 10 |
| software requirements..... | 11 |
| front end..... | 11 |
| back end..... | 11 |
| softwafre features..... | 11 |
| PHP | 12 |
| Usage | 14 |
| Input design..... | 17 |
| Administrator..... | 17 |
| Menus..... | 18 |

| | |
|--------------------------|----|
| Dialog box..... | 18 |
| Process Design..... | 18 |
| System Architecture..... | 20 |
| UML diagram..... | 21 |
| Data Flow Diagrams..... | 22 |
| Allotment process..... | 23 |
| Vacating process..... | 20 |
| Usecase diagram..... | 25 |
| sequence diagram..... | 25 |

CHAPTER 5

| | |
|------------------------------|----|
| System testing..... | 27 |
| unit testing..... | 27 |
| Integration testing..... | 28 |
| User acceptance testing..... | 28 |

CHAPTER 6

| | |
|----------------------------|----|
| System implementation..... | 28 |
|----------------------------|----|

CHAPTER 7

| | |
|-------------------------------------|----|
| Conclusion & Future enhacement..... | 29 |
|-------------------------------------|----|

Appendices

| | |
|-----------------------|-----|
| Appendix-1..... | 31 |
| Staff Homepage..... | 31 |
| Student Homepage..... | 72 |
| Appendix-2..... | 103 |
| Sample outputs..... | 103 |

CHAPTER 8

| | |
|-----------------|-----|
| references..... | 106 |
|-----------------|-----|

CHAPTER 1

INTRODUCTION

Since, from existence of humans many methodologies, technologies are being evolving. Keeping tomorrow in view humans are like apes, without technology. Considering this evolving technology our big ledgers, registers are gradually disappearing. It is sad to lose the traditional practices.

Ourselves COMPUTER ENGINEERS are trying to maintain the same traditional practices but with new techniques, & even with new technology. Taking decision is easy but the decision is best, only when taken decision will be favorable it is only possible with human perception & thinking. Many a times human's decision are not favourable for personnel the solution for this scenario is Decision Support System (DSS). The method Decision Support System (DSS) enables the ease of taking complex decisions. This system's DSS is designed in such a way that it meets the quality of best decision among the pool.

Every integrated campus also includes hostels. Security of every student is of course needed. As per today's techniques manual paper documentation is maintained for monitoring student activity in hostel as well thought the campus. This manual documentation may have some errors this can be neglected by using this system which finely designed to maintain the activity of the student. It will be harder to switch from one format of documentation to another format if any changes in existing format of documentation that to all documentation scripted manually.

Therefore, for eliminating this problem we are in try to make all the documentations to be scripted with less human power & with fewer efforts. Even if the person is trained in, such a way that he can adapt to any changes easily it is good but, what about the manual errors? There is no other option rather than atomization. Yes, the solution of atomization is with us.

As described in abstract our tool is mainly developed for providing atomized system for education institutions for monitoring activities of students. It is not only about atomization, it also matters how personnel feels with the system. We have tried our level best to maintain a very good interaction & easy interface with the personnel. As Bill Gates says 'SOFTWARE IS GREAT COMBINATION BETWEEN ARTISTRY & ENGINEERING'. Our design is in such say way that both artistry & engineering are transparent. It is false that software totally rely on engineering, the art of representing the engineering techniques are also equally important for reflecting the nature of software.

The Hostel Management framework is a web application which is created for managing different activities in the hostel. This project is expected to limit human works and make hostel allocation much easier for student and hostel administrators with the help of the web application to hostel, naturally select the student from the waiting list and mess billing, outpass generation, complaint registration, and so forth. Student will get endorsement notice in their mails. It advises guardians with respect to their wards and their presence in hostel and their curricular will be informed to their parents using this model just in one touch. In last, few years the number of educational establishments is expanding quickly. In this way, the quantity of hostels is additionally expanding for the settlement of the student considering in this college. Also, henceforth there is a considerable measure of strain on the individual who are running the hostel and websites are not generally utilized as a part of this specific circumstance. This specific project manages the issues on dealing with a hostel and helps to deal from the issues which happen when conveyed manually

OBJECTIVES AND SCOPE OF THE STUDY

- To eliminated hard-core
- documentation like Excel Sheets,
- ledgers.
- To get precise results.
- To reduce manual effort.
- To avoid human errors.
- To achieve security to data.
- To get results in graphical manner i.e.
- Bar Graph, Pie Chart.
- To generate reports in generic form.

User Panel

User Login

Home

1. This consist of the different pop-up menus showing the details of the different hostels
2. It contain a link to the our college official web-site.
3. It allows the different users to access the registration forms.
4. He can view the Student administration division of the different hostels and also view the notice Boards.

Registration Form

This section provides an online form to the students which can be filled by them, and a copy of the filled page can be taken in the printed form. This is later submitted to the Hostel authorities which can be by them before allotting them to the respective hostels.

Notice Board

All the hostels have their Notice boards. Any change in the Hostel fee, mess fee will be shown in this. It can be also used for different notifications.

Admin Panel

Administrator Login

Home

The Administrator can :

1. Allot different students to the different hostels.
2. Vacate the students for the hostels.
3. Control the status of the fee payment.
4. Edit the details of the students & modify the student records.

Allotment of the hostels

There will be pre-defined criteria for the admission to the hostels. He checks the attested application forms of the students obtained from the internet and verify it with the student database. If the students are found eligible then they are allotted to the hostel.

Vacating the rooms

As the student's course is over they will vacate their rooms. So it is required for the administrator to remove their records from the database tables. This section includes the option for the room vacation and the deletion of the particular record from the database.

CHAPTER 2

LITERATURE SURVEY

Every institute uses their own way of documentation to maintain activity of student. Documentation will be effective manner, but if this will be transferred to atomized mode the output of the maintain activity will be more effective than existing method. Some of monitoring services are even provided by online means, the online means does not provide that effectiveness because it is puzzling.

Even though we use the online services there will be a requirement of internet connectivity. Further, about offline services, there are some offline services, which provide the same service as online systems. These offline systems are mostly supportable for very less number of users at a time. The multi user handling systems provides uses that are more effective.

CHAPTER 3

SYSTEM ANALYSIS

PROPOSED SYSTEM

It is proposed to simplify the procedures involved in Acquiring an out-pass for the hostel students, while at the same time maintain paramount and for-sure security methodologies. We wish to do the above by means of a mobile application. This application will allow students to send out-pass requests with just a button click. Also, it simplifies all the processes of hostel management, including attendance maintenance at regular intervals.

The pass is approved automatically by the system if the requested student has eligible number of pass credits of that current month. However, if the passes exceeds the monthly limit or request is raised during working hours, the system forwards the request to the warden. As the request gets approved, the parent of the ward will be intimated with the exit time of the student at guard desk. A list containing the student's details and their out-pass status will be updated to the warden and the security guard at regular intervals. The student's entry and exit to and from the campus is monitored with the help of application at the security guard desk.

SUMMARY

- ✧ The system, which enables the precise outcome.
- ✧ The high throughput model.
- ✧ Multi user handling capacity.
- ✧ User friendly.
- ✧ More efficient output than existing system.
- ✧ Easy adaptable environment.
- ✧ And also to predict the fore coming.

EXISTING SYSTEM

For the past few years the number of educational institutions are increasing rapidly. Thereby the number of hostels are also increasing for the accommodation of the students studying in this institution. And hence there is a lot of strain on the person who are running the hostel and software's are not usually used in this context. This particular project deals with the problems on managing a hostel and avoids the problems which occur when carried manually. Identification of the drawbacks of the existing system leads to the designing of computerized system that will be compatible to the existing system with the system which is more user friendly and more GUI oriented.

We can improve the efficiency of the system, thus overcome the following drawbacks of the existing system.

- more human error.
- more strength and strain of manual labour needed
- Repetition of the same procedures.
- low security
- Data redundancy
- difficult to handle
- difficult to update data
- record keeping is difficult

i) Student-side:

The students have to search for the warden who may be teaching faculty throughout the Vast spread campus. The student has to carry the letter around for providing proof when enquired.

ii) Warden-side:

The wardens may be teaching faculties, research assistants, office staff etc. They might find the time that the student chooses to get his/her authorization very nagging. They find it very difficult to keep a manual record of the attendance in the hostel

They have to take more effort and thoroughly monitor students to ensure extreme security.

iii) Parent-side:

The parents may find it non-comforting to not know about the whereabouts of their children.

CHAPTER 4

SYSTEM DESIGN

INTRODUCTION

The general protocol to get an out-pass in any organization is to get a manual written letter from the student requesting an out-pass signed by the respective warden in-charge of the student. This process can become quite tedious when the campus size is large.

As the students will have to go in search of the wardens in person. Also, in most cases the warden in authorization procedure to be intruding in their professional work times. Time is an important factor playing here affecting both student and the warden. To avoid this problem to occur, we are implementing an android application. We propose to implement this project using Java with Android SDK offers even more features that enhance your productivity when building android apps, for the front end of the app and hp and my sql for the back end with flask framework.

As we all know that nowadays every individual carries their own smart phones and the uses of android applications have been increased rapidly so it is better to have such an android application which will provide a safe environment. Having the application on your phone can diminish our risk and bring assistance when we require.

SYSTEM REQUIREMENTS

HARDWARE REQUIREMENTS :

1. Pentium IV Processor
2. 512 MB RAM
3. 40GB HDD
4. 1024 * 768 Resolution Color Monitor

SOFTWARE REQUIREMENTS:

1.OS : Windows XP

2.PHP Triad (PHP, MySQL,Apache,PHPMyAdmin)

Front End

Language – PHP.

Also includes technologies like Bootstrap, CSS, HTML5, and Java Script.

Back End

Microsoft SQL Server.

SQL Database.

Apache local Server

Software Features

PHP TRIAD

PHPTriad installs a complete working PHP/MySQL server environment on Windows platforms (9x/ NT). Installs PHP, MySQL, Apache, and PHPMyAdmin.

PHP

PHP is a scripting language originally designed for producing dynamic web pages. It has evolved to include a command line interface capability and can be used in standalone graphical applications. While PHP was originally created by Rasmus Lerdorf in 1995, the main implementation of PHP is now produced by THE PHP group and serves as the de facto standard for PHP as there is no formal specification. PHP is free software released under the PHP License, however it is incompatible with the GNU General Public License (GPL), due to restrictions on the usage of the term **PHP**.

It is a widely-used general-purpose scripting language that is especially suited for web development and can be embedded into HTML. It generally runs on a web server, taking PHP code as its input and creating web pages as output. It can be deployed on most web servers and on almost every operating system and platform free of charge. PHP is installed on more than 20 million websites and 1 million web servers.

PHP originally stood for Personal Home Page. It began in 1994 as a set of Common Gateway Interface binaries written in the C programming language by the Danish/Greenlandic programmer Rasmus Lerdorf. Lerdorf initially created these Personal Home Page Tools to replace a small set of Perl scripts he had been using to maintain his personal homepage. The tools were used to perform tasks such as displaying his résumé and recording how much traffic his page was receiving. He combined these binaries with his Form Interpreter to create PHP/FI, which had more functionality. PHP/FI included a larger implementation for the C programming language and could communicate with databases, enabling the building of simple, dynamic web applications.

Lerdorf released PHP publicly on June 8, 1995 to accelerate bug location and improve the code. This release was named PHP version 2 and already had the basic functionality that PHP has today. This included Perl-like variables, form handling, and the ability to embed HTML. The syntax was similar to Perl but was more limited, simpler, and less consistent. Zeev Suraski and Andi Gutmans, two Israeli developers at the Technion IIT, rewrote the parser in 1997 and formed the base of PHP 3, changing the language's name to the recursive initialism **PHP: Hypertext Preprocessor**. The development team officially released PHP/FI 2 in November 1997 after months of beta testing. Afterwards, public testing of PHP 3 began, and the official launch came in June 1998. Suraski and Gutmans then started a new rewrite of PHP's core, producing the Zend Engine in 1999. They also founded Zend Technologies in Ramat Gan, Israel.

On May 22, 2000, PHP 4, powered by the Zend Engine 1.0, was released. On July 13, 2004, PHP 5 was released, powered by the new Zend Engine II. PHP 5 included new features such as improved support for object-oriented programming, the PHP Data Objects extension (which defines a lightweight and consistent interface for accessing databases), and numerous performance enhancements. The most recent update released by The PHP Group is for the older PHP version 4 code branch. In 2008, PHP 5 became the only stable version under development.

Late static binding has been missing from PHP and will be added in version 5.3. PHP 6 is under development alongside PHP 5. Major changes include the removal of `register_globals`, magic quotes, and safe mode. The Reason for the removals was because `register_globals` had given way to security holes, and magic quotes had an unpredictable nature, and was best avoided. Instead, to escape characters, Magic quotes may be substituted with the `addslashes()` function, or more appropriately an escape mechanism specific to the database vendor itself like `mysql_real_escape_string()` for MySQL.

PHP does not have complete native support for Unicode or multibyte strings; Unicode support will be included in PHP 6. Many high profile open source projects ceased to support PHP 4 in new code as of February 5, 2008, due to the GoPHP5 initiative, provided by a consortium of PHP developers promoting the transition from PHP 4 to PHP 5. It runs in both 32-bit and 64-bit environments, but on Windows the only official distribution is 32-bit, requiring Windows 32-bit compatibility mode to be enabled while using IIS in a 64-bit Windows environment. There is a third-party distribution available for 64-bit Windows

USAGE

PHP is a general-purpose scripting language that is especially suited for web development. PHP generally runs on a web server, taking PHP code as its input and creating web pages as output. It can also be used for Command-line scripting and client-side GUI applications.

PHP can be deployed on most web servers, many operating systems and platforms, and can be used with many relational database management systems. It is available free of charge, and the PHP Group provides the complete source code for users to build, customize and extend for their own use.

PHP primarily acts as a filter, taking input from a file or stream containing text and/or PHP instructions and outputs another stream of data; most commonly the output will be HTML. It can automatically detect the language of the user. From PHP 4, the PHP parser compiles input to produce bytecode for processing by the Zend Engine, giving improved performance over its interpreter predecessor.

Originally designed to create dynamic web pages, PHP's principal focus is server-side scripting, and it is similar to other server-side scripting languages that provide dynamic content from a web server to a client, such as Microsoft's Active Server Pages, Sun Microsystems' JavaServer Pages, and mod_perl. PHP has also attracted the development of many frameworks that provide building blocks and a design structure to promote rapid application development (RAD). Some of these include CakePHP, Symfony, CodeIgniter, and ZendFramework, offering Features similar to other web application frameworks.

As of April 2007, over 20 million Internet domains were hosted on servers with PHP installed, and PHP was recorded as the most popular Apache module. Significant websites are written in PHP including the userfacing portion of Facebook, Wikipedia (MediaWiki), Yahoo!, MyYearbook, , Digg, Wordpress and Tagged. In addition to server-side scripting, PHP can be used to create

stand-alone, compiled applications and libraries, it can be used for shell scripting, and the PHP binaries can be called from the command line.

Input Design

The system design is divided in to two portions. The Administrator section and the User(student's) section.

Administrator

1. The Administrator can allot different students to the different hostels.
- 2.He can vacate the students for the hostels.
- 3.He can control the status of the fee payment.
- 4.He can edit the details of the students.He can change their rooms, edit and delete the student records.

A process of converting user originated inputs to a computer-based format. Input design is an important part of development process since inaccurate input data are the most common cause of errors in data processing. Erroneous entries can be controlled by input design. It consists of developing specifications and procedures for entering data into a system and must be in simple format. The goal of input data design is to make data entry as easy, logical and free from errors as possible. In input data design, we design the source document that capture the data and then select the media used to enter them into the computer.

There are two major approaches for entering data in to the computer .

They are

- Menus.
- Dialog Boxes.

Menus

A menu is a selection list that simplifies computer data access or entry. Instead of remembering what to enter, the user chooses from a list of options. A menu limits a user choice of response but reduce the chances for error in data entry.

Dialog Box

Dialog boxes are windows and these windows are mainly popup, which appear in response to certain conditions that occur when a program is run. It

allows the display of bitmaps and pictures. It can have various controls like buttons, text boxes, list boxes and combo boxes. Using these controls we can make a 'dialog' with the program.

The proposed system has three major inputs. They are Machine Registration, Machine Scheduling and Request Form.


Process Design

Process design plays an important role in project development. In order to understand the working procedure, process design is necessary. Data Flow Diagram and System Flow chart are the tools used for process design.


System Flow Chart is a graphical representation of the system showing the overall flow of control in processing at the job level; specifies what activities must be done to convert From a physical to logical model.

Data Flow Diagram is the logical representation of the data flow of the project. The DFD is drawn using various symbols. It has a source and a destination. The process is represented using circles and source and destination are represented using squares. The data flow is represented using arrows. One reader can easily get the idea about the project through Data Flow Diagram

SYSTEM ARCHITECTURE

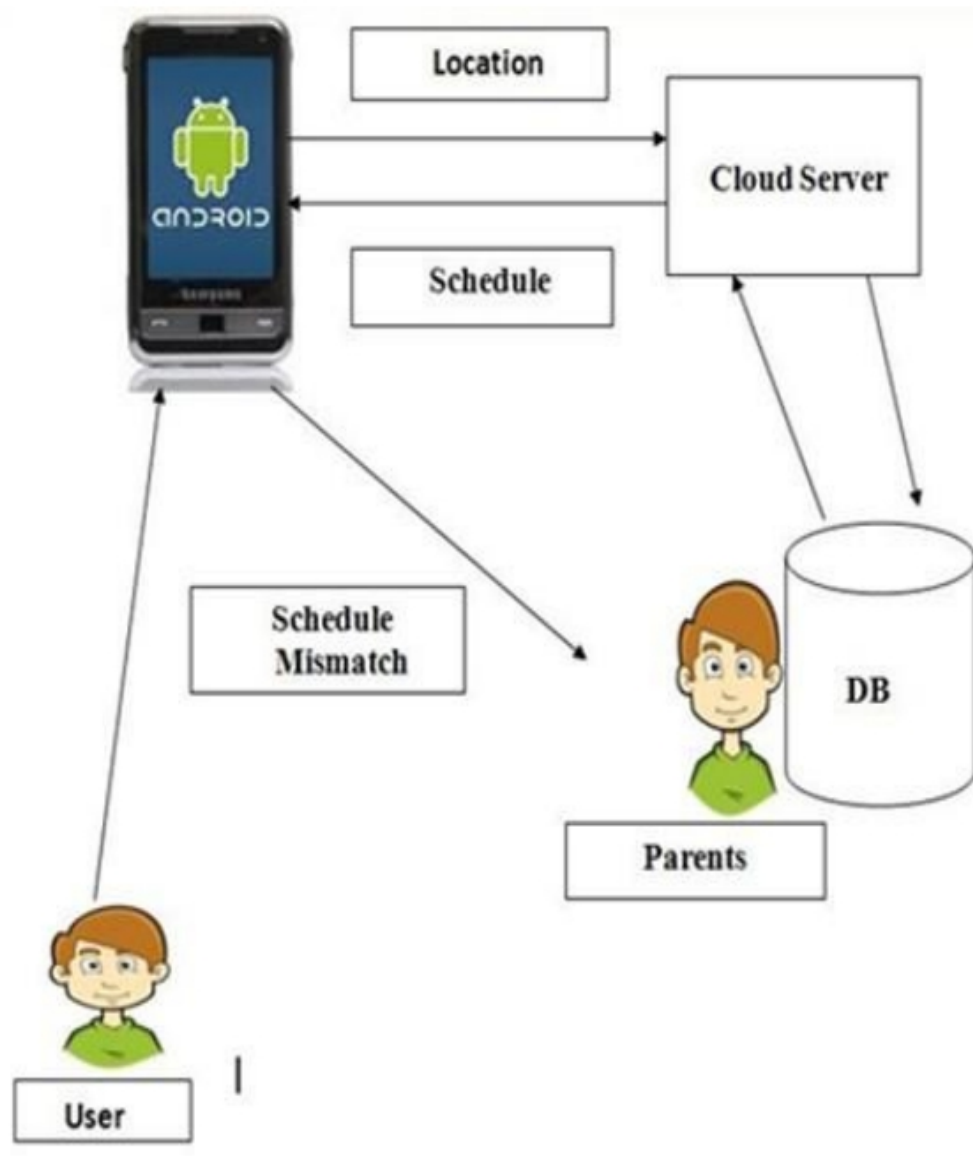


SYSTEM ARCHITECTURE

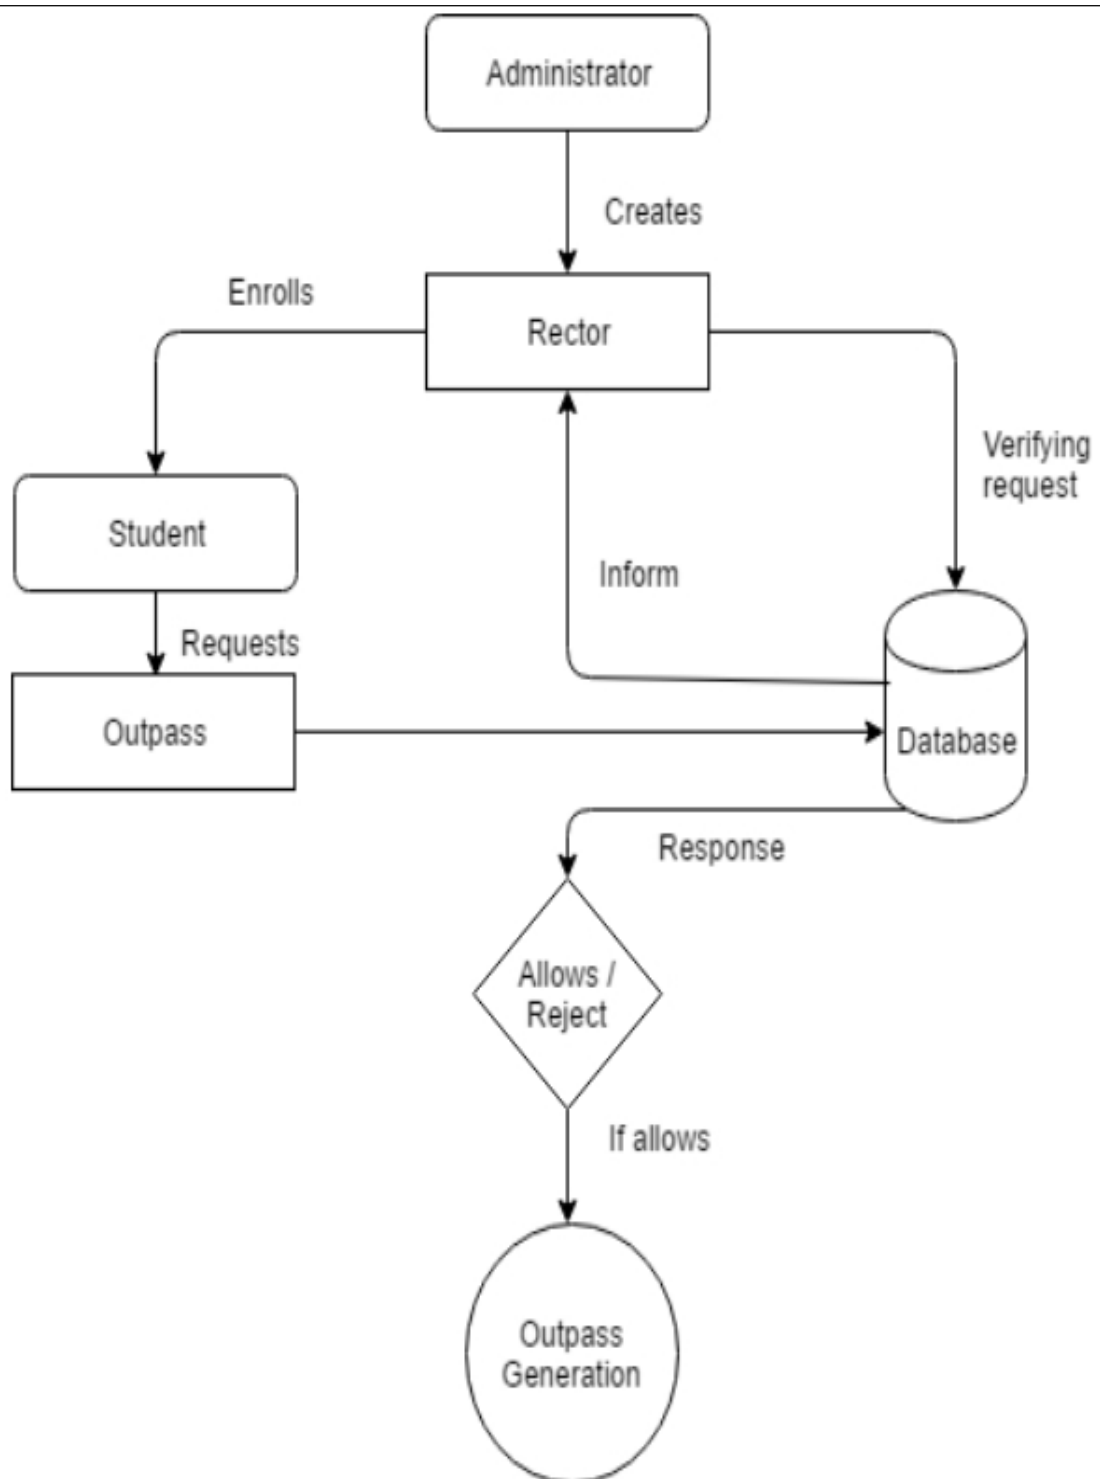


UML DIAGRAMS

DATAFLOW DIAGRAMS

CONTEXT LEVEL DFD:

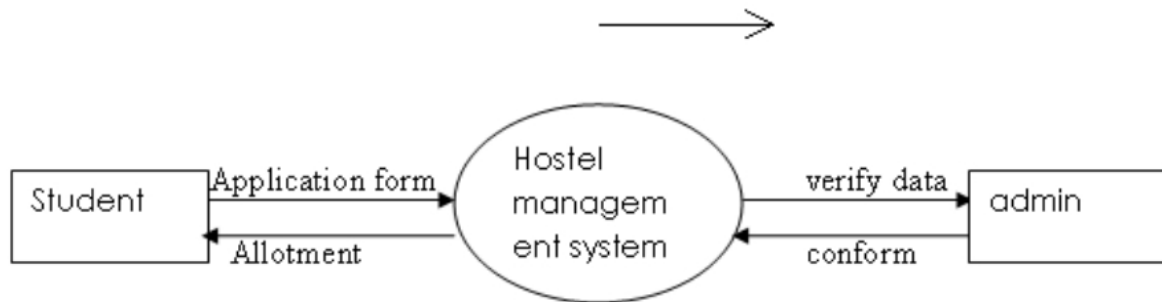


STUDENT MODULE:

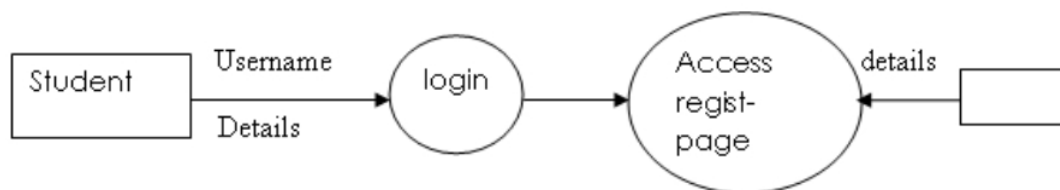


REGISTRATION PROCESS:




ADMIN MODULE:

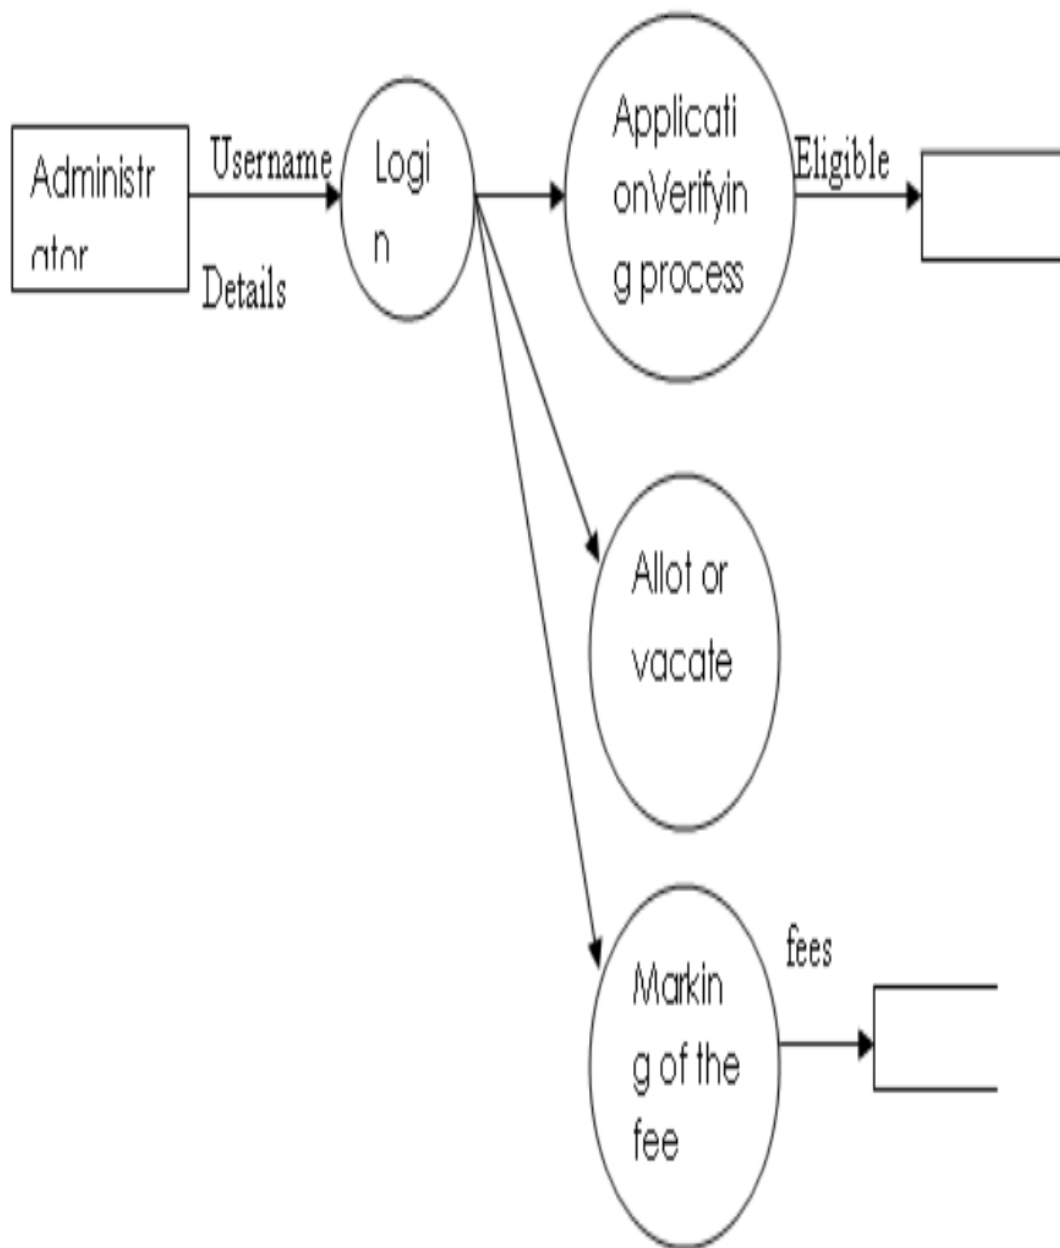


ALLOTMENT PROCESS:

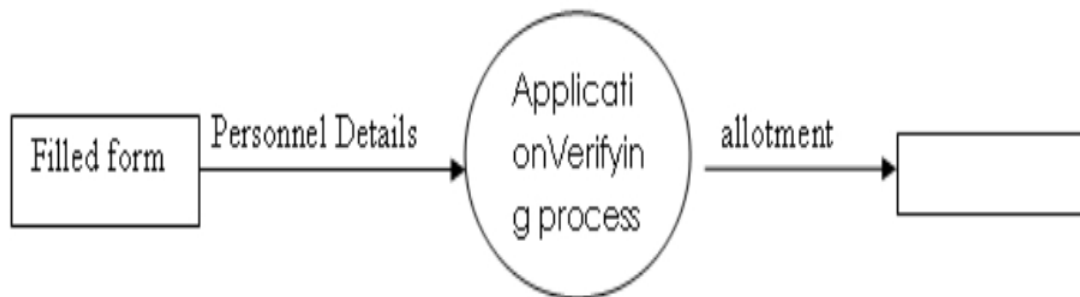


VACATING PROCESS:

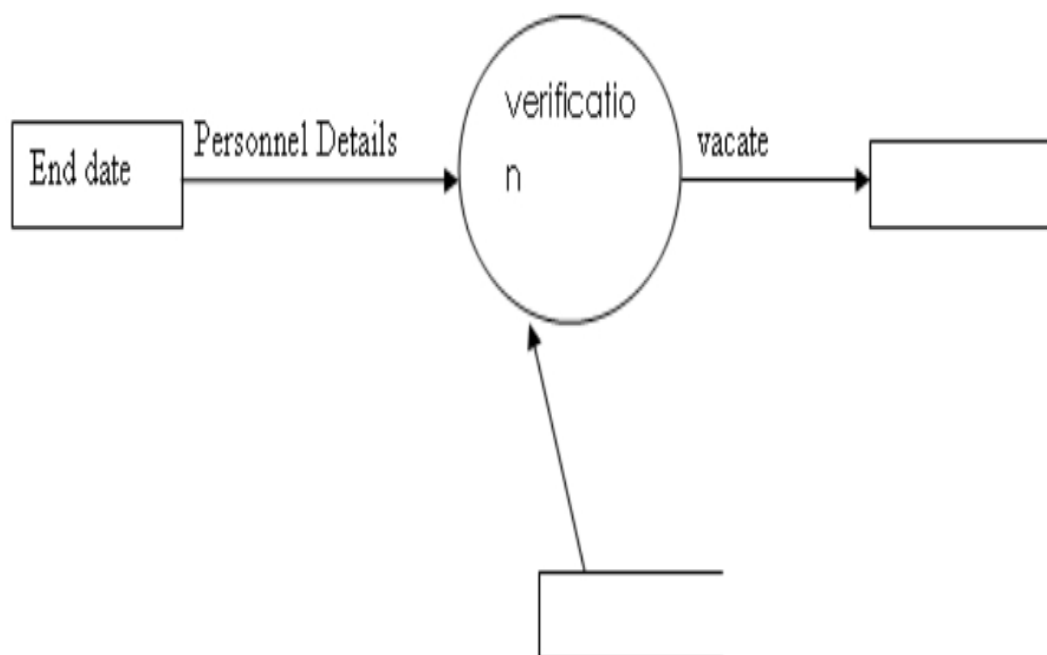


USECASE DIAGRAM 1:

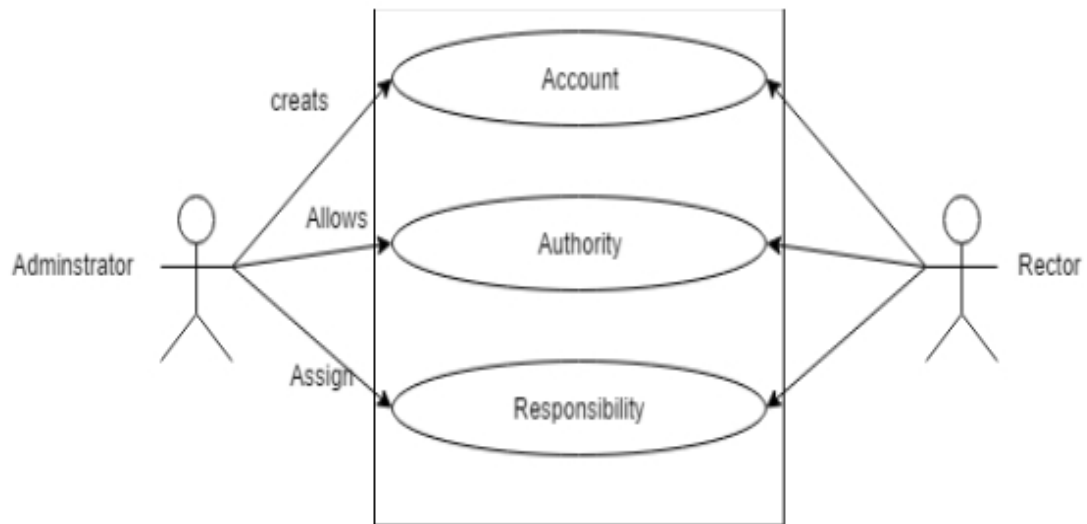

USECASE DIAGRAM2:

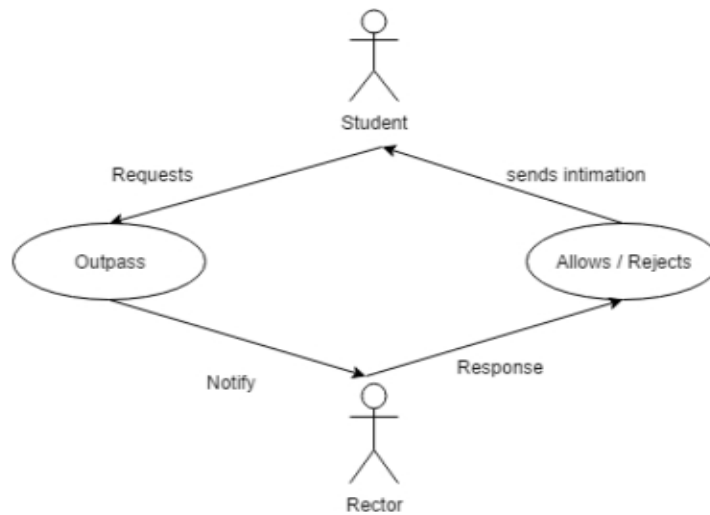

SEQUENCE DIAGRAM:

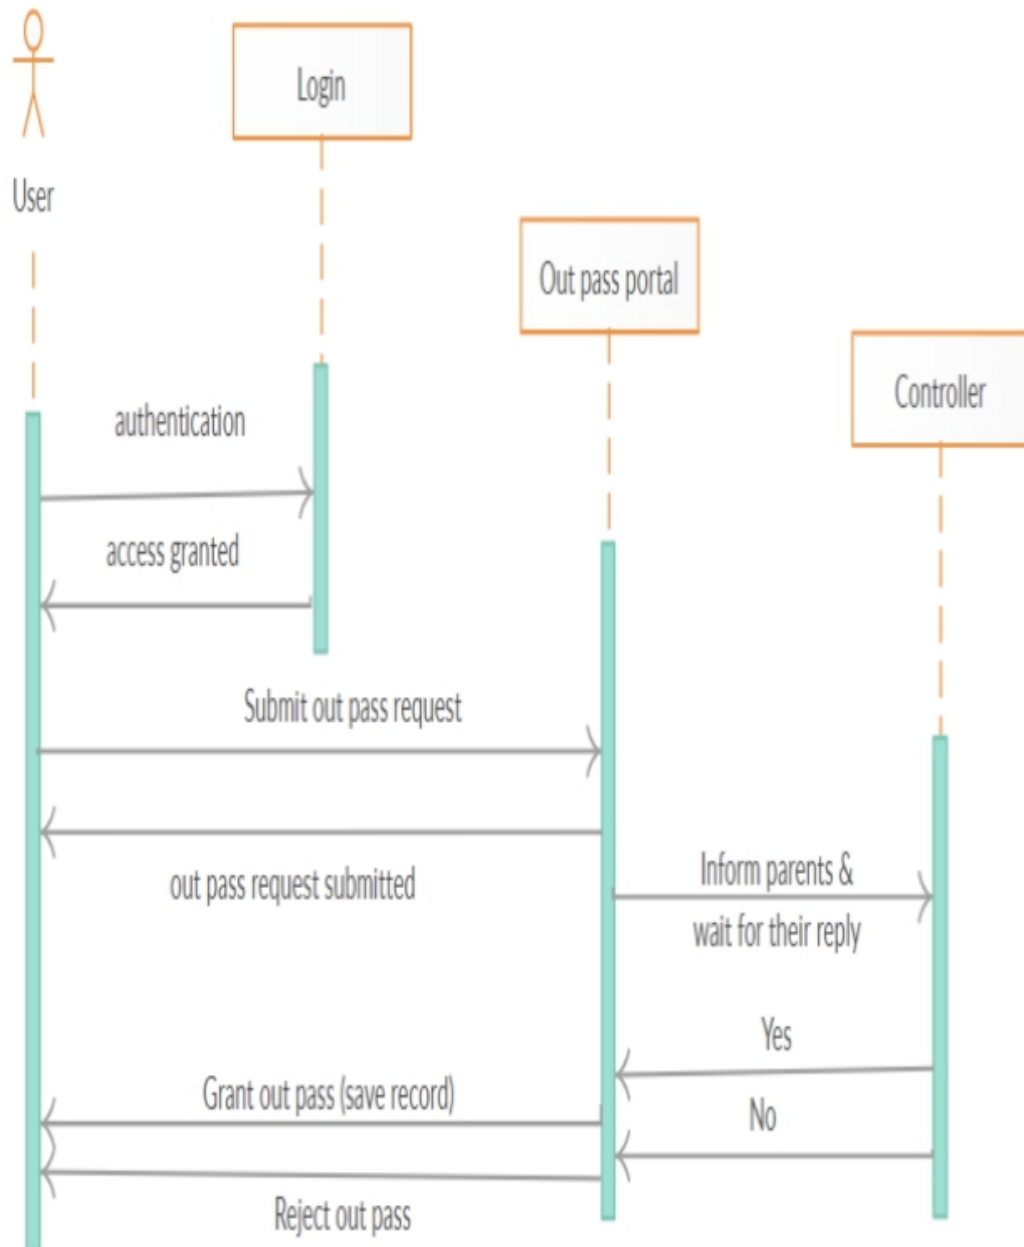

SEQUENCE DIAGRAM

CHAPTER 5

SYSTEM TESTING

System testing is the stage of implementation, which is aimed at ensuring that the system works accurately and efficiently before live operation commences. Testing is the process of executing the program with the intent of finding errors and missing operations and also a complete verification to determine whether the objectives are met and the user requirements are satisfied. The ultimate aim is quality assurance.

Tests are carried out and the results are compared with the expected document. In the case of erroneous results, debugging is done. Using detailed testing strategies a test plan is carried out on each module. The various tests performed in “**Network Backup System**” are unit testing, integration testing and user acceptance testing.

Unit Testing

The software units in a system are modules and routines that are assembled and integrated to perform a specific function. Unit testing focuses first on modules, independently of one another, to locate errors. This enables, to detect errors in coding and logic that are contained within each module. This testing includes entering data and ascertaining if the value matches to the type and size supported by java. The various controls are tested to ensure that each performs its action as required.

Integration Testing

Data can be lost across any interface, one module can have an adverse effect on another, sub functions when combined, may not produce the desired major functions. Integration testing is a systematic testing to discover errors associated within the interface. The objective is to take unit tested modules and build a program structure.

All the modules are combined and tested as a whole. Here the Server module and Client module options are integrated and tested. This testing provides the assurance that the application is well integrated functional unit with smooth transition of data.

User Acceptance Testing

User acceptance of a system is the key factor for the success of any system. The system under consideration is tested for user acceptance by constantly keeping in touch with the system users at time of developing and making changes whenever required.

CHAPTER 6

SYSTEM IMPLEMENTATION

IMPLEMENTATION:

The Drawbacks of the existing system is when emergency situation occurs the user cannot set the alert function when they are in risk situation and immediately they cannot pass their location to friends and family members to intimate they are in risk.

Some of the existing comprises of three coloured buttons based on the seriousness of a situation. So, you can tap the one you want depending on your situation. The problem with existing app sends panic alerts to emergency contacts in a problematic situation.

The proposed system has the following advantages compared to other approaches that currently existing system exist for:

- ❖ Unlike other apps work only at danger, our app can be used as precaution measure.
- ❖ Easy to use and friendly interface.

CHAPTER 7

CONCLUSION AND FUTURE ENHANCEMENT

CONCLUSION:

To conclude the description about the project : The project, developed using PHP and MySQL is based on the requirement specification of the user and the analysis of the existing system, with flexibility for future enhancement.

The expanded functionality of today's software requires an appropriate approach towards software development. This hostel management software is designed for people who want to manage various activities in the hostel. For the past few years the number of educational institutions are increasing rapidly.

Thereby the number of hostels are also increasing for the accommodation of the students studying in this institution. And hence there is a lot of strain on the person who are running the hostel and software's are not usually used in this context. This particular project deals with the problems on managing a hostel and avoids the problems which occur when carried manually.

Identification of the drawbacks of the existing system leads to the designing of computerized system that will be compatible to the existing system with the system which is more user friendly and more GUI oriented.

FUTURE ENHANCEMENT:

This project has an efficient scope in coming future where the output of this project will be used as an input for to get hostel outpass very quickly and will be helpful for the students and staffs on level of impact on time management and also we can avoid fake outpasses.

APPENDICES

APPENDIX – 1

SAMPLE SOURCE CODE

STAFF HOMEPAGE:

staff page:

```
<?php
include "configs.php";

session_start();

if(isset($_SESSION['apn']))
{

    if(isset($_GET['application_number'])){
        $apn= $_GET['application_number'];

    }

    if(isset($_GET['tname'])){
        $tname = $_GET['tname'];
    }
}
```

```
$sql_query = "SELECT username from admin where application_number=
$apn ";
```

```
$retval = mysqli_query($link,$sql_query);
```

```
$row = mysqli_fetch_array($retval);
```

```
$username = $row['username'];
```

```
if(isset($_GET['ct'])){
```

```
    $ct = $_GET['ct'];
```

```
}
```

```
$ct = $_GET['ct'];
```

```
if(isset($_GET['ci'])){
```

```
    $ci = $_GET['ci'];
```

```
}
```

```
// logout
```

```
if(isset($_POST['but_logout'])){
```

```
    $_SESSION = array();
```

```
    session_destroy();
```

```
    $start ==0;
```

```
    header('Location: studentLogin.php.php');
```

```
}if(isset($_POST['ct'])){
```

```
    $ct =0;
```

```
}
```

```
?>
```

```
<!doctype html>
```

```
<html>
```

```
<title> Staff </title>
```

```
<script src="parallax.js"></script>
```

```
  <head><!-- CSS -->
```

```
    <link rel="stylesheet" type="text/css" href="slider/style.css">
```

```
      <link
```

```
href="https://fonts.googleapis.com/css2?family=Montserrat&family=Roboto+Slab:wght@300&display=swap" rel="stylesheet">
```

```
      <link rel="stylesheet" type="text/css"
```

```
href="https://cdnjs.cloudflare.com/ajax/libs/flickity/2.2.1/flickity.css">
```

```
    <script src="https://code.jquery.com/jquery-3.2.1.slim.min.js"
```

```
integrity="sha384-
```

```
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5KkN" crossorigin="anonymous"></script>
```

```
<script
```

```
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"
```

```
integrity="sha384-
```

```
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvfa0b4Q" crossorigin="anonymous"></script>
```

```
  <link rel="stylesheet"
```

```
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/css/bootstrap.min.css"
```

```
integrity="sha384-
```

```
Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm" crossorigin="anonymous">
```

```
<script
```

```
src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/js/bootstrap.min.js"
```

```
integrity="sha384-
```

JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76PV
CmYl" crossorigin="anonymous"></script>

<link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css"
>

<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.min.css">

<!-- JavaScript Bundle with Popper -->

<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.0-
beta3/dist/js/bootstrap.bundle.min.js" integrity="sha384-
JEW9xMcG8R+pH31jmWH6WWP0WintQrMb4s7ZOdauHnUtxwoG2vI5DkL
tS3qm9Ekf" crossorigin="anonymous"></script>

<script src="https://cdn.jsdelivr.net/npm/sweetalert2@10"></script>

<script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>

</head>

<style>

.bg-image {
background: url("wp7.jpg");
background-size: cover;
background-position: center;
min-height: 100px;
background-image: blur(10px);

}

@media screen and (max-width: 670px){

```

body{
    min-height: 500px;
}
}

body{ font: 14px sans-serif; }
.wrapper{ width: 350px; padding: 20px; }
.container .form-control {
    width:none;
}
#count{
    border-radius: 50%;
    top: -10px;
    left: -10px;
    position: relative;
}

/* external css: flickity.css */

* { box-sizing: border-box; }

.carousel {
    background: #EEE;
}

.carousel-cell {

```

```
margin-right: 20px;
overflow: hidden;
}

.carousel-cell img {
display: block;
height: 200px;
}

@media screen and ( min-width: 768px ) {
.carousel-cell img {
height: 400px;
}
}

#message{

position: fixed;
bottom: 40px;
left: 30px;
z-index: 99;
font-size: 18px;
border: none;
outline: none;

color: white;
cursor: pointer;

border-radius: 500px;
```

```

}
#message:hover{

    background-color: #555;
}

</style>

<nav style="background-color:#616161;" class="navbar navbar-expand-lg
navbar-light transparent " >
    <div class="container">
    <div class="container-fluid">
        <a class="navbar-brand" href="#"><h4 style="color:white;">PERI STAFF
PAGE</h4></a>
        <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
data-bs-target="#navbarSupportedContent" aria-
controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle
navigation">
            <span class="navbar-toggler-icon"></span>
        </button>
<?php
$sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0");
$counts = mysqli_num_rows($sql_get);
$get_data2 = "SELECT * FROM admin WHERE application_number= $apn ";

$run_data2 = mysqli_query($link,$get_data2);

```

```

$row2 = mysqli_fetch_array($run_data2);
$type = $row2['who'];

?>
<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav ml-auto">

    &nbsp; &nbsp; &nbsp; &nbsp; &nbsp; &nbsp; <a style="width:125px;
height:50px;" href="logout.php" type="submit" value="Logout"
name="but_logout" > <button type='button' class='btn btn-light'
style="width:125px; height:40px; ">Log-Out</button></a>

    <!-- Example single danger button -->

    <li class="nav-item dropdown">
      <a style="color:white;" class="nav-link dropdown-toggle" href="#"
id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-
expanded="false">
        notifications <i style="color:white;" class="fa fa-bell"></i> <span
class="badge badge-danger " id="count"> <?php echo $counts; ?></span>
      </a>

      <ul class="dropdown-menu p-3 text-muted " style="max-width:200px;"
aria-labelledby="navbarDropdown">
        <p>
          <?php
            if(isset($_GET['ct'])){
              $ct = $_GET['ct'];
            }

```



```

        $ct = $_GET['ct'];
        if(isset($_GET['ci'])) {
            $ci = $_GET['ci'];
        }

        $sql_get1 = mysqli_query($link, "SELECT * FROM $username WHERE
status=0");

        $stafflast =mysqli_query( $link," SELECT MAX( id ) AS max FROM
$username ");

        $stafflast2 = mysqli_fetch_assoc($stafflast);
        $slastValue = $stafflast2['max'];

        $sql_last = mysqli_query($link, "SELECT * FROM $username WHERE
id=$slastValue");

        if(mysqli_num_rows($sql_get1)>0)
        {
            while($result = mysqli_fetch_assoc($sql_get1))
            {

                echo '<a style="text-decoration:none;" class="container" class=
"dropdown-item text-primary "
href="staffnotify.php?username='.$username.'&type='.$type.' & tname=
'.$username.'.Profile & application_number='.$apn.' &ct='.$ct.' &ci='.$ci.' &
id='.$result['id'].'">'.$result['message'].' </a> ';

                echo '<div class="dropdown-divider"></div>';

            }
        }
    else {
        $resultlast = mysqli_fetch_assoc($sql_last);

        echo '<div class="container" class= "dropdown-item text-danger font-
weight-bold"> <i class="fa fa-frown-open"></i> sorry! No new notifications
</div>';
    }
}

```

```

        echo '<div class="dropdown-divider"></div>';

        echo '<div class="container" class= "dropdown-item text-danger font-
weight-bold"><a style="text-decoration:none;"
href="staffnotify.php?username='.$username.' &ct='.$ct.' &ci='.$ci.'
&type='.$type.' & tname= '.$username.'Profile & application_number='.$apn.'
& id='.$resultlast['id'].' " >see last notification</a> </div>';

    }

?>
</p>

</ul>

</li>

</ul>

<a class="navbar-brand"
href="upload_images/staffindex.php?tname=<?php echo $username; echo
"Profile";?>&ct=<?php echo $ct ?> &ci=<?php echo $ci ?> &
application_number=<?php echo $apn; ?> "> <strong><em
style="color:white;">Profile </em> </strong><i style="color:white;" class="fa
fa-user-circle "></i></a>

<li>
<?php
$get_data2 = "SELECT * FROM admin WHERE application_number= $apn ";

```

```
$run_data2 = mysqli_query($link,$get_data2);
$row2 = mysqli_fetch_array($run_data2);
$type = $row2['who'];

if($type == 'AHOD' ){

    $ct = $_GET['ct'];

    echo "<a href='ct.php?tname= $tname & apn= $apn &ct= $ct' type='submit'
name='ct' class='btn btn-outline-info'> Change type </a>";

}

if($type == 'common_incharge' ){

    $ci = $_GET['ci'];

    echo "<a href='ci.php?tname=$tname&apn=$apn&ci=$ci &in=$ci'
type='submit' value=$ci name='value' class='btn btn-outline-info'> Change Type
</a>";
```

```

}

if($type == 'creator'){

    $sql_ge = mysqli_query($link, "SELECT * FROM admin WHERE allot=0
AND status=0 ");

    $countsz = mysqli_num_rows($sql_ge);

?>

    &nbsp; <button type='button' class='btn btn-outline-info' data-bs-
toggle="modal" data-bs-target="#staticBackdrop" >Allot</button> <span
class="badge badge-danger " id="count"> <?php echo $countsz; ?></span>
&nbsp;&nbsp; 

    <?php
}

if($type == 'HOD'){

    $sql_ge = mysqli_query($link, "SELECT * FROM admin WHERE allot=0
AND status=0 ");

    $countsz = mysqli_num_rows($sql_ge);

?>

    &nbsp; <button type='button' class='btn btn-outline-info' data-bs-
toggle="modal" data-bs-target="#staticBackdrop" >Allot</button> <span
class="badge badge-danger " id="count"> <?php echo $countsz; ?></span>
&nbsp;&nbsp; 

    <?php
}

?>

&nbsp; &nbsp; <li style="marker:none;color:white;">

    <?php echo date("h:i:s:a");

```

```

    echo "<br>";
    echo "today".date("d-m-y");

    ?>

</li>

    </div>
</div>
</div>

</nav>

<!--message --><!--message --><!--message --><!--message --><!--message --
><!--message --><!--message --><!--message --><!--message -->

<div class="modal fade" id="chatmessage" data-bs-backdrop="static" data-bs-
keyboard="false" tabindex="-1" aria-labelledby="chatmessageLabel" aria-
hidden="true">
<div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">

        <div class="modal-header">
            <h5 class="modal-title" id="chatmessageLabel"> <i
style="color:#00A9DF;" class="fa fa-comments"></i> </h5>
            <button type="button" class="close" data-bs-dismiss="modal" aria-
label="Close">
                <span aria-hidden="true">&times;</span>
            </button>

```

```
</div>
```

```
<div class="modal-body">
```

```
<nav>
```

```
<div class="nav nav-tabs nav-justified" id="meaasge" role="tablist">
```

```
<button class="nav-link" id="nav-profile-tab" data-bs-toggle="tab" data-bs-target="#nav-new" type="button" role="tab" aria-controls="nav-profile" aria-selected="false">New </button>
```

```
<button class="nav-link" id="nav-username-tab" data-bs-toggle="tab" data-bs-target="#nav-username" type="button" role="tab" aria-controls="nav-username" aria-selected="false">Usernames </button>
```

```
</div>
```

```
</nav>
```

```
<div class="tab-content md-3 " id="messageContent">
```

```
<div class="tab-pane fade" id="nav-new" role="tabpanel" aria-labelledby="nav-profile-tab">
```

```
<form action="staffmessage.php" method="GET">
```

```
<div class="input-group flex-nowrap">
```

```
<span class="input-group-text" id="addon-wrapping">To</span> <br><br>
```

```
<input type="text" name="for" class="form-control"
placeholder="@Username" aria-label="Username" aria-describedby="addon-
wrapping">
```

```
</div>
```

```
<div class="input-group">
```

```
<input type="text" style="display:none;" name="from" value=<?php echo
$username ?>>
```

```
<input type="text" style="display:none;" name="tname" value=<?php echo
$tname ?>>
```

```
<input type="text" style="display:none;" name="apn" value=<?php echo
$apn ?>>
```

```
<input type="text" style="display:none;" name="ct" value=<?php echo
$ct ?>>
```

```
<input type="text" style="display:none;" name="ci" value=<?php echo
$ci?>>
```

```
<textarea class="form-control" name="message" aria-label="With
textarea" ></textarea>
```

```
<button class="btn btn-outline-info" type="submit">Send</button>
```

```
</div>
```

```
</form>
```

```
</div>
```

```
<div class="tab-pane fade" id="nav-usernames" role="tabpanel2" aria-
labelledby="nav-profile-tab">
```

```
<?php
```

```
$message = mysqli_query($link," SELECT * FROM admin ");
```

```
$i = 0;
```

```

if(mysqli_num_rows($message)>0)
{

while($adminmsg = mysqli_fetch_assoc($message )){

$mi = ++$i;
$username = $adminmsg['username'];
$yar = $adminmsg['who'];
echo "<center><em> $mi --$yar- Username: $username <em><center> <br>";

}
}
?>

</div>
</div>

</div>

<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>

```


</div>

</div>

</div>

</div>

<!--message --><!--message --><!--message --><!--message --><!--message -->
<!--message --><!--message --><!--message --><!--message -->

<body>

<button style="

 " id="message" type="button" data-bs-toggle="modal" data-bs-target="#chatmessage" class="btn btn-primary rounded-circle"> <i class="fa fa-comment" ></i></button>

<div class="bg-image">

 <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot -->

```

<div class="modal fade" id="staticBackdrop" data-bs-backdrop="static" data-
bs-keyboard="false" tabindex="-1" aria-labelledby="staticBackdropLabel" aria-
hidden="true">

  <div class="modal-dialog modal-dialog-scrollable-centered">

    <div class="modal-content">

      <div class="modal-header">

        <h5 class="modal-title" id="staticBackdropLabel">ALLOT USERS</h5>

        <button type="button" class="close" data-bs-dismiss="modal" aria-
label="Close">

          <span aria-hidden="true">&times;</span>

        </button>

      </div>

      <div class="modal-body">

        <nav>

          <div class="nav nav-tabs nav-justified" id="nav-tab" role="tablist">

            <button class="nav-link active" id="nav-home-tab" data-bs-toggle="tab"
data-bs-target="#nav-home" type="button" role="tab" aria-controls="nav-
home" aria-selected="true">New USERS. </button>

            <button class="nav-link" id="nav-profile-tab" data-bs-toggle="tab" data-bs-
target="#nav-profile" type="button" role="tab" aria-controls="nav-profile" aria-
selected="false">Change </button>

          </div>

        </nav>

        <div class="tab-content " id="nav-tabContent">

```

```
<div class="tab-pane fade show active" id="nav-home" role="tabpanel" aria-  
labelledby="nav-home-tab">
```

```
<?php
```

```
    $sql_ge = mysqli_query($link, "SELECT * FROM admin WHERE allot=0  
AND status=0 ");
```

```
$countsz = mysqli_num_rows($sql_ge);
```

```
    if(mysqli_num_rows($sql_ge)>0)
```

```
    {
```

```
        while($resu = mysqli_fetch_assoc($sql_ge))
```

```
        {
```

```
$rprofile = "Profile";
```

```
$rptable = $resu['username'].$rprofile;
```

```
$rpapn = $resu['application_number'];
```

```
$sql_rp = mysqli_query($link, "SELECT * FROM $rptable");
```

```
$arp = mysqli_fetch_assoc($sql_rp);
```

```
$imagearp = $arp['image'];
```

```
$arpdept2 = $arp['department'];
```

```
$arpapnz2 = $arp['u_card'];
```

```
$arpdot = "-";
```

```
$arpflname = $arp['u_f_name'].$arpdot.$arp['u_l_name'];
```

```
echo "<img src='upload_images/image/$imagearp'
alt='class='responsive-img rounded-circle' style='width: 50px; padding:5px;
height: 50px;'>";
```

```
echo "<strong><em>$arpflname</em></strong> <a class='btn btn-
primary btn-sm' data-bs-toggle='collapse' href='#collapseExampz$rpapn'
role='button' aria-expanded='false' aria-controls='collapseExample'>
```

Choose

```
</a> &nbsp;<a href='deleteallot.php?apn=$apn &rpapn=$rpapn
&tname=$tname' ><button type='button' class='btn btn-danger rounded-
circle'><i class='fa fa-trash' ></i></button> </a><br> &nbsp;&nbsp;<h8
class='text-muted'>$arpapnz2 - $arpdept2 Department <h8>" ;
```

```
echo "
```

```
<p>
```

```
</p>
```

```
<div class='collapse' id='collapseExampz$rpapn'>
```

```
<div class='card card-body'>
```

```
<form action='allot.php' method='GET'>
```

```
<div class='input-group'>
```

```
<span class='input-group-text'>From</span>
```

```
<input type='text' style='width:100%' class='form-control' name='from'
placeholder='Register number start by 0' >
```

```
<span class='input-group-text'>To</span>
```

```
<input type='text' style='width:100%' class='form-control' name='to'
placeholder='Register number end by 9999999999999' >
```

```

<div class='dropdown-divider'></div>
<select name='option' class='form-select' id='inputGroupSelect04' aria-
label='Example select with button addon'>
  <option selected>Choose...</option>
  <option value='1'>HOD</option>
  <option value='2'>class_incharge</option>
  <option value='3'>WARDEN</option>
  <option value='4'>Class Incharge & Asst.HOD</option>
  <option value='5'>Common Class Incharge</option>
</select>
<input type='text' style='display:none;' id='disabledTextInput' name='rpapn'
value='$rpapn' class='form-control' >
<input type='text' style='display:none;' id='disabledTextInput' name='apn'
value='$apn' class='form-control' >
<input type='text' style='display:none;' id='disabledTextInput' name='tname'
value='$tname' class='form-control' >
<input type='submit' name='DONE' value='DONE' class='btn btn-outline-
secondary'>
</div>
</form>
</div>
</div>

```

";

```

        echo '<div class="dropdown-divider"></div>';
    }

    }else{
        echo '<h7 class="text-danger " ><center> <em> sorry! No new users
</em> </center> </h7>';

    }
?>

</div>

<div class="tab-pane fade" id="nav-profile" role="tabpanel" aria-
labelledby="nav-profile-tab">

<?php
    $sql_g = mysqli_query($link, "SELECT * FROM admin ");

    if(mysqli_num_rows($sql_g)>0)
    {

        while($resum = mysqli_fetch_assoc($sql_g))
        {

$profile = "Profile";
$rptable = $resum['username'].$profile;

```

```

$rpapn = $resum['application_number'];
$frange = $resum['frange'];
$lrange = $resum['lrange'];
$sql_rp = mysqli_query($link, "SELECT * FROM $rptable");
$arp = mysqli_fetch_assoc($sql_rp);
$imagearp = $arp['image'];
$arpdept = $arp['department'];
$arpapnz = $arp['u_card'];
$arpdot = "-";
$arpflname = $arp['u_f_name'].$arpdot.$arp['u_l_name'];

    echo "<img src='upload_images/image/$imagearp'
alt='class='responsive-img rounded-circle' style='width: 50px; padding:5px;
height: 50px;'>";

    echo "<strong><em>$arpflname</em></strong> <a class='btn btn-
primary btn-sm' data-bs-toggle='collapse' href='#collapseExam$rpapn'
role='button' aria-expanded='false' aria-controls='collapseExample'>

        Change

    </a> <br> &nbsp; &nbsp; <h8 class='text-muted'>$arpapnz - $arpdept
Department <h8> <h8 class='text-muted' >/ $frange - $lrange</h8> /" ;

    echo "

    <p>

</p>

<div class='collapse' id='collapseExam$rpapn'>

```

```

<div class='card card-body'>

<form action='allot.php' method='GET'>
<div class='input-group'>
<span class='input-group-text'>From</span>
<input type='text' style='width:100%' class='form-control' name='from'
placeholder='Register number start by 0' >
<span class='input-group-text'>To</span>
<input type='text' style='width:100%' class='form-control' name='to'
placeholder='Register number end by 9999999999999' >


<select name='option' class='form-select' id='inputGroupSelect04' aria-
label='Example select with button addon'>
  <option selected>Choose...</option>
  <option value='1'>HOD</option>
  <option value='2'>class_incharge</option>
  <option value='3'>WARDEN</option>
  <option value='4'>Class Incharge & Asst.HOD</option>
  <option value='5'>Common Class Incharge</option>
</select>

<input type='text' style='display:none;' id='disabledTextInput' name='rpapn'
value='$rpapn' class='form-control' >
<input type='text' style='display:none;' id='disabledTextInput' name='apn'
value='$apn' class='form-control' >
<input type='text' style='display:none;' id='disabledTextInput' name='tname'
value='$tname' class='form-control' >
<input type='submit' name='DONE' value='DONE' class='btn btn-outline-
secondary'>
</div>

```



```

</form>
</div>
</div>

";

echo '<div class="dropdown-divider"></div>';
}

}else{
    echo '<h7 class="text-danger "><center> <em> sorry! No new users
</em> </center> </h7>';

}
?>

</div>

</div>

```

```

</div>

<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-bs-
dismiss="modal">Close</button>
</div>

</div>
</div>
</div>

<!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!-- Allot --> <!--
Allot --> <!-- Allot -->

<?php

$get_data = "SELECT * FROM $name ";
if($get_data){
    $run_data = mysqli_query($link,$get_data);

    $row = mysqli_fetch_array($run_data);

if(!$run_data ){
    echo "<center class='text-danger'> Please complete your Profile</center>";

```

```

}
if(!$get_data ){
    echo "<center class='text-danger'> Please complete your Profile</center>";
}

$get_data2 = "SELECT * FROM admin WHERE application_number=
$apn ";

$run_data2 = mysqli_query($link,$get_data2);

$row2 = mysqli_fetch_array($run_data2);
$type = $row2['who'];

$id = $row['id'];
$card = $row['u_card'];
$name = $row['u_f_name'];
$name2 = $row['u_l_name'];
$father = $row['u_father'];
$mother = $row['u_mother'];
$gender = $row['u_gender'];
$email = $row['u_email'];
$aadhar = $row['u_aadhar'];
$Bday = $row['u_birthday'];
$family = $row['u_family'];
$phone = $row['u_phone'];
$address = $row['u_state'];
$village = $row['u_village'];
$police = $row['u_police'];

```

```

$dist = $row['u_dist'];
$pincode = $row['u_pincode'];
$state = $row['u_state'];
$time = $row['uploaded'];
$department = $row['department'];
$year = $row['year'];
$section = $row['section'];
$image = $row['image'];

$dot = '-';
$title = $name2.$dot.$name;
$date = date("h:i:s:a");

echo "
<div class='container'>
<div class='card sm-12 mb-3' style='max-width: 100%; background-color:
#f0f0f0;'>
<div class='row g-0'>
<div class='col-md-4'>
<img src='upload_images/image/$image' alt='class='responsive-img
rounded-circle' style='width: 150px; padding:5px; height: 150px;'>
<p class='text-muted center'>
<h3 style='padding-right:50px; padding-left:10px;'><strong> $type
</strong></h3>
</p>

</div>
<div class='col-md-8'>

```

```

<div class='card-body'>
  <h5 class='card-title'> $title</h5>
  <p class='card-text'> <i class='fa fa-id-card' aria-hidden='true'></i>&nbsp;
Application/id No - $card<br>
  <i class='fa fa-phone' aria-hidden='true'></i> &nbsp;Contact no $phone
<br> </p>
  <p class='card-text'> department: $department</p>
  <p class='card-text'><small class='text-muted'>$cdate
</small></p><br> <br>";

if($ct== 1 && $ci== 0){
  echo "<div class='card text-white bg-dark ' style='max-width: 8rem;
max-height: 4rem;'>

  <div class='card-body'>
    <h5 class='card-title'> AS HOD </h5>

  </div>
</div>";
}

if($ct== 0 && $ci== 1){
  echo "<div class='card text-white bg-dark ' style='max-width: 15rem;
max-height: 4rem;'>

  <div class='card-body'>
    <h5 class='card-title'> AS Common Incharge </h5>

  </div>
</div>";
}

```

```

    }

    echo " </div>
</div>
</div>
</div>

</div>

";

}else{
    echo "
<div class='card'>
<div class='card-body'>
<center class='text-danger'> please! complete your profile</center>
</div>
</div>";
}

```

?>

```
<div class="container">
```

```
  <div class="hero-slider" style="height:45vh;" data-carousel>
```

```
    <div class="carousel-cell" style="background-image: url(canva1.png);">
```

```
      <div class="overlay"></div>
```

```
      <div class="inner">
```

```
    </div>
```

```
  </div>
```

```
  <div class="carousel-cell" style="background-image: url(canva4.png);">
```

```
    <div class="overlay"></div>
```

```
    <div class="inner">
```

```
  </div>
```

```
</div>
```

```
  <div class="carousel-cell" style="background-image: url(canva5.png);">
```

```
    <div class="overlay"></div>
```

```
    <div class="inner">
```

```

        </div>
    </div>
</div>

</div>

<?php

if($type !='creator' && $type !='HOD' && $type !='class_incharge' &&
$type !='WARDEN' && $type !='AHOD' && $type !='common_incharge' ){

?>

<nav>
    <div class="nav nav-tabs nav-justified" id="nav-tab" role="tablist">
        <button class="nav-link active" id="nav-home-tab" data-bs-toggle="tab"
data-bs-target="#nav-home" type="button" role="tab" aria-controls="nav-
home" aria-selected="true">REQUESTS. </button>
        <button class="nav-link" id="nav-profile-tab" data-bs-toggle="tab" data-bs-
target="#nav-profile" type="button" role="tab" aria-controls="nav-profile" aria-
selected="false">RESPONSES. </button>
        <button class="nav-link" id="nav-contact-tab" data-bs-toggle="tab" data-bs-
target="#nav-contact" type="button" role="tab" aria-controls="nav-contact"
aria-selected="false">link.</button>
    </div>

```



```

</div>

</nav>

<div class="tab-content " id="nav-tabContent">

<div class="tab-pane fade show active" id="nav-home" role="tabpanel" aria-
labelledby="nav-home-tab"><center class="text-danger"> Sorry! NO requests .
contact HOD/Creator to allot your user type</center>

</div>

<div class="tab-pane fade" id="nav-profile" role="tabpanel" aria-
labelledby="nav-profile-tab"><center class="text-danger">Sorry! No
Responses. contact HOD/Creator to allot your user type</center>

</div>

<div class="tab-pane fade" id="nav-contact" role="tabpanel" aria-
labelledby="nav-contact-tab"><center class="text-danger">No Link. contact
HOD/Creator to allot your user type</center></div>

</div>

</div>

<?php

}else{

if($type=='class_incharge'){

    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number=$apn ");

    $range = mysqli_fetch_array( $sql_range);

    $frange = $range['frange'] ;

    $lrange = $range['lrange'] ;

```

```

$sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0");
$counts = mysqli_num_rows($sql_get);

$sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status =0
AND stage =0 AND application_number BETWEEN $frange AND $lrange ");
$counts5 = mysqli_num_rows($sql_get5);


$sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE status
=0 AND stage =0 AND application_number BETWEEN $frange AND
$lrange");
$countsrp = mysqli_num_rows($sql_getrp);


$sr_no =1;
$sr_norp =1;
}
else if( $type =='HOD' ){
    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number =$apn ");
    $range = mysqli_fetch_array( $sql_range);
    $frange = $range['frange'] ;
    $lrange = $range['lrange'] ;
    $sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0 ");
    $counts = mysqli_num_rows($sql_get);

    $sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status =0
AND stage =1 ");

```

```

$counts5 = mysqli_num_rows($sql_get5);

$sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE status
=0 AND stage =1 ");
$countsrp = mysqli_num_rows($sql_getrp);


$sr_no =1;
$sr_norp =1;
}
else if( $type =='common_incharge' ){

    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number =$apn ");
    $range = mysqli_fetch_array( $sql_range);
    $frange = $range['frange'] ;
    $lrange = $range['lrange'] ;
    if($ci==0){
        $sql_get = mysqli_query($link,"SELECT * FROM $username WHERE
status =0");
        $counts = mysqli_num_rows($sql_get);

        $sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status
=0 AND stage =0 AND application_number BETWEEN $frange AND $lrange
");
        $counts5 = mysqli_num_rows($sql_get5);
    }
}

```

```
$sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE  
status =0 AND stage =0 AND application_number BETWEEN $frange AND  
$lrange ");
```

```
$countsrp = mysqli_num_rows($sql_getrp);
```

```
$sr_no =1;
```

```
$sr_norp =1;
```

```
}else{
```

```
$sql_get = mysqli_query($link,"SELECT * FROM $username WHERE  
status =0");
```

```
$counts = mysqli_num_rows($sql_get);
```

```
$sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status  
=0 AND stage =0 ");
```

```
$counts5 = mysqli_num_rows($sql_get5);
```

```
$sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE  
status =0 AND stage =0 ");
```

```
$countsrp = mysqli_num_rows($sql_getrp);
```

```
$sr_no =1;
```

```

    $sr_norp=1;

}

}

else if( $type == 'AHOD' ){
    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number =$apn ");
    $range = mysqli_fetch_array( $sql_range);
    $frange = $range['frange'] ;
    $lrange = $range['lrange'] ;

    if($ct==1){

        $sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0 ");
        $counts = mysqli_num_rows($sql_get);

        $sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status =0
AND stage =1 ");
        $counts5 = mysqli_num_rows($sql_get5);

        $sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE status
=0 AND stage =1 ");
        $countsrp = mysqli_num_rows($sql_getrp);
    }
}

```

```

$sr_no =1;
$sr_norp =1;

}else{

    $sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0");
    $counts = mysqli_num_rows($sql_get);

    $sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status
=0 AND stage =0 AND application_number BETWEEN $frange AND $lrange
");
    $counts5 = mysqli_num_rows($sql_get5);

    $sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE
status=0 AND stage =0 AND application_number BETWEEN $frange AND
$lrange");
    $countsrp = mysqli_num_rows($sql_getrp);

    $sr_no =1;
    $sr_norp =1;

}
}

```

```

else if( $type == 'WARDEN' ){
    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number =$apn ");
    $range = mysqli_fetch_array( $sql_range);
    $frange = $range['frange'] ;
    $lrange = $range['lrange'] ;
    $sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0 ");
    $counts = mysqli_num_rows($sql_get);

    $sql_get5 = mysqli_query($link,"SELECT * FROM requests WHERE status =0
AND stage =2 ");
    $counts5 = mysqli_num_rows($sql_get5);

    $sql_getrp = mysqli_query($link,"SELECT * FROM responses WHERE status
=0 AND stage =2 ");
    $countsrp = mysqli_num_rows($sql_getrp);

    $sr_no =1;
    $sr_norp =1;
}
else if( $type == 'creator' ){
    $sql_range = mysqli_query($link,"SELECT * FROM admin WHERE
application_number =$apn ");
    $range = mysqli_fetch_array( $sql_range);
    $frange = $range['frange'] ;

```

```

$lrage = $range['lrage'] ;

$sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0 ");

$counts = mysqli_num_rows($sql_get);


$sql_get5 = mysqli_query($link,"SELECT * FROM requests");
$counts5 = mysqli_num_rows($sql_get5);


$sql_getrp = mysqli_query($link,"SELECT * FROM responses ");
$countsrp = mysqli_num_rows($sql_getrp);


$sr_no =1;
$sr_norp =1;
}

?>

<?php

?>

```



```

<nav>
  <div class="nav nav-tabs nav-justified" id="nav-tab" role="tablist">
    <button class="nav-link active" id="nav-home1-tab" data-bs-toggle="tab"
data-bs-target="#nav-home1" type="button" role="tab" aria-controls="nav-
home1" aria-selected="true"> <?php if($counts5<1){ ?><h8 class="text-
danger"> NO NEW REQUESTS. </h8><?php }else{?> REQUESTS.
<?php }?><span class="badge badge-danger " id="count"> <?php echo
$counts5; ?></span></button>

    <button class="nav-link" id="nav-profile1-tab" data-bs-toggle="tab" data-bs-
target="#nav-profile1" type="button" role="tab" aria-controls="nav-profile1"
aria-selected="false"> <?php if($countsrp<1){ ?><h8 class="text-danger"> NO
NEW RESPONSES. </h8><?php }else{?> RESPONSES. <?php }?> <span
class="badge badge-danger " id="count"> <?php echo
$countsrp; ?></span></button>

    <button class="nav-link" id="nav-contact1-tab" data-bs-toggle="tab" data-bs-
target="#nav-contact1" type="button" role="tab" aria-controls="nav-contact1"
aria-selected="false">link</button>

  </div>
</nav>

<div class="tab-content" id="nav-tabContent">

  <!-- Requests--><!-- Requests--><!-- Requests--><!-- Requests--><!--
Requests--><!-- Requests--><!-- Requests-->

  <div class="tab-pane fade show active" id="nav-home1" role="tabpanel" aria-
labelledby="nav-home1-tab">

```

[illegible]

<?php

```
if(mysql_num_rows($sql_get5)>0)
```

 $\{$

```
while($row5 = mysqli_fetch_assoc($sql_get5)):
```

```
$apnrq = $row5['application_number'];
```

```
$tnamerq = $row5['tname'];
```

```
$sql queryrq = "SELECT * from $tnamerq ";
```

```
$retvalrq = mysqli_query($link,$sql_queryrq);
```

```
$rowrq = mysqli_fetch_array($retvalrq);
```

 $\dot{} = \text{'-'};$

```
$fname = $rowrq['u f name'];
```

```
$lname = $rowrq['u 1 name'];
```

```
$flname = $fname.$dot.$lname;
```

```
$outinfoo=mysqli_query( $link," SELECT MAX( id ) AS max FROM
outpass WHERE application number = $apnrq ");
```

```
$outinfoooo=mysqli_fetch_array( $outinfo);
```

```
if($outinfoooo){
```

```

}else{
    echo "id not done";
}

$highestValue1 = $outinfoooo['max'];

$sql_queryop = "SELECT * from outpass WHERE id = $highestValue1 ";
$retvalop = mysqli_query($link,$sql_queryop);

$rowop = mysqli_fetch_array($retvalop);
$passid = $rowop['id'];

$imagerq = $rowrq['image'];

?>
<br>

<li><?php echo $sr_no++; ?></li>
<br>

<div class="card sm-12 mb-3">
    <div class="card-header"> <?php echo $flname ?></li> &nbsp;
&nbsp;
```

```
<a class="btn btn-outline-primary" data-bs-toggle="collapse" href="#<?php
echo $flname?>" role="button" aria-expanded="false" aria-
controls="collapseExample">
```

More info

```
</a> &nbsp; &nbsp; <a class="btn btn-info" data-bs-toggle="collapse"
href="#<?php echo $flname?>0" role="button" aria-expanded="false" aria-
controls="collapseExample">
```

Ask

```
</a>
```

```
<?php $sec = 0 ;?>
```

```
<div class="d-grid gap-2 d-md-flex justify-content-md-end">
```

```
<a href="approve.php?username=<?php echo
$row5['username'] ; ?>&ct=<?php echo $ct ?>&ci=<?php echo $ci ?>
&myusername=<?php echo $username ?>&section= <?php echo $sec ?>
&stuapn=<?php echo $apnrq ?> &passid=<?php echo $passid ?>
&tname=<?php echo $tname ?>&apn=<?php echo $apn ?> &type=<?php echo
$type ?>"> <button class="btn btn-primary me-md-2"
type="button">Approve</button> </a>&nbsp;
```

```
<a href="decline.php?username=<?php echo $row5['username'] ; ?>
&ct=<?php echo $ct ?>&ci=<?php echo $ci ?> &myusername=<?php echo
$username ?> &tname=<?php echo $tname ?>&apn=<?php echo $apn ?>
&type=<?php echo $type ?> & section=ask"><button class="btn btn-danger"
type="button">Decline</button></a>
```

```
</div>
```

```

<div class="collapse" id="<?php echo $fname ?>">
    <div class="card card-body">
        <strong><em> Name : <?php echo $fname?> </em></strong> <br>
        <strong><em> Application/ID NO : <?php echo
$row5['application_number'] ?></em></strong> <br>
        <strong><em> Mobile NO : <?php echo $rowrq['u_phone'] ?></em></strong>
<br>
        <strong><em> Department : <?php echo
$rowrq['department'] ?></em></strong> <br>
        <strong><em> Section : <?php echo $rowrq['section'] ?></em></strong>
<br>
        <strong><em>year : <?php echo $rowrq['year'] ?></em></strong> <br>
        <strong><em>Out DateTime : <?php echo
$rowop['out_date'] ?></em></strong> <br>
        <strong><em> In DateTime : <?php echo $rowop['in_date'] ?>
</em></strong> <br>
        <strong><em>Out Pass Info: <?php echo $rowop['outing_info'] ?>
</em></strong> <br>
        <?php
        $nil = $row5['username'];
        $sql_nil = mysqli_query($link,"SELECT * FROM $nil WHERE output=1 ");
        $countsnil = mysqli_num_rows($sql_nil);

        if($countsnil>0)
        {
            echo " <strong><em> Unsubmitted Outpass: $countsnil </em></strong>
<br>";
        }else{
            echo " <strong><em> Unsubmitted Outpass: NILL </em></strong> <br>";
        }
    }

```

```

}

?>

</div>
</div>

<div class="collapse" id="<?php echo $fname ?>0">
  <div class="card card-body">
    <?php
    $value= $row5['username'] ;
    $stuapn = $row5['application_number'];

    ?>

    <form action="ask.php?table=<?php echo $value ?> & message=<?php echo
    $_GET['message']; ?> " method="GET">
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="ci" value= <?php echo $ci ?> >
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="ct" value= <?php echo $ct ?> >
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="from" value=" <?php echo $type ?> " placeholder=" <?php
    echo $row5['username']; ?> ">
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="to" value=" <?php echo $value ?> " placeholder=" <?php echo
    $row5['username']; ?> ">

```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="apn" value=" <?php echo $apn ?> " placeholder=" <?php echo $row5['username']; ?> ">
```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="tname" value=" <?php echo $tname ?> " placeholder=" <?php echo $row5['username']; ?> ">
```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="section" value=0 placeholder=" <?php echo $row5['username']; ?> ">
```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="stuapn" value=" <?php echo $stuapn ?> " placeholder=" <?php echo $row5['username']; ?> ">
```

```
<h6 class="input-group">
```

```
<span class="input-group-text">MESSAGE</span>
```

```
<textarea class="form-control" name="message" placeholder="Don't leave empty! before send" aria-label="With textarea"></textarea>&nbsp; <input type="submit" name="submit" id="register" value="<?php echo $value ?>" class="btn btn-info">
```

```
</h6>
```

```
</form>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<?php endwhile; }
```

```
?>
```

```
<!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1-->  
><!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1--><!--tab1-->  
><!--tab1--><!--tab1--><!--tab1-->
```

```
</div>
```

```
<!-- Responses--><!-- Responses--><!-- Responses--><!-- Responses--><!--  
Responses--><!-- Responses--><!-- Responses-->
```



```
<div class="tab-pane fade" id="nav-profile1" role="tabpanel" aria-  
labelledby="nav-profile1-tab">
```

```
<!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--  
><!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--><!--tab2--  
><!--tab2--><!--tab2--><!--tab2--><!--tab2-->
```

```
<?php
```

```
if(mysqli_num_rows($sql_getrp)>0)  
{  
while($rowrp = mysqli_fetch_assoc($sql_getrp)):  
  
    $apnrp = $rowrp['application_number'];  
    $tnamerp = $rowrp['tname'];  
  
    $sql_queryrp = "SELECT * from $tnamerp";  
    $retvalrp = mysqli_query($link,$sql_queryrp);  
  
    $profile = mysqli_fetch_array($retvalrp);  
  
    $dot = '-';  
    $fnamerp = $profile['u_f_name'];  
    $lnamerp = $profile['u_l_name'];  
    $flnamerp = $fnamerp.$dot.$lnamerp;
```

```

// <!-- out info--> // <!-- out info--> // <!-- out info--> // <!-- out info--> // <!--
out info--> // <!-- out info-->

$outinfo0 = mysqli_query($link," SELECT MAX( id ) AS max FROM outpass
WHERE application_number = $apnrp ");
$outinfo1 = mysqli_fetch_array( $outinfo0);
    $highestValue = $outinfo1['max'];


$sql_queryop = "SELECT * from outpass WHERE id = $highestValue ";
$retvalop = mysqli_query($link,$sql_queryop);


// <!-- out info--> // <!-- out info--> // <!-- out info--> // <!-- out info--> // <!--
out info--> // <!-- out info-->


$rowop = mysqli_fetch_array($retvalop);
$imageerp = $profile['image'];

?>
<li><?php echo $sr_norp++; ?></li>
<br>

<div class="card mb-3 sm-12">
<div class="card-header">
<?php echo $flnamerp ?></li> &nbsp;
&nbsp;
```

```
<a class="btn btn-outline-primary" data-bs-toggle="collapse"
href="#<?php echo $flnamerp?>1" role="button" aria-expanded="false" aria-
controls="collapseExample">
```

More info

```
</a> &nbsp; &nbsp; <a class="btn btn-secondary" data-bs-
toggle="collapse" href="#<?php echo $flnamerp?>2" role="button" aria-
expanded="false" aria-controls="collapseExample">
```

Show Reply

```
</a>
```

```
<?php $sec = 1 ;?>
```

```
<div class="d-grid gap-2 d-md-flex justify-content-md-end">
```

```
<a href="approve.php?username=<?php echo
$rowrp['username'] ; ?>&ct=<?php echo $ct ?>&ci=<?php echo
$ci ?>&section= <?php echo $sec ?> &stuapn=<?php echo $apnrp ?>
&myusername=<?php echo $username ?> &tname=<?php echo
$tname ?>&apn=<?php echo $apn ?> &type=<?php echo $type ?>"> <button
class="btn btn-primary me-md-2" type="button">Approve</button></a>
&nbsp;
```

```
<a href="decline.php?username=<?php echo $rowrp['username'] ; ?>
&ct=<?php echo $ct ?>&ci=<?php echo $ci ?> &myusername=<?php echo
$username ?> &tname=<?php echo $tname ?>&apn=<?php echo $apn ?>
&type=<?php echo $type ?> & section=responses"><button class="btn btn-
danger" type="button">Decline</button></a>
```

```
</div>
```

```
<div class="collapse" id="<?php echo $flnamerp ?>1">
```

```
<div class="card card-body">
```

```
<strong><em> Name : <?php echo $flnamerp?> </em></strong> <br>
```

```
<strong><em> Application/ID NO : <?php echo
$rowrp['application_number'] ?></em></strong> <br>
```

```
<strong><em> Mobile NO : <?php echo
$profile['u_phone'] ?></em></strong> <br>
```

```

<strong><em> Department : <?php echo
$profile['department'] ?></em></strong> <br>

<strong><em> Section : <?php echo $profile['section'] ?></em></strong>
<br>

<strong><em>year : <?php echo $profile['year'] ?></em></strong> <br>

<strong><em>Out DateTime : <?php echo
$rowop['out_date'] ?></em></strong> <br>

<strong><em> In DateTime : <?php echo $rowop['in_date'] ?>
</em></strong> <br>

<strong><em>Out Pass Info: <?php echo $rowop['outing_info'] ?>
</em></strong> <br>

<?php
$nil2 = $rowrp['username'];
$sql_nil2 = mysqli_query($link,"SELECT * FROM $nil2 WHERE output=1
");
$countsnil2 = mysqli_num_rows($sql_nil2);

if($countsnil2>0)
{
    echo " <strong><em> Unsubmitted Outpass: $countsnil2 </em></strong>
<br>";
}else{
    echo " <strong><em> Unsubmitted Outpass: NILL </em></strong> <br>";
}

?>

</div>

```

```

</div>

<div class="collapse" id="<?php echo $flnamerp ?>2">
  <div class="card card-body">

    <?php
      $value= $rowrp['username'] ;
      $stuapn2 = $rowrp['application_number'];

    ?>

    <em><strong> Qn: <?php echo $rowrp['qn'] ?></strong></em><br>
    <em><strong> Reply:<?php echo $rowrp['reply'] ?> </strong></em><br>
    <form action="ask.php " method=" GET">
    <h6 class="input-group">

    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="ci" value= <?php echo $ci ?> >
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="ct" value= <?php echo $ct ?> >
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="from" value=" <?php echo $type ?> " placeholder=" <?php
    echo $row5['username']; ?> ">
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="to" value=" <?php echo $value ?> " placeholder=" <?php echo
    $row5['username']; ?> ">
    <input type="text" style="display:none;" id="disabledTextInput" class="form-
    control" name="apn" value=" <?php echo $apn ?> " placeholder=" <?php echo
    $row5['username']; ?> ">

```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="tname" value="<?php echo $tname ?> " placeholder="<?php echo $row5['username']; ?> ">
```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-
control" name="section" value= 1 placeholder=" <?php echo
$row5['username']; ?> ">
```

```
<input type="text" style="display:none;" id="disabledTextInput" class="form-control" name="stuapn2" value=" <?php echo $stuapn2 ?> " placeholder=" <?php echo $row5['username']; ?> ">
```

MESSAGE

```
<textarea class="form-control" name="message" placeholder="Don't leave empty! before send" aria-label="With textarea"></textarea>&nbsp;  <input type="submit" name="submit" id="register" value="send" class="btn btn-info">
```


</div>

</div>

</div>

```
<?php endwhile; }?>
```

[illegible]

</div>

<!-- link--><!-- link--><!-- link--><!-- link--><!-- link--><!-- link--><!-- link-->
><!-- link--><!-- link--><!-- link--><!-- link-->

<div class="tab-pane fade" id="nav-contact1" role="tabpanel" aria-labelledby="nav-contact1-tab">

<center class="text-danger"> wellcome </center>

</div>

</div>

<div style="margin-bottom:0px; margin-top:170px;" class="dropdown-divider"></div>

<?php

}

?>

</div>

</body>

<script type="text/javascript"
src="https://cdnjs.cloudflare.com/ajax/libs/flickity/2.2.1/flickity.pkgd.min.js"></script>

<script type="text/javascript" src="slider/script.js"></script>

```

<footer style="background-color:#3B3B3B;" class="page-footer grey darken-3">
<div style="background-color:grey;" class="footer-copyright grey darken-2">
<div style="padding:10px;" style="background-color:white;" class="container center-align"><center>2018-2022 Batch </center> </div>
</div>
<div class="container">

<div style="padding:10px;" class="row">

<div id="services" class="col s12 l6">
<h5 style="color:white;"> services</h5>
<ul>
<a style="text-decoration:none; " href="../mainpage.php" class="grey-text text-lighten-3"><h8 style="color:white;">home</h8>&nbsp;<i style="color:white;" class="fa fa-home"></i></a> &nbsp;&nbsp;&nbsp;
<a style="text-decoration:none;" href="#" class="grey-text text-lighten-3"><h8 style="color:white;">about</h8> &nbsp;&nbsp;&nbsp; <i style="color:white;" class="fa fa-info"></i></a>&nbsp;&nbsp;&nbsp; &nbsp;&nbsp;&nbsp;
<a style="text-decoration:none;" href=" http://www.periit.com" class="grey-text text-lighten-3"><h8 style="color:white;">Peri IT </h8>&nbsp;&nbsp;&nbsp;<i style="color:white;" class="fa fa-graduation-cap "></i></a>
</ul>
<p> </p>
</div>

<div id="connect" class="col s12 l4 ">
<h5 style="color:white;"> Connect</h5>
<ul>
<a href="#" style="text-decoration:none;" class="grey-text text-lighten-3"><h8 style="color:white;">Facebook</h8> &nbsp;&nbsp;&nbsp;<i style="color:white;" class="fa fa-facebook"> </i> </a>&nbsp;&nbsp;&nbsp; &nbsp;&nbsp;&nbsp;

```



```

<a href="#" style="text-decoration:none;" class="grey-text text-lighten-3"><h8
style="color:white;" >Twitter</h8> &nbsp;<i style="color:white;" class="fa fa-
twitter"></i> </a>&nbsp;&nbsp;&nbsp;

<a href="#" style="text-decoration:none;" class="grey-text text-lighten-3"><h8
style="color:white;" >LinkedIn</h8> &nbsp;<i style="color:white;" class="fa
fa-linkedin-square"></i> </a>

</ul>

</div>

</div>

<div style="background-color:#000000;" class="footer-copyright grey darken-
4">

<div class="container center-align"><center style="padding:3px;" > <h8
style="color:white; " >&copy; 2021 Art4lyf copyrights owned by srini kc
</h8></center> </div>

</div>

</footer>

</html>

<?php

}

else {

    echo "<script>location.href='studentLogin.php'</script>";

    }

?>

```

STUDENT HOMEPAGE:

```
<?php
include "configs.php";

session_start();

if(isset($_GET['tname'])){
    $tname = $_GET['tname'];
}

if(isset($_SESSION['apn']))
{

if(isset($_GET['application_number'])){
    $apn= $_GET['application_number'];
}

$sql_query = "SELECT username from users where application_number=
$apn ";
$retval = mysqli_query($link,$sql_query);

$row = mysqli_fetch_array($retval);

    $username = $row['username'];

// logout
if(isset($_GET['but_logout'])){
    $_SESSION = array();
```

```

    session_destroy();
    $start ==0;
    header('Location: studentLogin.php');
}
?>

<!doctype html>
<html>
<title> student </title>
    <head>

    <!--message --><!--message --><!--message --><!--message --><!--message --
><!--message --><!--message --><!--message --><!--message -->

    <div class="modal fade" id="chatmessage" data-bs-backdrop="static" data-bs-
keyboard="false" tabindex="-1" aria-labelledby="chatmessageLabel" aria-
hidden="true">
<div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">

        <div class="modal-header">
            <h5 class="modal-title" id="chatmessageLabel"> <i
style="color:#00A9DF;" class="fa fa-comments"></i> </h5>
            <button type="button" class="close" data-bs-dismiss="modal" aria-
label="Close">
                <span aria-hidden="true">&times;</span>
            </button>
        </div>

        <div class="modal-body">

```

```

<nav>
<div class="nav nav-tabs nav-justified" id="measge" role="tablist">
  <button class="nav-link active" id="nav-home-tab" data-bs-toggle="tab" data-
bs-target="#nav-message" type="button" role="tab" aria-controls="nav-home"
aria-selected="true">Meassage</button>

  <button class="nav-link" id="nav-profile-tab" data-bs-toggle="tab" data-bs-
target="#nav-new" type="button" role="tab" aria-controls="nav-profile" aria-
selected="false">New </button>

  <button class="nav-link" id="nav-username-tab" data-bs-toggle="tab" data-
bs-target="#nav-username" type="button" role="tab" aria-controls="nav-
username" aria-selected="false">Usernames </button>


</div>
</nav>

<div class="tab-content md-3 " id="messageContent">

<div class="tab-pane fade show active" id="nav-message" role="tabpanel" aria-
labelledby="nav-home-tab">

<?php

$sql_msg = mysqli_query($link,"SELECT * FROM message WHERE
For_=$apn AND status =0 " );

$countsmgs = mysqli_num_rows($sql_msg);

$sql_msg1 = mysqli_query($link, "SELECT * FROM message WHERE
For_=$apn AND status =0");

if(mysqli_num_rows($sql_msg1)>0)
{

```

[illegible]

```

<?php

    }
}else{

?>

<h7 class="text-danger " ><center> <em> sorry! No new messages </em>
</center> </h7>

<?php
}

?>

</div>

<div class="tab-pane fade" id="nav-new" role="tabpanel" aria-
labelledby="nav-profile-tab">

<form action="message.php" method="GET">
    <div class="input-group flex-nowrap">
        <span class="input-group-text" id="addon-wrapping">To</span> <br><br>
        <input type="text" name="for" class="form-control"
placeholder="@Username" aria-label="Username" aria-describedby="addon-
wrapping">
    </div>

```

```

<div class="input-group">
  <input type="text" style="display:none;" name="from" value=<?php echo
$username ?>>
  <input type="text" style="display:none;" name="tname" value=<?php echo
$tname ?>>
  <input type="text" style="display:none;" name="apn" value=<?php echo
$apn ?>>
  <textarea class="form-control" name="message" aria-label="With
textarea" ></textarea>
  <button class="btn btn-outline-info" type="submit">Send</button>
</div>

</form>

</div>
<div class="tab-pane fade" id="nav-usernames" role="tabpane2" aria-
labelledby="nav-profile-tab">

<?php

$message = mysqli_query($link," SELECT * FROM admin ");
$i = 0;
if(mysqli_num_rows($message)>0)
{

while($adminmsg = mysqli_fetch_assoc($message )){

$mi = ++$i;
$username = $adminmsg['username'];

```

```

$yar = $adminmsg['who'];
echo "<center><em> $mi --$yar- Username: $username <em><center> <br>";

}
}

?>

</div>
</div>

</div>

<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-bs-
dismiss="modal">Close</button>

</div>

</div>
</div>
</div>

```



```

<!--message --><!--message --><!--message --><!--message --><!--message --
><!--message --><!--message --><!--message --><!--message -->

<script type="text/javascript"
src="https://cdnjs.cloudflare.com/ajax/libs/flickity/2.2.1/flickity.pkgd.min.js"><
/script>

<link
href="https://fonts.googleapis.com/css2?family=Montserrat&family=Roboto+Sl
ab:wght@300&display=swap" rel="stylesheet">

<link rel="stylesheet" type="text/css"
href="https://cdnjs.cloudflare.com/ajax/libs/flickity/2.2.1/flickity.css">

<script src="https://code.jquery.com/jquery-3.2.1.slim.min.js"
integrity="sha384-
KJ3o2DKtIkVYIK3UENzmM7KCKRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93
hXpG5KkN" crossorigin="anonymous"></script>

<script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"
integrity="sha384-
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvf
a0b4Q" crossorigin="anonymous"></script>

<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/css/bootstrap.min.css"
integrity="sha384-
Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/d
AiS6JXm" crossorigin="anonymous">

<script
src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/js/bootstrap.min.js"
integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76PV
CmYI" crossorigin="anonymous"></script>

<link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css"
>

<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.min.css">

<!-- JavaScript Bundle with Popper -->

```

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.0-beta3/dist/js/bootstrap.bundle.min.js" integrity="sha384-JEW9xMcG8R+pH31jmWH6WWP0WintQrMb4s7ZOdauHnUtxwoG2vI5DkLtS3qm9Ekf" crossorigin="anonymous"></script>
```

```
<script src="https://cdn.jsdelivr.net/npm/sweetalert2@10"></script>
```

```
<script  
src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>
```

```
<script type="text/javascript"  
src="https://cdnjs.cloudflare.com/ajax/libs/flickity/2.2.1/flickity.pkgd.min.js"></script>
```

```
<script type="text/javascript" src="slider/script.js"></script>
```

```
<style>
```

```
body{ font: 14px sans-serif; }
```

```
.wrapper{ width: 350px; padding: 20px; }
```

```
.container .form-control {
```

```
width:none;
```

```
}
```

```
#count{
```

```
border-radius: 50%;
```

```
position: relative;
```

```
top: -10px;
```

```
left: -10px;
```

```
}
```

```
body{
```

```
background: url("wp7.jpg");
```

```
background-size: cover;
```

```
background-position: center;
```

```
min-height: 100px;
```

```
background-image: blur(10px);

}

@media screen and (max-width: 670px){
  body{
    min-height: 500px;
  }
}

#message{

  position: fixed;
  bottom: 40px;
  left: 30px;
  z-index: 99;
  font-size: 18px;
  border: none;
  outline: none;

  color: white;
  cursor: pointer;

  border-radius: 500px;

}

#message:hover{

  background-color: #555;
```

```
}  
  
</style>  
  
<style type="text/css">  
  
#slider {  
    overflow: hidden;  
}  
  
#slider figure {  
    position: relative;  
    width: 500%;  
    margin: 0;  
    left: 0;  
    animation: 15s slider infinite;  
}  
  
#slider figure img {  
    float: left;  
    width: 20%;  
}  
  
@keyframes slider {  
    0% {  
        left: 0;  
    }  
    20% {  
        left: 0;  
    }  
    25% {  
        left: -100%;  
    }  
}
```

```
45% {  
  left: -100%;  
}  
50% {  
  left: -200%;  
}  
70% {  
  left: -200%;  
}  
75% {  
  left: -300%;  
}  
95% {  
  left: -300%;  
}  
100% {  
  left: -400%;  
}  
}  
  
</style>  
  
</head>  
  
<nav style="background-color:#616161; " class="navbar navbar-expand-lg  
navbar-light transparent ">  
  <div class="container">  
    <div class="container-fluid">
```

```

    <a class="navbar-brand" href="#"><h4 style="color:white;">HOSTEL
    PASS</h4></a>

    <button class="navbar-toggler" type="button" data-bs-toggle="collapse"
    data-bs-target="#navbarSupportedContent" aria-
    controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle
    navigation">

        <span class="navbar-toggler-icon"></span>

    </button>

<?php
$sql_get = mysqli_query($link,"SELECT * FROM $username WHERE status
=0");
$counts = mysqli_num_rows($sql_get);

?>

<div class="collapse navbar-collapse" id="navbarSupportedContent">
    <ul class="navbar-nav ml-auto">

        &nbsp; &nbsp;<a style="width:125px; height:50px;" href="logout.php"
        type="submit" value="Logout" name="but_logout" > <button type='button'
        class='btn btn-light' style="width:125px; height:40px; ">Log-Out</button></a>

        &nbsp; &nbsp;<button type='button' class='btn btn-secondary'
        style="width:125px; height:40px; " data-bs-toggle="modal" data-bs-
        target="#staticBackdrop" >Pass History</button>

        <!-- Example single danger button -->

        <li class="nav-item dropdown">

```

```

        <a style="color:white;" class="nav-link dropdown-toggle" href="#"
id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-
expanded="false">

            notifications <i class="fa fa-bell"></i>    <span class="badge badge-
danger " id="count"> <?php echo $counts; ?></span>

        </a>

        <ul class="dropdown-menu p-3 text-muted " style="max-width:200px;"
aria-labelledby="navbarDropdown">

            <p>

                <?php

                    $sql_get1 = mysqli_query($link, "SELECT * FROM $username WHERE
status=0");

                    if(mysqli_num_rows($sql_get1)>0)
                    {

                        while($result = mysqli_fetch_assoc($sql_get1))
                        {

                            echo '<a style="text-decoration:none; " class="container" class=
"dropdown-item text-primary " href="notify.php?username='.$username.' &
tname= '.$username.'Profile & application_number='.$apn.' &
id='.$result['id'].'">'.$result['message'].' </a> ';

                            echo '<div class="dropdown-divider"></div>';

                        }

```

```

    }
    else{

        $result = mysqli_fetch_assoc($sql_get1);

        $sqlid= mysqli_query($link, "SELECT MAX( id ) AS max FROM
$username" );
        $resid = mysqli_fetch_array( $sqlid);
        $highestValue = $resid['max'];


        echo '<div style="text-decoration:none;" class="container" class=
"dropdown-item text-danger font-weight-bold"> <i class="fa fa-frown-
open"></i> sorry! No new notifications </div>';

        echo '<div class="dropdown-divider"></div>';

        echo '<div style="text-decoration:none;" class="container" class=
"dropdown-item text-danger font-weight-bold"><a style="text-decoration:none;
color:indigo;" href="notify.php?username='.$username.' & tname=
'.$username.'Profile & application_number='.$apn.' & id='.$highestValue.'
">see last notification</a> </div>';

    }

?>

</p>

```


<a class="navbar-brand" href="upload_images/index.php?tname=<?php
echo \$username; echo "Profile";?> & application_number=<?php echo \$apn; ?>
>"><em style="color:white;" >Profile <i
style="color:white;" class="fa fa-user-circle "></i>

<ul style="marker:none;color:white;">

<?php echo date("h:i:s:a");
echo "
";
echo "today".date("d-m-y");

?>

</div>

</div>

</div>

</nav>

<body>

```

<button style="

" id="message" type="button" data-bs-toggle="modal" data-bs-
target="#chatmessage" class="btn btn-primary rounded-circle"> <i class="fa
fa-comment" ></i><u1 class="badge badge-danger " id="count"><?php echo
$countsmg; ?> </u1> </button>

<div style="size:70px;" class="container shadow bg-body ">
<div style="padding:0%;" class="card ">
<div style="padding:0px; " class="card-body ">
<div id="slider">
<figure>





</figure>
</div>
</div>
</div>

</div>

<!--form--><!--form--><!--form--><!--form--><!--form--><!--form--><!--
form--><!--form--><!--form--><!--form--><!--form--><!--form--><!--form--
><!--form-->

```

```
<form action="homepage2.php?application_number = <?php echo  
$_GET['application_number'];?> & tname = <?php echo $tname ?>"  
method="GET" >
```

```
<div class="container" style="
```

```
background:rgb(0,0,0,0.6);
```

```
box-sizing: border-box;
```

```
border-radius: 10px;
```

```
box-shadow: 0 15px 25px rgb(38, 37, 37);
```

```
margin-bottom: 75px;padding:30px;width:60vh; margin-top:  
1% !important; ">
```

```
<div class="form-group">
```

```
<label style="color:#00DCE3;">application/id number</label>
```

```
<input style="
```

```
color: rgb(255, 255, 255);
```

```
margin-bottom: 30px;
```

```
border: none;
```

border-bottom: 1px solid white;

outline: none;

background: transparent;

```
" type="number" name="application_number"
id="application_number" class="form-control" >
```

```
</div>
```

```
<div class="form-group">
```

```
<label style="color:#00DCE3;">Out date</label>
```

```
<input
```

```
style="
```

color: rgb(255, 255, 255);

margin-bottom: 30px;

border: none;

border-bottom: 1px solid white;

outline: none;

background: transparent;

```
"

    type="datetime-local" name="out_date" id="out_date" class="form-
control" >

</div>
<div class="form-group">
    <label style="color:#00DCE3;">In date</label>
    <input
    style="

color: rgb(255, 255, 255);

margin-bottom: 30px;
border: none;
border-bottom: 1px solid white;

outline: none;
background: transparent;

"
```

```
type="datetime-local" name="in_date" id="in_date" class="form-control" >
```

```
</div>
```

```
<div class="form-group">
```

```
<label style="color:#00DCE3;">Outpass Detail</label><br><br>
```

```
<textarea
```

```
style="
```

```
color: rgb(255, 255, 255);
```

```
margin-bottom: 30px;
```

```
border: none;
```

```
border-bottom: 1px solid white;
```

```
border-top: 1px solid white;
```

```
outline: none;
```

```
background: transparent;
```

```
"
```

```
cols="40" rows="7" name="outting_info" id="outting_info" ></textarea>
```

```

</div>

<h8 style="color:white;"> make sure that your profile is completed !
before submit</h8> <br><br> <br>

<div class="form-group">
  <input

                                type="submit" name="submit" id="register" class="btn btn-
primary">

</div>

</div>

</div>

</form>
<!--form--><!--form--><!--form--><!--form--><!--form--><!--form--><!--
form--><!--form--><!--form--><!--form--><!--form--><!--form--><!--form--
--><!--form-->
</body>

<footer style="background-color:#3B3B3B;" class="page-footer grey
darken-3">

<div style="background-color:grey; padding:10px;" class="footer-copyright
grey darken-2">

<div style="padding:10px;" style="background-color:white;" class="container
center-align"><center>2018-2022 Batch </center> </div>

</div>

```



```

</div>

</div>

</div>
<div style="background-color:#000000;" class="footer-copyright grey darken-4">

<div class="container center-align"><center > <h8
style="color:white;" >&copy; 2021 Art4lyf copyrights owned by srini kc
</h8></center> </div>

</div>
</footer>

</html>

<?php

$outdate = $application_number= $indate = $info = "";

if(isset($_GET['submit']))

{
    if(isset($_GET['tname'])){
        $tname = $_GET['tname'];
    }
}

```

```

if(!empty($_GET['out_date']) && !empty($_GET['out_date'])
&& !empty($_GET['out_date']) && !empty($_GET['out_date']))

{

    $outdate = mysqli_real_escape_string($link,trim( $_GET['out_date']));
    $indate = mysqli_real_escape_string($link,trim($_GET['in_date']));
    $info = mysqli_real_escape_string($link,trim($_GET['outting_info']));
    $application_number =
mysqli_real_escape_string($link,trim($_GET['application_number']));
    $apn = $application_number;

    $sql_query = "SELECT username from users where application_number=
$apn ";
    $retval = mysqli_query($link,$sql_query);

    $row = mysqli_fetch_array($retval);

    $username = $row['username'];
    $profile = "Profile" ;

    $tname = $username.$profile;

    $dup = mysqli_query($link,"SELECT * FROM outpass WHERE
out_date='$outdate'");
    if(mysqli_num_rows($dup)>0)
    {

```

```

}else{

    $sql5 = "INSERT INTO outpass
(out_date,in_date,outing_info,application_number)
VALUES( '$outdate','$indate','$info','$application_number' )";

    $result5 = mysqli_query($link,$sql5);

    if ($result5)
    {
        $sql_insert1 = "INSERT INTO $username (message,From_)
VALUES('your outpass has been submitted successfully ! and sent to
class_incharge for verification. ','class_incharge') ";

        $result3 = mysqli_query($link,$sql_insert1);

        $requests = " INSERT INTO requests
(application_number,tname,username,stage,status)
VALUES('$apn','$tname','$username','0','0') ";

        $requestresult = mysqli_query($link,$requests);
    }
    else{
        echo "<script type='text/javascript'>alert('Enter valid data');</script>";
    }

// Close connection

```

```
    echo "<script type='text/javascript'>alert('your outpass has been submitted  
successfully ! and sent to verification. refresh page & check notification for  
further update');</script>";
```

```
}
```

```
}
```

```
else
```

```
{
```

```
    echo 'fields are empty';
```

```
}
```

```
}
```

```
?>
```

```
<?php
```

```
}
```

```
else
```

```
{
```

```
    echo "<script>location.href='studentLogin.php'</script>";
```

```
}
```

```
?>
```

```
<!-- history --><!-- history --><!-- history --><!-- history --><!-- history --  
><!-- history --><!-- history --><!-- history --><!-- history -->
```

```

<div class="modal fade" id="staticBackdrop" data-bs-backdrop="static" data-
bs-keyboard="false" tabindex="-1" aria-labelledby="staticBackdropLabel" aria-
hidden="true">

<div class="modal-dialog modal-dialog-scrollable-centered">

  <div class="modal-content">

    <div class="modal-header">

      <h5 class="modal-title" id="staticBackdropLabel">Pass info</h5>

      <button type="button" class="close" data-bs-dismiss="modal" aria-
label="Close">

        <span aria-hidden="true">&times;</span>

      </button>

    </div>

    <div class="modal-body">

      <nav>

        <div class="nav nav-tabs nav-justified" id="nav-tab" role="tablist">

          <button class="nav-link active" id="nav-home-tab" data-bs-toggle="tab"
data-bs-target="#nav-home" type="button" role="tab" aria-controls="nav-
home" aria-selected="true">Submit. </button>

          <button class="nav-link" id="nav-profile-tab" data-bs-toggle="tab" data-bs-
target="#nav-profile" type="button" role="tab" aria-controls="nav-profile" aria-
selected="false">Expired. </button>

          <button class="nav-link" id="nav-op-tab" data-bs-toggle="tab" data-bs-
target="#nav-op" type="button" role="tab" aria-controls="nav-profile" aria-
selected="false">Current Pass. </button>

        </div>

      </nav>

      <div class="tab-content md-3 " id="nav-tabContent">

```

```
<div class="tab-pane fade show active" id="nav-home" role="tabpanel" aria-  
labelledby="nav-home-tab">
```

```
<!--table--><!--table--><!--table--><!--table--><!--table--><!--table--><!--  
table--><!--table-->
```

```
<?php
```

```
    $pass = mysqli_query($link," SELECT * FROM outpass WHERE  
application_number = $apn AND passop = 0 AND output = 1 order by 1 desc");
```

```
    $i = 0;
```

```
    if(mysqli_num_rows($pass)>0)
```

```
{
```

```
while($passwhile = mysqli_fetch_assoc($pass )){
```

```
    $sl = ++$i;
```

```
    $idp = $passwhile['id'];
```

```
    $passat = $passwhile['created at'];
```

```
$passinfo = $passwhile['outing_info'];
```

```
$passid = $passwhile['id'];
```

```
$passapn = $passwhile['application_number'];
```

```
?>
```

```
<div class="container">
```

```
<td class="text-center"> <?php echo $sl ?> . </td>
```

```

<td class="text-left">Created at - <?php echo $passat ?></td>

<p>
  <a class="btn btn-info" data-bs-toggle="collapse" href="#cop<?php echo
$passid?>" role="button" aria-expanded="false" aria-
controls="collapseExample">
    Info
    </a> &nbsp; <a class="btn btn-primary" href="passsubmit.php?passid=<?php
echo $passid ?> &apn= <?php echo $apn ?> & username= <?php echo
$username ?>"> Submit </a>

</p>

<div class="collapse" id="cop<?php echo $passid ?>">
  <div class="card card-body">

    <!-- outpass -->
    <?php

    $sqluserop = mysqli_query($link, "SELECT * FROM users WHERE
application_number = $passapn " );
    $sqluserop2 = mysqli_fetch_array( $sqluserop);
    $sqlopuname = $sqluserop2['username'];
    $sqlopprofile = "Profile";
    $sqlopfull= $sqlopuname.$sqlopprofile;

    $sql_selectop = "SELECT * FROM $sqlopfull ";
    $retop = mysqli_query($link,$sql_selectop);

```

```
$mainop = mysqli_fetch_array($retop);
```

```
$imageop = $mainop['image'];
```

```
$sql_selectop2 = "SELECT * FROM outpass WHERE id = $passid ";
```

```
$retop2 = mysqli_query($link,$sql_selectop2);
```

```
$sottop = mysqli_fetch_array($retop2);
```

```
?>
```

```
<div class="container z-depth-5" style="margin-top: 52px;">
```

```
<div class="card z-depth-5 mb-3" style="background-color: #f0f0f0;">
```

```
<div class="row g-0">
```

```

```

```
<br>
```

```
<p class="text-muted center" style="padding-right:50px; padding-  
left:75px;">Scan For More Info</p>
```

```
<br>
```

```
<div class="card-body">
```



```

<div class="dropdown-divider "></div>

<em><strong>Student Name:<?php
echo $mainop['u_f_name']; echo"."; echo $mainop['u_l_name'];?>
</strong></em>

<p class="card-text"><u> application/id number:<?php echo
$mainop['u_card']?> </u> <div class="dropdown-divider "></div></p>

<p class="card-text"><u> department: <?php echo
$mainop['department']?> </u> <div class="dropdown-divider "></div></p>

<p class="card-text"><u> <?php echo $mainop['year']?> year
</u> &nbsp;

<u> <?php echo $mainop['section']?> section </u> <div
class="dropdown-divider "></div>

</p>

<p><em><strong>This outpass is valid from<u> <?php echo
$otop['out_date']?> </u> to <u>

<?php echo $otop['in_date']?> </u></strong></em></p>

<p><em> Outing Info : <?php echo $otop['outing_info'] ?>
</em> </p>

<p><em> <strong >Officially verified by Class incharge, HOD
and Hostel warden</strong></em></p>

</div>

</div>

</div>

```

```

</div>
</div>
</div>
<div class="dropdown-divider"></div>

<?php

}
}else{

    echo '<h7 class="text-danger " ><center> <em> sorry! No outpass available
</em> </center> </h7>';
}

//<!--table--><!--table--><!--table--><!--table--><!--table--><!--table--><!--
table-->

?>

</div>

<div class="tab-pane fade" id="nav-profile" role="tabpanel" aria-
labelledby="nav-profile-tab">

<?php

```

```

    $pass = mysqli_query($link," SELECT * FROM outpass WHERE
application_number = $apn AND passop = 1 order by 1 desc");

    $i = 0;
    if(mysqli_num_rows($pass)>0)
{

while($passwhile = mysqli_fetch_assoc($pass )){

    $sl = ++$i;
    $idp = $passwhile['id'];
    $passat = $passwhile['created at'];

    $passinfo = $passwhile['outing_info'];
    $passid = $passwhile['id'];
    $passapn = $passwhile['application_number'];

?>
<div class="container">
<td class="text-center"> <?php echo $sl ?> . </td>

<td class="text-left">Created at - <?php echo $passat ?></td>

&nbsp;

    <a class="btn btn-info" data-bs-toggle="collapse" href="#cop<?php echo
$passid?>" role="button" aria-expanded="false" aria-
controls="collapseExample">

```

Info

<div class="collapse" id="cop<?php echo \$passid ?>">

<div class="card card-body">

<!-- outpass -->

<?php

\$sqluserop = mysqli_query(\$link, "SELECT * FROM users WHERE
application_number = \$passapn ");

\$sqluserop2 = mysqli_fetch_array(\$sqluserop);

\$sqlopuname = \$sqluserop2['username'];

\$sqlopprofile = "Profile";

\$sqlopfull= \$sqlopuname.\$sqlopprofile;

\$sql_selectop = "SELECT * FROM \$sqlopfull ";

\$retop = mysqli_query(\$link,\$sql_selectop);

\$mainop = mysqli_fetch_array(\$retop);

\$imageop = \$mainop['image'];

\$sql_selectop2 = "SELECT * FROM outpass WHERE id = \$passid ";

\$retop2 = mysqli_query(\$link,\$sql_selectop2);

\$ottop = mysqli_fetch_array(\$retop2);

?>

```

<div class="container z-depth-5" style="margin-top: 52px;">

<div class="card z-depth-5 mb-3" style="background-color: #f0f0f0;">

    <div class="row g-0">

        
        <br>
        <p class="text-muted center" style="padding-right:50px; padding-
left:75px;">Scan For More Info</p>

    <br>

    <div class="card-body">

        <div class="dropdown-divider "></div>
        <em><strong>Student Name:<?php
echo $mainop['u_f_name']; echo "."; echo $mainop['u_l_name'];?>
</strong></em>
        <p class="card-text"><u> application/id number:<?php echo
$mainop['u_card']?> </u> <div class="dropdown-divider "></div></p>

```

```

        <p class="card-text"><u> department: <?php echo
$mainop['department']?> </u> <div class="dropdown-divider "></div></p>

        <p class="card-text"><u> <?php echo $mainop['year']?> year
</u> &nbsp;

        <u> <?php echo $mainop['section']?> section </u> <div
class="dropdown-divider "></div>

        </p>

        <p><em><strong>This outpass is valid from<u> <?php echo
$otop['out_date']?> </u> to <u>

        <?php echo $otop['in_date']?> </u></strong></em></p>
<p><em> Outing Info : <?php echo $otop['outing_info'] ?> </em> </p>

        <p><em> <strong >Officially verified by Class incharge, HOD
and Hostel warden</strong></em></p>

        </div>

</div>

        </div>

</div>

        </div>
<div class="dropdown-divider"></div>

```

```

<?php

}

} else{

    echo '<h7 class="text-danger " ><center> <em> sorry! No expired
outpass available </em> </center> </h7>';

}

?>

</div>

<div class="tab-pane fade " id="nav-op" role="tabpanel" aria-labelledby="nav-
op-tab">

<!--table--><!--table--><!--table--><!--table--><!--table--><!--table--><!--
table--><!--table-->

<?php

$sqlidz= mysqli_query($link, "SELECT MAX( id ) AS max FROM outpass
WHERE application_number = $apn AND passop = 0 AND output = 1 " );

if($sqlidz){
    $residz = mysqli_fetch_array( $sqlidz);
    $highestValuez = $residz['max'];
}

```

```
$pass = mysqli_query($link," SELECT * FROM outpass WHERE id=
$highestValuez order by 1 desc");
```

```
$i = 0;
```

```
if($pass)
{
```

```
$passwhile = mysqli_fetch_assoc($pass );
```

```
$sl = ++$i;
```

```
$idp = $passwhile['id'];
```

```
$passat = $passwhile['created at'];
```

```
$passinfo = $passwhile['outing_info'];
```

```
$passid = $passwhile['id'];
```

```
$passapn = $passwhile['application_number'];
```

```
?>
```

```
<div class="container">
```

```
<td class="text-center"> <?php echo $sl ?> . </td>
```

```
<td class="text-left">Created at - <?php echo $passat ?></td>
```

```
<a class="btn btn-info" data-bs-toggle="collapse" href="#cop<?php echo
$passid?>" role="button" aria-expanded="false" aria-
controls="collapseExample">
```

```
Info
```


<div class="collapse" id="cop<?php echo \$passid ?>">

<div class="card card-body">

<!-- outpass -->

<?php

\$sqluserop = mysqli_query(\$link, "SELECT * FROM users WHERE
application_number = \$passapn ");

\$sqluserop2 = mysqli_fetch_array(\$sqluserop);

\$sqlopuname = \$sqluserop2['username'];

\$sqlopprofile = "Profile";

\$sqlopfull= \$sqlopuname.\$sqlopprofile;

\$sql_selectop = "SELECT * FROM \$sqlopfull ";

\$retop = mysqli_query(\$link,\$sql_selectop);

\$mainop = mysqli_fetch_array(\$retop);

\$imageop = \$mainop['image'];

\$sql_selectop2 = "SELECT * FROM outpass WHERE id = \$passid ";

\$retop2 = mysqli_query(\$link,\$sql_selectop2);

\$ottop = mysqli_fetch_array(\$retop2);

?>

<div class="container z-depth-5" style="margin-top: 52px;">

```

<div class="card z-depth-5 mb-3" style="background-color: #f0f0f0;">

    <div class="row g-0">

        
        <br>
        <p class="text-muted center" style="padding-right:50px; padding-
left:75px;">Scan For More Info</p>

    <br>

    <div class="card-body">

        <div class="dropdown-divider "></div>
        <em><strong>Student Name:<?php
echo $mainop['u_f_name']; echo"."; echo $mainop['u_l_name'];?>
</strong></em>

        <p class="card-text"><u> application/id number:<?php echo
$mainop['u_card']?> </u> <div class="dropdown-divider "></div></p>

        <p class="card-text"><u> department: <?php echo
$mainop['department']?> </u> <div class="dropdown-divider "></div></p>

```

```

        <p class="card-text"><u> <?php echo $mainop['year']?> year
</u> &nbsp;

        <u> <?php echo $mainop['section']?> section </u> <div
class="dropdown-divider "></div>

    </p>

    <p><em><strong>This outpass is valid from<u> <?php echo
$stotop['out_date']?> </u> to <u>

    <?php echo $stotop['in_date']?> </u></strong></em></p>

    <p><em> Outing Info : <?php echo $stotop['outing_info'] ?>
</em> </p>

    <p><em> <strong >Officially verified by Class incharge, HOD
and Hostel warden</strong></em></p>

    </div>

</div>

    </div>

</div>

</div>
<div class="dropdown-divider"></div>

```

```

<?php

}else{

    echo '<h7 class="text-danger " ><center> <em> sorry! No outpass available
</em> </center> </h7>';
}
}

//<!--table--><!--table--><!--table--><!--table--><!--table--><!--table--><!--
table-->

?>

</div>

</div>

</div>

<div class="modal-footer">

    <button type="button" class="btn btn-secondary" data-bs-
dismiss="modal">Close</button>

```

</div>

</div>

</div>

</div>

<!-- history --><!-- history --><!-- history --><!-- history --><!-- history --><!--
history --><!-- history --><!-- history --><!-- history -->

APPENDIX-2

SCREENSHOTS

Login Page For Both Student&Staff :

HOSTEL PASS

into page

log in

user type select

application/ID no:
..... enter your application no

password:
..... enter your password

don't have a account ?

submit

forget password ?

2k 18-22 batch

Student Outpass Applying Home Page:

HOSTEL PASS

Log-Out

Pass History


notifications

Profile

03:48:32 pm
today 18-08-21

Keep Update
Your Profile

LEVEL
UP

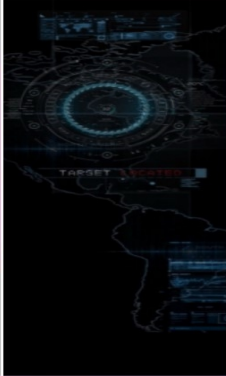

application/vid number

Out date

dd-mm-yyyy --:-- --

In date

dd-mm-yyyy --:-- --


Outpass Detail

make sure that your profile is completed ! before submit


Submit

2018-2022 Batch

OUTPASS DETAILS:

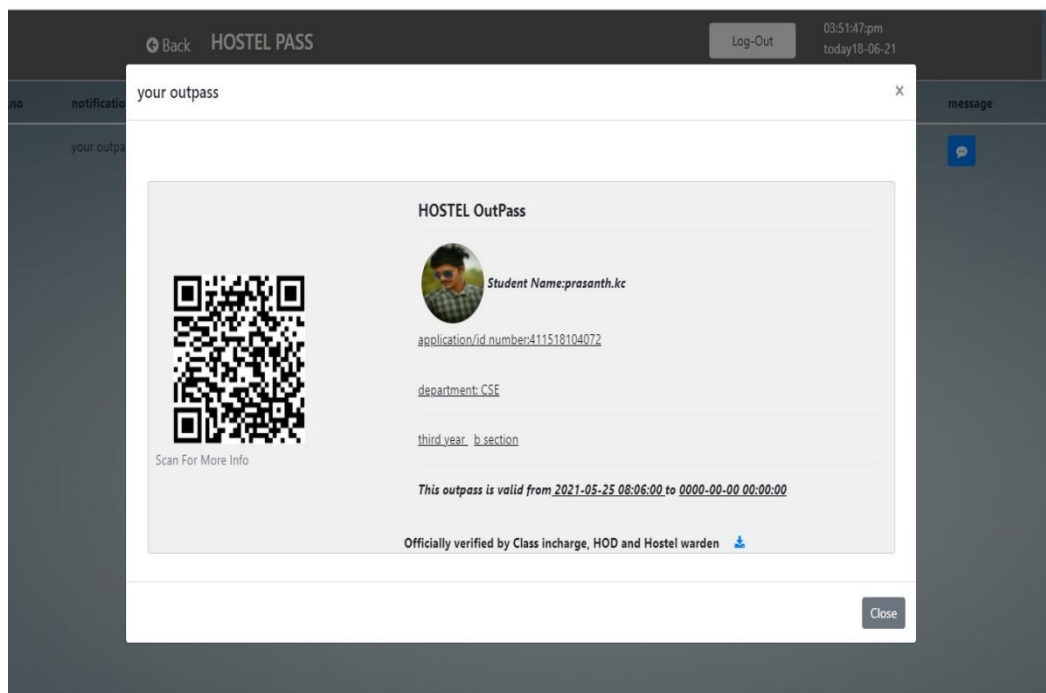

CREATOR PAGE:

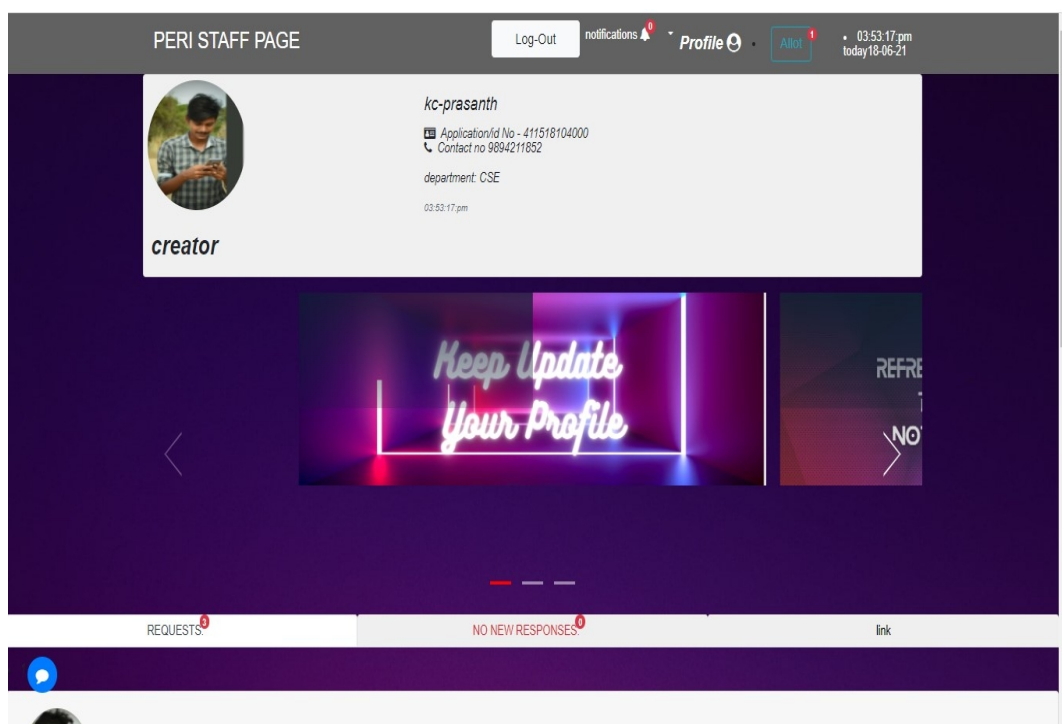

CHAPTER 8

REFERENCES

- *in.php.net*
- *en.wikipedia.org/wiki/PHP* . *www.hotscripts.com/category/php/*
- *www.apache.org/*
- *www.mysql.com/click.php?e=35050*
- *http://google.com*
- *http://www.thesaurus.com/*
- *https://www.tutorialspoint.com/*
- *https://www.wikipedia.org/*
- *https://stackoverflow.com/*
- *https://www.w3schools.com/*
- *https://www.asp.net/learn*
- *https://www.youtube.com/channel/UCCTVrRB5KpIiK6V2GGVsR1Q*
- *https://msdn.microsoft.com/ens/default.aspx*