Enforce least-privilege access through identity-aware, application-specific access policies using Zscaler Private Access (ZPA).

COLLEGE NAME: VET Institute Of Arts and Science (co-ed) College, Thindal, Erode.

NM ID: D83BF782F2893A192994D9A9906F4332

COLLEGE CODE: BRUBB

TEAM SIZE: 5

TEAM MEMBERS:

Team Leader Name: Sarveshwarana A

Email: sarveshwarana23sit@vetias.ac.in

Team Member1: Darun Prasath S

Email: darunprasaths23sit@vetias.ac.in

Team Member2: Sabari S

Email: sabaris23sit@vetias.ac.in

Team Member3: Kesavan D

Email: kesavand23sit@vetias.ac.in

Team Member4: Saravanan Kumar A

Email: saravanankumara23sit@vetias.ac.in

INTRODUCTION:

In an era where the digital landscape is constantly evolving, organizations face an ever-increasing threat from cyberattacks. The need for swift and effective incident response has become paramount to safeguard sensitive data, protect digital assets, and maintain the trust of stakeholders. In response to this growing challenge, we present a visionary project: the development of an AI-driven incident response platform that empowers cybersecurity teams with the tools to automate and enhance incident triage and response tasks.

In response to the evolving threat landscape and the dissolution of the traditional network perimeter, modern enterprises are rapidly shifting away from legacy VPN-centric remote access models. These conventional approaches often grant excessive network-level access, creating a significant attack surface and increasing the risk of lateral threat movement. To address these challenges, this project centers on the implementation of a Zero Trust security architecture, fundamentally operating on the principle of "never trust, always verify." By moving beyond location-based access, we aim to establish a security posture where trust is no longer implicit, and access is determined by granular context rather than network connectivity.

The core of this initiative involves the deployment of Zscaler Private Access (ZPA), a cloud-delivered Zero Trust Access solution designed to create identity-aware, application-specific connectivity. Unlike traditional VPNs that place users on the internal network, ZPA leverages a "service-initiated" model to establish direct, one-to-one connections between authorized users and specific applications, completely hiding the corporate network and IP address space from the internet. This ensures that users connect exclusively to the applications they are permitted to access, based on continuous identity verification and context, rendering the applications invisible to unauthorized users and preventing common attack vectors such as port scanning and distributed denial-of-service (DDoS) attacks.

Ultimately, this project will enforce a least-privilege access model, ensuring users and devices are granted the minimum required access necessary to perform their functions. By decoupling application access from network access, we will eliminate the risk of lateral movement across the network, as users have no visibility or connectivity to other hosts. This strategic move not only significantly enhances security by reducing the attack surface but also simplifies the user experience and reduces operational overhead associated with legacy remote access infrastructure, positioning the organization at the forefront of secure and efficient access management.

In response to the evolving threat landscape and the dissolution of the traditional network perimeter, modern enterprises are rapidly shifting away from legacy VPN-centric remote access models. These conventional approaches often grant excessive network-level access, creating a significant attack surface and increasing the risk of lateral threat movement. To address these challenges, this project centers on the implementation of a Zero Trust security architecture, fundamentally operating on the principle of "never trust, always verify." By moving beyond location-based access, we aim to establish a security posture
where trust is

ABSTRACT:

The proliferation of hybrid work and cloud-based resources has rendered traditional perimeter-based security models, such as VPNs, obsolete and increasingly dangerous. These legacy solutions often provide overly broad network access, exposing organizations to significant risks including lateral threat movement and an expanded attack surface. This project addresses these vulnerabilities by implementing a Zero Trust Architecture (ZTA) utilizing Zscaler Private Access (ZPA). The primary objective is to transition from network-centric to identity-centric access, thereby enforcing the principle of least privilege.

The methodology involves deploying ZPA's cloud-based service to create application-specific, identity- aware micro-tunnels. Unlike conventional VPNs that place users on the internal network, this solution establishes direct, one-to-one connections between verified users and authorized applications. The network infrastructure and all non-authorized applications remain completely invisible to the end-user, effectively eliminating surface for reconnaissance and attack. Access policies are dynamically governed by user identity, device posture, and contextual attributes, ensuring that connectivity is strictly limited to what is explicitly required for specific job functions.

The implementation of ZPA successfully decouples application access from network access, resulting in a demonstrable reduction in the organization's attack surface and the complete prevention of lateral movement. This project delivers a robust, scalable, and user-friendly remote access framework that aligns with modern security best practices. By shifting to an identity-aware, least-privilege model, the organization significantly enhances its security posture while simultaneously reducing operational complexity and improving the end-user experience.

Use Case Scenarios

Scenario 1: Finance Department Access to ERP System

A senior accountant in the finance department needs to access the corporate Enterprise Resource Planning (ERP) system to process monthly payroll. The user connects from a remote location using their company-managed laptop. Upon launching the ZPA Client Connector, they authenticate via Azure Active Directory with multi-factor authentication (MFA). ZPA evaluates the user's identity, group membership (Finance_ERP_Users), device posture (antivirus active, disk encryption enabled), and connection context. The policy engine determines that the user is authorized and brokers a secure, direct micro-tunnel to the ERP application only. The user can interact with the ERP interface, but has no visibility or network-level access to any other internal systems, such as development servers or the HR database.

Output:

- User authenticated and authorized based on identity and group membership
- Direct micro-tunnel established specifically to the ERP application
- All other internal applications and network segments remain invisible and inaccessible

Scenario 2: Contractor Access to Specific Project Repository

An external software consultant is hired for a three-month project and requires access only to a specific Git repository hosted on an internal server. The contractor is onboarded as a guest user in the identity provider and assigned to the "Project_X_Contractors" group. When the contractor connects using the ZPA client, the system verifies their identity and checks the device for basic security compliance (OS patch level, firewall enabled). ZPA enforces a policy that grants access exclusively to the Git repository application (port 22/SSH or port 443/HTTPS) during business hours (9 AM to 5 PM). The contractor can clone, push, and pull code, but cannot discover or connect to any other internal resources, including the corporate intranet or file servers.

Output:

- Time-bound and role-specific access enforced
- Contractor restricted to a single application (Git repository)
- Lateral movement to adjacent systems completely blocked

Scenario 3: Executive Access to Confidential Board Documents

A company executive needs to access a confidential folder containing board meeting materials hosted on an internal file server. The executive connects from a tablet device while traveling internationally. ZPA integrates with the mobile device management (MDM) solution to verify that the tablet is compliant (not jailbroken, passcode enabled, encryption active). Upon successful authentication, ZPA evaluates the policy: "If user is in 'Executive_Board' group AND device is MDM-compliant AND connection is from a trusted country (allowlist), THEN grant access to 'Board_Documents' application." The executive is connected directly to the specific file share, and all data in transit is encrypted via TLS. Any attempt to access other shares or network resources is automatically blocked and logged.

Output:

- Context-aware access based on user role, device posture, and geographic location
- Granular access to a specific file share (Board_Documents)
- Comprehensive logging of access events for audit and compliance

Scenario 4: IT Administrator Access to Server Management Interfaces

A systems administrator requires access to management interfaces (SSH for Linux servers and RDP for Windows servers) to perform routine maintenance. Instead of granting VPN access to the entire management network, ZPA is configured to treat each server or management interface as a separate application segment. The administrator authenticates and is presented only with the specific servers they are authorized to manage based on their IT subgroup (e.g., "Linux_Admins" see only Linux servers; "Windows_Admins" see only Windows servers). When the admin connects via SSH to a Linux server, ZPA creates a direct micro-tunnel to that specific IP and port combination. The admin cannot scan the subnet, access other servers, or initiate connections to non-authorized ports.

Output:

- Micro-segmentation at the individual server/interface level
- Role-based access controlling visibility of specific management consoles
- Elimination of network-level reconnaissance capabilities for admins

Scenario 5: Mergers and Acquisitions Integration

A company acquires a smaller firm and needs to provide the acquired company's HR team with temporary access to the parent company's benefits enrollment application. The acquired company's users are added as external collaborators in the identity provider with limited attributes. ZPA policies are created that specifically grant the "Acquired_HR" group access only to the "Benefits_App" (a web application hosted internally). The acquired users install the ZPA client, authenticate, and are connected directly to the benefits application. Because ZPA provides access without network connectivity, the parent company's entire internal network remains completely hidden and protected. The acquired users cannot ping, scan, or access any other corporate resource. After six months, when the integration is complete and users are migrated to the parent identity system, the temporary policies are revoked.

Output:

- Secure, temporary access provided without network exposure
- Complete network invisibility protecting the parent company's infrastructure
- Simplified deprovisioning through policy revocation rather than complex network changes

Stage – 1

Title:

Enforce least-privilege access through identity-aware, application-specific access policies using Zscaler Private Access (ZPA).

Overview:

In response to the evolving threat landscape and the dissolution of the traditional network perimeter, modern enterprises are rapidly shifting away from legacy VPN-centric remote access models. These conventional approaches often grant excessive network-level access, creating a significant attack surface and increasing the risk of lateral threat movement. To address these challenges, this project centers on the implementation of a Zero Trust security architecture, fundamentally operating on the principle of "never trust, always verify." By moving beyond location-based access, we aim to establish a security posture where trust is no longer implicit, and access is determined by granular context rather than network connectivity.

The core of this initiative involves the deployment of Zscaler Private Access (ZPA), a cloud-delivered Zero Trust Access solution designed to create identity-aware, application-specific connectivity. Unlike traditional VPNs that place users on the internal network, ZPA leverages a "service-initiated" model to establish direct, one-to-one connections between authorized users and specific applications, completely hiding the corporate network and IP address space from the internet. This ensures that users connect exclusively to the applications they are permitted to access, based on continuous identity verification and context, rendering the applications invisible to unauthorized users and preventing common attack vectors such as port scanning and distributed denial-of-service (DDoS) attacks.

Ultimately, this project will enforce a least-privilege access model, ensuring users and devices are granted the minimum required access necessary to perform their functions. By decoupling application access from network access, we will eliminate the risk of lateral movement across the network, as users have no visibility or connectivity to other hosts. This strategic move not only significantly enhances security by reducing the attack surface but also simplifies the user experience and reduces operational overhead associated with legacy remote access infrastructure, positioning the organization at the forefront of secure and efficient access management.

List of Vulnerability:

S. No.	Vulnerability Name	CWE No.
1.	Cross-site scripting (stored)	79
2.	Broken Access Control	285
3.	SQL Injection	89
4.	Broken Authentication	285
5.	Insecure Direct Object Reference	639
6.	Security Misconfiguration	732
7.	Cross-Site Request Forgery	352
8.	Cleartext Transmission of Sensitive Information	319
9.	ClickJacking	1021
10.	webserver allows password auto-completion	310
11.	Cross-site scripting (DOM-based XSS)	79
12.	JQuery 1.2 < 3.5.0 Multiple XSS	79
13.	Information Exposure (Web Server HTTP Header Internal IP Disclosure)	200
14.	Information Exposure (SSL (Multiple Issues))	200
15.	Information Exposure (HTTP (Multiple Issues))	200
16.	OS Identification Failed	200

Report:

1. Vulnerability name: Cross site scripting

   (stored) CWE: 79

   OWASP category: A03:2021 -Injections

   Description: It occurs when a malicious script is injected directly into a vulnerable web application. Reflected XSS involves the reflection of a malicious script of a web application, onto a user's browser.

   Business Impact: The application stores dangerous data in a database, message forum, visitor log, or other trusted data store. Later, the dangerous data is subsequently read back into the application and included in dynamic content. From an attacker's perspective, the optimal place to inject malicious content is in an area that is displayed to either many users or particularly interesting users. Interesting users typically have elevated privileges in the application or interact with sensitive data that is valuable to the attacker. If one of these users executes malicious content, the attacker may be able to perform privileged operations on behalf of the user or gain access to sensitive data belonging to the user.

   Vulnerability path: http://testfire.net/

   Vulnerability parameter:
   http://testfire.net/search.jsp?query=%27%3E%3Cscript%3Ealert%28%27hacked%27%29%3C%2Fscrip t%3E

   Steps to Reproduce:

   - Access the URL

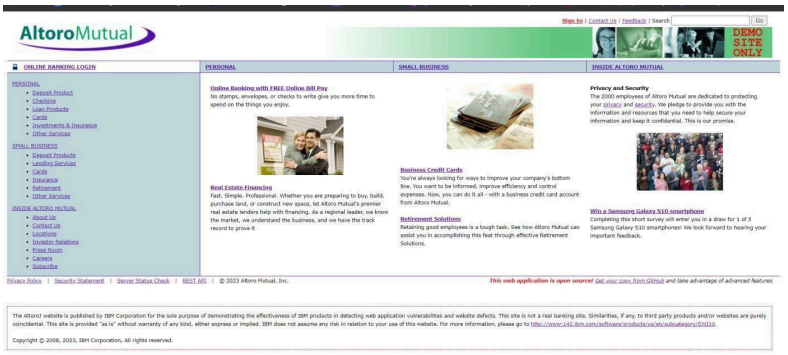

- In the search box we will input some code to perform the vulnerability.

- The Script we will be inputting is '><script>alert('hacked')</script>

- This displays a harmless pop up alert box with the text saying 'hacked'

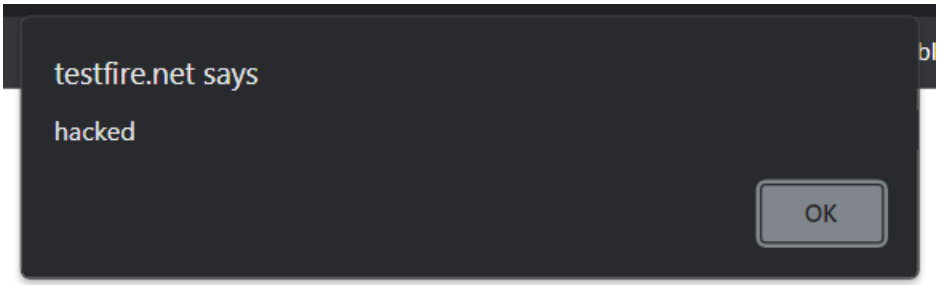

Recommendation:

- When interacting with databases, use parameterized statements or prepared statements to avoid SQL injection, which can be a vector for XSS.
- Sanitize and validate all user inputs and ensure that any data displayed on the web page is properly encoded. Use output encoding libraries or functions to prevent script injection.

2. **Vulnerability name: Broken access**

control CWE: 285

Description: When access control checks are not applied consistently - or not at all - users are able to access data or perform actions that they should not be allowed to perform. This can lead to a wide range of problems, including information exposures, denial of service, and arbitrary code execution.

Business Impact: wide-ranging business impact, including financial losses, reputation damage, legal consequences, operational disruption, and loss of customer trust. Addressing this vulnerability is crucial to protect the organization and its stakeholders from these potential negative effects.

Vulnerability path: http://testfire.net/

Vulnerability parameter: http://testfire.net/login.jsp

Steps to Reproduce:

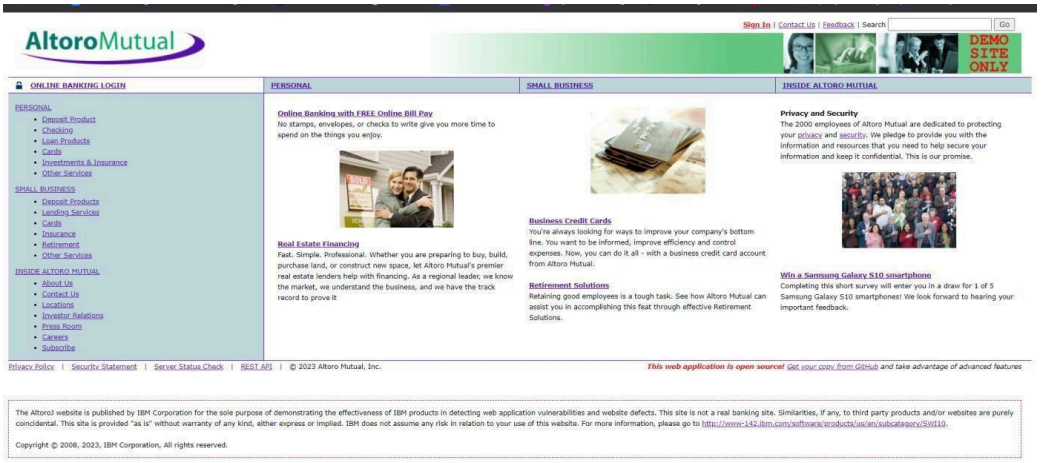

- Now we will try to sign in to this website with admin privileges

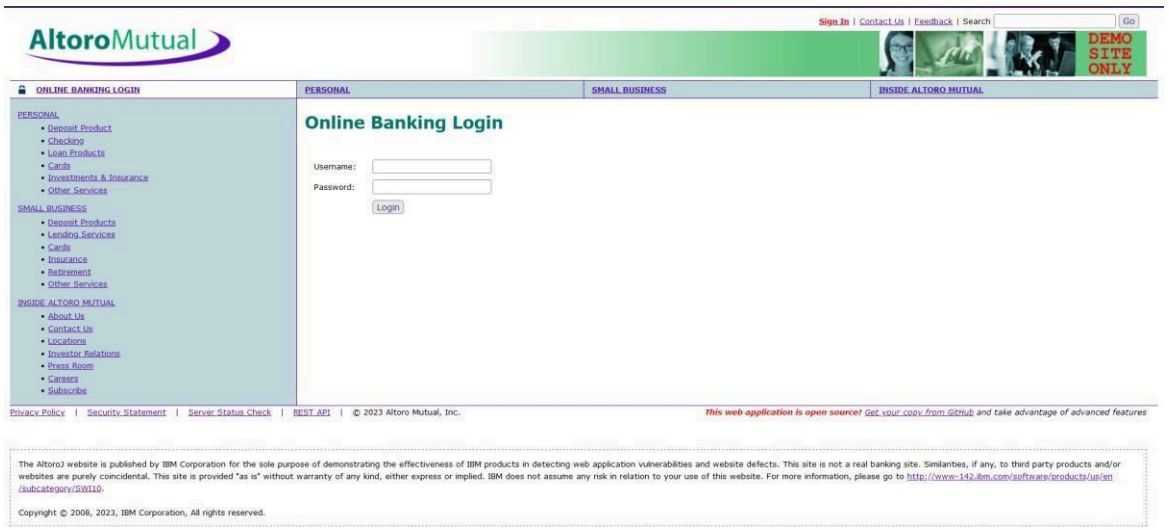

- Also, we will be using burp suite to get requests from the website and know additional information. We use 'admin' for the username and password.

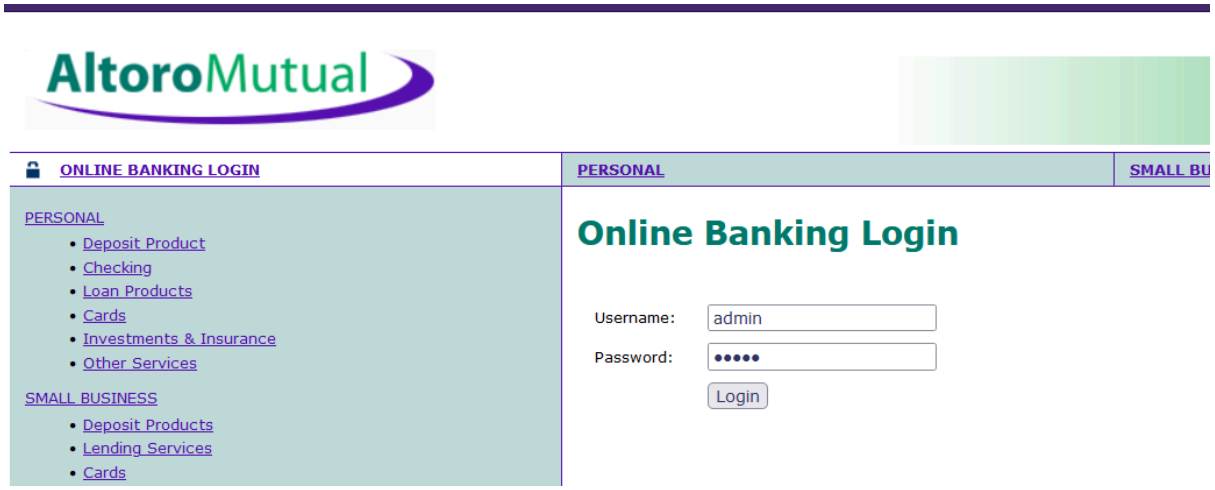

- This request has been received in the burp suite with the username and password as well in clear text.

```
Pretty   Raw   Hex
1  POST /doLogin HTTP/1.1
2  Host: testfire.net
3  User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:109.0) Gecko/20100101 Firefox/117.0
4  Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,*/*;q=0.8
5  Accept-Language: en-US,en;q=0.5
6  Accept-Encoding: gzip, deflate, br
7  Content-Type: application/x-www-form-urlencoded
8  Content-Length: 37
9  Origin: http://testfire.net
10 Connection: close
11 Referer: http://testfire.net/login.jsp
12 Cookie: JSESSIONID=B6ADB36ACD5C83083787343A1F97F853; AltoroAccounts="0DAwMDAwfkNvcnBvcmF0ZX45LjQ30TA1MTE2MUU3fDgwMDAwMX5DaGVjaC1uZ34tNC4yMjc0NjkONTZFN3w="
13 Upgrade-Insecure-Requests: 1
14
15 uid=admin&passw=admin&btnSubmit=Login
```

- now we click on forward request in the burp suite and then we will be redirected to the admin user details.

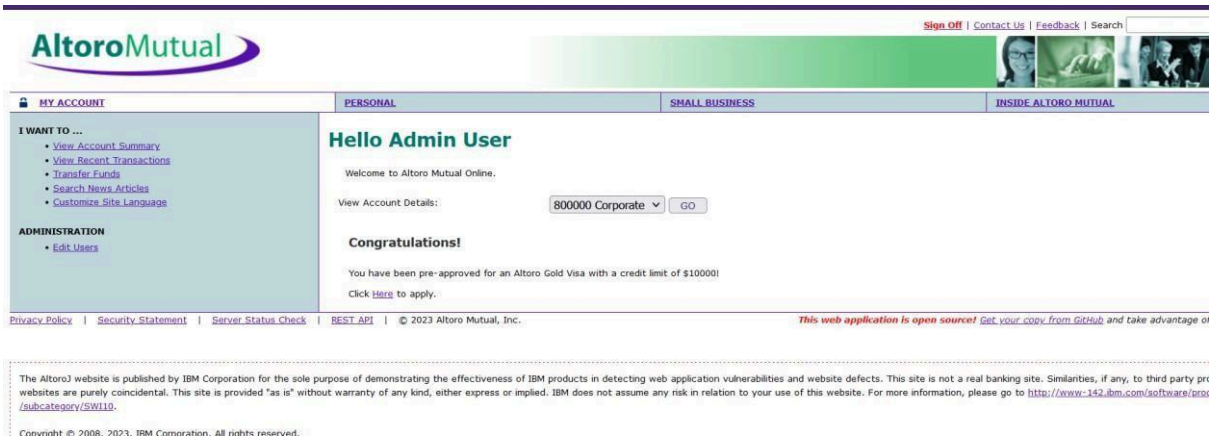

- We can even edit the other users data and delete their login details as well.

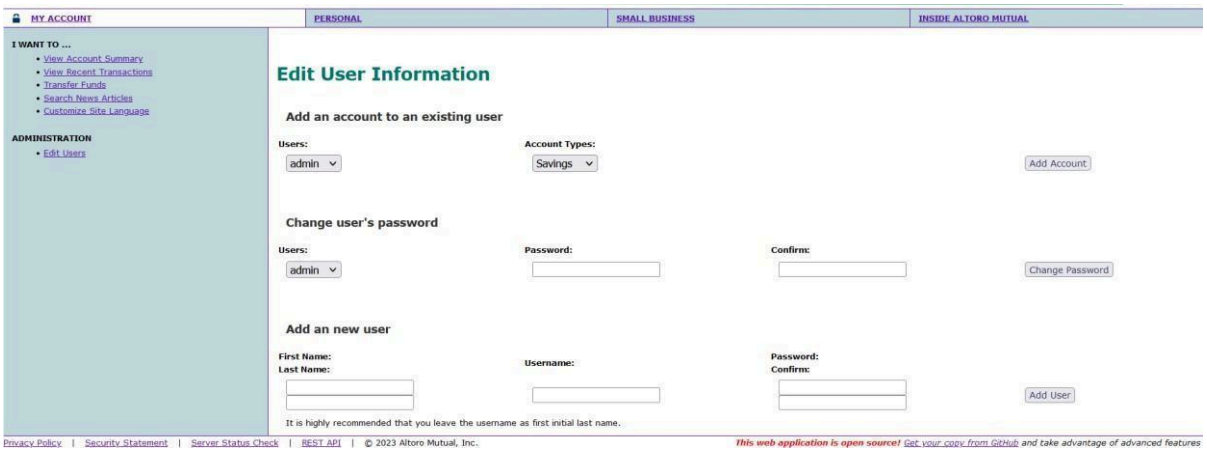

Recommendations:

- Ensure that the application has a robust authentication and authorization mechanism in place. Users should be authenticated before any sensitive actions are performed, and authorization checks should be conducted to verify that users have the necessary permissions for the requested operation.
- Ensure that session management is secure. Use strong session IDs, enforce session timeouts, and regenerate session tokens after login. Implement session fixation protection to prevent session hijacking.

3. **Vulnerability name: SQL**

injection CWE: 89

Description: The product constructs all or part of an SQL command using externally-influenced input from an upstream component, but it does not neutralize or incorrectly neutralizes special elements that could modify the intended SQL command when it is sent to a downstream component.

Business Impact: In summary, it is crucial to underscore that CWE-89, known as SQL Injection, can exert a profound and diverse business impact. This encompasses critical facets such as data breaches, financial setbacks, harm to reputation, legal ramifications, and operational turmoil. Hence, the imperative of preventing and remedying SQL injection vulnerabilities cannot be overstated, as it is indispensable for fortifying the security and continuity of an organization's applications and data.

Vulnerability path: http://testfire.net/

Vulnerability parameter: http://testfire.net/login.jsp

Steps to Reproduce:

Access the URL

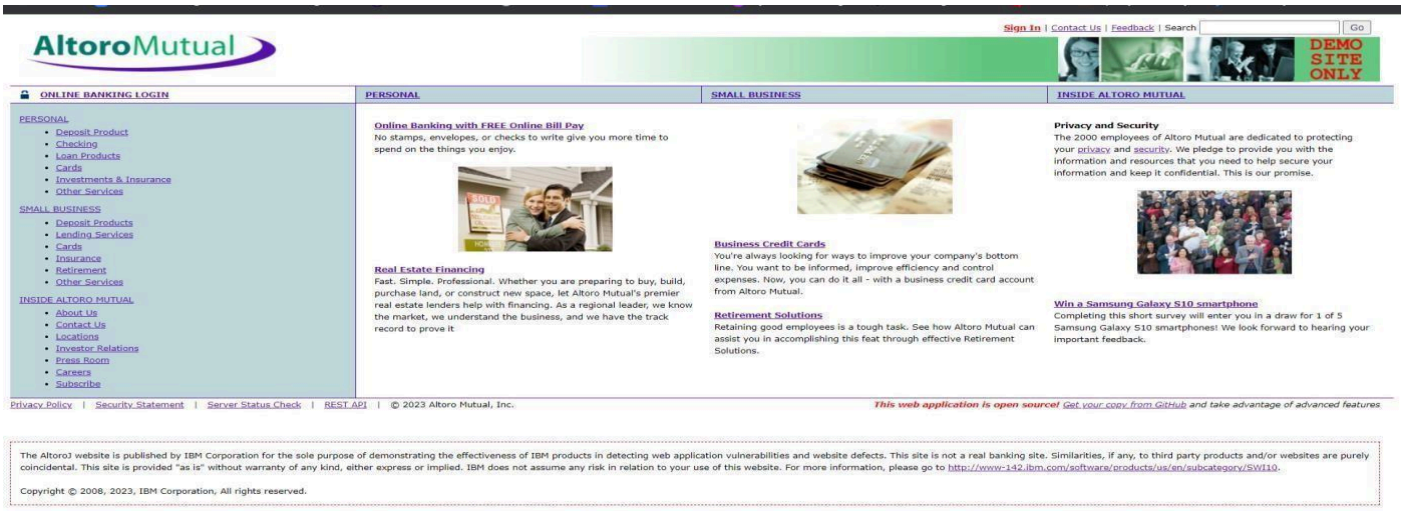

vit.ac.in

CRITICAL	HIGH	MEDIUM	LOW	INFO
0	0	1	1	26

Vulnerabilities — Total: 28

SEVERITY	CVSS V3.0	VPR SCORE	PLUGIN	NAME
MEDIUM	6.1	5.7	136929	JQuery 1.2 < 3.5.0 Multiple XSS
LOW	3.1	2.2	10759	Web Server HTTP Header Internal IP Disclosure
INFO	N/A	-	48204	Apache HTTP Server Version
INFO	N/A	-	45590	Common Platform Enumeration (CPE)
INFO	N/A	-	10107	HTTP Server Type and Version
INFO	N/A	-	24260	HyperText Transfer Protocol (HTTP) Information
INFO	N/A	-	106658	JQuery Detection
INFO	N/A	-	11219	Nessus SYN scanner
INFO	N/A	-	19506	Nessus Scan Information
INFO	N/A	-	42823	Non-compliant Strict Transport Security (STS)
INFO	N/A	-	50350	OS Identification Failed
INFO	N/A	-	66334	Patch Report
INFO	N/A	-	56984	SSL / TLS Versions Supported
INFO	N/A	-	10863	SSL Certificate Information
INFO	N/A	-	70544	SSL Cipher Block Chaining Cipher Suites Supported
INFO	N/A	-	21643	SSL Cipher Suites Supported
INFO	N/A	-	57041	SSL Perfect Forward Secrecy Cipher Suites Supported
INFO	N/A	-	94761	SSL Root Certification Authority Certificate Information
INFO	N/A	-	156899	SSL/TLS Recommended Cipher Suites

NESSUS SCAN REPORT:

"With the Nessus scan report now at our disposal, we're equipped with critical data on the existing vulnerabilities and potential threats. This invaluable information will serve as a foundation for our project planning phase, as we chart the course to develop our AI-driven incident response platform with a well-informed strategy and timeline."

INFO	N/A	-	22964	Service Detection
INFO	N/A	-	42822	Strict Transport Security (STS) Detection
INFO	N/A	-	25220	TCP/IP Timestamps Supported
INFO	N/A	-	84821	TLS ALPN Supported Protocol Enumeration
INFO	N/A	-	136318	TLS Version 1.2 Protocol Detection
INFO	N/A	-	10287	Traceroute Information
INFO	N/A	-	100669	Web Application Cookies Are Expired
INFO	N/A	-	10386	Web Server No 404 Error Code Check
INFO	N/A	-	10302	Web Server robots.txt Information Disclosure

* indicates the v3.0 score was not available; the v2.0 score is shown

testfire.net

0	0	3	1	24
CRITICAL	HIGH	MEDIUM	LOW	INFO

Vulnerabilities Total: 28

SEVERITY	CVSS V3.0	VPR SCORE	PLUGIN	NAME
MEDIUM	6.5	-	142960	HSTS Missing From HTTPS Server (RFC 6797)
MEDIUM	6.5	-	104743	TLS Version 1.0 Protocol Detection
MEDIUM	6.5	-	157288	TLS Version 1.1 Protocol Deprecated
LOW	3.7	4.5	83875	SSL/TLS Diffie-Hellman Modulus <= 1024 Bits (Logjam)
INFO	N/A	-	46180	Additional DNS Hostnames
INFO	N/A	-	39446	Apache Tomcat Detection
INFO	N/A	-	45590	Common Platform Enumeration (CPE)
INFO	N/A	-	54615	Device Type
INFO	N/A	-	84502	HSTS Missing From HTTPS Server
INFO	N/A	-	10107	HTTP Server Type and Version
INFO	N/A	-	24260	HyperText Transfer Protocol (HTTP) Information
INFO	N/A	-	11219	Nessus SYN scanner
INFO	N/A	-	19506	Nessus Scan Information
INFO	N/A	-	11936	OS Identification
INFO	N/A	-	10919	Open Port Re-check
INFO	N/A	-	56984	SSL / TLS Versions Supported
INFO	N/A	-	10863	SSL Certificate Information
INFO	N/A	-	95631	SSL Certificate Signed Using Weak Hashing Algorithm (Known CA)
INFO	N/A	-	70544	SSL Cipher Block Chaining Cipher Suites Supported

INFO	N/A	-	21643	SSL Cipher Suites Supported
INFO	N/A	-	57041	SSL Perfect Forward Secrecy Cipher Suites Supported
INFO	N/A	-	94761	SSL Root Certification Authority Certificate Information
INFO	N/A	-	156899	SSL/TLS Recommended Cipher Suites
INFO	N/A	-	22964	Service Detection
INFO	N/A	-	25220	TCP/IP Timestamps Supported
INFO	N/A	-	121010	TLS Version 1.1 Protocol Detection
INFO	N/A	-	136318	TLS Version 1.2 Protocol Detection
INFO	N/A	-	10287	Traceroute Information

* indicates the v3.0 score was not available; the v2.0 score is shown