

A dark blue vertical bar on the left side of the page. A blue arrow points to the right from the bar, containing the date.

5/1/2018

Consulting Report

ISTM 637 602, Group - 4

Several thin, curved lines in dark blue and light grey originate from the bottom left corner and sweep upwards and to the right.

Aditya Waghlikar, Kailun Xu, Prashant Shisodia
DOMINIC'S FINER FOOD

Credentials for accessing the data warehouse, reporting and analysis services
SQL Server Authentication
Server Name: infodata.tamu.edu

User ID	Password
Wa5420	Mays5420
Xu8301	Mays8301
Sh3873	Mays3873

The above credentials can be used to access:

1) Database Engine in the Microsoft SQL Server Management Studio

Staging Area: grp0004-602-ISTM-637-602-staging-area

Data Warehouse Area: grp0004-602-ISTM-637-602-dw-area

2) Analysis Service of the SQL Server

Cube deployed for SSAS

ISTM637_SoftDrinkAnalysis

ISTM637_602_Grp4_BQ5-Cigarette Analysis

3) <http://infodata16.mbs.tamu.edu/ReportServer>

Project Folder: 602_Group4_ProjectGroup

infodata16.mbs.tamu.edu/ReportServer - /602_Group4_ProjectGroup

[\[To Parent Directory\]](#)

Friday, April 27, 2018 7:48 PM
Friday, April 27, 2018 6:58 PM
Sunday, April 29, 2018 9:59 PM

31917 [BQ-2_Canned_Soup_Analysis](#)
75942 [BQ-3_SoftDrinks_HealthBeverage_Analysis](#)
45802 [Weekly_%_Change_in_Sales](#)

Microsoft SQL Server Reporting Services Version 13.0.4474.0

Contents

1. Introduction	4
1.1 Project Background	4
1.2 Domain Knowledge	4
1.3 Data Details	4
1.4 Entity-Relationship Diagram	5
2. Business Questions and Justification	6
2.1 BQ1 and Justification	6
2.2 BQ2 and Justification	7
2.3 BQ3 and Justification	9
2.4 BQ4 and Justification	10
2.5 BQ5 and Justification	12
3. Data Warehouse Design	13
3.1 Dimension Matrix and Information Package	13
3.2 Dimension Tables	14
3.3 Fact Tables	15
3.4 Star Schema	16
4. Data Marts	18
4.1 Dimension Mapping Table	18
4.2 Category Sales Data Mart	20
4.2.1 Business Question Justification	20
4.2.2 Category Sales Mapping Table	20
4.3 Product Sales Data Mart	21
4.3.1 Business Question Justification	21
4.3.2 Product Sales Mapping Table	22
5. Data Integration	22
5.1 Data Quality Issues	22
5.2 ETL Plan	23
5.2.1 Target Data	23
5.2.2 Data Sources	24
5.2.3 Data Mappings from Sources to Staging to Data Warehouse	24
5.2.4 Data Extraction Rules	28
5.2.5 Data Transformation and Cleansing Rules	28

5.3 ETL Implementation	30
5.3.1 Time Dimension Table Creation	30
5.3.2 Store Dimension Table Creation	32
5.3.3 Product Dimension Table Creation	35
5.3.4 Category Dimension Table Creation	37
5.3.5 CategorySales Fact Table Creation	41
5.3.6 ProductSales Fact Table Creation	42
5.3.7 Category Fact Table Creation	47
5.3.7 Table Structure for Data Marts	50
5.2.3 Table Structure for Category Sales Data Mart	50
5.3 Snapshot of Data Warehouse Area	51
5.4 SQL Queries for Staging and Data Warehouse area	52
5.4.1 Staging	52
6. Business Intelligence (BI) Reports	60
6.1 Reporting Plan	60
6.2 SSRS for BQ-1	66
6.3 SSRS for BQ-2	75
6.4 SSAS+SSRS for BQ-3	79
6.4.1 SSAS Part	79
6.4.2 SSRS on top of SSAS	94
6.5 ReportBuilder3.0 for BQ-4	98
6.6 SSAS for BQ-5	103
7. Group Special Work on Data Quality, Error Files	110
7.1 NULL CHECK	110
7.2 REFERENTIAL INTEGRITY CHECK	111
7.3 DUPLICATES CHECK	112
Appendix A	114

1. Introduction

1.1 Project Background

As a core component of business intelligence, a data warehouse functions as a system to achieve data analysis and reporting. It is a central repository that stores current and historical data from one or more disparate sources in a single place ^[1]. The system is used to solve business problems and support business decisions. Thus, to build the system in a better way, the first step is to understand the business domain and gather requirements to create business problems.

In this project, a data warehouse will be built for a retail store chain called Dominick's Fine Food (DFF). DFF is a grocery store chain and subsidiary of Safeway Inc. with locations mainly in the Chicago area. The data for this project includes store-level data covering shelf management and pricing from all the branches of DFF. For academic purpose, we will build a data warehouse to study the internal business model reflected by the data. And this consulting report is dedicated to finish the first and primary step of business domain understanding and business problem recognition.

1.2 Domain Knowledge

Four papers are synthesized to help us build our understanding of this domain. Paper 1 is "Holiday Price Rigidity and Cost of Price Adjustment" which grasps Thanksgiving-Christmas holiday period as a major sales period for US retailers. Paper 2 is "Cross-Brand Pass-Through in Supermarket Pricing" which investigates the sensitivity of cross brand pass-through estimate. Paper 3 is "Chain-wide and store-level analysis for cross-category management" which forward two important aspects of chain-wide and store-level. And paper 4 is "Why Do Some Prices In The Retail Sector Drop When Demand Rises" which reviews literature on price rigidity, its implications, the role of psychological pricing.

From the papers, we have learned:

- In sales domain, there exist differences between non-holiday and holiday sales. And sales pattern happened in holiday is even more worthwhile to investigate because of the high profit the vendors can receive.
- Price prediction of cross-brand category is worth to investigate and sale differences among different stores can be another study point.
- Variations in price are considered crucial for understanding price adjustments. How to depict the price tendency over time is of great value.

1.3 Data Details

The Dominick's database covers store-level scanner data collected at Dominick's Finer Foods over a period of more than seven years. Basically, the database contains two types of files: category-

specific files and general files. The general files contain information pertaining to all the categories in the project.

Table 1 shows the detailed information about the files and metadata.

Table 1. File Details

File	Metadata	File Description
Customer Count	Store traffic and coupon usage by store	<ul style="list-style-type: none"> In-store daily traffic, including number of customers visiting the store and purchasing Variables: <i>Date, Week, Store</i>
Store-specific Demographics	store-specific demographic data information	<ul style="list-style-type: none"> Records in-store targeted promotion to customer groups Variables: <i>age, ethnicity, education, income, etc</i>
UPC	Record for each UPC in a category	<ul style="list-style-type: none"> Records same-brand and cross-brand sale data Variables: <i>upc, com_code, nitem, etc</i>
Movement	Weekly sales for each UPC by store	<ul style="list-style-type: none"> Records the margin profit for each upc in a category following a weekly basis Variables: <i>upc, store, week, move, price, qty, profit, sale and ok</i>

1.4 Entity-Relationship Diagram

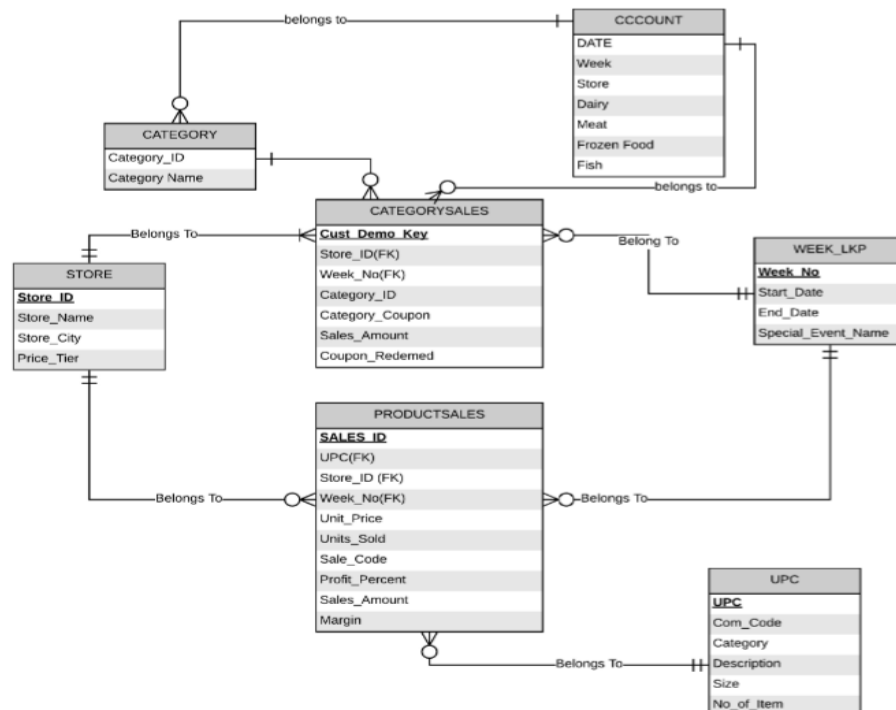


Figure 1 ERD for Dominick's Data Warehouse

2. Business Questions and Justification

2.1 BQ1 and Justification

BQ 1 - What is the trend of weekly change in sales of Frozen Food, Meat, Fish and Dairy till current week in 1997 for store 2?

Justification

Frozen foods, meat, fish and dairy are edible food items. They are key items in customer grocery list. By understanding the sales trend of these items, the store manager can plan the inventory to ramp up or down their quantity. Additionally, these graphs below show the micro and macro seasonality of various categories of food products which requires refrigeration. It displays the % change in average price of basket of products under a category. Knowledge of this change can help store managers determine price reduction/change strategy at macro level on a weekly basis and insulate the store from erratic costs of price reduction. Our observation through the subset of data leads us to a preliminary conclusion fish sale are quite bipolar on weekly basis. There is a tremendous amount of fluctuation points to the nature of fish consumption. People buy fish for consumption on fortnightly basis. Extra procurement of any anticipated spike in consumption is not the best idea. The similar pattern of crests and dips in other frozen items point towards an integrated strategy of cross selling various meat and dairy products. Their peaks and dips are in lockstep. A combo package-based discounting offer on combination of above products could lead to higher and predictable volumes. Consequently, the customer side push in volumes could be leveraged to get supplier side rebates and discounts to improve margins.

Data Snapshot

STORE	2			
Row Labels	Average of FROZEN	Average of MEAT	Average of FISH	Average of DAIRY
High				
1997				
381				
382	4.91%	-11.66%	-59.29%	-3.14%
383	5.53%	21.09%	32.63%	19.22%
384	6.34%	4.80%	-15.21%	-8.17%
385	-10.99%	-13.81%	31.03%	-1.28%
386	7.17%	-7.96%	-12.99%	-5.51%
387	-3.23%	3.52%	57.82%	-1.30%
388	-3.54%	11.20%	-32.51%	-4.21%
389	-3.48%	-15.95%	-26.29%	4.37%
390	9.49%	3.98%	24.01%	-0.84%
391	3.86%	-1.30%	1.02%	1.21%
392	-17.18%	10.27%	-8.37%	-4.89%
393	9.43%	6.84%	40.74%	15.52%
394	-13.30%	-9.24%	-7.06%	9.25%
395	14.55%	-16.30%	-32.51%	-25.56%
396	0.64%	22.36%	60.41%	-8.01%
397	-1.20%	0.32%	-32.59%	16.73%
398	8.78%	-3.05%	7.74%	-0.24%

Figure 2 Data for BQ-1

Pivot Table

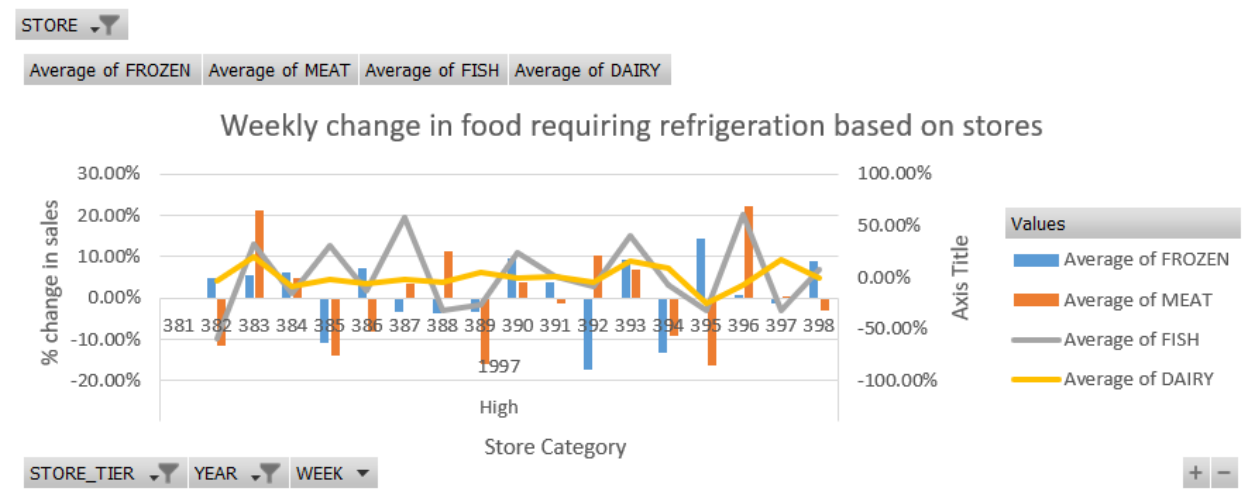


Figure 3 Pivot Table for BQ-1

2.2 BQ2 and Justification

BQ 2 - Which are the top 10 products with respect to profitability in Medium Tier stores w.r.t “Canned Soup” category of in year 1991?

Justification

Medium Tier stores have a demographic consisting of high number of college graduates and working population with medium to disposable income. Canned soup is one of the popular products in this demographic. By focusing on popular products, sales of this category can be augmented. Ready to eat canned soups can be bundled in Buy One Get One offers or Combo offers of various varieties to drive sales in this category. If this category is consistently on a growth curve, other products in ready to eat category could be bundled and to increase their volumes. Certain new products in non-competing category could be introduced on a pilot basis by bundling with these popular (top 10) products. Dominick's could also sell certain related in-house products with these products on introductory basis. These products should be placed in shelves which are easily visible to customer to further increase the sales.

Data Snapshot

YEAR	1991	
PRICE TIER	Medium	
Row Labels	Sum of GROSS MARGIN	
2400032220	\$	38,841
2400032230	\$	30,477
2400032320	\$	16,870
2400032200	\$	12,014
4119601012	\$	11,858
4119601000	\$	11,400
3360000031	\$	9,148
4119601022	\$	6,978
3828115013	\$	5,843
4119601011	\$	5,473

Figure 4 Data for BQ-2

Pivot Table



Figure 5 Pivot Table for BQ-2

2.3 BQ3 and Justification

BQ 3 - What is the growth trend of Soft Drinks versus Bottled Juice for year 1990 and 1991? Which of these has negative growth rate? What is the trend for bottled juice especially in Low Tier?

Justification

Globally, the soda based soft drink consumption is on decline in absolute terms due to healthier alternatives. As a retailer, Dominick's has some key challenges to manage the dip in soda sales. As the data shows, bottled juice is picking up sales especially in stores in low tier. By giving better visibility to bottled juices along with attractive pricing, bottle juice consumption could be driven up. On the other hand, to arrest decrease in soft drink sales, focused efforts to promote their sales by using various discounting techniques are suggested by our team. Cross selling of soft drinks with other frozen foods like frozen pizza, snack crackers and ready to eat food can help to improve sales.

Data Snapshot

Sum of TOTAL_SALES		Column Labels							
		Health_Beverage		Health_Beverage Total		Soft_Drink		Soft_Drink Total	
Row Labels		High	Low	Medium		High	Low	Medium	
1989									
1990		175.66%	90.80%	125.56%	134.84%	322.24%	263.83%	259.90%	271.81%
1991		110.76%	112.88%	116.24%	114.22%	3.27%	-14.78%	-6.16%	-5.16%

Figure 6 Data for BQ-3

Pivot Table

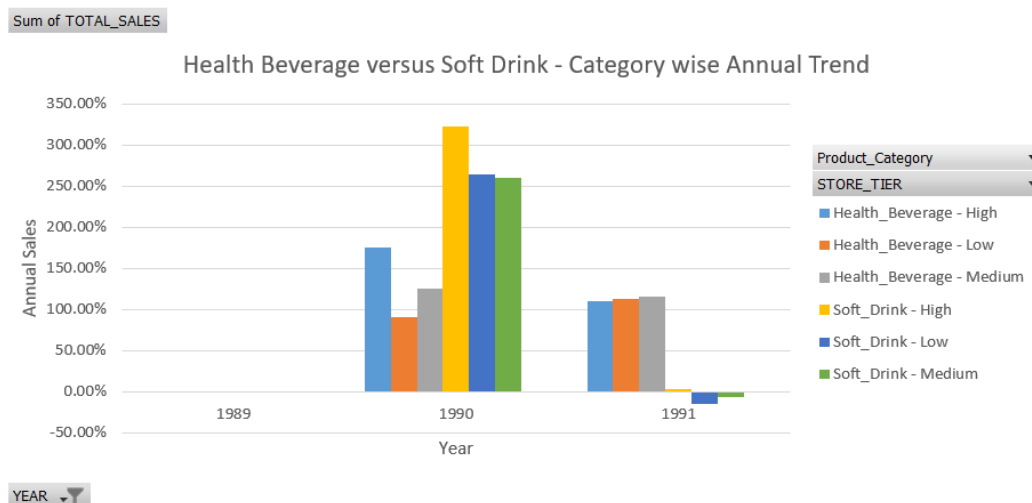


Figure 7 Pivot Table for BQ-3

2.4 BQ4 and Justification

BQ 4 - What effect does the time of the year have on sales of each Tuna? Determine the impact of seasonality on Average Sales of Tuna from December-1990 to September 1992?

Justification

Tuna is a popular fish consumed in North America. Although some of it is native is grown in America, most of it is imported from outside USA. Tuna is perishable commodity with less shelf life. Tuna is a costly fish in general. Being perishable not in frozen foods category, it is important for Dominick's that they are able to sell maximum Tuna fish from their existing stock and replenish it with newer one. After analyzing data, it is evident that Tuna sales peaks up during January or February and remains stable for rest of the year. There are number of external factors contributing to this consumer behavior - festive season, high cost due to less supply, etc. By using below trend, proper planning for Tuna procurement and sales could be done. It could be also assisted by proper discounting strategy.

Data Snapshot

YEAR	(Multiple Items)
Row Labels	Average of SALE PRICE
⊕ Dec-90	344.978638
⊕ Jan-91	5370.001123
⊕ Feb-91	283.8186929
⊕ Mar-91	291.6595521
⊕ Apr-91	329.6294943
⊕ May-91	340.4026567
⊕ Jun-91	300.9550155
⊕ Jul-91	335.9021949
⊕ Aug-91	344.2458283
⊕ Sep-91	323.723763
⊕ Oct-91	346.0913395
⊕ Nov-91	349.2583955
⊕ Dec-91	471.557312
⊕ Jan-92	295.1784226
⊕ Feb-92	1976.237553
⊕ Mar-92	348.8107775
⊕ Apr-92	331.9829086
⊕ May-92	312.8758857
⊕ Jun-92	337.8112629
⊕ Jul-92	272.7444369
⊕ Aug-92	342.2466535
⊕ Sep-92	331.2639485

Figure 8 Data for BQ-4

Pivot Table

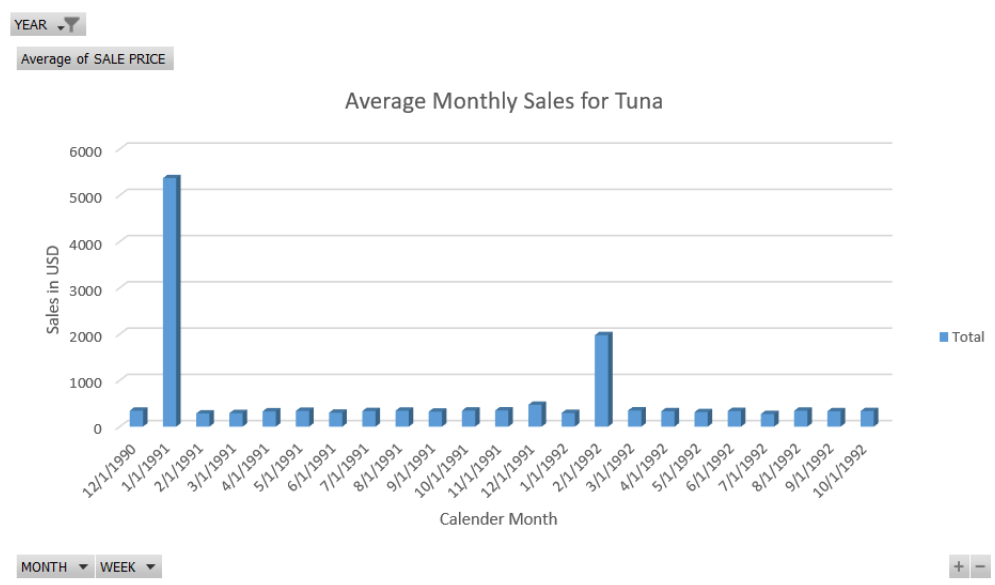


Figure 9 Pivot Table for BQ-4

2.5 BQ5 and Justification

BQ 5 - What is annual growth rate of cigarette margins in low tier stores? What is the decreasing trend?

Justification

Globally, there is reduction in Tobacco consumption. Be it cigarettes or any other medium. However, there is still some traction in areas with higher proportion of college graduates. By knowing the trend in stores having demographics in favor of college students, cigarette sales strategy can be formulated. As per the data analyzed by our team, it is observed that cigarette sales are decreasing even in these localities. They are exponentially decreasing in all the stores in given locality. Dominick's needs to use discounting or price reduction strategy to arrest this decline and change its directions. Generally, college graduates are cost sensitive. So simple price reduction is the strategy to go forward. Secondly, if there is concrete evidence of dip in sales, Dominick's could reassess its space utilization to see if some less selling products could be replaced by popular products in the category.

Data Snapshot

PRICE TIER	Low								
Sum of GROSS MARGIN	Column Labels								
Row Labels		21	40	59	70	77	78	80	83
1990									
1991		-54.57%	-27.16%	-44.91%	-36.21%	-53.85%	-6.10%	-53.84%	-58.17%
1992		-81.15%	-73.42%	-80.10%	-74.84%	-79.29%	-63.23%	-81.98%	-81.16%
1993		-17.89%	-57.31%	-35.65%	-48.94%	-51.66%	-83.38%	-30.14%	-30.02%
1994		-15.67%	-37.42%	-32.50%	-79.86%	-31.39%	-29.99%	-18.09%	-37.68%
1995		-5.26%	-16.02%	-15.44%	47.35%	-2.03%	-9.29%	-2.25%	-25.55%
1996		-5.95%	-65.42%	-9.93%	20.01%	1.75%	14.36%	-10.10%	-3.79%
1997		-79.42%	-84.52%	-72.85%	-70.65%	-69.92%	-74.00%	-74.33%	-73.28%

Figure 10 Data for BQ-5

Pivot Table

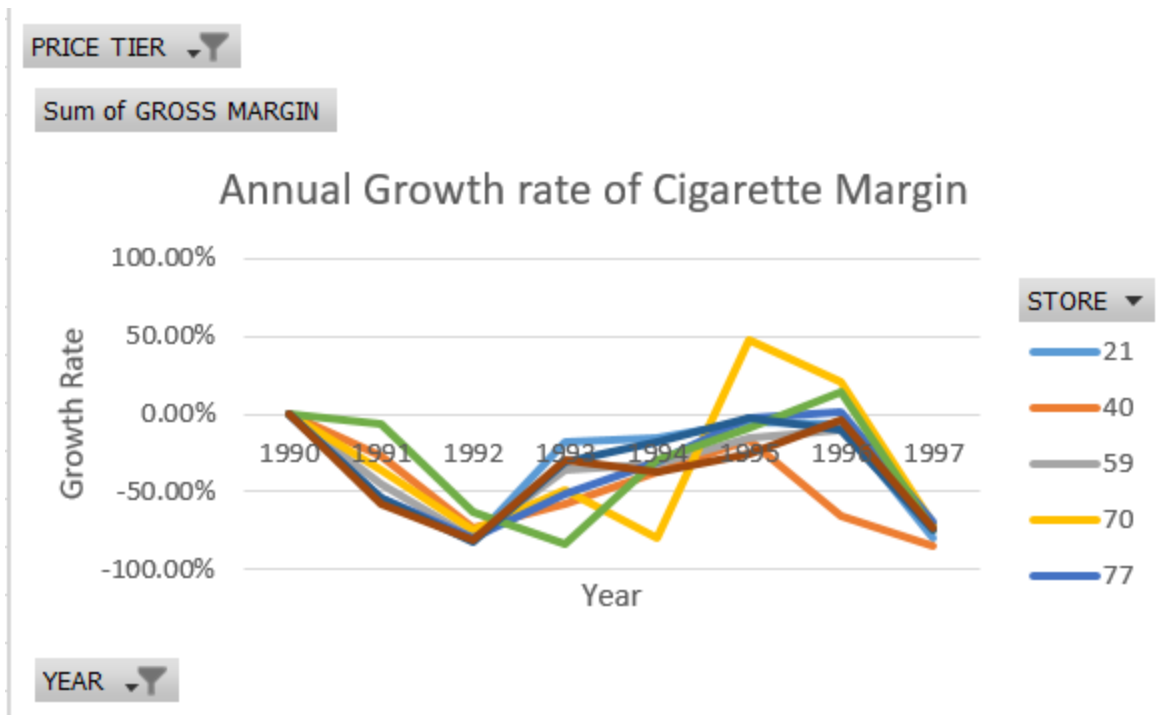


Figure 11 Pivot Table for BQ-5

3. Data Warehouse Design


3.1 Dimension Matrix and Information Package

Five business questions can be summarized as weekly food sales, top 10 canned soup, soft drinks verses bottle juices, seasonally tuna sale and annual cigarette growth in low tire store. Two kinds of data marts are designed: Product Sales and Category Sales.

Table 2. Dimension Matrix


BQs	Data Marts	Dimensions			
		Product	Store	Category	Time
	Product Sales	X	X	X	X
	Category Sales		X	X	X

Based on the Dimension Matrix of **Kimball Approach** of data warehouse design, below are the **information package** diagrams which specify the fact tables design by giving details of level of hierarchy, attributes, and metrics of measurement. We must admit that while making data mart, the information package technique helped us to create cohesive data marts – Product Sales and Category Sales.



Product	Store	Category	Time
Product_Name	Store_Name	Category_Name	Year
UPC Number	Store_City		Month
	Zone		Week
Facts: Price, Quantity, Profit_Percent_per_Dollar, Sales, Move, Margin, Gross Margin			

Figure 12 Product Sales Information Package



Store	Category	Time
Store_Name	Category_Name	Year
Store_City		Month
Zone		Week
Facts: Category Sales		

Figure 13 Category Sales Information Package

3.2 Dimension Tables

- Product Dimension

Product dimension table contains information about the product.

Table 3. Product Dimension

Attribute Name	Description
Product_ID	Surrogate key (unique identify) of Product Dimension
Product_Name	Product name
UPC_Number	Upc number
Source_System_Code	Indicates the source system
Active	Active flag

- Store Dimension

Store Dimension Table contains information of the concrete store in the DFF retail store chain

Table 4. Store Dimension

Attribute Name	Description
Store_ID	Surrogate key (unique identify) of Store Dimension
Store_Number	Store number
Store_Name	Name of the store
Store_City	City where the store is located
Price_Tier	Includes high and low tier
Zone	Area of the store
Source_System_Code	Indicates the source system
Active	Active flag

- Category Dimension

Category dimension table contains information about the category classification in the DFF store chain.

Table 5. Category Dimension

Attribute Name	Description
Category_ID	Surrogate key (unique identify) of Category Dimension
Category_Name	Category number
Source_System_Code	Indicates the source system
Active	Active flag

- Time Dimension

Time dimension table contains information about time attribute.

Table 6. Time Dimension

Attribute Name	Description
Time_ID	Surrogate key (unique identify) of Time Dimension
Year	Year of date
Month	Month of date
Week_Number	Number of week
Special_Event	Holiday or other special promotion date
Source_System_Code	Indicates the source system

3.3 Fact Tables

- Product Sales Fact Table

Table 7. Product Sales Fact Attribute

Attribute Type	Attribute Name	Description
Keys	Product_Sales_ID	Unique identifier for each product sale. Primary Key
	Product_ID	Unique identifier which help divide data from product dimension. Foreign key
	Store_ID	Unique identifier for store which help divide data from store dimension. Foreign key
	Category_ID	Unique identifier for category which help divide data by category dimension. Foreign key
	Time_ID	Unique identifier for time which helps divide data by time dimension. Foreign key
Measures	Price	Unit price of the product sales
	Quantity	Quantity of each product sold
	Profit_Percent_per_Dollar	Profit made on each dollar sold. It is percentage
	Sale_Promotion_Code	Promotion information
	Sales Move	Total sale value The number of actual items sold in a bundle

Margin	The difference between cost price and sell price
Gross-Margin	The absolute margins

- Category Sales Fact Table

Table 8. Category Sales Fact Attribute

Attribute Type	Attribute Name	Description
Keys	Category_Sales_ID	Unique identifier for each product sale. Primary Key
	Store_ID	Unique identifier for store which help divide data from store dimension. Foreign key
	Category_ID	Unique identifier for category which help divide data by category dimension. Foreign key
	Time_ID	Unique identifier for time which helps divide data by time dimension. Foreign key
Measures	Category Sales	the sale value of the category sales across multiple dimensions

3.4 Star Schema

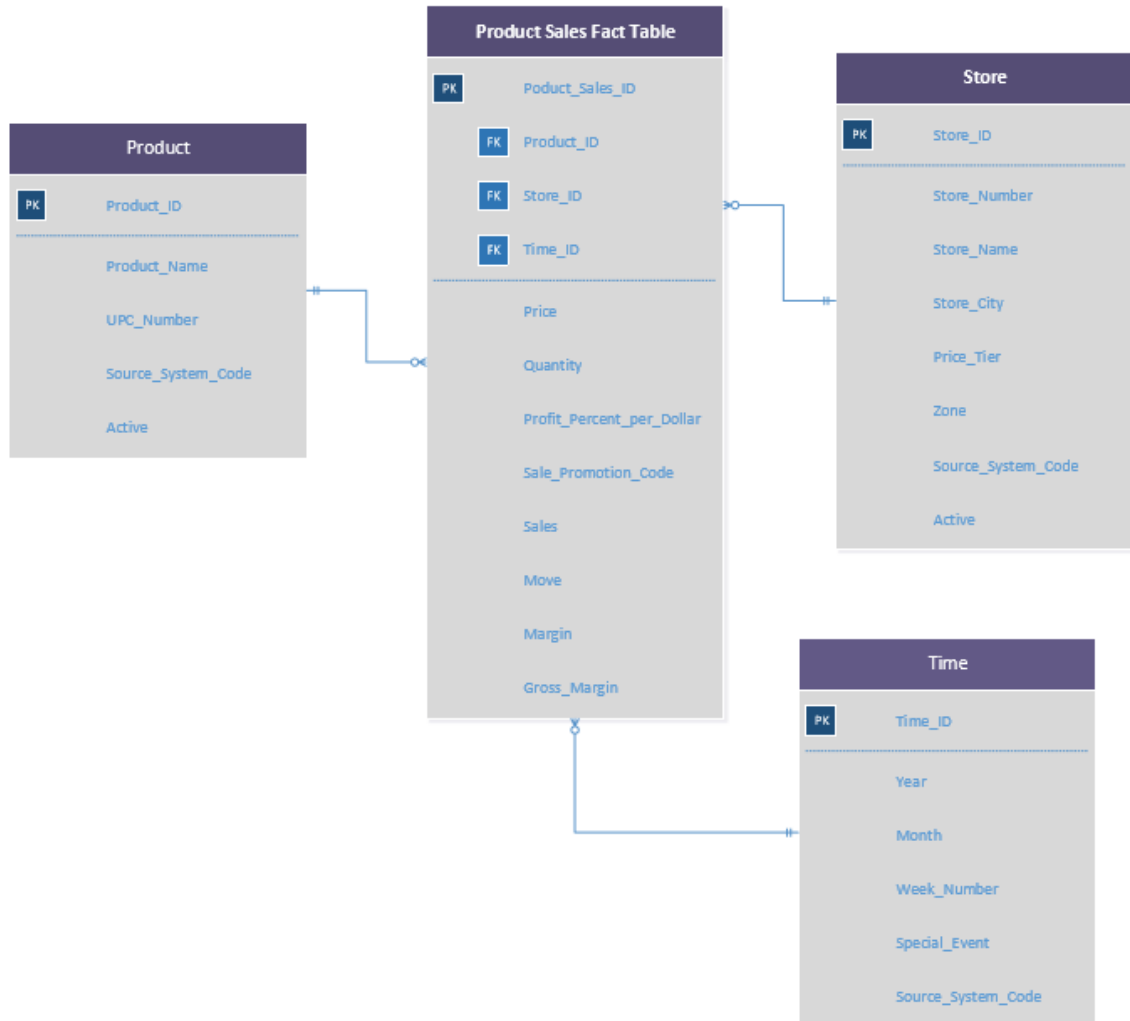


Figure 14 Star Schema for Product Sales data mart



Figure 15 Star Schema for Category Sales data mart

4. Data Marts

4.1 Dimension Mapping Table

Table 9. Mapping Table for Store Dimension

DW Dimension Table	DW Dimension Attribute	Source Table	Source Table Attribute	Mapping Functions
Store	Store_ID (Row Number)	Dominick's Store and Store Specific Demographics		Auto-generated
	Store_Number			
	Store_Name		Store Name	
	Store_City		City	
	Store_Tier		Price_Tier	
	Zone		Zone	

Source_System_Code

Taken from System code generator function. Value is "DEMO"

Active

Flag for slowly changing dimensions.

Open record has value = 1

Closed record has value = 0

Table 10. Mapping Table for Category Dimension

DW Dimension Table	DW Dimension Table Attribute	Source Table	Source Table Attribute	Mapping Functions
Category		CCount		Auto-generated
	Category_ID (Row number)			
	Category_Name			Various category attributes like Fish, grocery, beer, etc from CCount.
	Source_System_Code			Taken from System code generator function during ETL specifying the details of source file.
	Active			Flag for slowly changing dimensions. Open record has value = 1 Closed record has value = 0

Table 11. Mapping Table for Product Dimension

DW Dimension Table	DW Dimension Table Attribute	Source Table	Source Table Attribute	Mapping Functions
Product		UPC Table		Auto-generated
	Product_ID (Row Number)			
	Product_Name		Description	
	UPC_Number		UPC	
	System_Source_Code			Specifies specific UPC source file.
	Active			Flag for slowly changing dimensions. Open record has value = 1 Closed record has value = 0

Table 12. Mapping Table for Time Dimension

DW Dimension Table	DW Dimension Attribute	Source Table	Source Table Attribute	Mapping Functions
Time		Week Decode Table		Auto-generated
	Time_ID (Row Number)			
	Year		Start End	To obtain Year, we can use start (date) and end (date) from Week Decode Table.
	Month		Start End	To obtain Year, we can use start (date) and end (date) from Week Decode Table.
	Week_Number		Week #	
	Special_Event		Special Events	
	Source_System_Code			Taken from System code generator function

4.2 Category Sales Data Mart

4.2.1 Business Question Justification

Category Sale Data Mart helps to resolve BQ-1.

BQ-1: What is the trend of weekly change in sales of Frozen Food, Meat, Fish and Dairy till current week in 1997 for store 2?

Justification – This business question is answered by *Category Sales* data mart. The Store Number attribute is used from Store dimension table to divide the data by Store. The week number and year attribute are used from Time dimension table to further divide data. The Category name attribute is used from Category dimension table to divide data in frozen meat, fish and dairy food category. The measure *Category_sales* from the *Category Sales* fact table is used to find the trend of weekly change in sales of Frozen Food, Meat, Fish and Dairy till current week in 1997 for store 2.

4.2.2 Category Sales Mapping Table

Table 13. Mapping Table for Category Sales

DW Fact Table	DW Fact Table Attribute	Source Table	Source Table Attribute	Mapping Functions
		CCount		
	CategorySales_ID			ETL-generated surrogate key
	Category_ID			Primary key of the Category dimension

Category Sales	Time_ID	Primary key of the Time dimension
	Store_ID	Primary key of the Store dimension
	Category Sales	Sales of categories like Fish, grocery, beer, etc from ccount.

4.3 Product Sales Data Mart

4.3.1 Business Question Justification

Product Sale Data Mart helps to resolve BQ-2 – BQ-5.

BQ-2: Which are the top 10 products with respect to profitability in Medium Tier stores w.r.t “Canned Soup” category of in year 1991?

Justification - This business question is answered by *ProductSales* data mart. We have used *store_tier* attribute from Store dimension table and year from Time dimension table as filters. Product details like UPC and Name is taken from Product dimension table. The measure *Gross_Total* is taken from Product Sales fact table and summed for given products and ranked. We display the top 10 products by applying rank function.

BQ-3: What is the growth trend of Soft Drinks versus Bottled Juice for year 1990 and 1991? Which of these has negative growth rate? What is the trend for bottled juice especially in Low Tier?

Justification - This business question is answered by *Product Sales* data mart. We have used *store_tier* attribute from Store dimension table, year from Time dimension table. Year filter acts as a filter criterion. The measure *Gross_Total* is taken from Product Sales fact table and summed for given years. We display the total sales growth with respect to previous year for product type combination.

BQ-4: What effect does the time of the year have on sales of each Tuna? Determine the impact of seasonality on Average Sales of Tuna from December-1990 to September 1992?

Justification - This business question is answered by *ProductSales* data mart. We have used year attribute from *Time* dimension table to filter on the basis of year. Month and Week attributes from Time dimension table are used to measure time dimension against which we plot average of Sales. Sales attribute comes from Product Sales Fact table.

BQ-5: What is annual growth rate of cigarette margins in low tier stores? What is the decreasing trend?

Justification - This business question is answered by *Product Sales* data mart. We have used *store_tier* attribute from Store dimension table to filter. *Year* attributes from Time dimension table are used to measure time dimension against which we plot sum of *Gross_Margin*.

Gross_Margin comes from the data mart - *Product_Sales*. *Store_Num* attribute comes from Store dimension table. We show a store wise trend plotted against year.

4.3.2 Product Sales Mapping Table

Table 14. Mapping Table for Product Sales

DW Fact Table	DW Fact Table Attribute	Source Table	Source Table Attribute	Mapping Functions
		Movement Table		
	Product_Sales_ID			ETL-generated surrogate key
	Product_ID			Primary key of the Product dimension
	Store_ID			Primary key of the Store dimension
	Time_ID			Primary key of the Time dimension
Product Sales	Price		Price	
	Quantity		qty	
	Profit_Percent_per_Dollar		profit	
	Sale_Promotion_Code		sale	
	Sales			Derived from the formula Sales = (price*move)/qty
	Move		move	
	Margin			(Sales*Profit_Percent_Per_Dollar)/100
	Gross_Margin			Abs(Margin)

5. Data Integration

5.1 Data Quality Issues

To solve the business problem, the quality of input data matters. However, the provided source data is not perfect. There exist dummy values, absence values, inconsistent values, and incorrect values. And these will cause problem in subsequent analysis. Hence, data quality issues in DFF data sets are summarized first before moving to ETL plan.

Table 15 - Data Quality Issues

Issue Type	Issue Name	Issue Description
Data Relationship	Referential Integrity	A lot of null values in all the excel sheet, even in keys which could be assumed to be primary key. E.g. Store number was repeated and had inconsistent values
	Cardinality	Structural inconsistency between entities and attributes
Fields Structure	Format	Values did not follow consistent formatting standards
	Standard	Confusion about what data represents. E.g. Coupons had decimal values, so shall a user assume it is coupon's dollar value or it is dirty data
	Consistent	Amongst files there was an overlap with the data values
Data Value	Completeness	Attributes had no value. E.g. "Sale" field was blank for most records
	Accuracy	There exist null values where value was expected. E.g. negative values for Sales data and decimal value for coupon
	Validity	Data values did not fall within acceptable ranges defined by the business. Store number have out of range values

The above table discusses the Data Quality of Dominic Finer Foods. For working on the ETL implementation, we need to have a good understanding of data. Dummy values, Absence of data values, unofficial use of fields, Cryptic values, Violation of business rules, Non-unique identifiers, Inconsistent values, and incorrect values are the problems faced by users during data analysis. Hence, problems are required to be classified and then appropriate steps in ETL will take care that data generated for business intelligence purpose is accurate.

5.2 ETL Plan

ETL plan refers to detailed plan for better implementing extract, transform and load. Extract is the process of reading data from a database; transform is the process of converting the extracted data from its previous form into required form in appropriate storage system; load is the process of writing data into target database.

Generally, ETL tools are used to pull data from one or more source systems, transform and load in another database. In ETL plan, we will determine the whole processes using tools.

5.2.1 Target Data

Table 16. Target Data

Data	Data Extraction	Data Transformation	Data Destination
UPC	UPCCSO, UPCSDR, UPCBJC, UPCTNA, UPCCIG	UPCCSO, UPCSDR, UPCBJC, UPCTNA, UPCCIG	PRODUCT_DIM
MOVEMENT	Done-WCSO, Done-SDR, Done-WBJC, Done-WTNA, Done-WCIG		PRODUCT_SALES_FACT
STORE	Store	Store	STORE_DIM
WEEK	Week_Decode	FinalWeekDecode	TIME_DIM
CCOUNT	CCOUNT	cleanCOUNT	CATEGORY_DIM, CATEGORYSALES_FACT

5.2.2 Data Sources

The data source for the data warehouse is the Dominick's database provided by the University of Chicago Booth School of Business.

Table 17. Data Sources

Data	Source Files
UPC	UPC<product_acronym>.csv
MOVEMENT	W<product_acronym>.csv
STORE	STORE(created)
WEEK	WEEK_DECODE(created)
CUSTOMER COUNT	CCOUNT.csv

5.2.3 Data Mappings from Sources to Staging to Data Warehouse

Table 18. Data Mapping from Sources to Staging

SOURCE FILE NAME	SOURCE FILE ATTRIBUTES	STAGING AREA NAME	STAGING AREA TABLE ATTRIBUTES
Week_Decode.csv	week number start date end date special events	Week_decode	[Week] [Start] [End] [Special Events]
Store.csv	store number city price tier zone zip code address	Store	[Store] [City] [Price Tier] [Zone] [Zip Code] [Address]
CCout.csv	store number Frozen Food Date Meat Fish Dairy Week	CCOUNT_Clean_STG	[STORE] [FROZEN] [Date] [MEAT] [FISH] [DAIRY] [Week]


upc<product_acronym>.csv		UPC<product_acronym> > 5 files – UPCCSO UPCBJC UPCSDR UPCTNA UPCCIG	
	com_code upc descrip nitem size case		com_code upc descrip nitem size case
w<product_acronym>.csv		We load 5 files in staging Movement<product _acronym> Movement_WCSO Movement_WSDR Movement_WBJC Movement_WTNA Movement_WCIG	
	STORE NUMBER UPC WEEK MOVE QTY PRICE SALE PROFIT OK		STORE UPC WEEK MOVE QTY PRICE SALE PROFIT_PER_DOLLAR OK

Table 19. Data Mapping from Staging to Data Warehouse

STAGING AREA TABLE NAME	STAGING AREA ATTRIBUTE	DATA WAREHOUSE TABLE	DATA WAREHOUSE TABLE ATTRIBUTES	MAPPING FUNCTION
Week_decode		TIME_DIM	TIME_ID	Auto-generated sequence at ETL level
	[Week] [Start]		Week_Number Start_Date End_Date	
	[End]		Year Month	Year([End]) Month([End)
	[Special Events]		Special Events	IF([Special Events]=="" , "Normal

Store, Demo		STORE_DIM	Source_System_Code	Day", [Special Events])
			Store_ID	Auto- generated sequence at ETL level
	[Store] [Demo].["Name"]		Store_Number Store_Name	SELECT D.["NAME"] FROM STORE S INNER JOIN DEMO D ON S.Store = D.["STORE"] WHERE (S.Zone IS NOT NULL) AND (S.Address NOT LIKE 'Closed') AND (D.["NAME"] NOT LIKE "");
	[City] [Price Tier] [Zone]		Store_City Price_Tier Zone Source_System_Code Active	"Store" 1 for OPEN record , 0 for CLOSED record to maintain SCD
Product(All 5 source tables for products)		PRODUCT_DIM	Product_ID	Auto- generated sequence at ETL level
	UPC DESCRIP SIZE		UPC_Number Product_Name Product_Type	Based on the name of UPC file this value is mapped in domain value

				Source_System_Code	(“Canned Soup”, “Soft Drinks”, “Cigarette”, “Tuna”, “Bottled Juice”) Based on the type of UPC File this value is mapped in domain value (“Canned Soup”, “Soft Drinks”, “Cigarette”, “Tuna”, “Bottled Juice”)
CATEGORY		CATEGORY_DIM	Category_ID		Auto-generated sequence at ETL level
	category		Category_Name	Source_System_Code	“Category”
			Active		1 for OPEN record , 0 for CLOSED record to maintain SCD
	Product_Sales_ID	PRODUCT_SALES_FACT	Product_Sales_ID		surrogate key
ProductSales_STG	Product_ID Store_ID Category_ID Time_ID Price Quantity Profit_Percent_per_Dollar Sale_Promotion_Code Sales Move		Product_ID Store_ID Category_ID Time_ID Price Quantity Profit_Percent_per_Dollar Sale_Promotion_Code Sales Move		

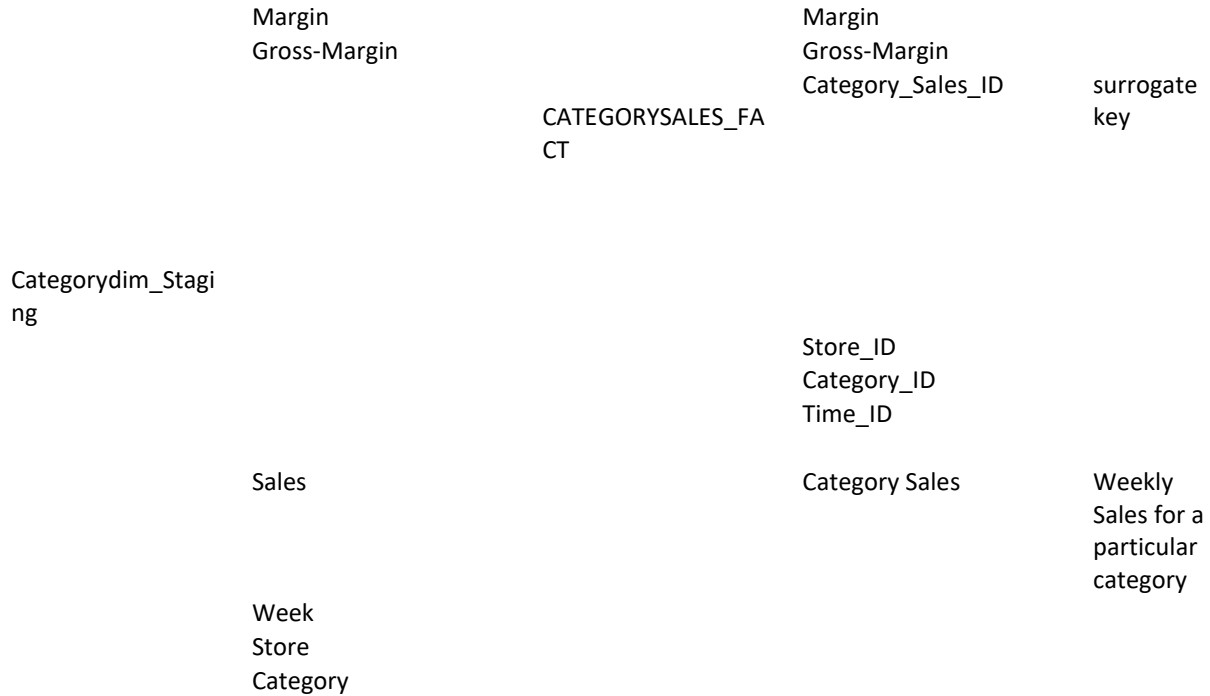

5.2.4 Data Extraction Rules

Data extraction is a process of extracting data from the source system and the extracted data is loaded into staging area (a relational database usually different from the data warehouse database) which is transformed and loaded into the data warehouse in remaining ETL process. Data extraction has been applied with proper discretion to build an effective data warehouse. For the purpose of extraction of data, all the data sources have been combined to a single format i.e. tables in Microsoft SQL Server Studio to be later used in data transformation and loading. Source data is in Comma Separated Value (.csv) formats. The data for Week and Store details was extracted from the data manual for Dominick Finer Foods. Comma Separated Value (.csv) files were created for such tabular data. Data from source files is loaded into the staging area.

5.2.5 Data Transformation and Cleansing Rules

Data extracted from source files present in the staging area is the input for data transformation and cleansing process. Data is transformed and cleansing rules are applied on it resulting in cleaned and consistent data throughout. Moreover, dead and useless data is removed to shed light on business people information requirements. Hence, data transformation activities has been properly implemented in this project to produce clean, condensed, complete and standardized data.

General transformation and cleansing rules that are applied to the data are as follows:

1) Data cleansing

Data that violates business rules is conformed to these rules. It is done through ETL programs that determine correct data values and the write them into BI target databases. Other steps taken in data cleansing are:

- **Removal of NULL values:** Existing null values in the data will be removed.
- **Removal of dirty data:** In this part, we will remove blank records and rows containing just a '.' (Dot) in any of their column values. Attributes which are not part of the business questions will also be removed such as attributes apart from STORE, DATE, FROZEN, MEAT, FISH, DAIRY, WEEK have been removed from Customer Count file. Moreover, any other dirt data such as redundant negative values will be removed. Records having sales value of various departments as '.' Will be removed.

2) Data conversion

Data extracted from source files are stored as attributes of type varchar (i.e., as string) in the staging area. These have been converted into their respective data types such as int, float and date. Date type field was stored as varchar. Using functionalities in SSIS, date has been split and stored as Year and Month attributes.

3) Creation of surrogate keys

Surrogate keys have been created for all the dimension tables and fact tables before loading the data in the data warehouse.

4) Derived Attributes

Derived attributes in dimension and fact tables are defined as follows:

- **Product Dimension:** Source_System_Code is set using derived column component feature specifying details of source file. Active flag is also used as derived attribute to show a particular product is presently sold.
- **Store Dimension:** Source_System_Code is set using system derived column component feature specifying details of source file. Active flag is also used as derived attribute to show a particular store is currently in function.
- **Category Dimension:** Source_System_Code is set using system derived column component feature specifying details of source file. Active flag is also used as derived attribute to show that products of a particular category are presently being sold.
- **Time Dimension:** Year and month are derived using start date and end date from functions YEAR(date) and MONTH (date) respectively. Source_System_Code is set using system code generator function feature specifying details of source file.
- **Product Sales fact:** Sales attribute is derived from formula $\text{Sales} = (\text{price} * \text{move}) / \text{qty}$.
Margin attribute is derived from formula $\text{Margin} =$

$(\text{Sales} * \text{Profit_Percent_Per_Dollar}) / 100$. Gross_Margin is derived from formula Abs(Margin).

5) SSIS Functions

The SSIS functions that aided during the transformation and cleaning process include:

- **LOOKUP:** It joins additional columns to the data flow by looking up values in a table.
- **Data Conversion:** It converts data from one data type to another.
- **Derived Columns:** It creates new column values by applying expressions to input columns.
- **AGGREGATE:** It aggregate data with functions such as count and sum.
- **UNPIVOT:** It makes an un-normalized dataset into a more normalized version by expanding values from multiple columns in a single record into multiple records with the same values in a single column.

6) Procedure for data loading:

Once the data is cleansed and transformed into a structure according to data warehouse requirements, data is ready to be loaded into the data warehouse. Initially, the tables are populated in the data warehouse and then checking that the data is ready for use. Then the referential integrity between dimension and fact tables is verified to ensure that all records relate to appropriate records in other tables, example - every record in a fact table relates to a record in each dimension table that will be used with that fact table.

5.3 ETL Implementation

The ETL process for the data warehouse was implemented using the SQL Server Management Studio and SSIS (Microsoft Visual studio – SQL Server Data Tools). The steps involved in this process are discussed as below, along with the SSIS tool screen shots explaining the entire process step-by-step.

5.3.1 Time Dimension Table Creation

ETL of Week decode source file

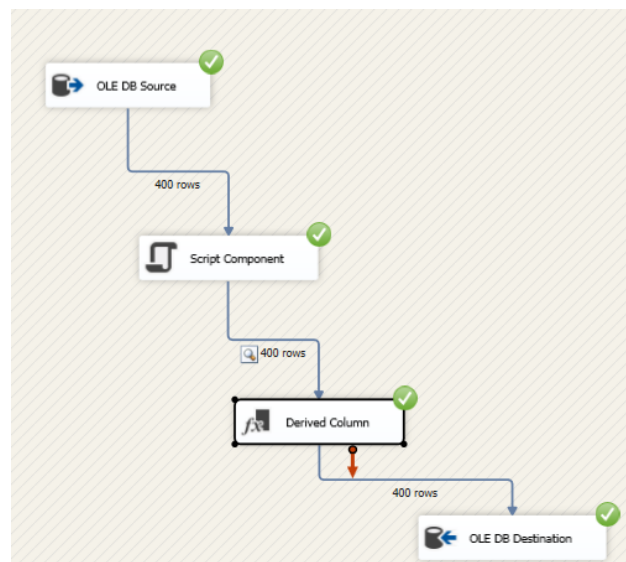
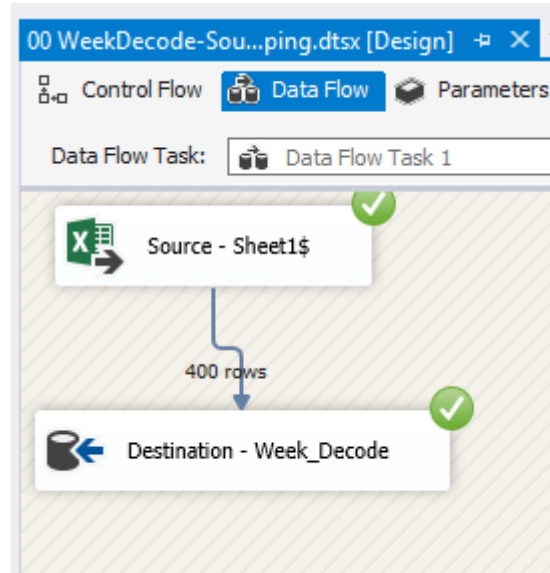
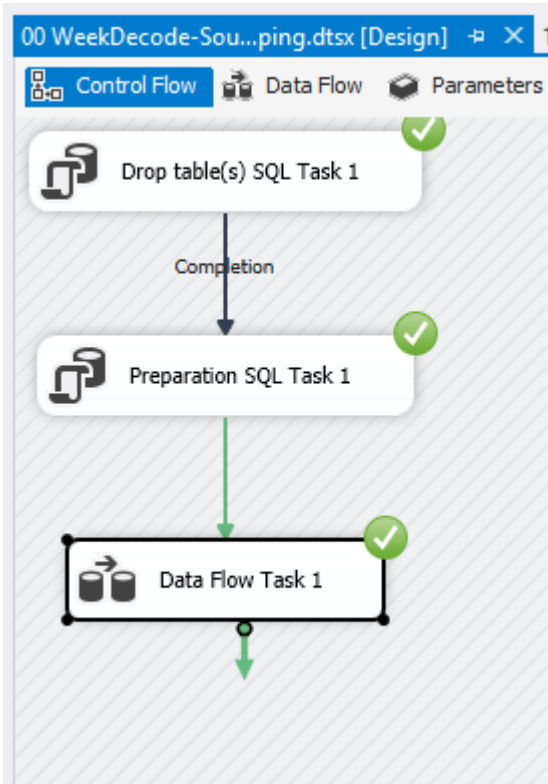


Figure 16 Time Dimension Transformation

Snapshot of Data in Product Dimension

SELECT * FROM TIME_DIM;

100 %



Results Messages

	Time_ID	Year	Month	Week_Number	Special Events	Source_System_Code
1	1	1989	9	1	NULL	WEEK
2	2	1989	9	2	NULL	WEEK
3	3	1989	10	3	NULL	WEEK
4	4	1989	10	4	NULL	WEEK
5	5	1989	10	5	NULL	WEEK
6	6	1989	10	6	NULL	WEEK
7	7	1989	11	7	Halloween	WEEK
8	8	1989	11	8	NULL	WEEK
9	9	1989	11	9	NULL	WEEK
10	10	1989	11	10	NULL	WEEK
11	11	1989	11	11	Thanksgiving	WEEK

Figure 17 Time Dimension Table

5.3.2 Store Dimension Table Creation

ETL of Store and Demo source file

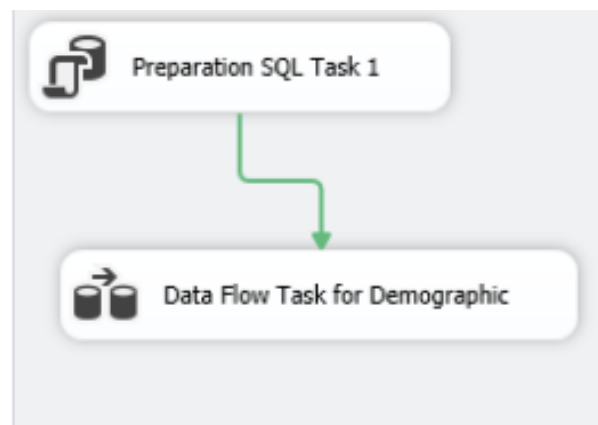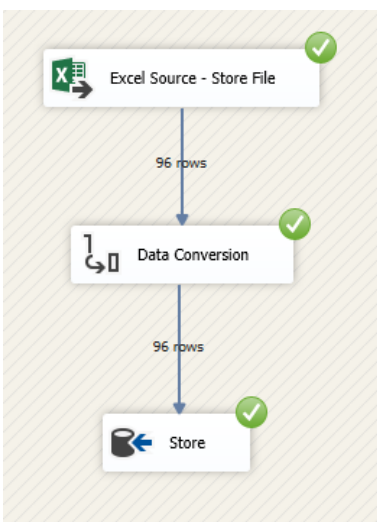

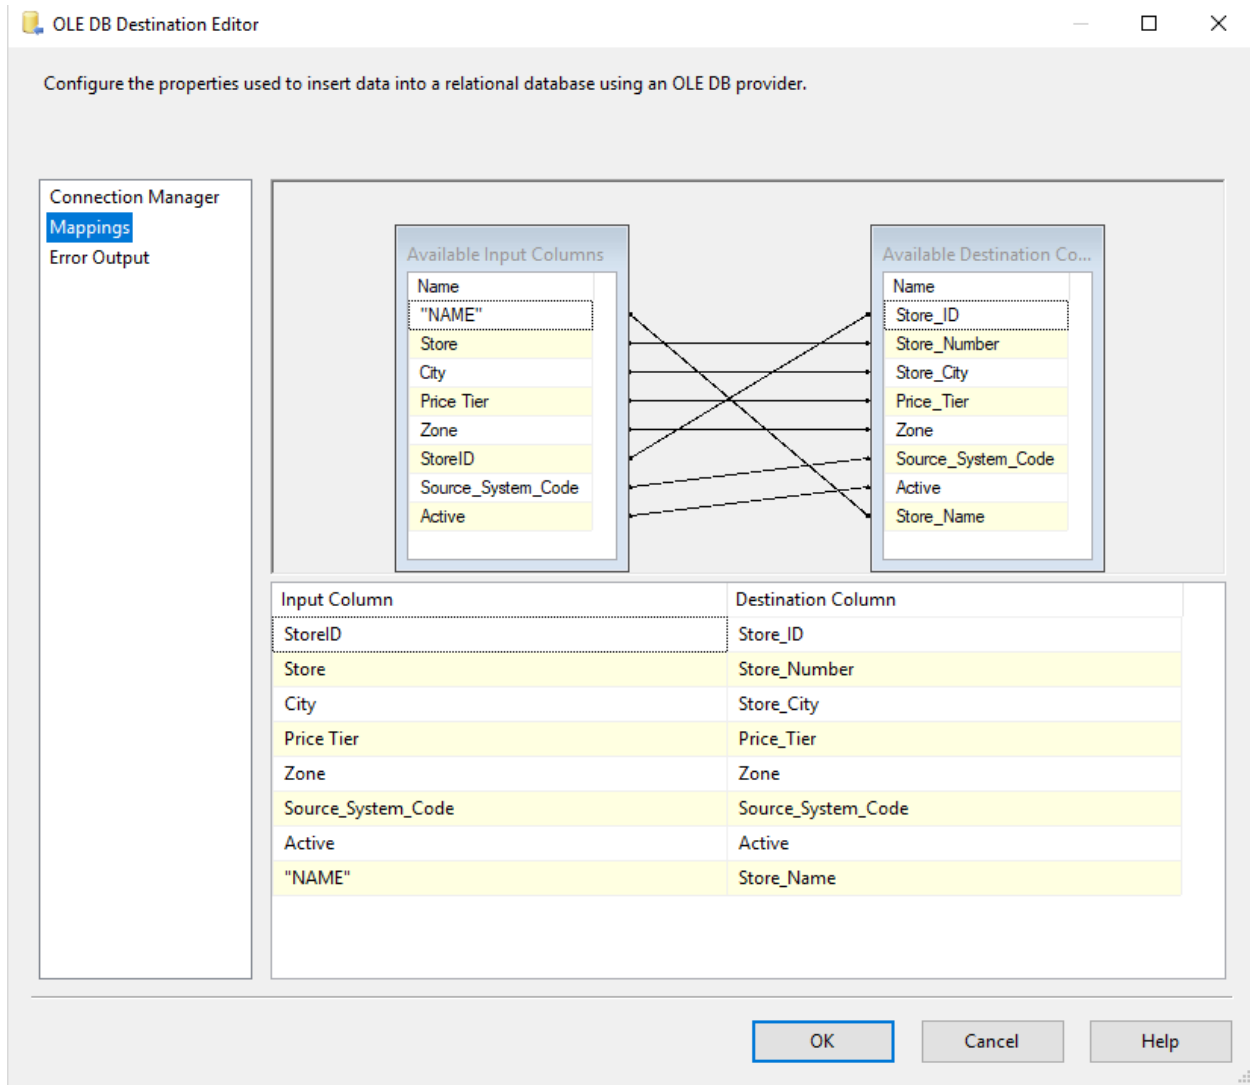


Figure 18 Store Dimension Mapping

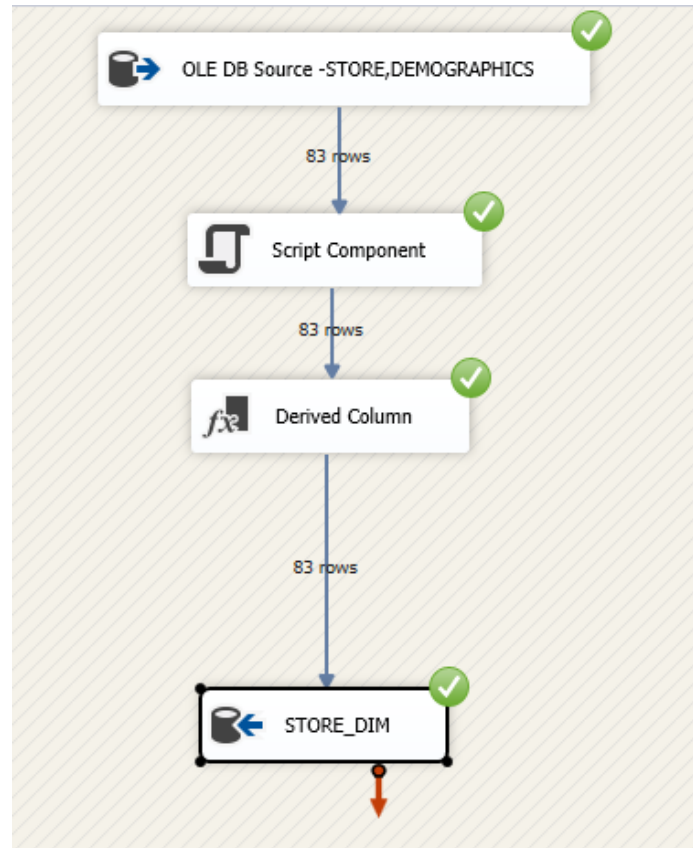


Figure 19 Store Dimension Transformation

Snapshot of Data in Product Dimension






Select * from STORE_DIM;

	Store_ID	Store_Number	Store_Name"	Store_City	Price_Tier	Zone	Source_System_Code	Active
1	1	2	"DOMINICKS 2"	River Forest	High	1	Store	1
2	2	5	"DOMINICKS 5"	Palatine	Medium	2	Store	1
3	3	8	"DOMINICKS 8"	Oak Lawn	Low	5	Store	1
4	4	9	"DOMINICKS 9"	Morton Grove	Medium	2	Store	1
5	5	12	"DOMINICKS 12"	Chicago	High	7	Store	1
6	6	14	"DOMINICKS 14"	Glenview	High	1	Store	1
7	7	18	"DOMINICKS 18"	River Grove	Low	5	Store	1
8	8	21	"DOMINICKS 21"	Hanover Park	CubFighter	6	Store	1
9	9	28	"DOMINICKS 28"	Mt. Prospect	Medium	2	Store	1
10	10	32	"DOMINICKS 32"	Park Ridge	High	1	Store	1
11	11	33	"DOMINICKS 33"	Chicago	High	7	Store	1
12	12	40	"DOMINICKS 40"	Bridgeview	CubFighter	6	Store	1

Figure 20 Store Dimension Table

5.3.3 Product Dimension Table Creation

ETL of UPC Source Files

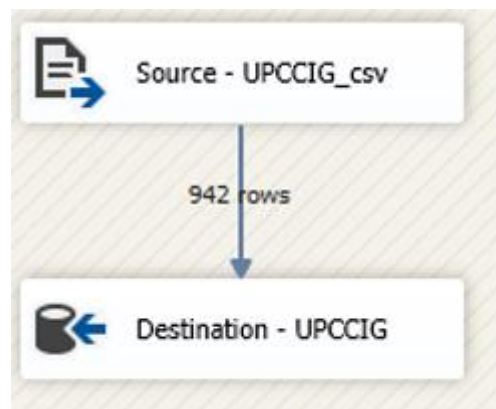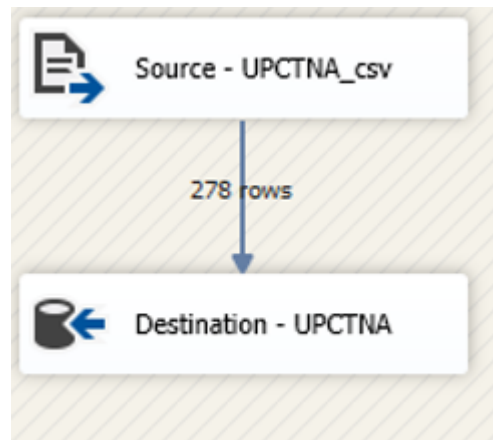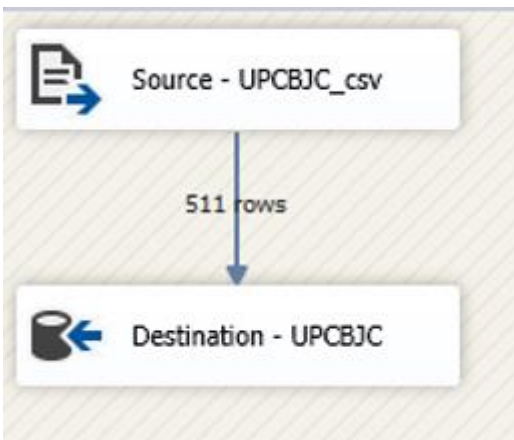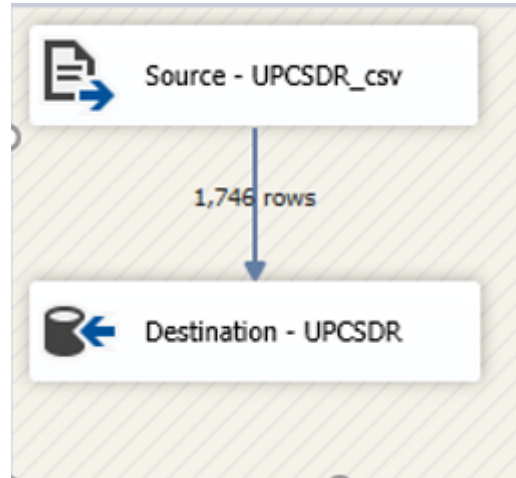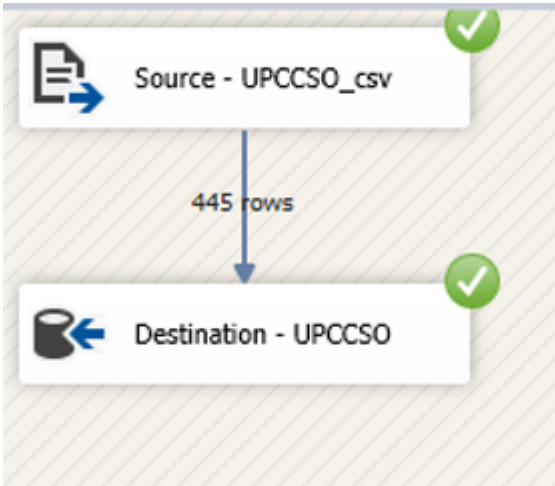

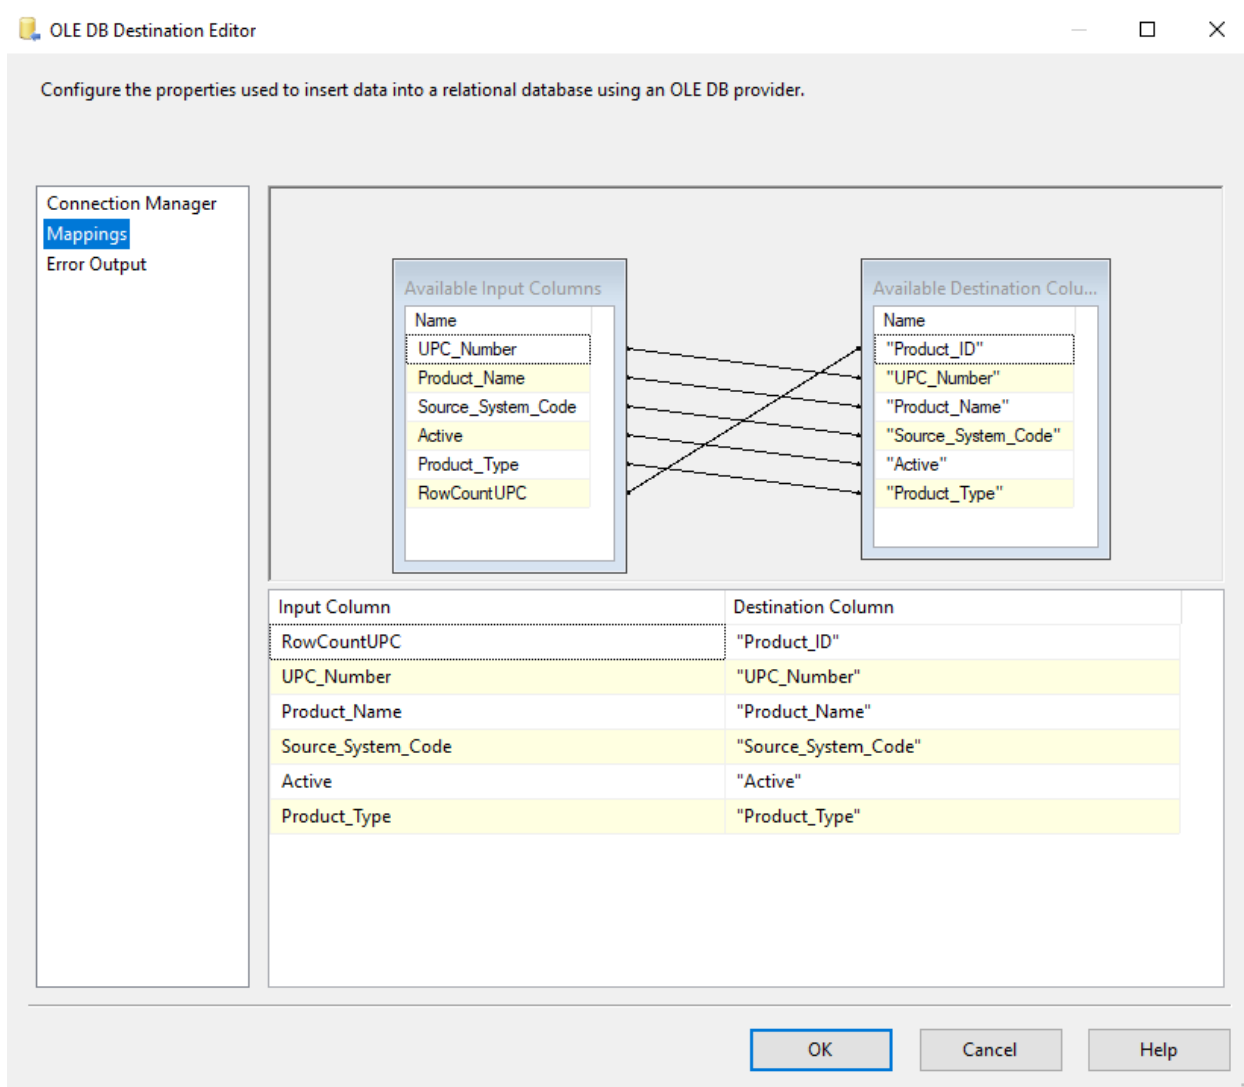


Figure 21 Product Dimension Mapping

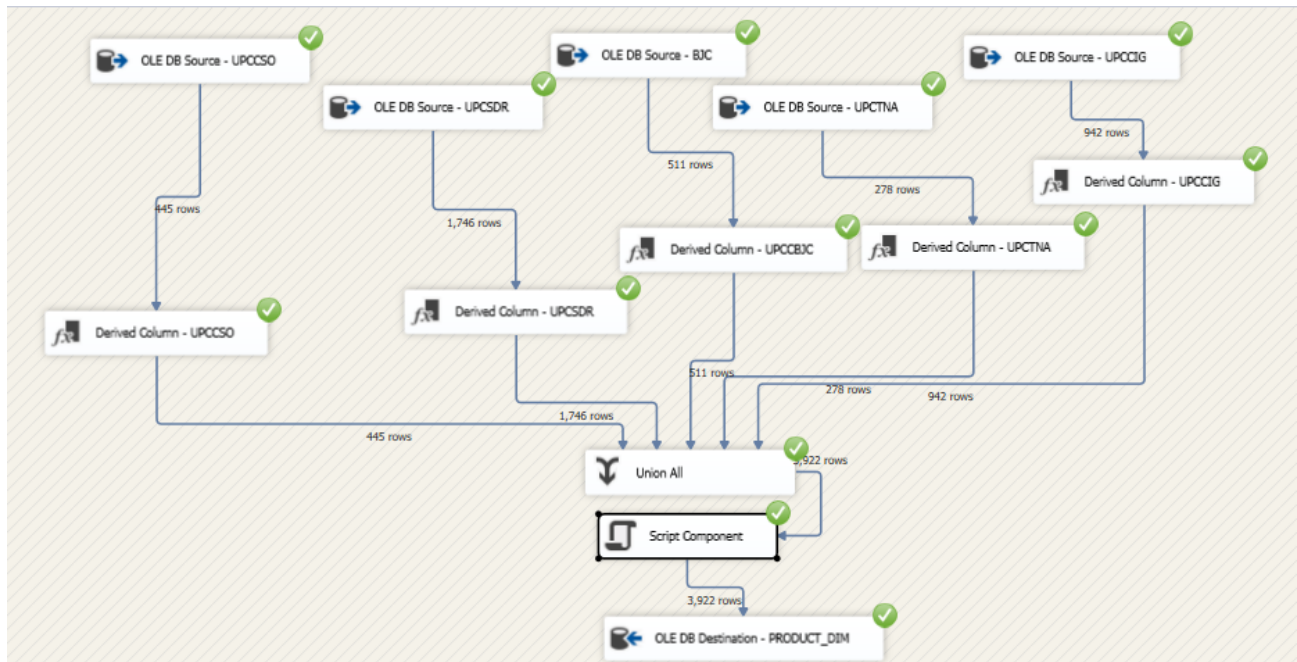


Figure 22 Product Dimension Transformation

Snapshot of Data in Product Dimension


select * from PRODUCT_DIM;

	"Product_ID"	"UPC_Number"	"Product_Name"	"Product_Type"	"Source_System_Code"	"Active"
1	1	1060831115	"ENDURO GRAPEFRUIT TA"	Bottled Juice	Bottled Juice	1
2	2	1060831116	"ENDURO ORNG APRIC SI"	Bottled Juice	Bottled Juice	1
3	3	1060831117	"ENDURO CRANBERRY SIN"	Bottled Juice	Bottled Juice	1
4	4	1060831118	"ENDURO LEMON ORNG SI"	Bottled Juice	Bottled Juice	1
5	5	1060831119	"ENDURO POLYNESIAN PU"	Bottled Juice	Bottled Juice	1
6	6	1060831120	"ENDURO CONCORD GRAPE"	Bottled Juice	Bottled Juice	1
7	7	1060840005	"ENDURO GRAPEFRUIT/TA"	Bottled Juice	Bottled Juice	1
8	8	1060840006	"ENDURO ORANGE/APRICO"	Bottled Juice	Bottled Juice	1
9	9	1060840007	"ENDURO CRANBERRY/PAS"	Bottled Juice	Bottled Juice	1
10	10	1060840008	"ENDURO LEMON/ORANGE"	Bottled Juice	Bottled Juice	1
11	11	1060850005	"ENDURO GRPFRT/TANG P"	Bottled Juice	Bottled Juice	1

Figure 23 Product Dimension Table

5.3.4 Category Dimension Table Creation

ETL of CCOUNT files

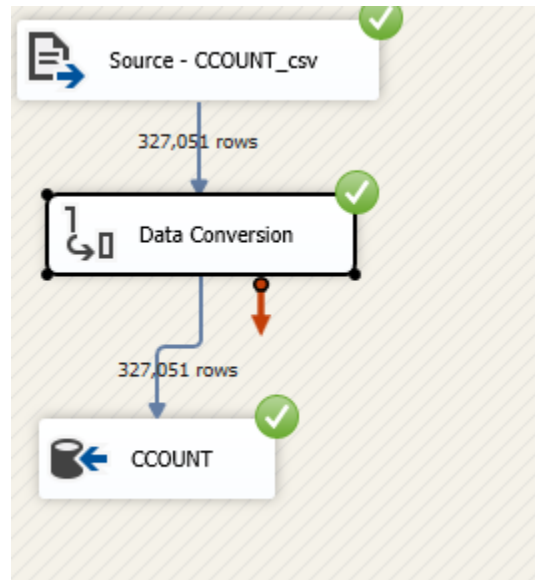

Snapshot of CCOUNT

SELECT * FROM CCOUNT;

100 %

Results Messages

	"STORE"	"DATE"	"FROZEN"	"MEAT"	"FISH"	"DAIRY"	"WEEK"
1...	9	"9311..."	2530.5900	3378....	1000...	3446.6...	217
1...	9	"9311..."	3382.2900	4647....	1202...	4452.7...	217
1...	9	"9311..."	2621.7000	3171....	767....	3323.0...	217
1...	9	"9311..."	1680.6600	1743....	503....	2384.7...	217
1...	9	"9311..."	2407.0200	3496....	677....	3343.9...	218
1...	9	"9311..."	2823.4900	4144....	795....	3786.3...	218
1...	9	"9311..."	3208.1700	4688....	898....	4409.2...	218
1...	9	"9311..."	2789.1400	3023....	366....	3497.3...	218
1...	9	"9311..."	2157.3100	2572....	532....	2991.0...	218
1...	9	"9311..."	1915.1400	2590....	396....	2731.5...	218
1...	9	"9311..."	1867.2500	1886....	471....	2487.1...	218
1...	9	"9311..."	2557.6800	4101....	524....	3418.4...	219

Figure 24 CCount File Snapshot

Cleaning CCOUNT files using SQL Queries

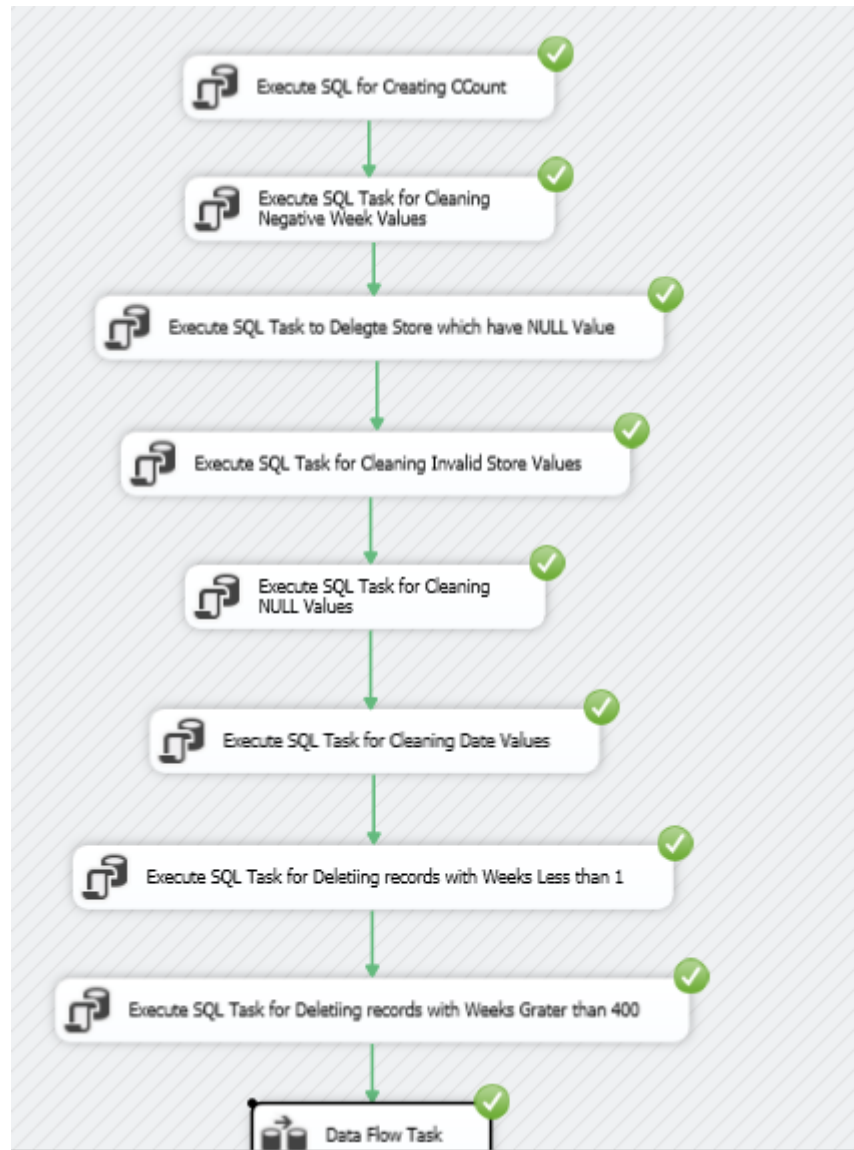


Figure 25 CCount-File Cleaning

Transforming CCount to Category Dimension

SQL Queries used

SQL for creating CCOUNT

```
SELECT  
["STORE"], ["DATE"], ["DAIRY"], ["FROZEN"], ["MEAT"], ["FISH"], ["WEEK"]  
INTO CCOUNT_Clean_STG  
FROM CCOUNT
```

SQL for cleaning negative week Values

```
DELETE FROM CCOUNT_Clean_STG WHERE (["WEEK"] < 0)
```


Delete stores which have NULL Value

DELETE FROM CCOUNT_Clean_STG WHERE ["STORE"] IS NULL

SQL Task for cleaning Invalid Store Values

DELETE FROM CCOUNT_Clean_STG WHERE ["STORE"] NOT IN (SELECT [Store_Number] FROM Store_DIM_TEMP)

SQL Task for Cleaning NULL Values

DELETE FROM CCOUNT_Clean_STG WHERE (["STORE"] IS NULL) OR (["DATE"] IS NULL) OR (["DAIRY"] IS NULL) OR (["FROZEN"] IS NULL) OR (["MEAT"] IS NULL) OR (["FISH"] IS NULL) OR (["WEEK"] IS NULL)

SQL Task for Cleaning Date Values

UPDATE CCOUNT_Clean_STG SET ["DATE"] = REPLACE(["DATE"], "", '')

SQL Task for Deleting records with Weeks Less than 1

DELETE FROM CCOUNT_Clean_STG WHERE ["WEEK"] < 1

SQL Task for Deleting records with Weeks Greater than 400

*DELETE FROM CCOUNT_Clean_STG
WHERE ["WEEK"] > 400*

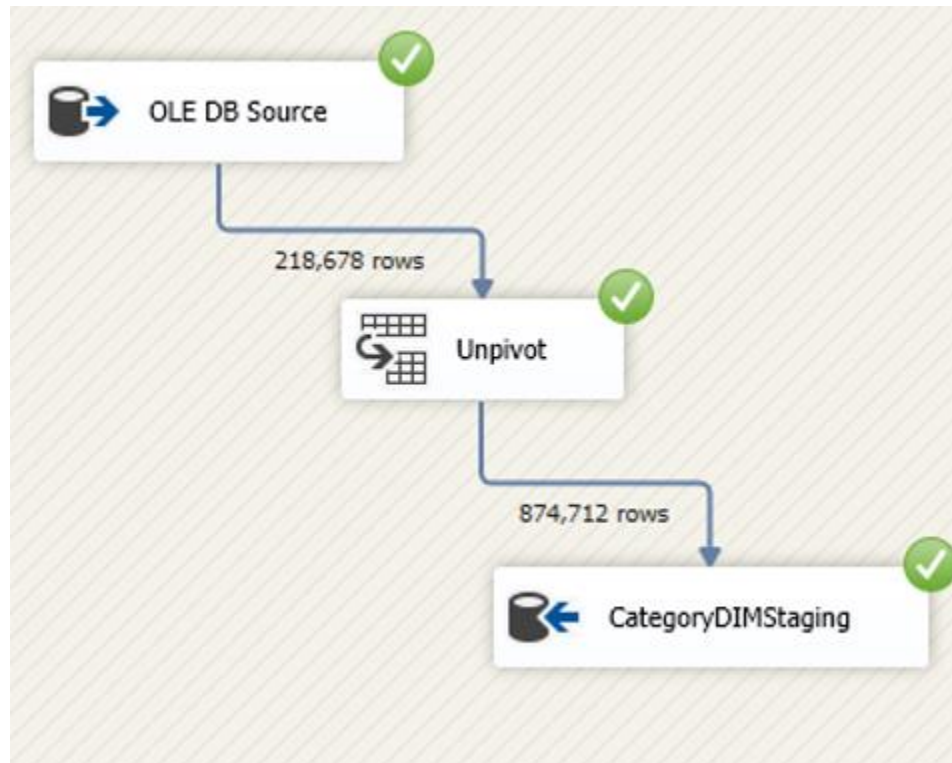


Figure 26 Category Dimension Transformation

5.3.5 CategorySales Fact Table Creation

Store Lookup, Time Lookup, Category Lookup are used in creating CategorySales fact table.

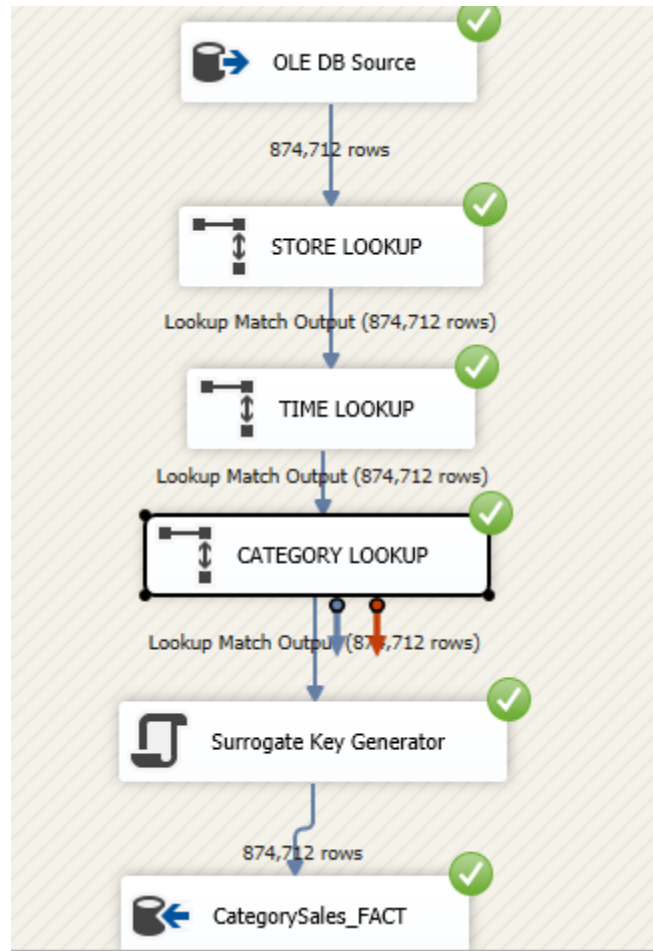


Figure 27 ETL of CategorySales Fact Table

Snapshot of data in CategorySales FACT

```
select * from CategorySales_FACT;
```

	CATEGORYSALES_ID	Store_ID	Time_ID	Category_ID	Sales
1	239401	72	121	1	4438.8700
2	239402	72	121	4	527.8900
3	239403	72	121	2	3848.8500
4	239404	72	121	3	4647.0500
5	239405	72	122	1	4955.7200
6	239406	72	122	4	658.7000
7	239407	72	122	2	3686.2700
8	239408	72	122	3	5103.5200
9	239409	72	122	1	5439.8300
10	239410	72	122	4	910.3800
11	239411	72	122	2	4371.3500
12	239412	72	122	3	5090.1000

Figure 28 CategorySales Fact Table Snapshot

5.3.6 ProductSales Fact Table Creation

Store Lookup, Time Lookup, Category Lookup and Product Lookup_are used in creating ProductSales fact table.


Time Lookup

Lookup Column	Lookup Operation	Output Alias
Time_ID	<add as new column>	Time_ID

Product Lookup

Lookup Column	Lookup Operation	Output Alias
"Product_ID"	<add as new column>	Product_ID

Store Lookup

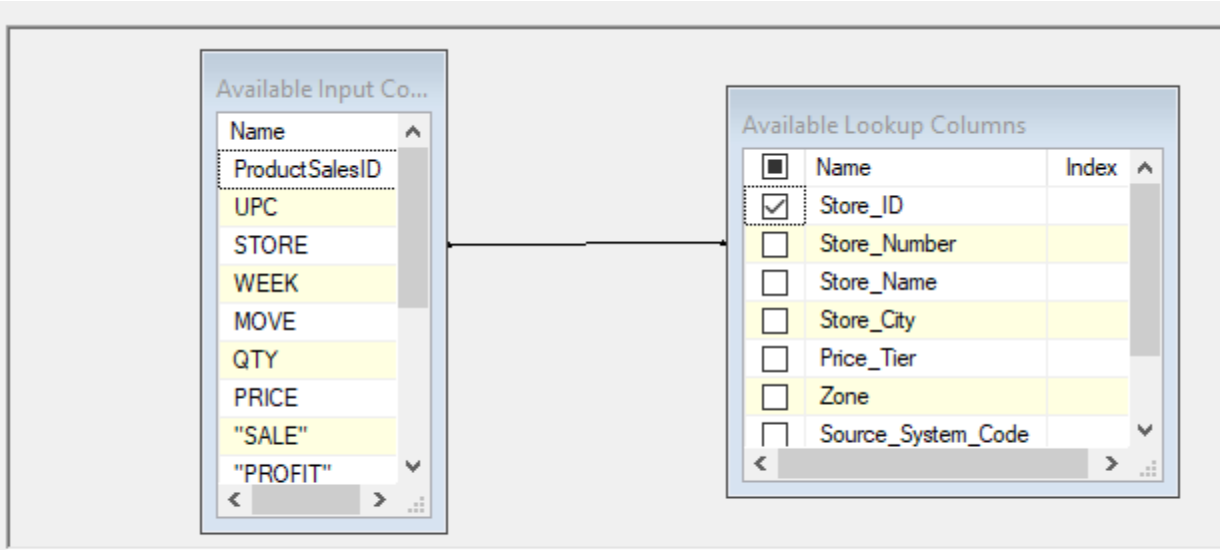

Lookup Column	Lookup Operation	Output Alias
Store_ID	<add as new column>	Store_ID

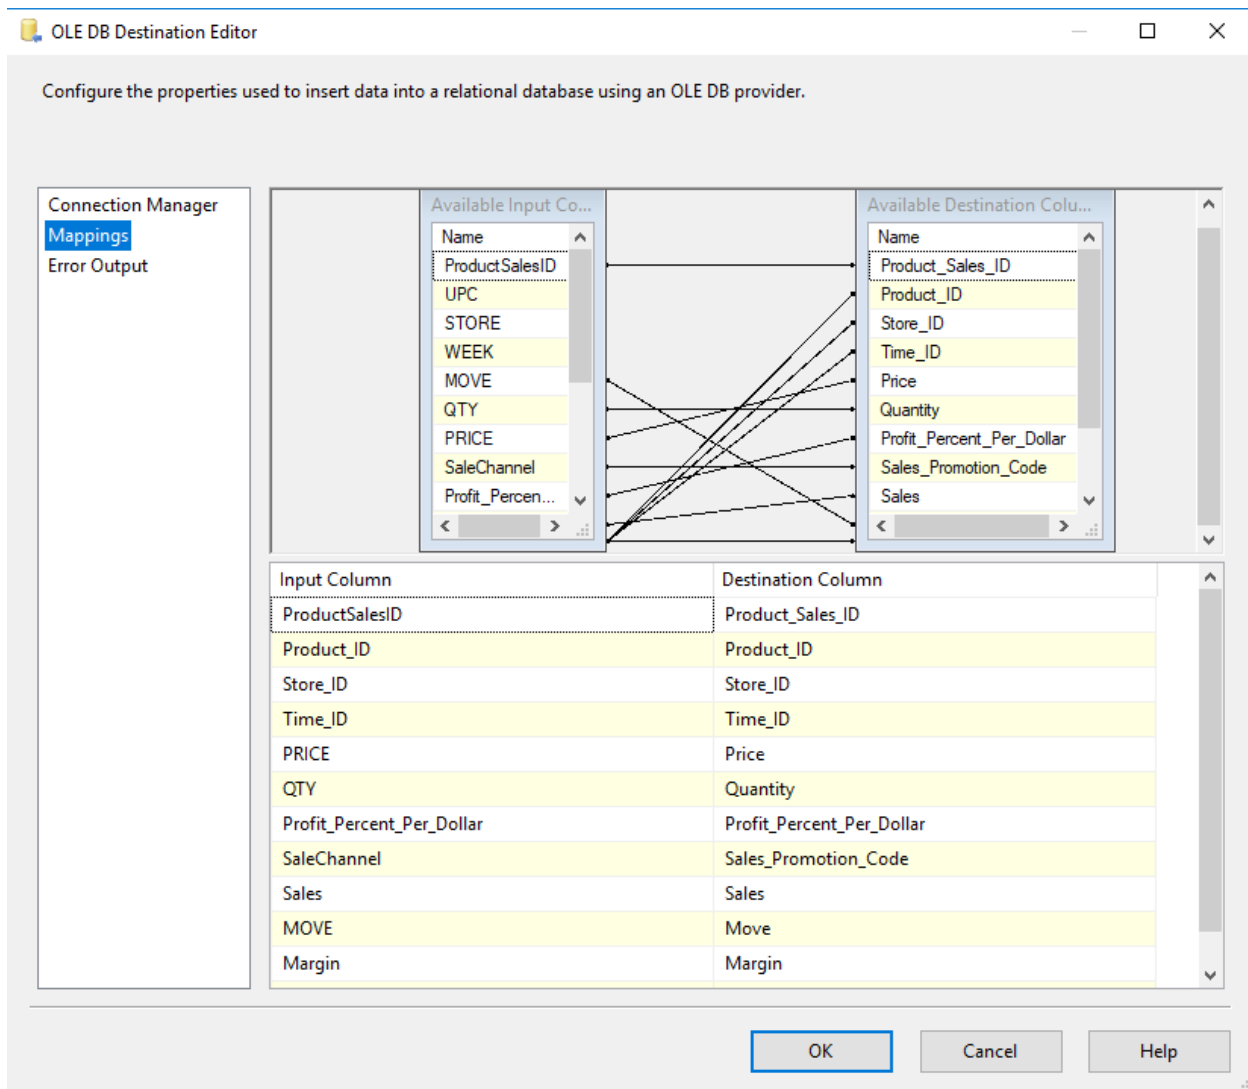


Figure 29 ProductSales Fact Table Mapping

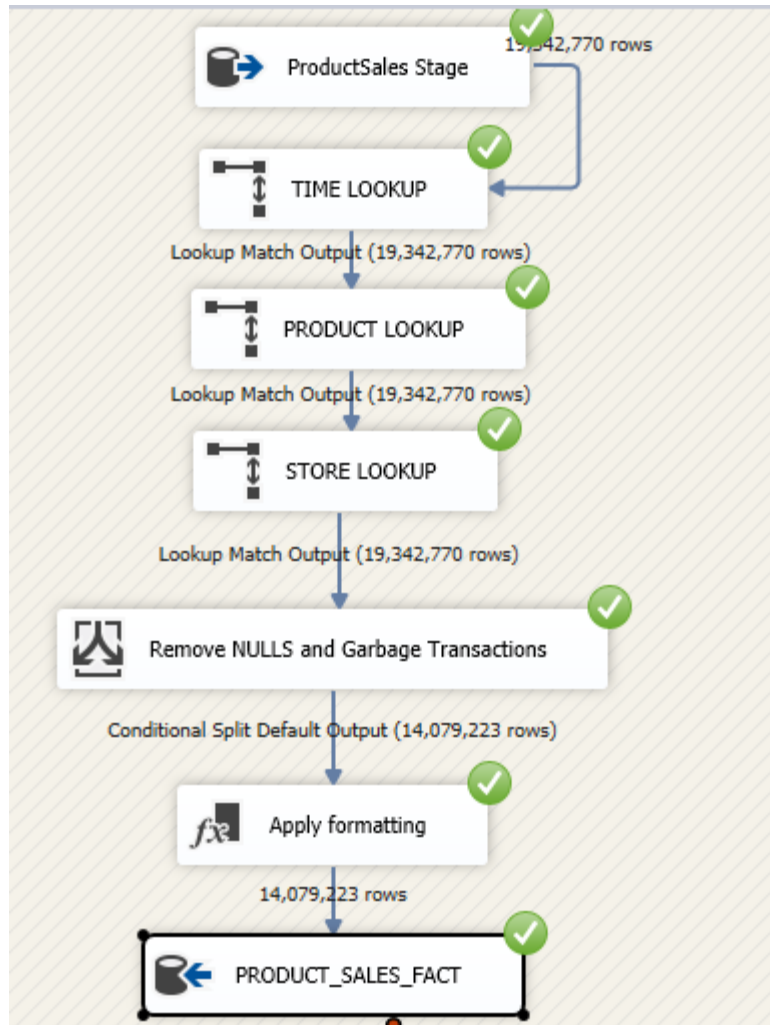


Figure 30 ETL of ProductSales Fact Table Mapping

Snapshot of data in ProductSales FACT


SELECT * FROM PRODUCT_SALES_FACT;

	Product_Sales_ID	Product_ID	Store_ID	Time_ID	Price	Quantity	Profit_Percent_Per_Dollar	Sales_Promotion_Code	Sales	Move	Margin	Gross Margin
1	53	510	31	1	1.42	1	13		9.940000	7	1.302140	1.302140
2	55	510	31	3	1.42	1	13	B	8.520000	6	1.116120	1.116120
3	56	510	31	4	1.42	1	13		7.100000	5	0.930100	0.930100
4	57	510	31	5	1.42	1	13		9.940000	7	1.302140	1.302140
5	58	510	31	6	1.42	1	13	B	2.840000	2	0.372040	0.372040
6	59	510	31	7	1.42	1	13		2.840000	2	0.372040	0.372040
7	60	510	31	8	1.49	1	17		1.490000	1	0.255982	0.255982
8	61	510	31	9	1.42	1	13	B	8.520000	6	1.116120	1.116120
9	62	510	31	10	1.42	1	13		11.360000	8	1.488160	1.488160
10	63	510	31	11	1.49	1	16		1.490000	1	0.234973	0.234973
11	64	510	31	12	1.42	1	12	B	1.490000	2	0.195012	0.195012

Figure 31 ProductSales Fact Table Snapshot

Transforming CCount to Category Dimension

Snapshot of Category Dimension

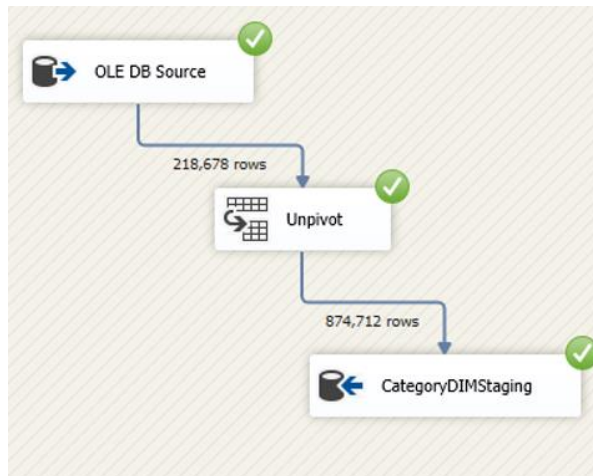

```
Select * from CATEGORY_DIM;
```

	Category_ID	Category_Name	Source_System_Code	Active
1	1	DAIRY	Category	1
2	2	FROZEN	Category	1
3	3	MEAT	Category	1
4	4	FISH	Category	1

5.3.7 Category Fact Table Creation

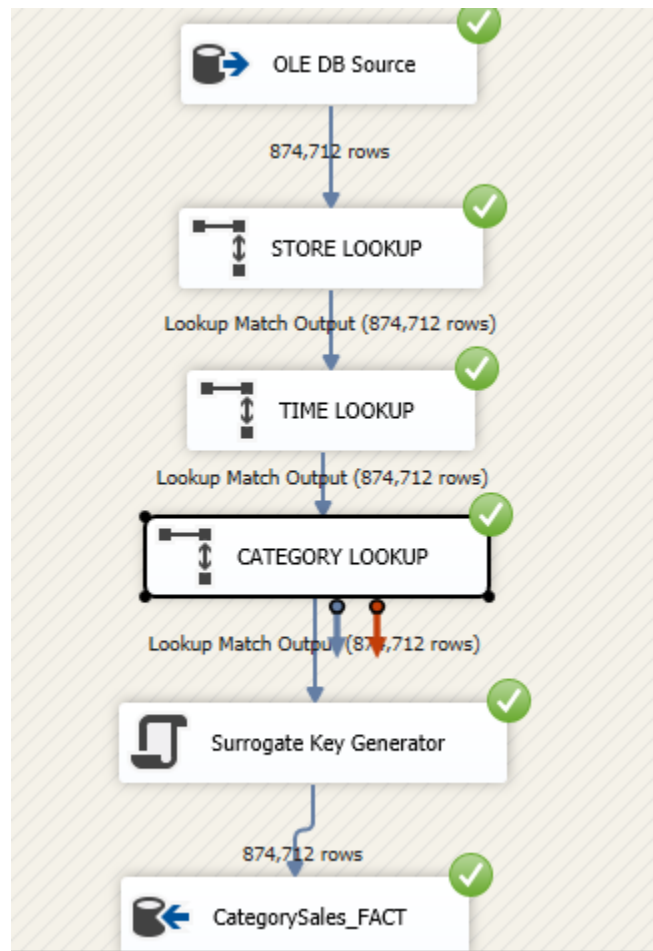


Figure 32 ETL of CategorySales Fact Table Mapping

Store Lookup

Available Input Col...

Name
"STORE"
"DATE"
"WEEK"
Category_Name

Available Lookup Columns

<input checked="" type="checkbox"/>	Name	Index
<input checked="" type="checkbox"/>	Store_ID	
<input type="checkbox"/>	Store_Number	
<input type="checkbox"/>	Store_Name	
<input type="checkbox"/>	Store_City	
<input type="checkbox"/>	Price_Tier	
<input type="checkbox"/>	Zone	
<input type="checkbox"/>	Source_System_Code	

Lookup Column	Lookup Operation	Output Alias
Store_ID	<add as new column>	Store_ID

Time Lookup

Available Input Col...


Name
"STORE"
"DATE"
"WEEK"
Category_Name
Sales

Available Lookup Columns

<input checked="" type="checkbox"/>	Name	Index
<input checked="" type="checkbox"/>	Time_ID	
<input type="checkbox"/>	Year	
<input type="checkbox"/>	Month	
<input type="checkbox"/>	Week_Number	
<input type="checkbox"/>	Start_Date	
<input type="checkbox"/>	End_Date	
<input type="checkbox"/>	Special Events	

Lookup Column	Lookup Operation	Output Alias
Time_ID	<add as new column>	Time_ID

Category Lookup

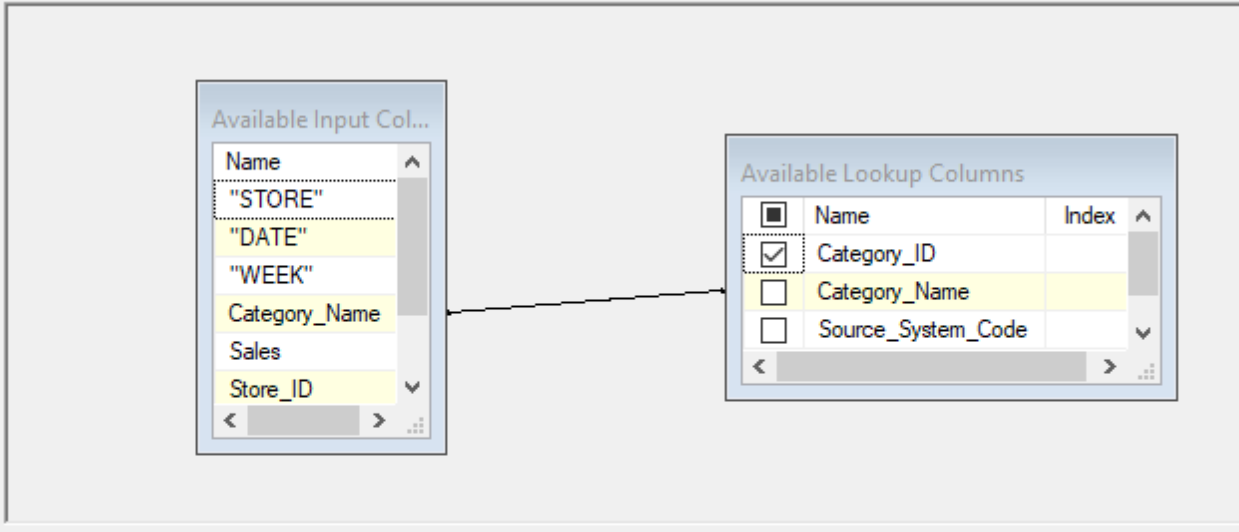

Lookup Column	Lookup Operation	Output Alias
Category_ID	<add as new column>	Category_ID

Snapshot of data in CategorySales FACT

```
select * from CategorySales_FACT;
```

	CATEGORYSALES_ID	Store_ID	Time_ID	Category_ID	Sales
1	239401	72	121	1	4438.8700
2	239402	72	121	4	527.8900
3	239403	72	121	2	3848.8500
4	239404	72	121	3	4647.0500
5	239405	72	122	1	4955.7200
6	239406	72	122	4	658.7000
7	239407	72	122	2	3686.2700
8	239408	72	122	3	5103.5200
9	239409	72	122	1	5439.8300
10	239410	72	122	4	910.3800
11	239411	72	122	2	4371.3500
12	239412	72	122	3	5000.1000

Figure 33 CategorySales Fact Table Snapshot

5.3.7 Table Structure for Data Marts

Product Sales Data Mart Structure

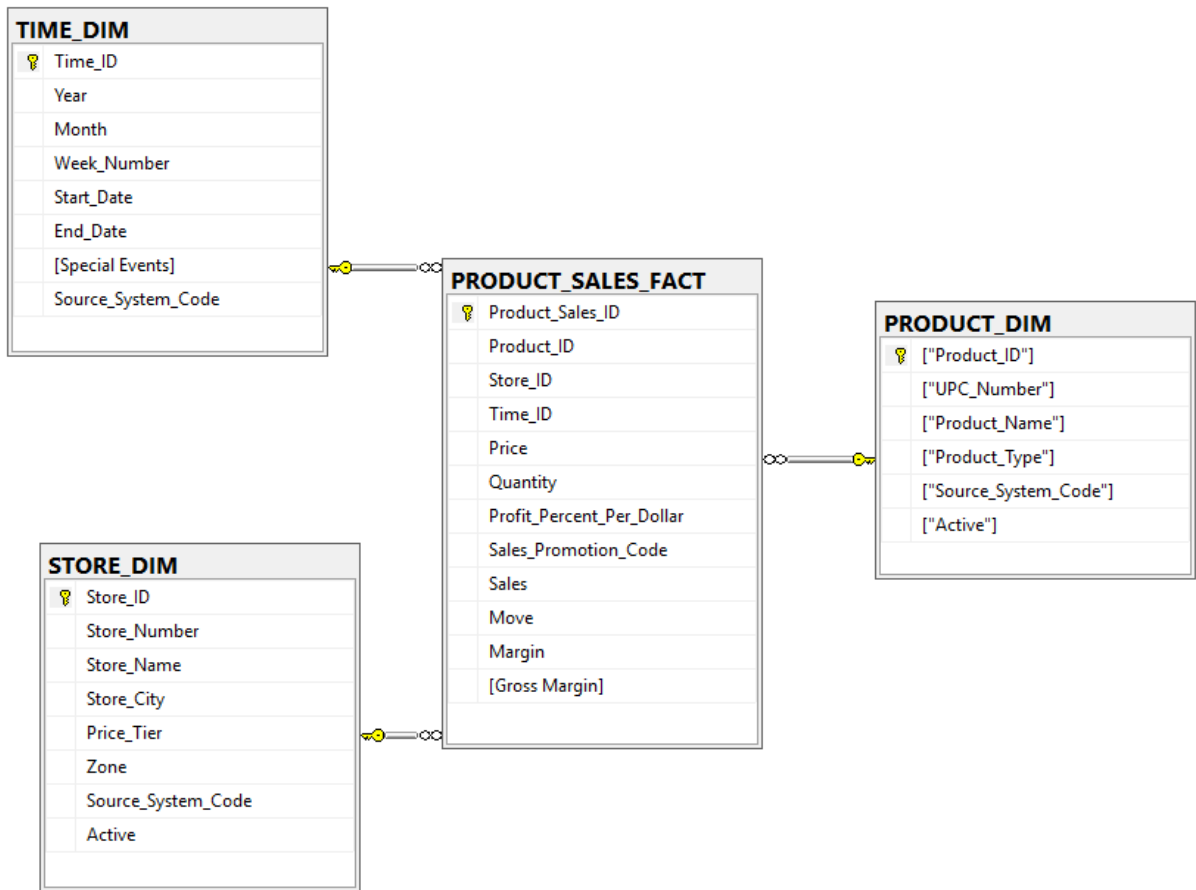


Figure 34 Table Structure for Product Sales Data Mart

5.2.3 Table Structure for Category Sales Data Mart

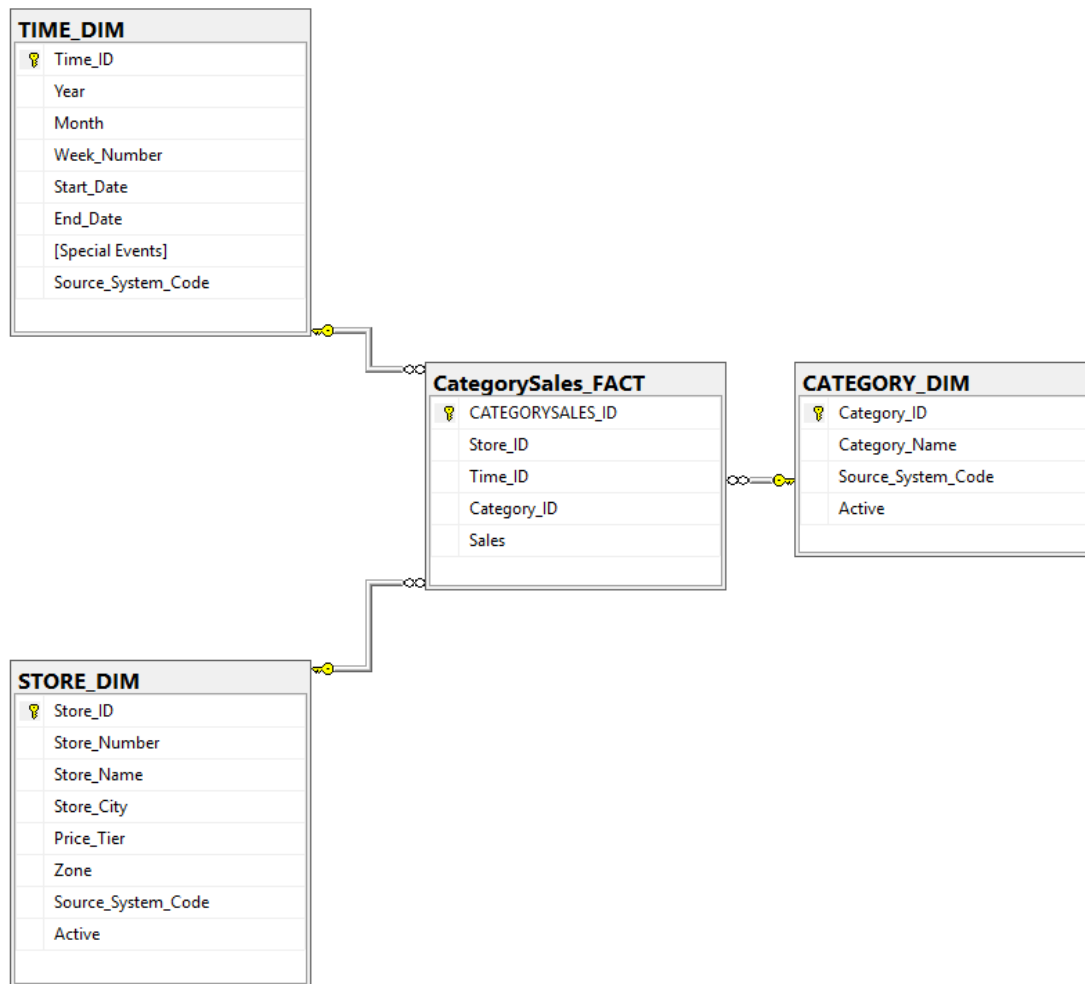


Figure 35 Table Structure for Category Sales Data Mart

5.3 Snapshot of Data Warehouse Area

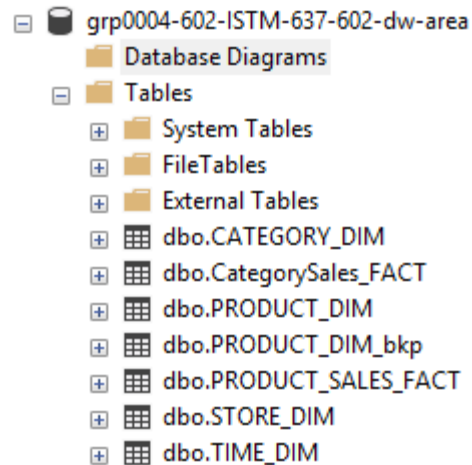


Figure 36 Snapshot for Data Warehouse Area

5.4 SQL Queries for Staging and Data Warehouse area

5.4.1 Staging

WEEK_DECODE

```
CREATE TABLE [dbo].[WEEK_DECODE](
    [Week] [float] NULL,
    [Start] [datetime] NULL,
    [End] [datetime] NULL,
    [Special Events] [nvarchar](255) NULL
)
```

Store

```
CREATE TABLE [dbo].[Store](
    [Store] [numeric](18, 0) NULL,
    [City] [nvarchar](255) NULL,
    [Price Tier] [nvarchar](255) NULL,
    [Zone] [numeric](18, 0) NULL,
    [Zip Code] [numeric](5, 0) NULL,
    [Address] [nvarchar](255) NULL
)
```

CategoryDIMStaging

```
CREATE TABLE [dbo].[CategoryDIMStaging](
    [Category_Name] [nvarchar](255) NULL,
    [Sales] [numeric](18, 4) NULL,
```

```

["STORE"] [numeric](18, 0) NULL,
["DATE"] [varchar](50) NULL,
["WEEK"] [numeric](18, 0) NULL
)

```

CCOUNT

```

CREATE TABLE [dbo].[CCOUNT](
    ["STORE"] [numeric](18, 0) NOT NULL,
    ["DATE"] [varchar](50) NULL,
    ["FROZEN"] [numeric](18, 4) NULL,
    ["MEAT"] [numeric](18, 4) NULL,
    ["FISH"] [numeric](18, 4) NULL,
    ["DAIRY"] [numeric](18, 4) NULL,
    ["WEEK"] [numeric](18, 0) NULL
)

```

CCOUNT Clean STG

```

CREATE TABLE [dbo].[CCOUNT_Clean_STG](
    ["STORE"] [numeric](18, 0) NOT NULL,
    ["DATE"] [varchar](50) NULL,
    ["DAIRY"] [numeric](18, 4) NULL,
    ["FROZEN"] [numeric](18, 4) NULL,
    ["MEAT"] [numeric](18, 4) NULL,
    ["FISH"] [numeric](18, 4) NULL,
    ["WEEK"] [numeric](18, 0) NULL
)

```

Movement WBJC

```

CREATE TABLE [dbo].[Movement_WBJC](
    ["STORE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["WEEK"] [varchar](50) NULL,
    ["MOVE"] [varchar](50) NULL,
    ["QTY"] [varchar](50) NULL,
    ["PRICE"] [varchar](50) NULL,
    ["SALE"] [varchar](50) NULL,
    ["PROFIT"] [varchar](50) NULL,
    ["OK"] [varchar](50) NULL
)

```

Movement WCIG

```
CREATE TABLE [dbo].[Movement_WCIG](  
    ["STORE"] [varchar](50) NULL,  
    ["UPC"] [varchar](50) NULL,  
    ["WEEK"] [varchar](50) NULL,  
    ["MOVE"] [varchar](50) NULL,  
    ["QTY"] [varchar](50) NULL,  
    ["PRICE"] [varchar](50) NULL,  
    ["SALE"] [varchar](50) NULL,  
    ["PROFIT"] [varchar](50) NULL,  
    ["OK"] [varchar](50) NULL  
)
```

Movement WCSO

```
CREATE TABLE [dbo].[Movement_WCSO](  
    ["STORE"] [varchar](50) NULL,  
    ["UPC"] [varchar](50) NULL,  
    ["WEEK"] [varchar](50) NULL,  
    ["MOVE"] [varchar](50) NULL,  
    ["QTY"] [varchar](50) NULL,  
    ["PRICE"] [varchar](50) NULL,  
    ["SALE"] [varchar](50) NULL,  
    ["PROFIT"] [varchar](50) NULL,  
    ["OK"] [varchar](50) NULL  
)
```

Movement WSDR

```
CREATE TABLE [dbo].[Movement_WSDR](  
    [STORE] [varchar](50) NULL,  
    [UPC] [varchar](50) NULL,  
    [WEEK] [varchar](50) NULL,  
    [MOVE] [varchar](50) NULL,  
    [QTY] [varchar](50) NULL,  
    [PRICE] [varchar](50) NULL,  
    [SALE] [varchar](50) NULL,  
    [PROFIT] [varchar](50) NULL,  
    [OK] [varchar](50) NULL  
)
```

Movement WTNA

```
CREATE TABLE [dbo].[Movement_WTNA](
    ["STORE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["WEEK"] [varchar](50) NULL,
    ["MOVE"] [varchar](50) NULL,
    ["QTY"] [varchar](50) NULL,
    ["PRICE"] [varchar](50) NULL,
    ["SALE"] [varchar](50) NULL,
    ["PROFIT"] [varchar](50) NULL,
    ["OK"] [varchar](50) NULL
)
```

ProductSales STG

```
CREATE TABLE [dbo].[ProductSales_STG](
    [ProductSalesID] [int] NULL,
    [UPC] [numeric](18, 0) NULL,
    [STORE] [numeric](18, 0) NULL,
    [WEEK] [numeric](18, 0) NULL,
    [MOVE] [numeric](18, 0) NULL,
    [QTY] [numeric](18, 0) NULL,
    [PRICE] [float] NULL,
    ["SALE"] [varchar](50) NULL,
    ["PROFIT"] [varchar](50) NULL,
    [Sales] [numeric](38, 6) NULL,
    [Margin] [numeric](38, 6) NULL,
    [Gross Margin] [numeric](38, 6) NULL,
    [Product_Type] [nvarchar](20) NULL
)
```

Store

```
CREATE TABLE [dbo].[Store](
    [Store] [numeric](18, 0) NULL,
    [City] [nvarchar](255) NULL,
    [Price Tier] [nvarchar](255) NULL,
    [Zone] [numeric](18, 0) NULL,
    [Zip Code] [numeric](5, 0) NULL,
    [Address] [nvarchar](255) NULL
)
```

Store DIM TEMP

```
CREATE TABLE [dbo].[Store_DIM_TEMP](
```



```

[Store_ID] [int] NULL,
[Store_Number] [numeric](18, 0) NULL,
[Store_Name] [varchar](50) NULL,
[Store_City] [nvarchar](255) NULL,
[Price_Tier] [nvarchar](255) NULL,
[Zone] [numeric](18, 0) NULL,
[Source_System_Code] [nvarchar](40) NULL,
[Active] [int] NULL
)

```

UPCBJC

```

CREATE TABLE [dbo].[UPCBJC](
    ["COM_CODE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["DESCRIP"] [varchar](50) NULL,
    ["SIZE"] [varchar](50) NULL,
    ["CASE"] [varchar](50) NULL,
    ["NITEM"] [varchar](50) NULL
)

```

UPCSDR

```

CREATE TABLE [dbo].[UPCSDR](
    ["COM_CODE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["DESCRIP"] [varchar](50) NULL,
    ["SIZE"] [varchar](50) NULL,
    ["CASE"] [varchar](50) NULL,
    ["NITEM"] [varchar](50) NULL
)

```

UPCCIG

```

CREATE TABLE [dbo].[UPCCIG](
    ["COM_CODE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["DESCRIP"] [varchar](50) NULL,
    ["SIZE"] [varchar](50) NULL,
    ["CASE"] [varchar](50) NULL,
    ["NITEM"] [varchar](50) NULL
)

```

UPCCSO

```
CREATE TABLE [dbo].[UPCCSO](
    ["COM_CODE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["DESCRIP"] [varchar](50) NULL,
    ["SIZE"] [varchar](50) NULL,
    ["CASE"] [varchar](50) NULL,
    ["NITEM"] [varchar](50) NULL
)
```

UPCTNA

```
CREATE TABLE [dbo].[UPCTNA](
    ["COM_CODE"] [varchar](50) NULL,
    ["UPC"] [varchar](50) NULL,
    ["DESCRIP"] [varchar](50) NULL,
    ["SIZE"] [varchar](50) NULL,
    ["CASE"] [varchar](50) NULL,
    ["NITEM"] [varchar](50) NULL
)
```

DATAWAREHOUSE TABLES

TIME_DIM

```
CREATE TABLE [dbo].[TIME_DIM](
    [Time_ID] [int] NOT NULL,
    [Year] [int] NULL,
    [Month] [int] NULL,
    [Week_Number] [numeric](18, 0) NOT NULL,
    [Start_Date] [date] NULL,
    [End_Date] [date] NULL,
    [Special Events] [nvarchar](255) NULL,
    [Source_System_Code] [nvarchar](20) NULL,
    PRIMARY KEY CLUSTERED
(
    [Time_ID] ASC
)
)
```

STORE_DIM

```
CREATE TABLE [dbo].[STORE_DIM](
    [Store_ID] [int] NOT NULL,
```

```

[Store_Number] [numeric](18, 0) NOT NULL,
[Store_Name] [varchar](50) NULL,
[Store_City] [nvarchar](255) NULL,
[Price_Tier] [nvarchar](255) NULL,
[Zone] [numeric](18, 0) NULL,
[Source_System_Code] [nvarchar](40) NULL,
[Active] [int] NOT NULL,
PRIMARY KEY CLUSTERED
(
    [Store_ID] ASC
))

```

PRODUCT_DIM

```

CREATE TABLE [dbo].[PRODUCT_DIM](
    ["Product_ID"] [int] NOT NULL,
    ["UPC_Number"] [numeric](18, 0) NULL,
    ["Product_Name"] [varchar](200) NULL,
    ["Product_Type"] [nvarchar](50) NULL,
    ["Source_System_Code"] [nvarchar](40) NULL,
    ["Active"] [int] NULL,
PRIMARY KEY CLUSTERED
(
    ["Product_ID"] ASC
)
)

```

CATEGORY_DIM

```

CREATE TABLE [dbo].[PRODUCT_DIM](
    ["Product_ID"] [int] NOT NULL,
    ["UPC_Number"] [numeric](18, 0) NULL,
    ["Product_Name"] [varchar](200) NULL,
    ["Product_Type"] [nvarchar](50) NULL,
    ["Source_System_Code"] [nvarchar](40) NULL,
    ["Active"] [int] NULL,
PRIMARY KEY CLUSTERED
(
    ["Product_ID"] ASC
)
)

```

PRODUCT_SALES_FACT

```

CREATE TABLE [dbo].[PRODUCT_SALES_FACT](
    [Product_Sales_ID] [int] NOT NULL,
    [Product_ID] [int] NOT NULL,
    [Store_ID] [int] NOT NULL,
    [Time_ID] [int] NOT NULL,
    [Price] [float] NULL,
    [Quantity] [numeric](18, 0) NULL,
    [Profit_Percent_Per_Dollar] [int] NULL,
    [Sales_Promotion_Code] [varchar](50) NULL,
    [Sales] [numeric](38, 6) NULL,
    [Move] [numeric](18, 0) NULL,
    [Margin] [numeric](38, 6) NULL,
    [Gross Margin] [numeric](38, 6) NULL,
    CONSTRAINT [PK_PRODUCT_SALES_FACT] PRIMARY KEY CLUSTERED
(
    [Product_Sales_ID] ASC
),
CONSTRAINT [FK_PRODUCT_SALES_FACT_1] FOREIGN KEY([Product_ID])
REFERENCES [dbo].[PRODUCT_DIM] ([Product_ID])
ON UPDATE CASCADE
ON DELETE CASCADE,
CONSTRAINT [FK_PRODUCT_SALES_FACT_2] FOREIGN KEY([Store_ID])
REFERENCES [dbo].[STORE_DIM] ([Store_ID])
ON UPDATE CASCADE
ON DELETE CASCADE,
ALTER TABLE [dbo].[PRODUCT_SALES_FACT] WITH CHECK ADD CONSTRAINT
[FK_PRODUCT_SALES_FACT_3] FOREIGN KEY([Time_ID])
REFERENCES [dbo].[TIME_DIM] ([Time_ID])
ON UPDATE CASCADE
ON DELETE CASCADE
)

```

CATEGORYSALES FACT

```

CREATE TABLE [dbo].[CategorySales_FACT](
    [CATEGORYSALES_ID] [int] NOT NULL PRIMARY KEY,
    [Store_ID] [int] NOT NULL FOREIGN KEY REFERENCES [STORE_DIM]([Store_ID]),
    [Time_ID] [int] NOT NULL FOREIGN KEY REFERENCES [TIME_DIM]([Time_ID]),
    [Category_ID] [numeric](18, 0) NOT NULL FOREIGN KEY REFERENCES
[CATEGORY_DIM]([Category_ID]),
    [Sales] [numeric](18, 4) NULL
);

```

6. Business Intelligence (BI) Reports

6.1 Reporting Plan

Business intelligence enables user to store data that represents some business processes, to organize the data in a useful manner, and to present the data as meaningful information to solve business questions. To deliver satisfactory BI reports, good planning is a key part.

In our report plan, three parts will be addressed. According to each specific business question, the target reports are specified, and the reasons have been given. Then, based on the report type, all the mappings from the independent data marts to the report attributes have been determined. Besides, all report templates are well described.

SSRS, SSAS, SSAS + SSRS and ReportBuilder3.0 are used in the report building as described below:

Table 20. Report Tool for Question Number

Reporting Tool	Question Number
SSRS	BQ -1, BQ - 2
SSAS	BQ -5
SSAS+SSRS	BQ -3
Report Builder 3.0	BQ-4

The details about mapping from data marts to designed table of each business question are listed below.

BQ-1: What is the trend of weekly change in sales of Frozen Food, Meat, Fish and Dairy till current week in 1997 for store 2?

Report generate from SSRS

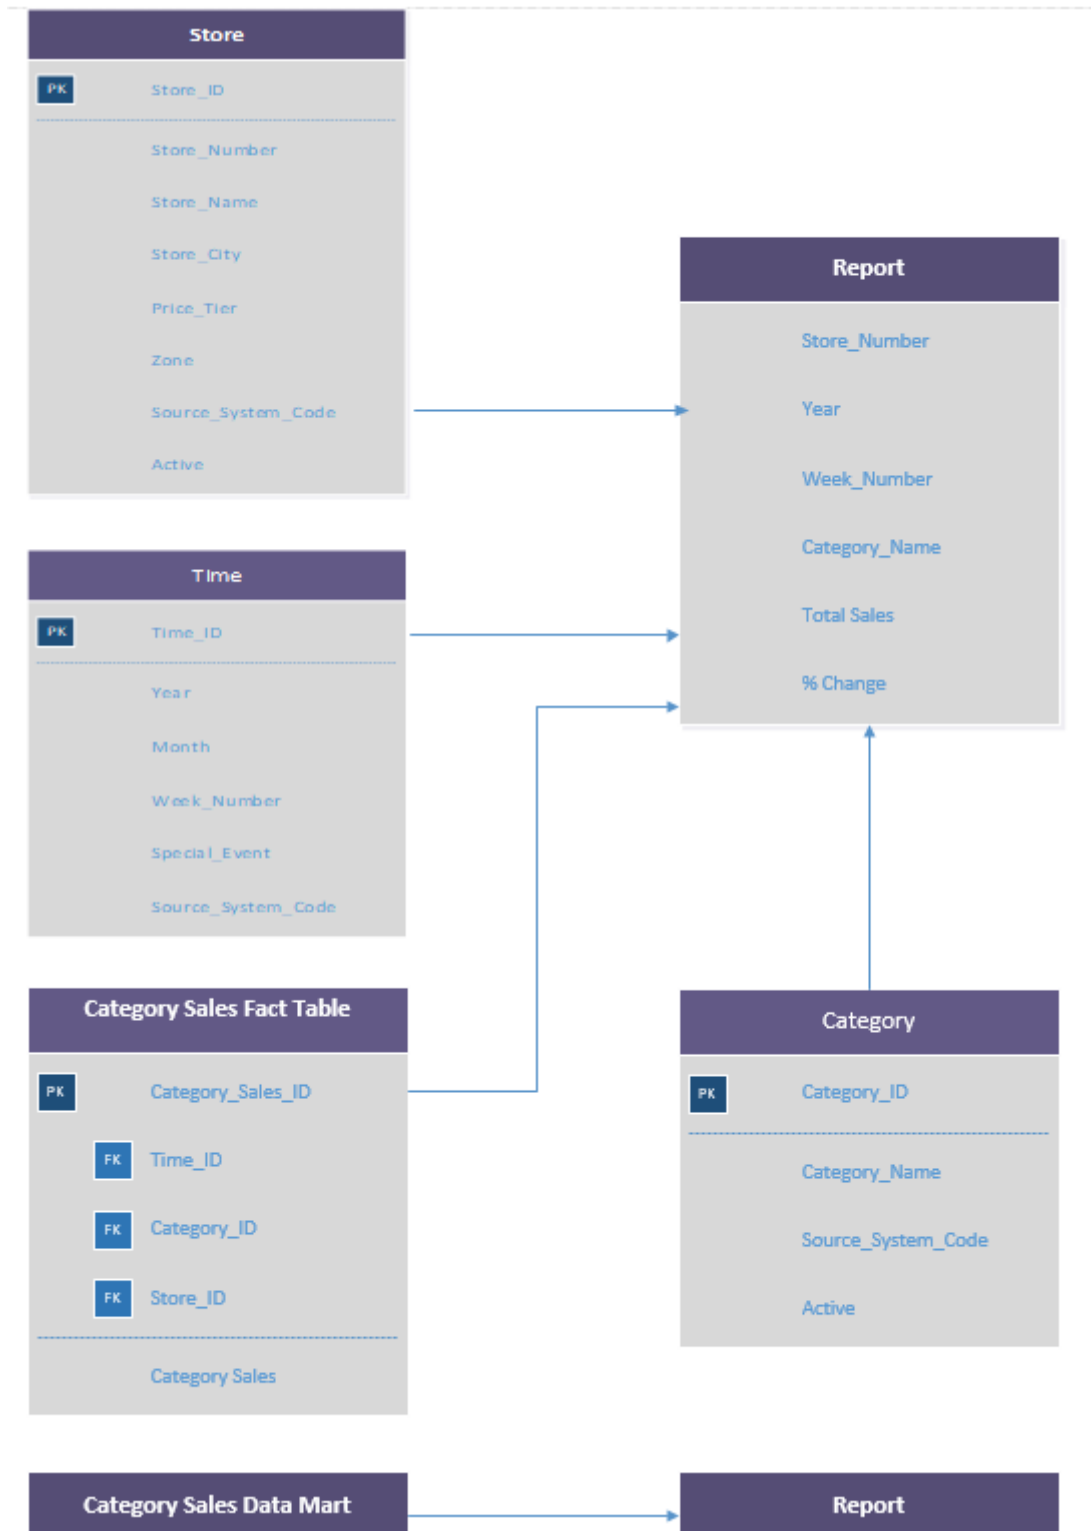


Figure 37 Mapping from Data Mart to SSRS report for BQ-1

BQ-2: Which are the top 10 products with respect to profitability in Medium Tier stores w.r.t “Canned Soup” category of in year 1991?

Report generate from SSRS

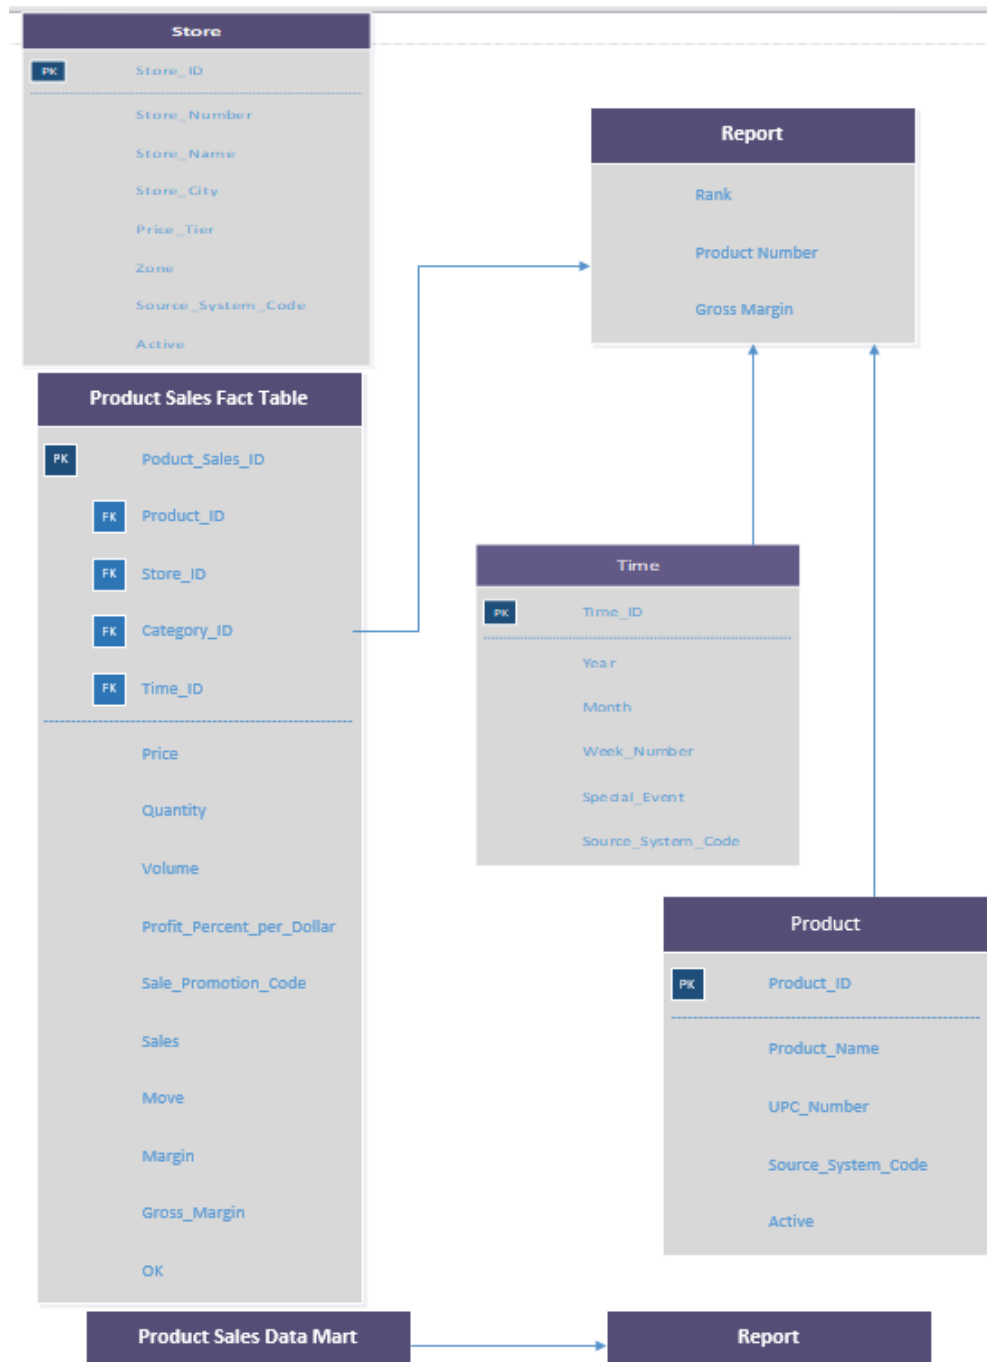


Figure 38 Mapping from Data Mart to SSRS report for BQ-2

BQ-3: What is the growth trend of Soft Drinks versus Bottled Juice for year 1990 and 1991? Which of these has negative growth rate? What is the trend for bottled juice especially in Low Tier?

Report generate from SSAS+SSRS

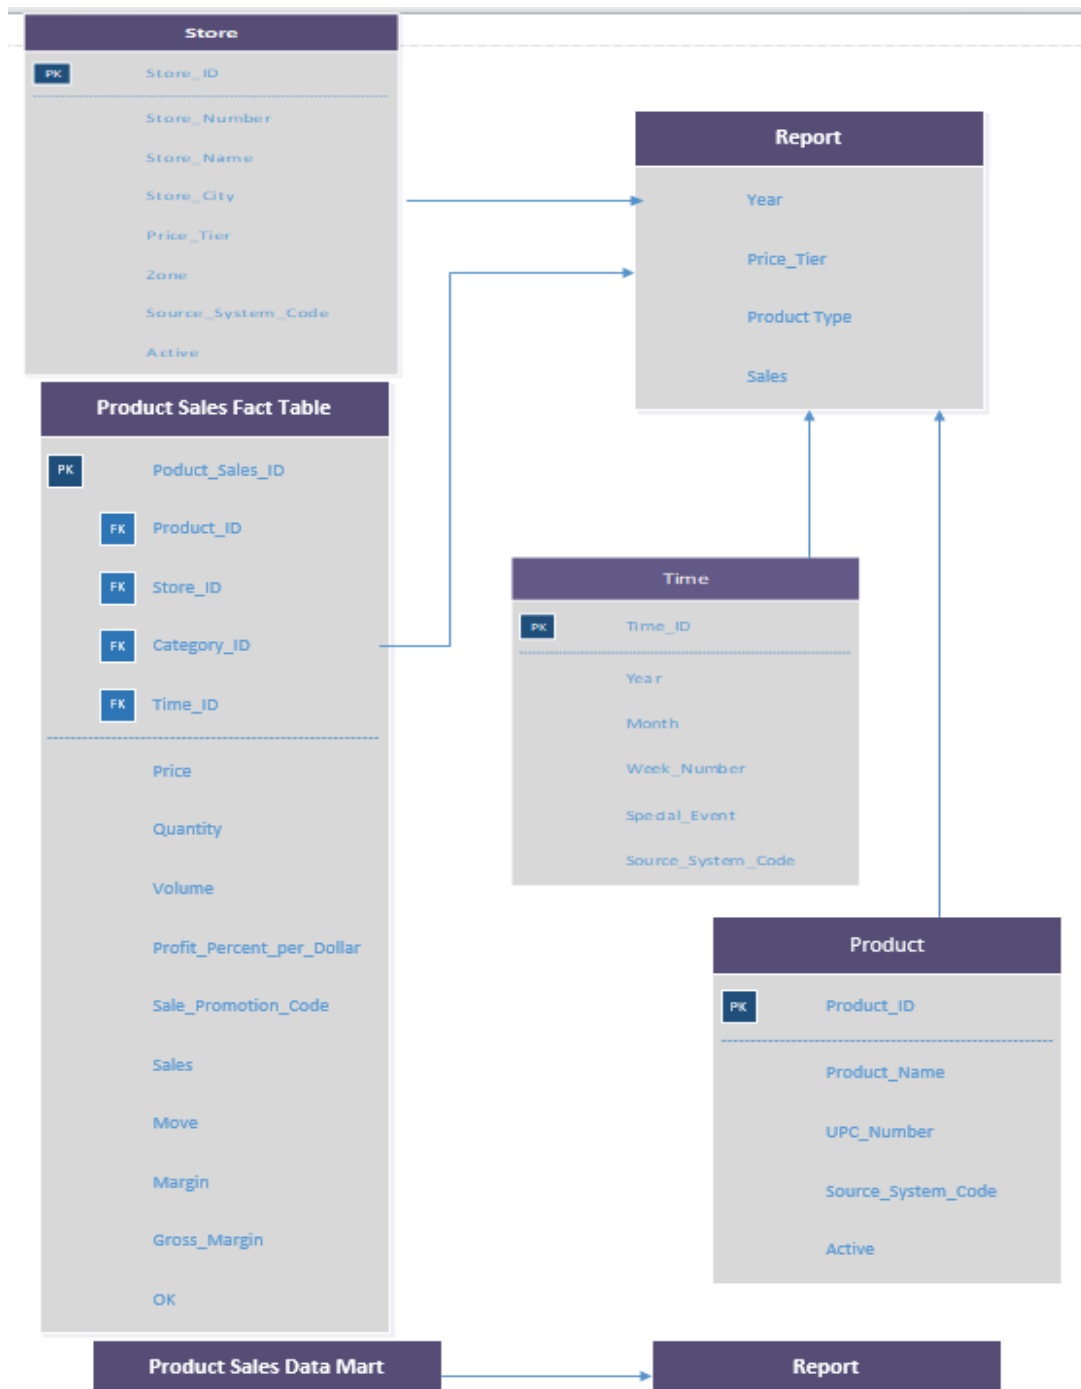


Figure 39 Mapping from Data Mart to SSRS+SSAS report for BQ-3

BQ-4: What effect does the time of the year have on sales of each Tuna? Determine the impact of seasonality on Average Sales of Tuna from December-1990 to September 1992?

Report generate from Report Builder 3.0

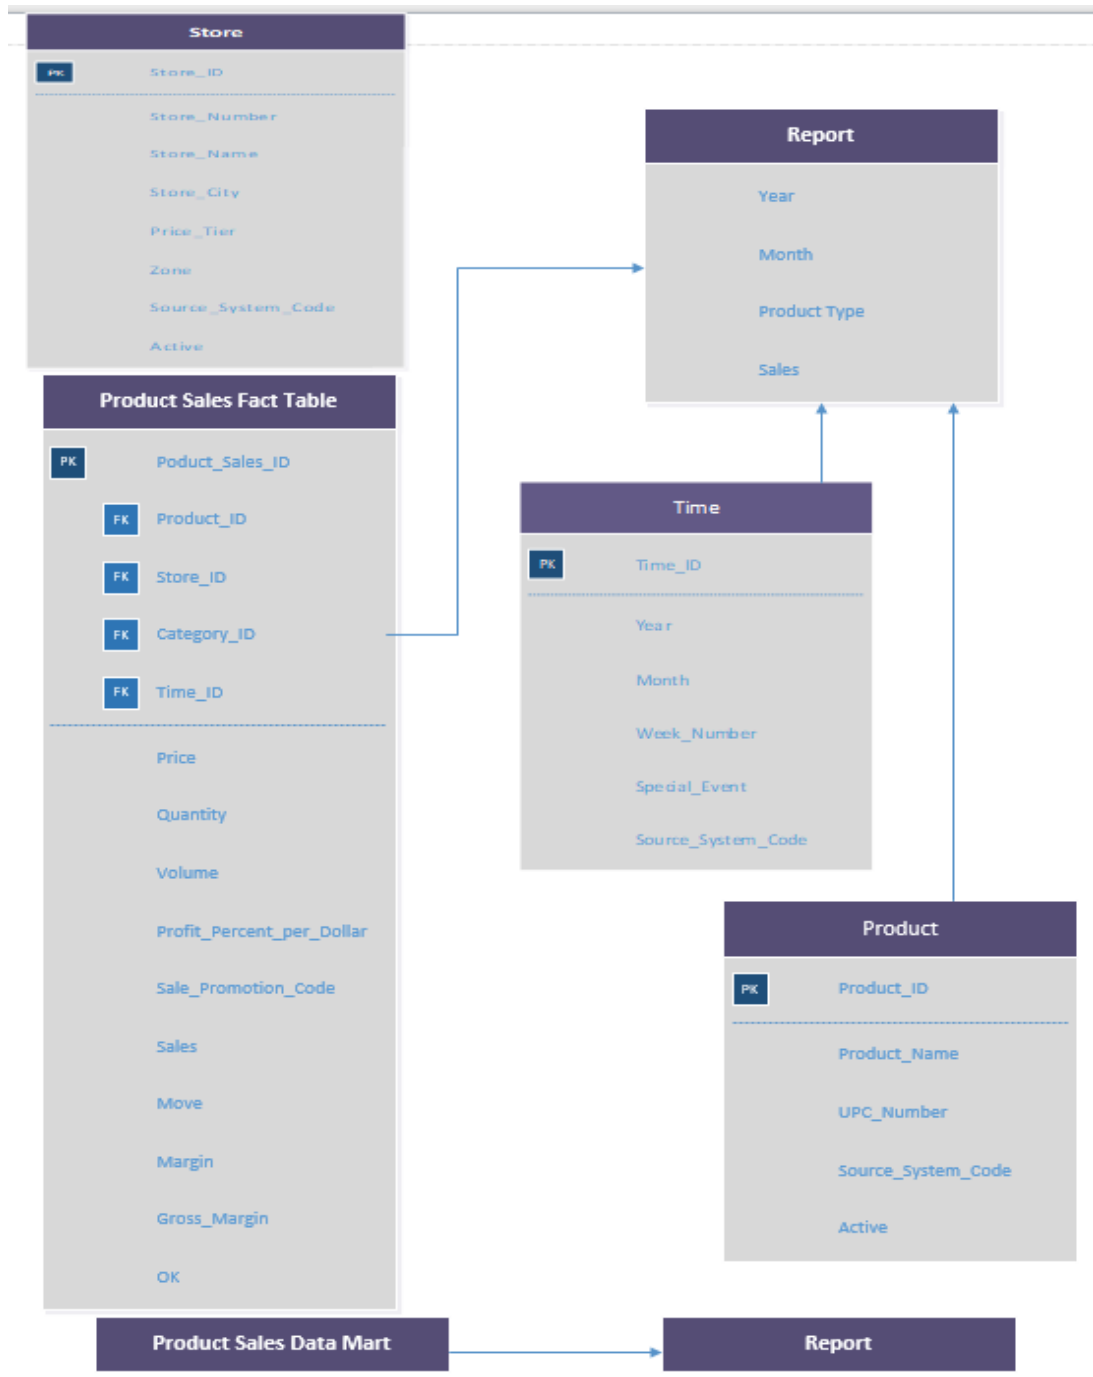


Figure 40 Mapping from Data Mart to report for BQ-4

BQ-5: What is annual growth rate of cigarette margins in low tier stores? What is the decreasing trend?

Report generate from SSAS

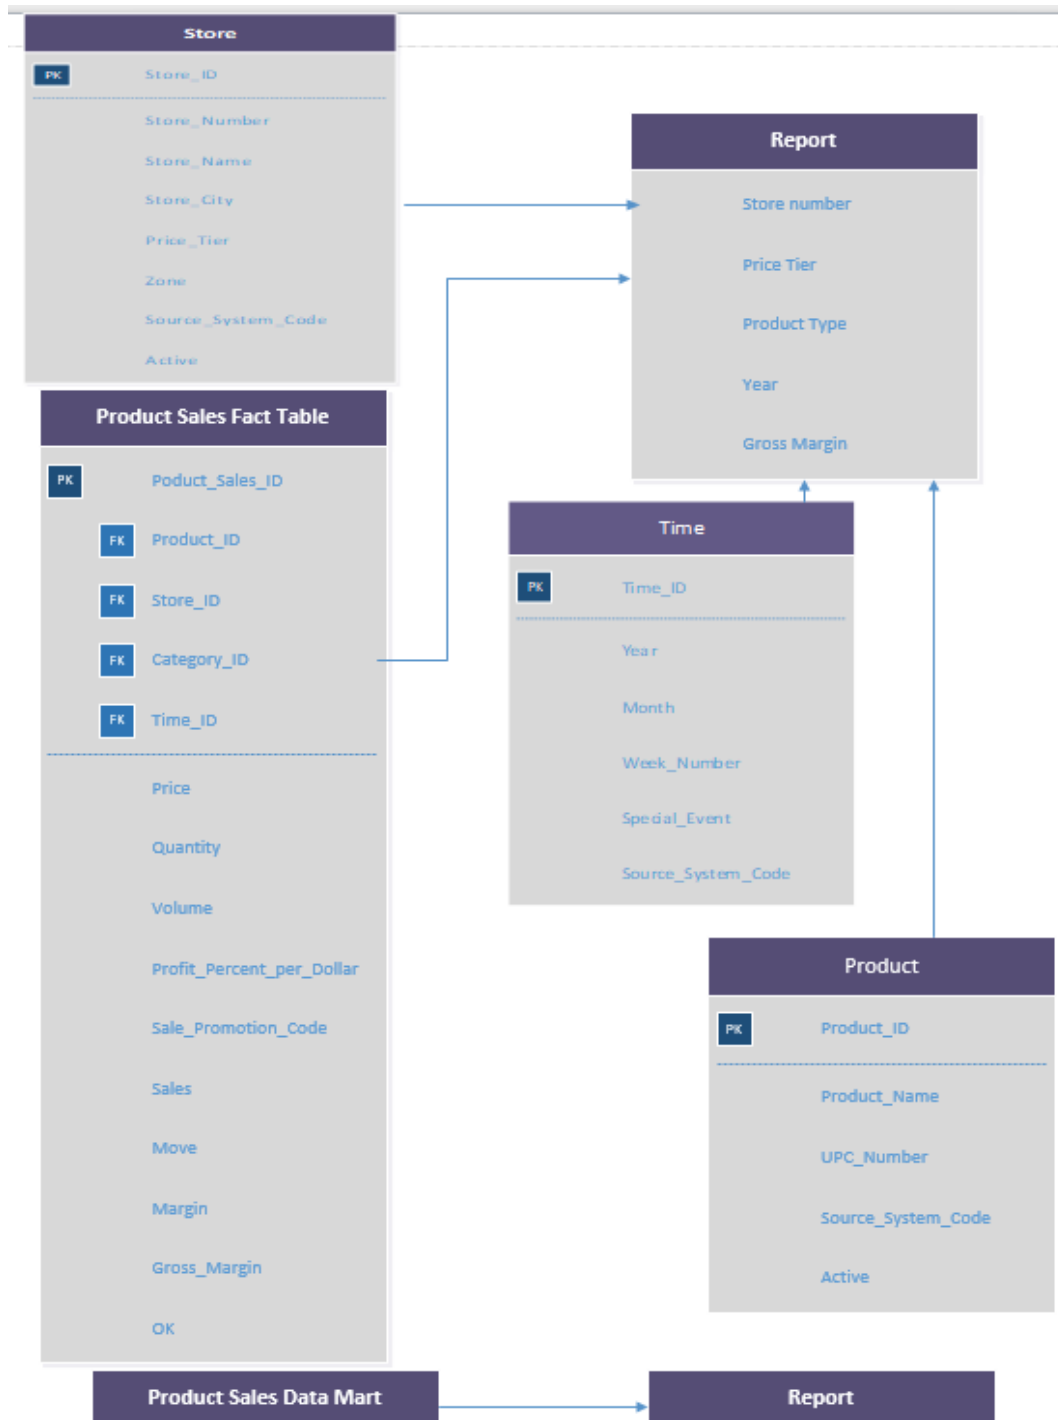


Figure 41 Mapping from Data Mart to SSAS report for BQ-5

6.2 SSRS for BQ-1

Based on the report plan, SSRS is adopted to create visualization for business question 1.

BQ-1: What is the trend of weekly change in sales of Frozen Food, Meat, Fish and Dairy till current week in 1997 for store 2?

Connection to Data Source

Connection Properties

Data source:
Microsoft SQL Server (SqlClient) Change...

Server name:
infodata16.mbs.tamu.edu Refresh

Log on to the server

Authentication: SQL Server Authentication

User name: sh3873

Password: ●●●●●●●●

☐ Save my password

Connect to a database

☒ Select or enter a database name:
grp0004-602-ISTM-637-602-dw-area

☐ Attach a database file:
Browse...

Figure 42 Data Source Connection for BQ-1

Query Design

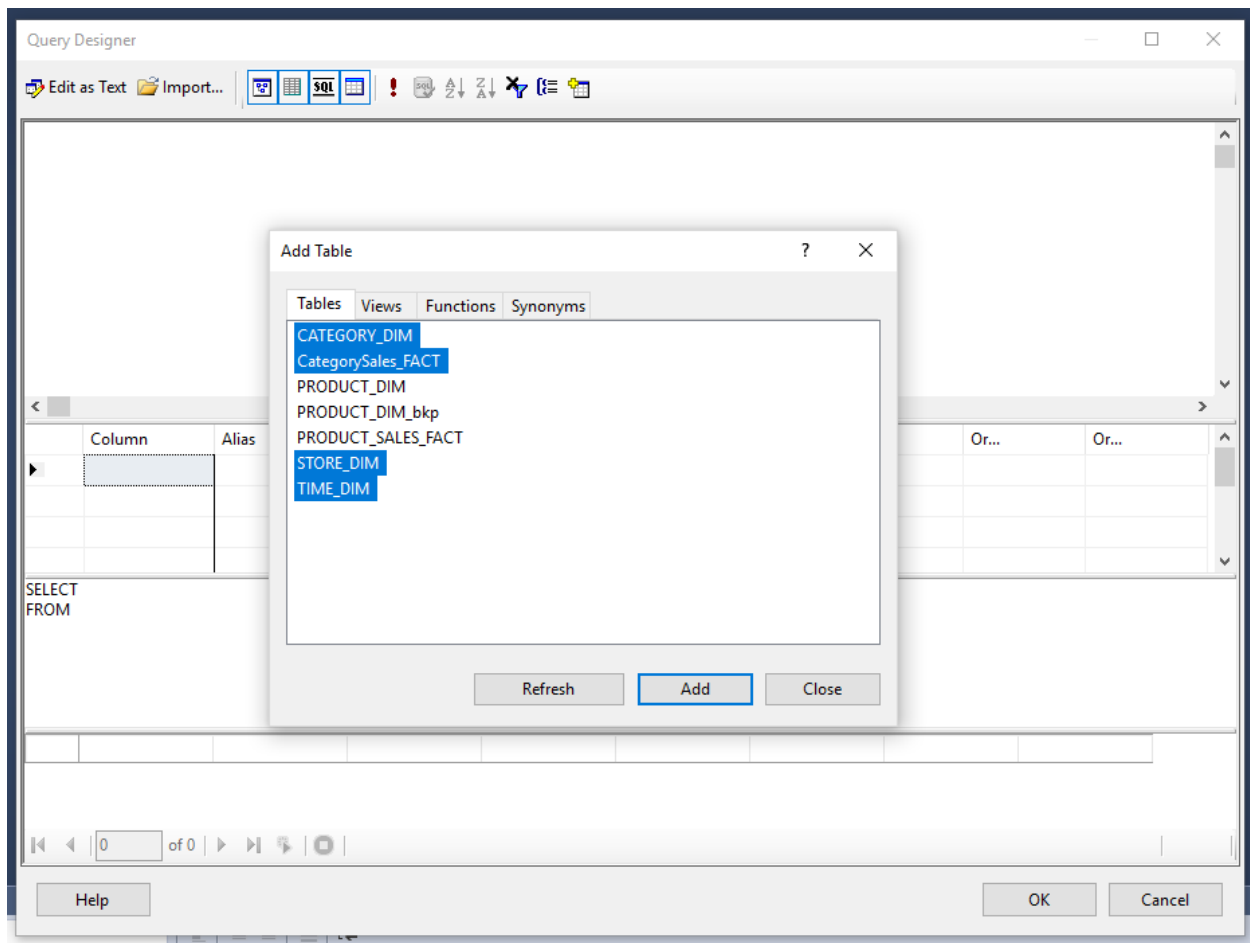


Figure 43 Query Design-1 for BQ-1

Query Designer

Edit as Text Import...

SQL

Diagram

Table b

Table a

Column	Alias	Table	Outp...	Sort Type	Sort Order	Filter	Or...	Or...	Or...
Store_Number		b	<input checked="" type="checkbox"/>						
Year		b	<input checked="" type="checkbox"/>						
Week_Number		b	<input checked="" type="checkbox"/>	Ascending	1				
Category_Name		b	<input checked="" type="checkbox"/>	Ascending	2				
Total_Sales		b	<input checked="" type="checkbox"/>						
{ fn IFNULL(C...	{ %Cha...		<input checked="" type="checkbox"/>						

WITH TAB AS (SELECT TOP (100) PERCENT STORE_DIM.Store_Number, TIME_DIM.Year, TIME_DIM.Week_Number, CATEGORY_DIM.Category_Name, SUM(Category_

FROM

CATEGORY_DIM INNER JOIN

CategorySales_FACT ON CATEGORY_DIM.Category_ID = CategorySales_FACT.Category_ID INNER JOIN

STORE_DIM ON CategorySales_FACT.Store_ID = STORE_DIM.Store_ID INNER JOIN

TIME_DIM ON CategorySales_FACT.Time_ID = TIME_DIM.Time_ID

GROUP BY CATEGORY_DIM.Category_Name, TIME_DIM.Year, STORE_DIM.Store_Number, TIME_DIM.Week_Number

HAVING (CATEGORY_DIM.Category_Name = N'FROZEN' OR

CATEGORY_DIM.Category_Name = N'FISH' OR

CATEGORY_DIM.Category_Name = N'MEAT' OR

CATEGORY_DIM.Category_Name = N'DAIRY')

	Store_Number	Year	Week_Number	Category_Name	Total_Sales	%Change
▶	2	1997	381	DAIRY	28697.6300	
	2	1997	381	FISH	8641.2800	
	2	1997	381	FROZEN	15867.2400	
	2	1997	381	MEAT	24639.8900	
	2	1997	382	DAIRY	27795.6300	-3.143116
	2	1997	382	FISH	3518.1200	-59.287050
	2	1997	382	FROZEN	16646.7100	4.912448

1 of 72

Cell is Read Only.

Help OK Cancel

Figure 44 Query Design-2 for BQ-1

Report Wizard

Design the Query
Specify a query to execute to get the data for the report.

Use a query builder to design your query.

[Query Builder...](#)

Query string:

```
WITH TAB AS (SELECT TOP (100) PERCENT STORE_DIM.Store_Number, TIME_DIM.Year, TIME_DIM.Week_Number,
CATEGORY_DIM.Category_Name, SUM(CategorySales_FACT.Sales) AS Total_Sales
FROM CATEGORY_DIM INNER JOIN
CategorySales_FACT ON CATEGORY_DIM.Category_ID = CategorySales_FACT.Category_ID
INNER JOIN
STORE_DIM ON CategorySales_FACT.Store_ID = STORE_DIM.Store_ID INNER JOIN
TIME_DIM ON CategorySales_FACT.Time_ID = TIME_DIM.Time_ID
GROUP BY CATEGORY_DIM.Category_Name, TIME_DIM.Year, STORE_DIM.Store_Number,
TIME_DIM.Week_Number
HAVING (CATEGORY_DIM.Category_Name = N'FROZEN' OR
CATEGORY_DIM.Category_Name = N'FISH' OR
CATEGORY_DIM.Category_Name = N'MEAT' OR
CATEGORY_DIM.Category_Name = N'DAIRY') AND (TIME_DIM.Year = 1997) AND
(STORE_DIM.Store_Number = 2)
ORDER BY TIME_DIM.Week_Number)
SELECT b.Store_Number, b.Year, b.Week_Number, b.Category_Name, b.Total_Sales, { fn IFNULL(CONVERT(varchar(20),
100 * (b.Total_Sales - a.Total_Sales) / a.Total_Sales), '' ) } AS [%Change]
FROM TAB AS b LEFT OUTER JOIN
TAB AS a ON b.Week_Number = a.Week_Number + 1 AND b.Category_Name = a.Category_Name
```

[Help](#) [< Back](#) [Next >](#) [Finish >>|](#) [Cancel](#)

Figure 45 Query Design-3 for BQ-1

Group Data in the Table

Report Wizard
—
□
×

Completing the Wizard

Provide a name and click Finish to create the new report.

Report name:

Report summary:

Data source: DataSource1

Connection string: Data Source=infodata16.mbs.tamu.edu;Initial Catalog=grp0004-602-ISTM-637-602-dw-area

Report type: Table

Layout type: Stepped

Style: Modern

Details: Store_Number, Year, Week_Number, Category_Name, Total_Sales, ID_Change

Query: WITH TAB AS (SELECT TOP (100) PERCENT STORE_DIM.Store_Number, TIME_DIM.Year, TIME_DIM.Week_Number, CATEGORY_DIM.Category_Name, SUM(CategorySales_FACT.Sales) AS Total_Sales
FROM CATEGORY_DIM INNER JOIN
CategorySales_FACT ON CATEGORY_DIM.Category_ID =
CategorySales_FACT.Category_ID INNER JOIN
STORE_DIM ON CategorySales_FACT.Store_ID = STORE_DIM.Store_ID INNER JOIN
TIME_DIM ON CategorySales_FACT.Time_ID = TIME_DIM.Time_ID

☐ Preview report

Help

< Back

Next >

Finish

Cancel

Figure 47 Report Parameter Preview for BQ-1

SQL Query

```
WITH TAB AS (SELECT TOP (100) PERCENT STORE_DIM.Store_Number, TIME_DIM.Year,
TIME_DIM.Week_Number, CATEGORY_DIM.Category_Name, SUM(CategorySales_FACT.Sales) AS
Total_Sales
FROM CATEGORY_DIM INNER JOIN
CategorySales_FACT ON
CATEGORY_DIM.Category_ID = CategorySales_FACT.Category_ID INNER JOIN
STORE_DIM ON
CategorySales_FACT.Store_ID = STORE_DIM.Store_ID INNER JOIN
TIME_DIM ON
CategorySales_FACT.Time_ID = TIME_DIM.Time_ID
GROUP BY CATEGORY_DIM.Category_Name, TIME_DIM.Year,
STORE_DIM.Store_Number, TIME_DIM.Week_Number
HAVING (CATEGORY_DIM.Category_Name =
N'FROZEN' OR
CATEGORY_DIM.Category_Name
= N'FISH' OR
CATEGORY_DIM.Category_Name
= N'MEAT' OR
CATEGORY_DIM.Category_Name
= N'DAIRY') AND (TIME_DIM.Year = 1997) AND (STORE_DIM.Store_Number = 2)
ORDER BY TIME_DIM.Week_Number)
SELECT b.Store Number, b.Year, b.Week Number, b.Category Name,
b.Total_Sales, { fn IFNULL(CONVERT(varchar(20), 100 * (b.Total_Sales -
a.Total_Sales) / a.Total_Sales), '') } AS [%Change]
FROM TAB AS b LEFT OUTER JOIN
TAB AS a ON b.Week_Number = a.Week_Number + 1 AND
b.Category_Name = a.Category_Name
ORDER BY b.Week_Number
```

Figure 48 SQL Query for BQ-1

Deployment Information

Saturday, April 21, 2018 2:49 PM	<dir> Report Project1 6681 HW5
Tuesday, April 3, 2018 4:06 PM	<dir> Report Project13
Thursday, April 5, 2018 11:51 AM	<dir> Report Project17
Tuesday, April 17, 2018 10:09 AM	<dir> Report Project19
Thursday, April 5, 2018 10:15 AM	<dir> Report Project2
Thursday, April 5, 2018 11:54 AM	<dir> Report Project3
Tuesday, April 17, 2018 11:52 AM	<dir> Report Project3 - HW - Vikas
Friday, April 20, 2018 6:20 PM	<dir> Report Project3 - Pooja
Tuesday, April 24, 2018 4:16 PM	<dir> Report Project3 Arbaz
Tuesday, April 24, 2018 2:23 AM	<dir> Report Project333
Saturday, April 21, 2018 3:33 PM	<dir> Report Project4
Saturday, April 21, 2018 8:03 PM	<dir> Report Project5
Saturday, April 21, 2018 4:02 PM	<dir> Report Project6
Thursday, April 5, 2018 10:15 AM	<dir> Report Project6681
Thursday, April 5, 2018 10:15 AM	<dir> Report Project7023
Tuesday, April 24, 2018 5:54 AM	<dir> Report Project8
Saturday, April 21, 2018 5:00 PM	<dir> Report Project9
Saturday, April 21, 2018 1:59 PM	<dir> Report Project-HW5
Saturday, April 21, 2018 6:54 PM	<dir> Report ProjectHW5 7023
Friday, April 20, 2018 7:53 PM	<dir> Report ProjectSwatiB2
Wednesday, April 18, 2018 7:19 PM	<dir> Report Project-Vikas-0418
Saturday, April 21, 2018 2:15 PM	<dir> Report Akshat
Saturday, April 21, 2018 2:44 PM	<dir> Report HW Akshat
Saturday, April 21, 2018 7:41 PM	<dir> Report multi6463
Saturday, April 21, 2018 4:49 PM	<dir> Report Sania

Figure 49 Report Deployment for BQ-1

Final Report

Weekly % Change in Sales					
Store Number	Year	Week Number	Category Name	Total Sales	% Change
[Store_Number]	[Year]	[Week_Number]	[Category_Nam	[Total_Sales]	[ID_Change]

Figure 50 Report Format for BQ-1

Weekly % Change in Fish, Frozen, Dairy & Meat Sales

Store Number	Year	Week Number	Category Name	Total Sales	% Change
2	1997	381	FISH	8641.2800	
2	1997	381	DAIRY	28697.6300	
2	1997	381	FROZEN	15867.2400	
2	1997	381	MEAT	24639.8900	
2	1997	382	FROZEN	16646.7100	4.912448
2	1997	382	FISH	3518.1200	-59.287050
2	1997	382	MEAT	21765.8000	-11.664378
2	1997	382	DAIRY	27795.6300	-3.143116
2	1997	383	FROZEN	17568.0400	5.534607
2	1997	383	DAIRY	33137.1700	19.217193
2	1997	383	MEAT	26355.1500	21.085142
2	1997	383	FISH	4665.9800	32.627084
2	1997	384	DAIRY	30428.9600	-8.172725
2	1997	384	MEAT	27619.5200	4.797430
2	1997	384	FISH	3956.3700	-15.208166
2	1997	384	FROZEN	18681.0900	6.335652

Figure 51 Report for BQ-1 – Part 1

Weekly % Change in food requiring refrigeration for Store 2 in 1997

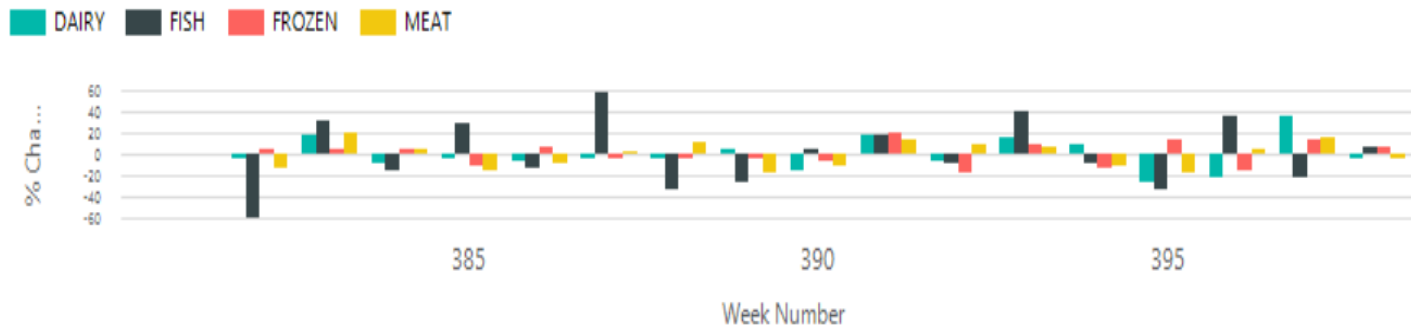


Figure 52 Report for BQ-1 – Part 2

Store Number	Year	Week Number	Category Name	Total Sales	% Change
2	1997	396	FISH	4933.8300	37.490803
2	1997	396	FROZEN	14175.1000	-13.740770
2	1997	396	MEAT	20425.7600	4.879258
2	1997	397	DAIRY	26971.9900	36.186611
2	1997	397	FISH	3880.3900	-21.351363
2	1997	397	FROZEN	16339.9200	15.271991
2	1997	397	MEAT	23905.4900	17.035987
2	1997	398	DAIRY	26908.2100	-0.236467
2	1997	398	FISH	4180.9100	7.744582
2	1997	398	FROZEN	17775.3800	8.784987
2	1997	398	MEAT	23176.8000	-3.048211

Weekly % Change in food requiring refrigeration for Store 2 in 1997

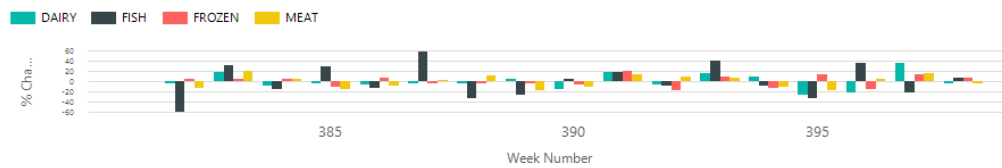


Figure 53 Report for BQ-1 – Part 3

Conclusion

In view of the bar diagram we made utilizing SSRS, we can presume that there is huge measure of change in offers of different classifications of food items which requires refrigeration particularly in the idea of fish utilization. This offer pattern can give Dominick Finer Foods indicates about how to build up an incorporated system of strategically pitching in different meat and dairy items in coming year. A combo bundle construct marking down offer in light of mix of above items could prompt higher and unsurprising volumes. The store chief can design the stock to increase or down their amount without additional acquisition of any expected spike in utilization. Subsequently, the client-side push in volumes could be utilized to get provider side refunds and rebates to enhance edges.

6.3 SSRS for BQ-2

Based on the report plan, SSRS is adopted to create visualization for business question 2.

BQ-2: Which are the top 10 products with respect to profitability in Medium Tier stores w.r.t “Canned Soup” category of in year 1991?

Connection to Data Source

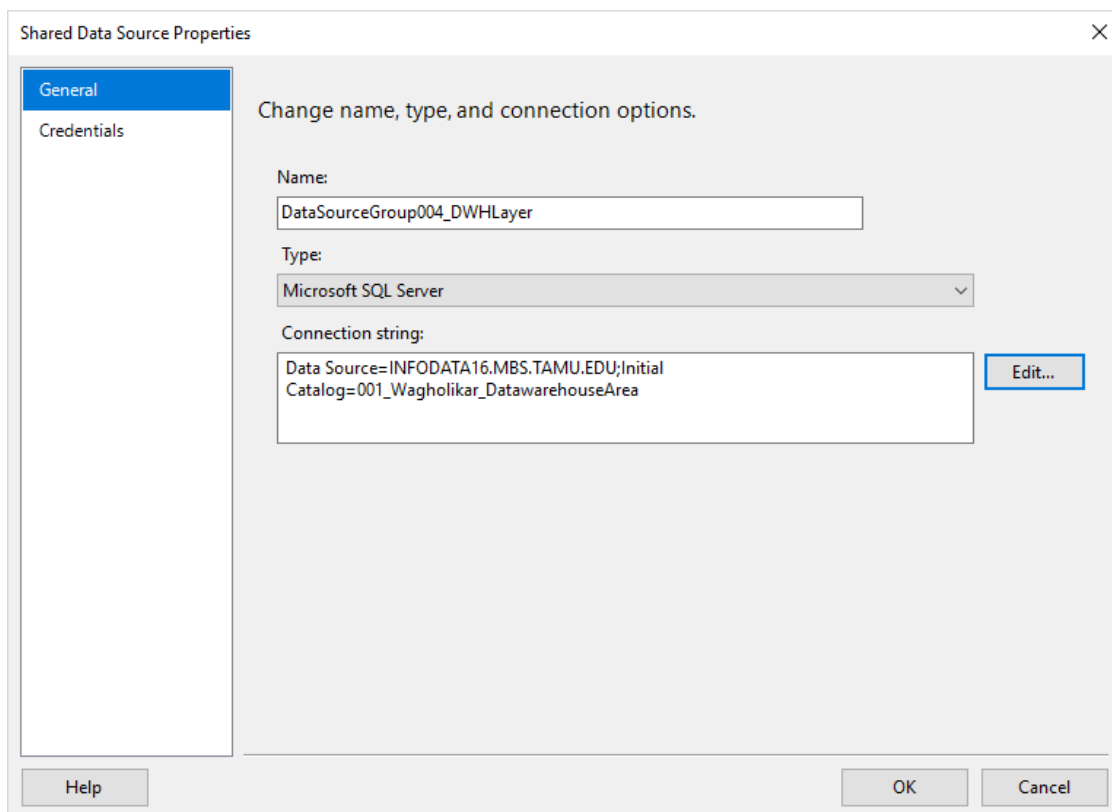


Figure 54 Data Connection for BQ-2

Query Builder

Report Wizard

Design the Query
Specify a query to execute to get the data for the report.

Use a query builder to design your query.

[Query Builder...](#)

Query string:

```
SELECT RANK, [Product Code] As [Product Number],[Gross Margin] FROM ((SELECT PRODUCT_DIM.[UPC_Number] AS  
[Product Code], SUM(PRODUCT_SALES_FACT.Sales) AS [Gross Margin], RANK() OVER  
(ORDER BY SUM(PRODUCT_SALES_FACT.Sales) DESC) AS Rank  
FROM PRODUCT_DIM INNER JOIN  
PRODUCT_SALES_FACT ON PRODUCT_DIM.[Product_ID] = PRODUCT_SALES_FACT.Product_ID INNER JOIN  
STORE_DIM ON PRODUCT_SALES_FACT.Store_ID = STORE_DIM.Store_ID INNER JOIN  
TIME_DIM ON PRODUCT_SALES_FACT.Time_ID = TIME_DIM.Time_ID  
WHERE (PRODUCT_DIM.[Product_Type] = N'Canned Soup') AND (STORE_DIM.Price_Tier = N'Medium') AND  
(TIME_DIM.Year = 1990)  
GROUP BY PRODUCT_DIM.[UPC_Number])) TABLE1  
WHERE RANK <= 10  
order by 1 ASC;
```

[Help](#) [< Back](#) [Next >](#) [Finish >>|](#) [Cancel](#)

Figure 55 Query Builder for BQ-2

Query Design

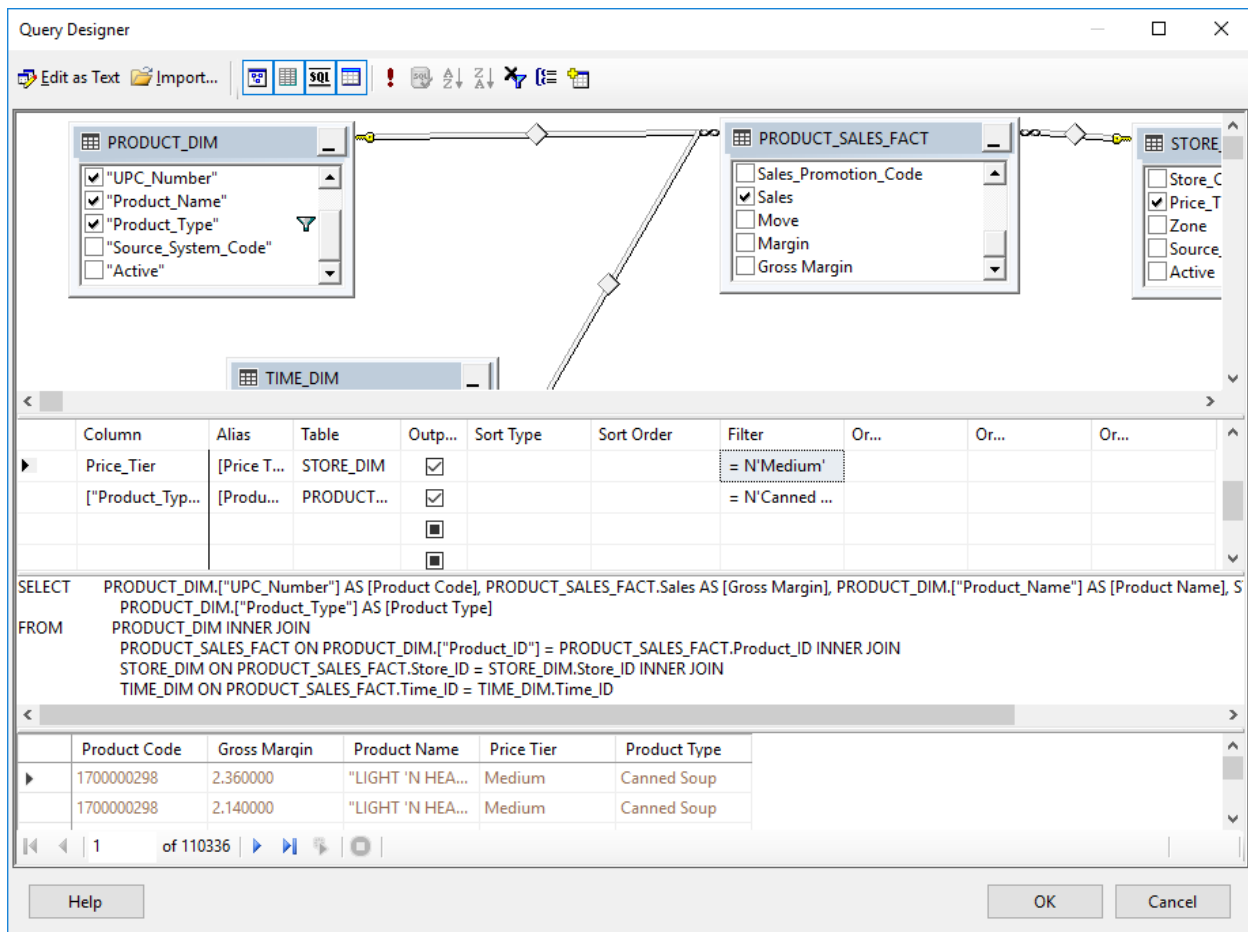


Figure 56 Query Design for BQ-2

SQL Query

```

SELECT RANK, [Product Code] As [Product Number],[Gross Margin] FROM ((SELECT
PRODUCT_DIM. ["UPC_Number"] AS [Product Code], SUM(PRODUCT_SALES_FACT.Sales) AS [Gross
Margin], RANK() OVER
(ORDER BY SUM(PRODUCT_SALES_FACT.Sales) DESC) AS Rank
FROM
PRODUCT_DIM INNER JOIN
PRODUCT_SALES_FACT ON PRODUCT_DIM.["Product_ID"] =
PRODUCT_SALES_FACT.Product_ID INNER JOIN
STORE_DIM ON PRODUCT_SALES_FACT.Store_ID = STORE_DIM.Store_ID
INNER JOIN
TIME_DIM ON PRODUCT_SALES_FACT.Time_ID = TIME_DIM.Time_ID
WHERE (PRODUCT_DIM.["Product_Type"] = N'Canned Soup') AND (STORE_DIM.Price_Tier =
N'Medium') AND (TIME_DIM.Year = 1990)
GROUP BY PRODUCT_DIM.["UPC_Number"])) TABLE1
WHERE RANK <=10
order by 1 ASC;

```

Final Report

Report Wizard
—
□
×

Completing the Wizard

Provide a name and click Finish to create the new report.

Report name:

Report summary:

Data source: DataSourceGroup004_DWHLayer

Connection string:

Report type: Table

Layout type: Stepped

Style: Modern

Page: RANK, Product_Number

Details: Gross_Margin

Query: SELECT RANK, [Product Code] As [Product Number],[Gross Margin] FROM ((SELECT PRODUCT_DIM, ["UPC_Number"] AS [Product Code], SUM(PRODUCT_SALES_FACT.Sales) AS [Gross Margin], RANK() OVER (ORDER BY SUM(PRODUCT_SALES_FACT.Sales) DESC) AS Rank FROM PRODUCT_DIM INNER JOIN PRODUCT_SALES_FACT ON PRODUCT_DIM,["Product_ID"] = PRODUCT_SALES_FACT.Product_ID INNER

☒ Preview report

Help

< Back

Next >

Finish

Cancel

Figure 57 Report Parameter Preview for BQ-2

Report for Top 10 Canned Soup Products by Profitability

RANK	Product Number	Gross Margin
1	5100000011	220145.078252
2	5100001031	150672.598333
3	2400032220	101541.730000
4	2400032230	92410.405000
5	5100001161	70740.235000
6	5100001051	65620.020000
7	5100000524	54476.050000
8	5100001151	53043.720000
9	5100001021	48624.535000
10	4125875115	45564.350000

Chart for Top 10 Canned Soup Products in 1990 in Medium Tier

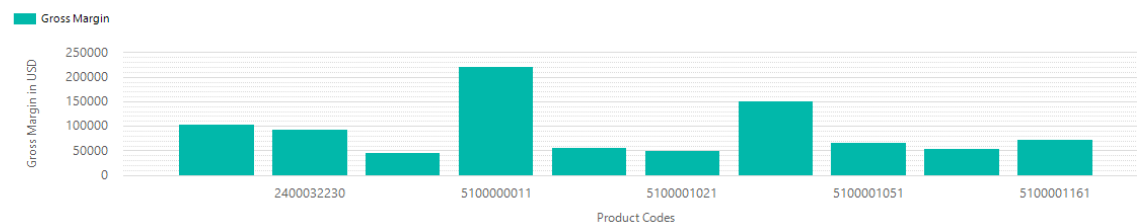


Figure 58 Report for BQ-2

Conclusion

Based on the bar chart we created using SSRS, we can conclude that the top 10 profitable “Canned Soup” product in Medium Tier stores in 1991 is 5100000011, 5100001031, 2400032220, 2400032230, 5100001161, 5100001051, 5100000524, 5100001151, 5100001021 and 4125875115. This sell trend can give Dominick Finer Foods hints about how to promote Canned Soup related products in Medium Tier store. Also, same method can be used on other products to determine the sell trend, thus to facilitate better inventory and enhance sale revenue.

6.4 SSAS+SSRS for BQ-3

Based on the report plan, SSAS+SSRS is adopted to create visualization for business question 3.

BQ-3: What is the growth trend of Soft Drinks versus Bottled Juice for year 1990 and 1991? Which of these has negative growth rate? What is the trend for bottled juice especially in Low Tier?

6.4.1 SSAS Part

Connect to data source

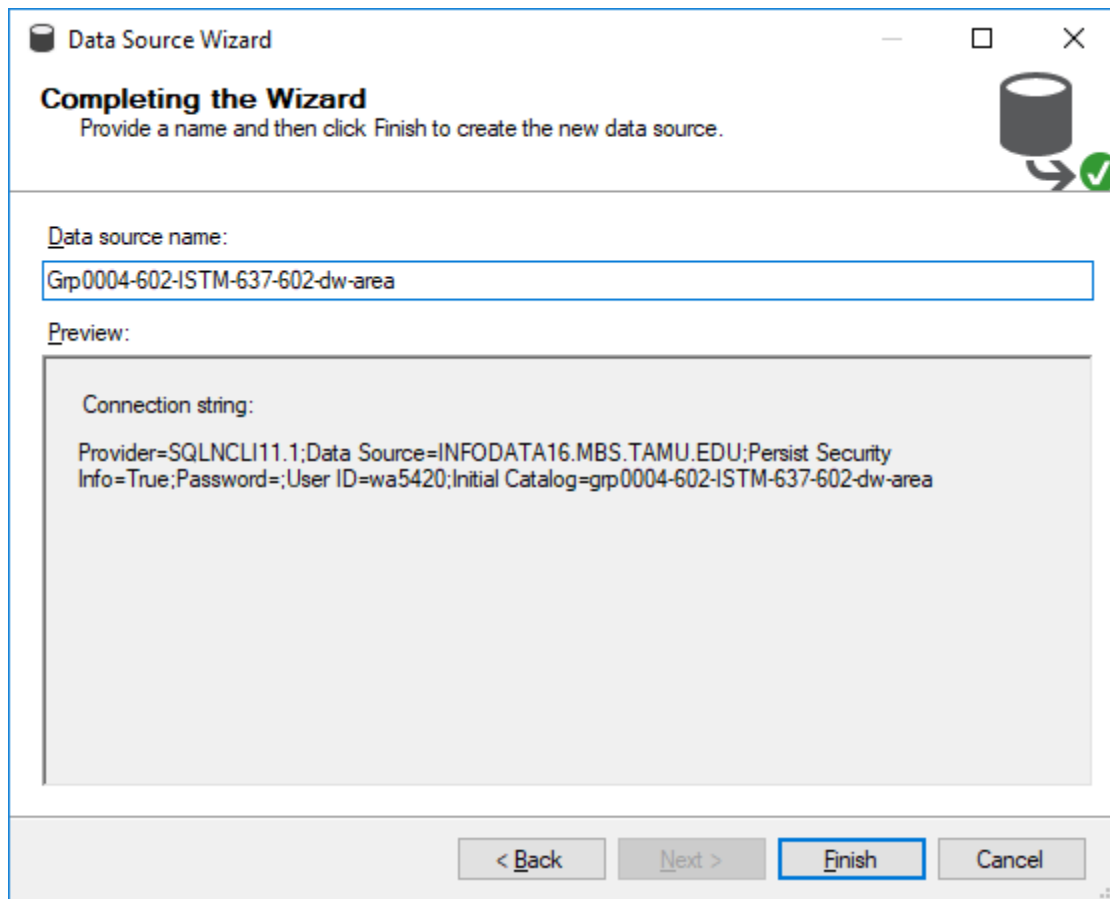


Figure 59 Data Source Creation for BQ-3

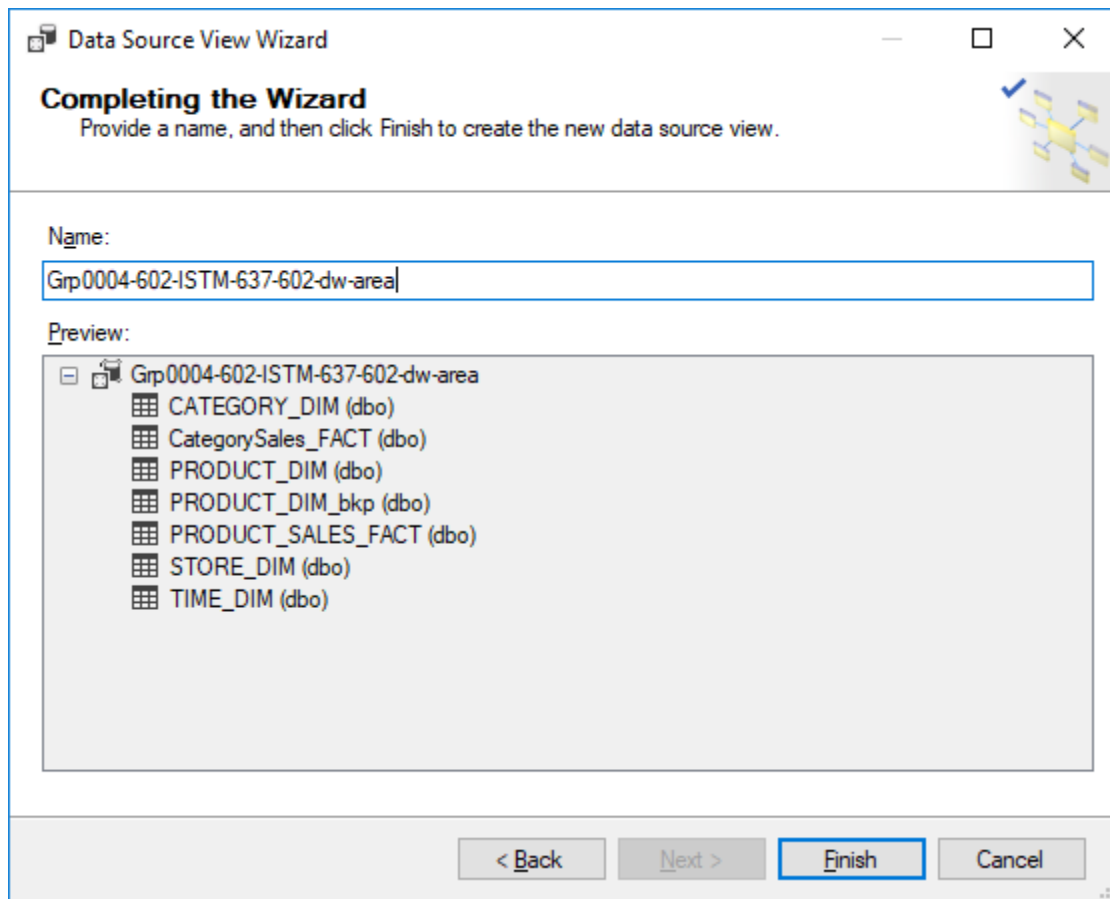


Figure 60 Data Source View Creation for BQ-3

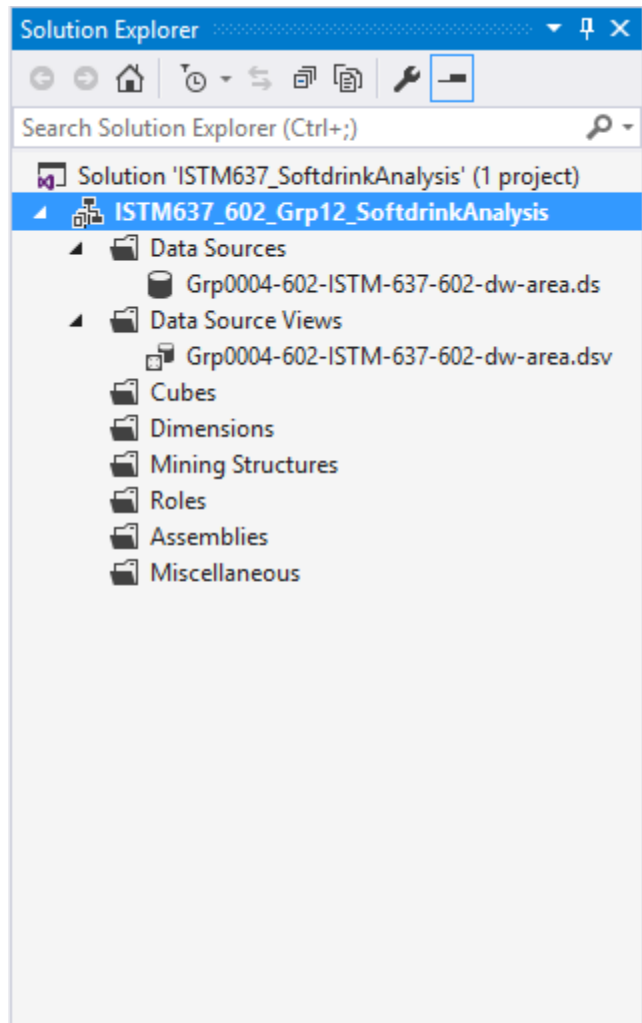


Figure 61 Analysis Services Project Preview for BQ-3

Cube creation

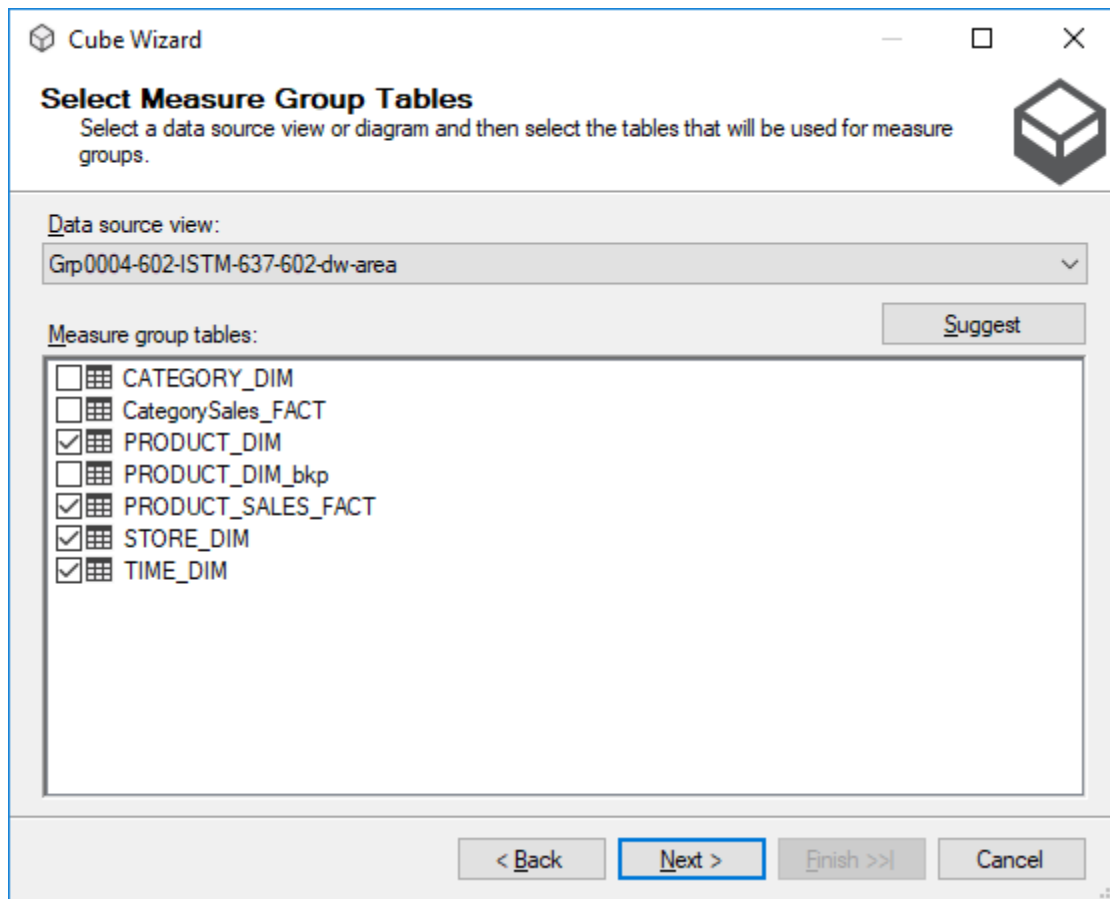


Figure 62 Cube Creation for BQ-3 – Part 1

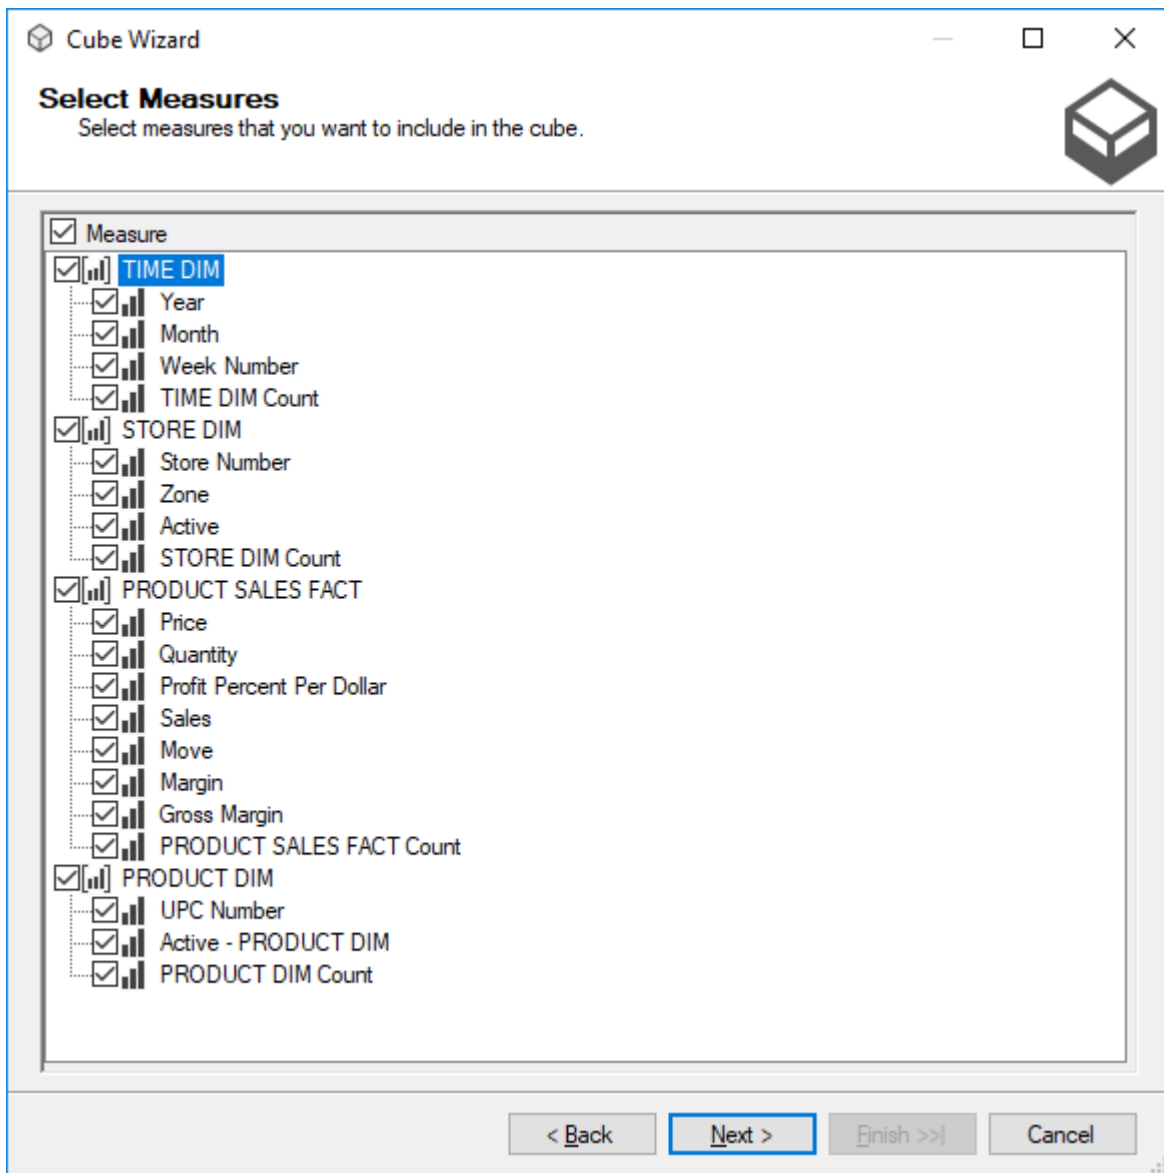


Figure 63 Cube Creation for BQ-3 – Part 2

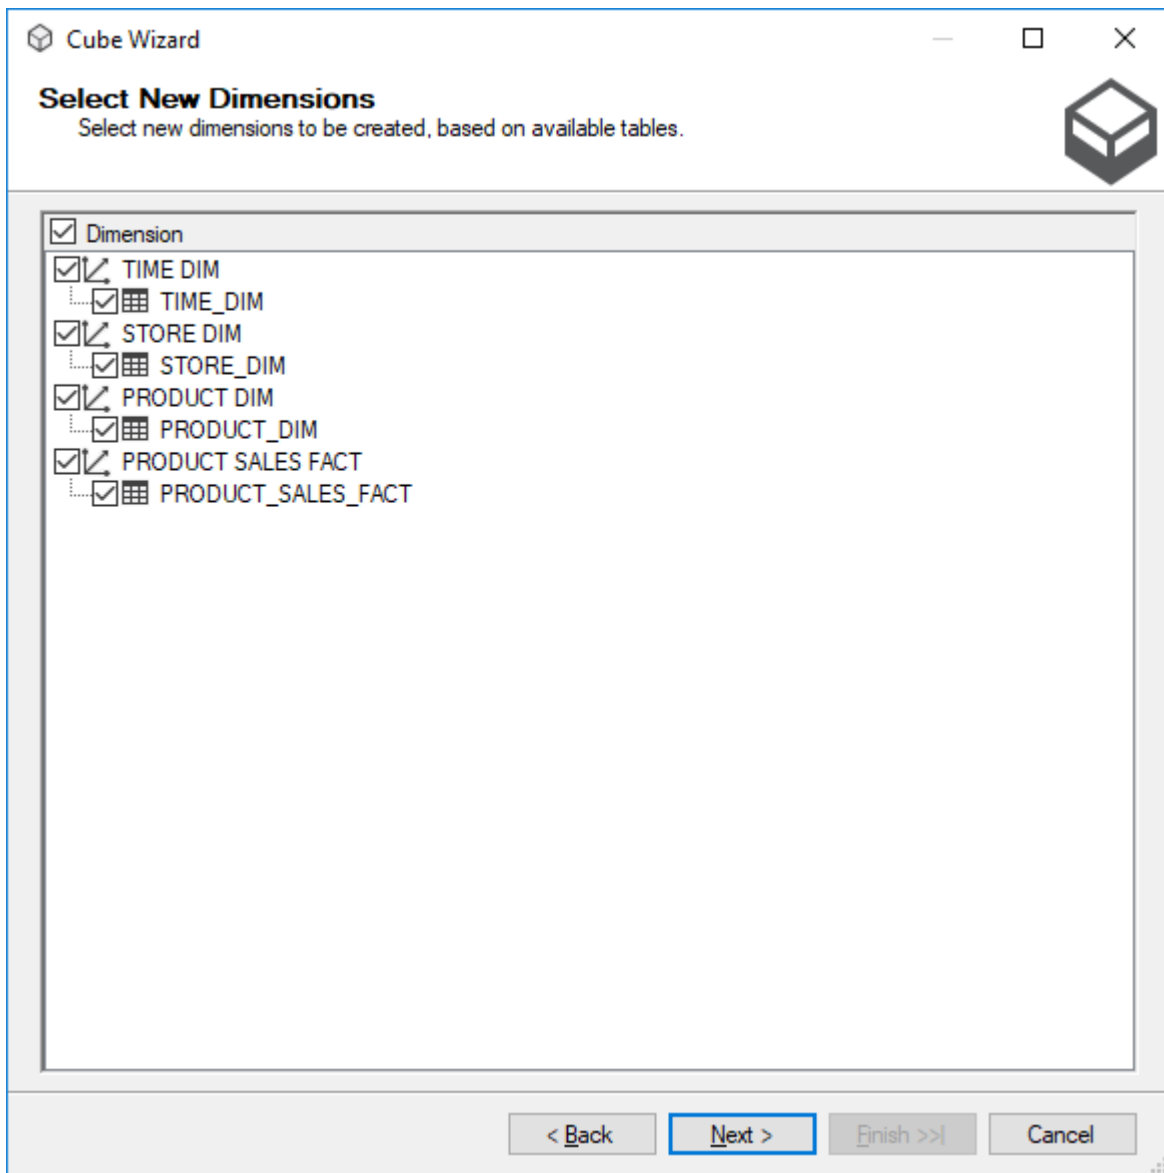


Figure 64 Cube Creation for BQ-3 – Part 3

Cube Structure

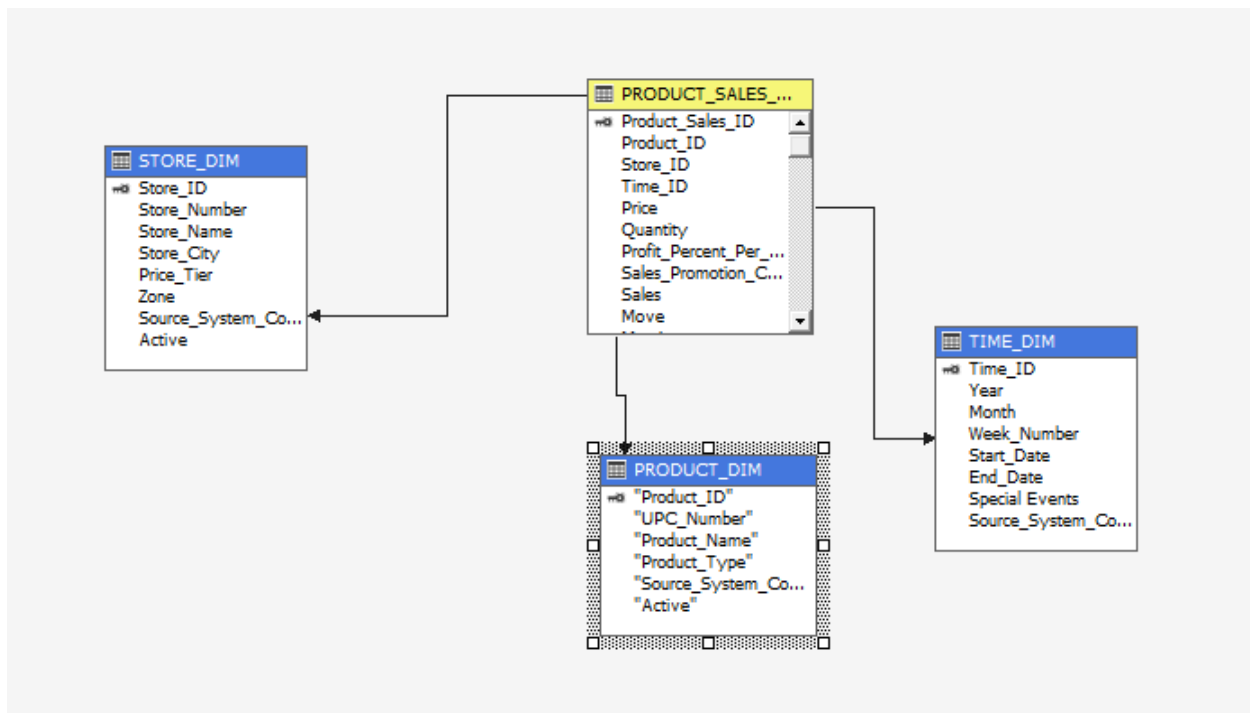


Figure 65 Cube Structure for BQ-3

Success Deploy

Deployment Progress - ISTM637_602_Grp12_SoftdrinkAnalysis

Server : infodata16.mbs.tamu.edu
Database : ISTM637_SoftdrinkAnalysis

Command
<div> <div>Command</div> <div> <div>Processing Database 'ISTM637_SoftdrinkAnalysis' completed. Start time: 4/23/2018 8:03:07 PM; End time: 4/23/2018 8:05:15 PM; Duration: 0:02:08</div> <div>Processing Cube 'Grp0004-602-ISTM-637-602-dw-area' completed. Start time: 4/23/2018 8:04:09 PM; End time: 4/23/2018 8:05:15 PM; Duration: 0:01:05</div> <div>Processing Measure Group 'PRODUCT SALES FACT' completed.</div> <div>Processing Dimension 'PRODUCT DIM' completed.</div> <div>Processing Dimension 'PRODUCT SALES FACT' completed.</div> <div>Processing Dimension 'STORE DIM' completed.</div> <div>Processing Dimension 'TIME DIM' completed.</div> </div> </div>

Status:

Deployment Completed Successfully

Deployment Progress | Error List | Output

Figure 66 Cube Deployment for BQ -3

Generate Excel

Grp0004-602-ISTM-...area_cube [Browse]

Language: Default

MDX

Grp0004-602-ISTM-637-602-dw-area_cube

Metadata

Search Model

Measure Group:

<All>

Gross Margin

Margin

Move

Price

PRODUCT SALES FACT Co

Profit Percent Per Dollar

Quantity

Sales

KPIs

PRODUCT DIM

Product ID

Product Name

Product Type

UPC Number

Hierarchy

Grp0004-602-ISTM-637-602-dw-area_cube

Dimension

TIME DIM

PRODUCT DIM

STORE DIM

Hierarchy

Operator

Filter Expression

{ 1990, 1991 }

{ Bottled Juice, Soft Drinks }

{ Low, Medium, High }

<Select dimension>

Year	Product Type	Price Tier	Sales
1990	Bottled Juice	High	1083917.14
1990	Bottled Juice	Low	397032.29
1990	Bottled Juice	Medium	1691071.36
1990	Soft Drinks	High	10026074.217896
1990	Soft Drinks	Low	5340968.176693
1990	Soft Drinks	Medium	16996331.292567
1991	Bottled Juice	High	1335324.476588
1991	Bottled Juice	Low	480222.93164
1991	Bottled Juice	Medium	2072751.999858
1991	Soft Drinks	High	10367078.047269
1991	Soft Drinks	Low	5142469.414895
1991	Soft Drinks	Medium	16322097.275686

Grp0004-602-ISTM-...area_cube [Browse]

Language: Default

MDX

Grp0004-602-ISTM-637-602-dw-area_cube

Metadata

Search Model

Measure Group:

<All>

Grp0004-602-ISTM-637-602-dw-area_cube

Measures

PRODUCT SALES FACT

Gross Margin

Dimension

TIME DIM

PRODUCT DIM

STORE DIM

Hierarchy

Operator

Year

Product Type

Price Tier

Sales

Equal

Equal

Equal

<Select dimension>

Year	Product Type	Price Tier	Sales
1990	Bottled Juice	High	1083917.14
1990	Bottled Juice	Low	397032.29
1990	Bottled Juice	Medium	1691071.36

Sales	Product Category				Product Category					
	Bottled Juice			Bottled Juice Total	Soft Drinks			Soft Drinks Total	Grand Total	
Row Labels	High	Low	Medium		High	Low	Medium			
1989										
1990	302.60%	330.55%	288.18%	297.96%	312.88%	283.05%	280.13%	290.21%	290.89%	
1991	23.19%	20.95%	22.57%	22.58%	3.40%	-3.72%	-3.97%	-1.64%	0.52%	
Grand Total										

Figure 67 Excel Export for BQ -3

Query Design

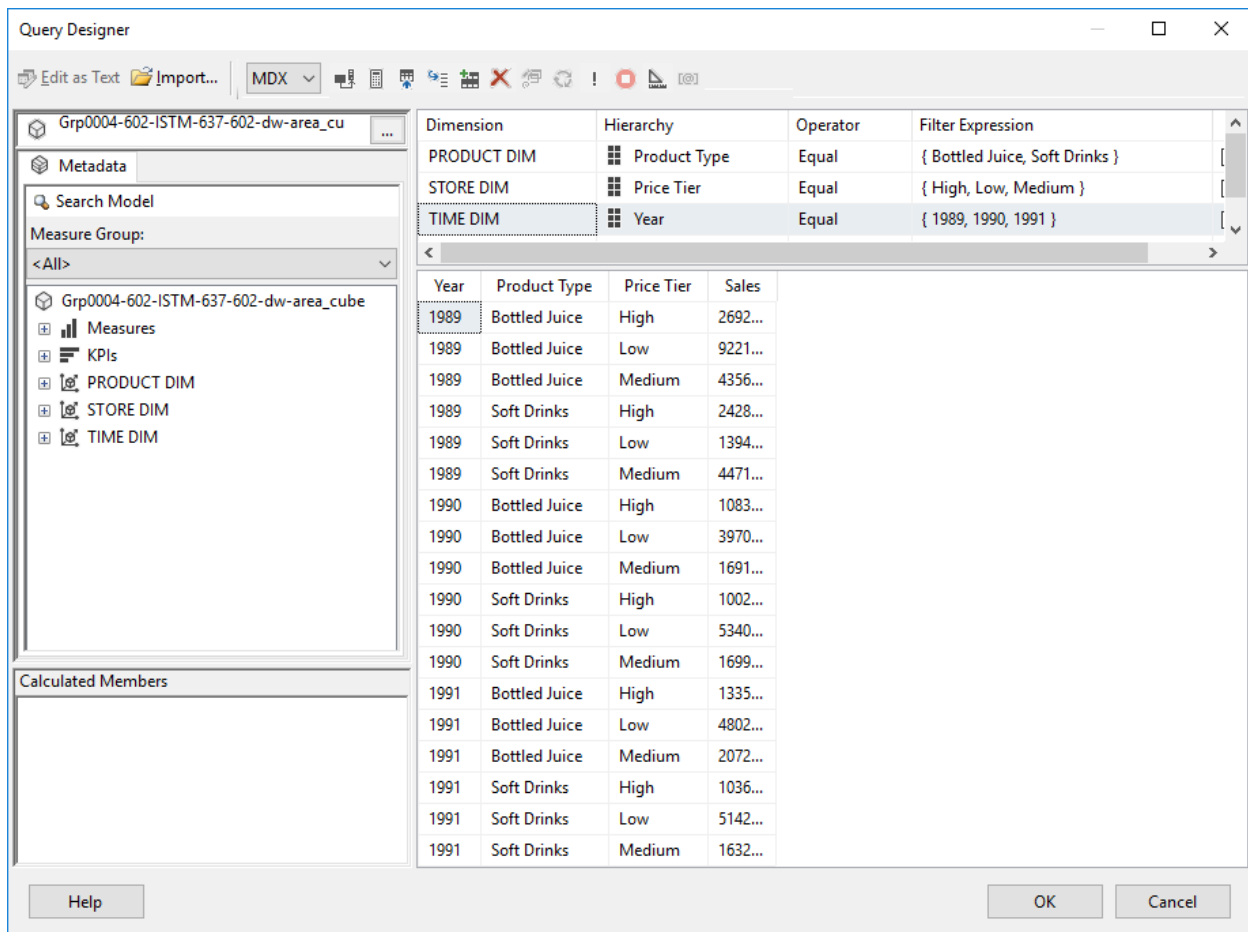


Figure 68 Query Design for BQ -3 – Part 1

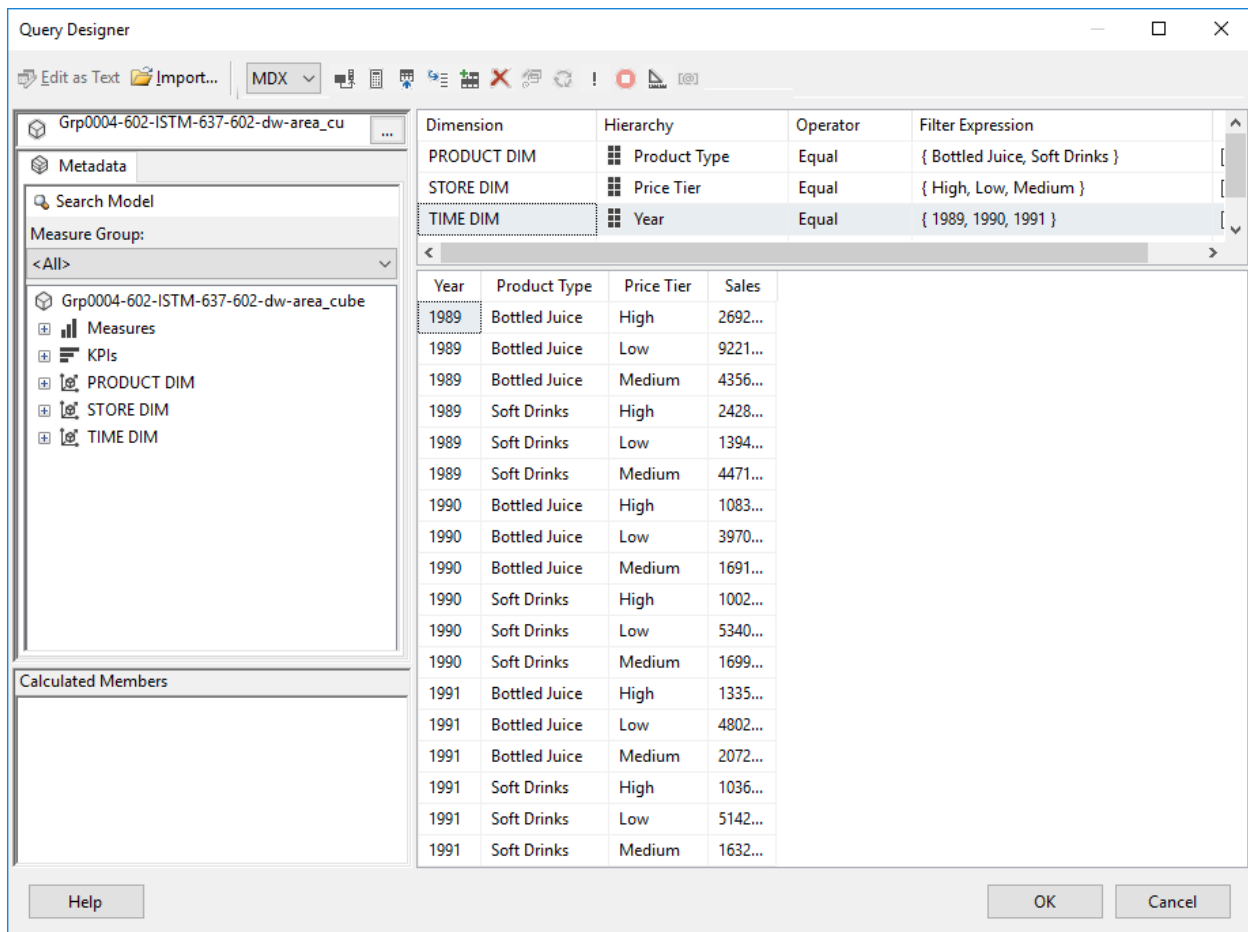


Figure 69 Query Design for BQ -3 - Part 2

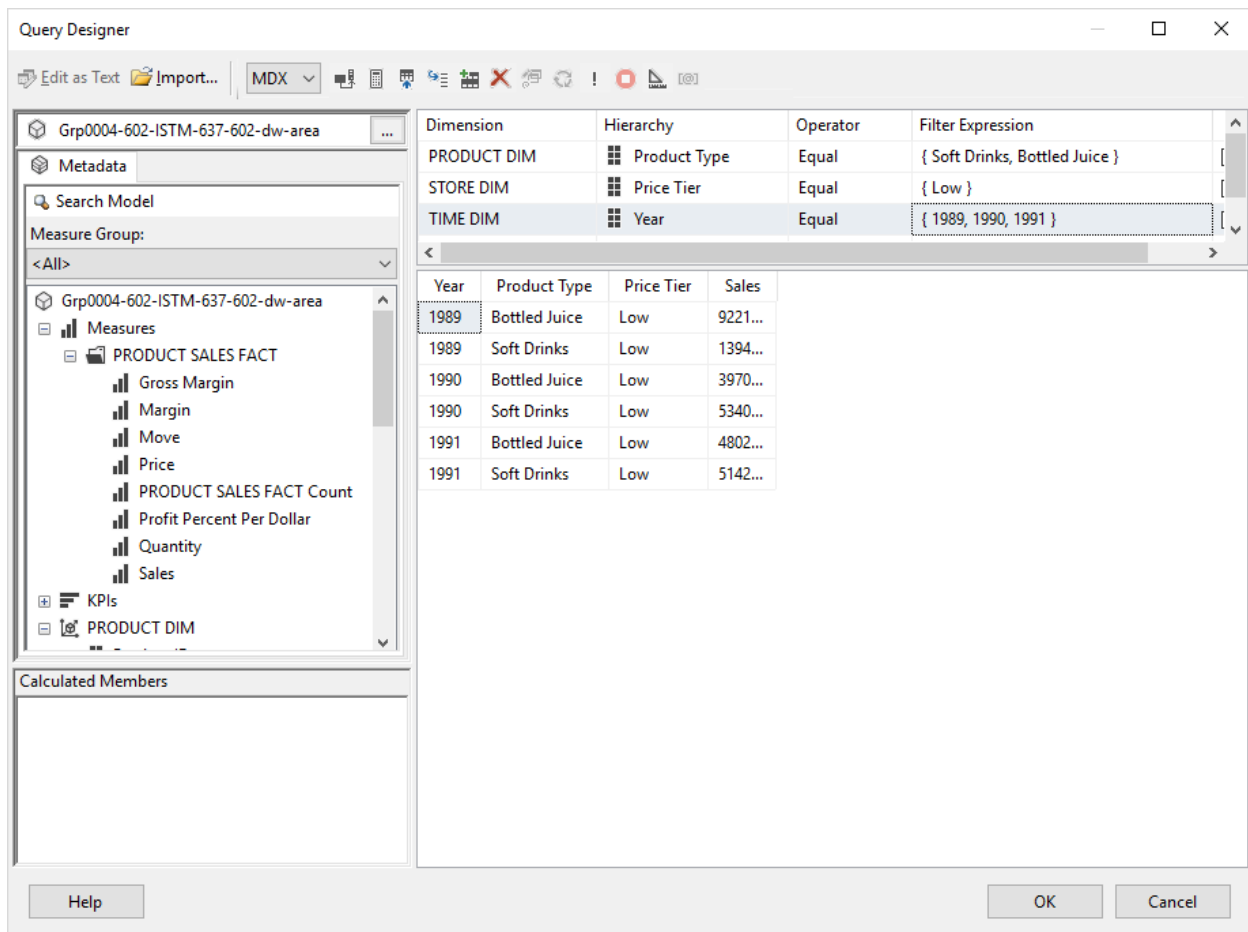


Figure 70 Query Design for BQ -3 – Part 3

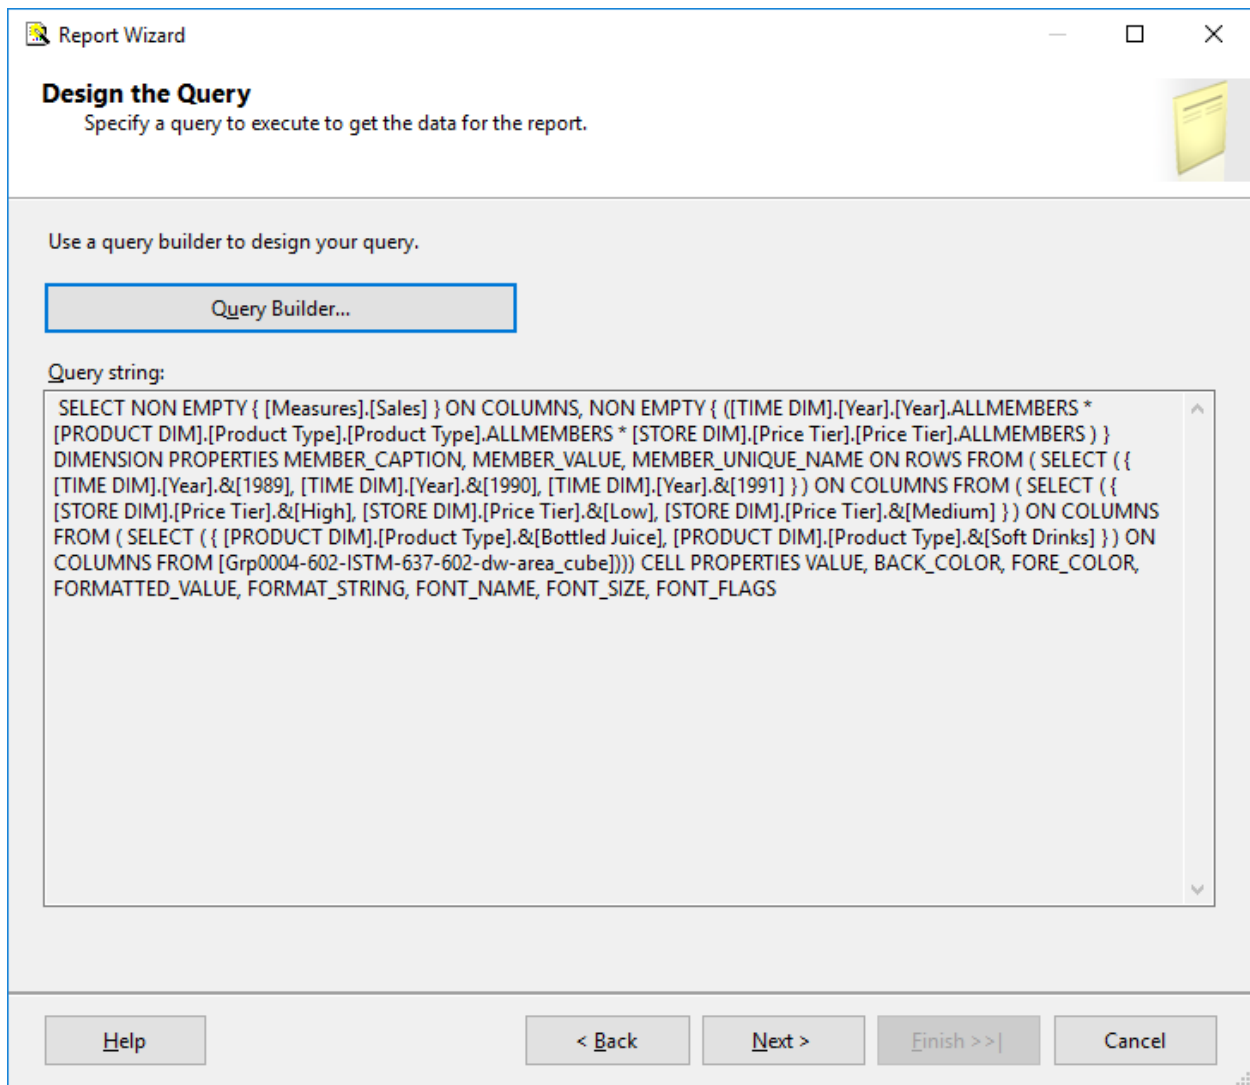


Figure 71 Query Builder for BQ -3

Table Design

Report Wizard

Design the Table
 Choose how to group the data in the table.

Available fields:

Page>

Group>

Details>

< Remove

Displayed fields:

Product_Type
Price_Tier

Year

Sales

↑

↓

XXXX

XXXX

XXXX

XXXX XXXX XXXX

XXXX XXXX XXXX

XXXX

XXXX XXXX XXXX

XXXX XXXX XXXX

Help

< Back

Next >

Finish >>|

Cancel

Figure 72 Table Design for BQ -3

Final Report

Report Wizard

Completing the Wizard

Provide a name and click Finish to create the new report.

Report name:
SoftDrinks_HealthBeverage_Annual_Trends

Report summary:

Data source: SoftDrinks_HealthBeverage_OLAP_Cube
Connection string: Data Source=INFODATA16.MBS.TAMU.EDU;Initial Catalog=001_SoftDrink_and_Beverage_Cube
Report type: Table
Layout type: Stepped (with subtotals)
Style: Modern
Drilldown: Enabled
Page: Product_Type, Price_Tier
Grouping: Year
Details: Sales
Query: SELECT NON EMPTY { [Measures].[Sales] } ON COLUMNS, NON EMPTY { ([TIME DIM].[Year].

☒ Preview report

Help < Back Next > Finish Cancel

Figure 73 Report Parameter Preview for BQ -3

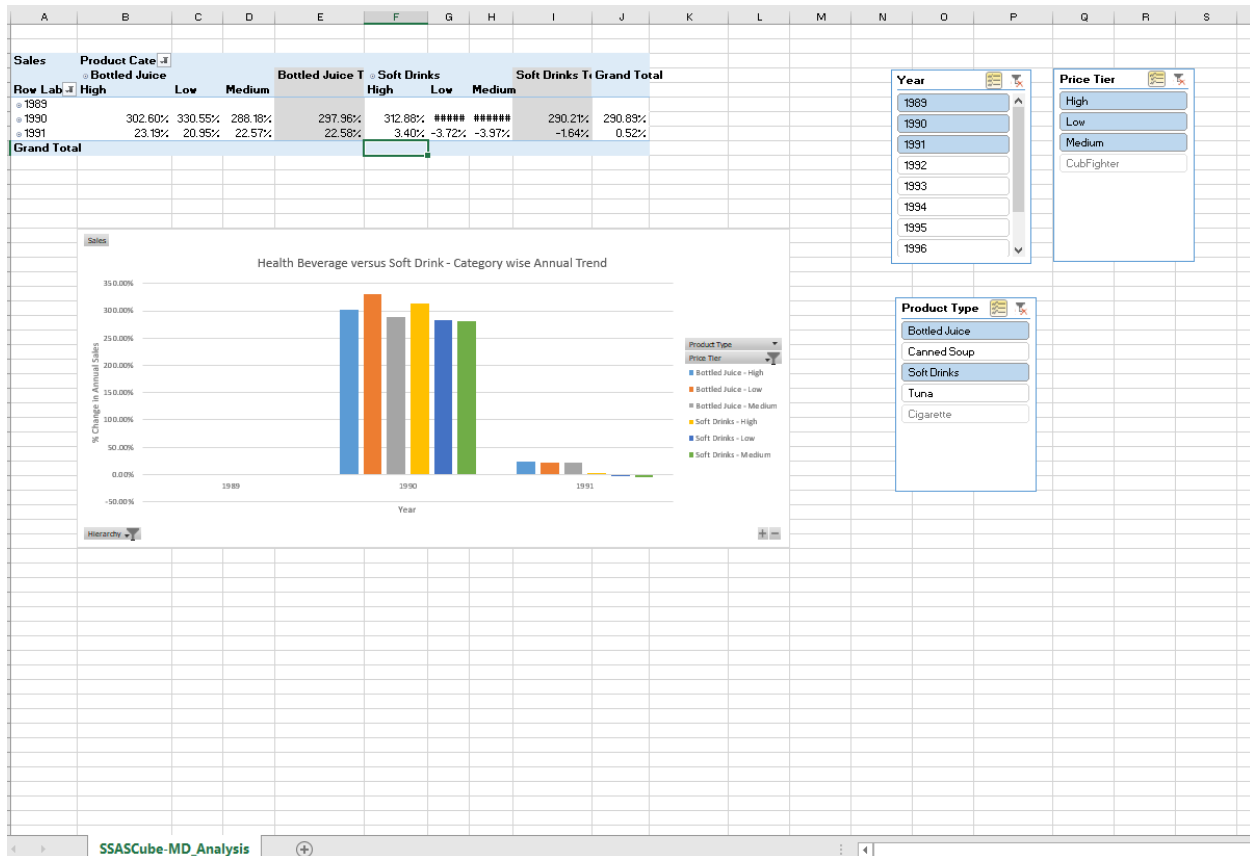


Figure 74 Pivot Table from SSAS for BQ -3

6.4.2 SSRS on top of SSAS

Connect to Cube

Report Wizard

Select the Data Source

Select a data source from which to obtain data for this report or create a new data source.

☐ Shared data source

☒ New data source

Name:
SoftDrinks_HealthBeverage_OLAP_Cube

Type:
Microsoft SQL Server Analysis Services

Edit... Credentials...

Connection string:
Data Source=INFODATA16.MBS.TAMU.EDU;Initial
Catalog=001_SoftDrink_and_Beverage_Cube

☐ Make this a shared data source

Help < Back Next > Finish >>| Cancel

Figure 75 Cube Connection for BQ -3 – Part 1

Connection Properties

Data source:
Microsoft SQL Server Analysis Services (Ac) Change...

Server name:
INFODATA16.MBS.TAMU.EDU

Log on to the server

User name:

Password:

☐ Save my password

Connect to a database

Select or enter a database name:
001_SoftDrink_and_Beverage_Cube

Advanced...

Test Connection OK Cancel

Figure 76 Cube Connection for BQ -3 – Part 2

Exported Graph

SoftDrinks HealthBeverage Analysis

Year	Price Tier	Product Type	Sales
1989	High	Bottled Juice	269226.93
			92214.83
			435638.16
1990	High	Bottled Juice	1083917.14
			397032.29
			1691071.36
1991	High	Bottled Juice	1335324.48
			480222.93
			2072752.00

Figure 77 SSRS on top of SSAS Report for BQ -3 – Part 1

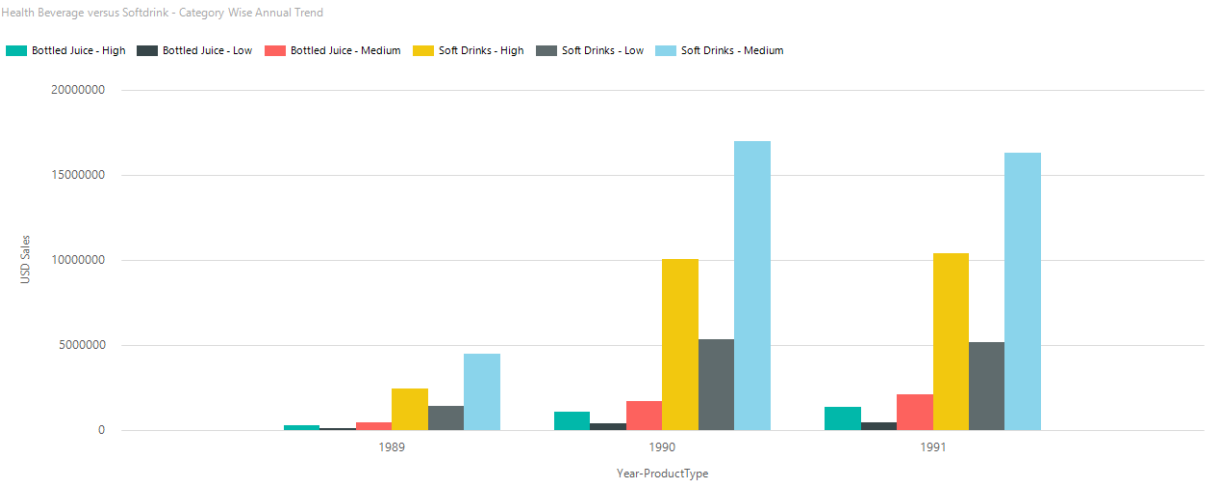


Figure 78 SSRS on top of SSAS Report for BQ -3 – Part 2

Conclusion

Based on the graphs we created using SSAS and SSRS on top of SSRS, generally the sales of Soft Drinks and Bottle Juice are both increasing from year 1989 to 1991, yet the increase ratio from 1989 to 1990 is larger than that from 1990 to 1991. Besides, the sale of Soft Drinks is much higher than Bottle Juice in each tire-level of stores. Only Soft Drinks in Medium Tire Store has slightly negative growth rate from 1990 to 1991. About the sales of Bottle Juice in Low Tire, it is increasing from 1989 to 1991. Comparatively, the obvious increase happens in 1990 and the sale slightly increases from 1990 to 1991. Such contrast sale trend analysis in the close category enables Dominick Finer Foods to adjust the inventory according to customers' need. Like in this case, the sale of Soft Drinks clearly beats the sale of Bottled Juice, thus DFF can provide more Soft Drinks and also initiate some promotion to enhance the sales of Bottle Juice.

6.5 ReportBuilder3.0 for BQ-4

Based on the report plan, ReportBuilder3.0 is adopted to create visualization for business question 4.

BQ-4: What effect does the time of the year have on sales of each Tuna? Determine the impact of seasonality on Average Sales of Tuna from December-1990 to September 1992?

Data Source Connection

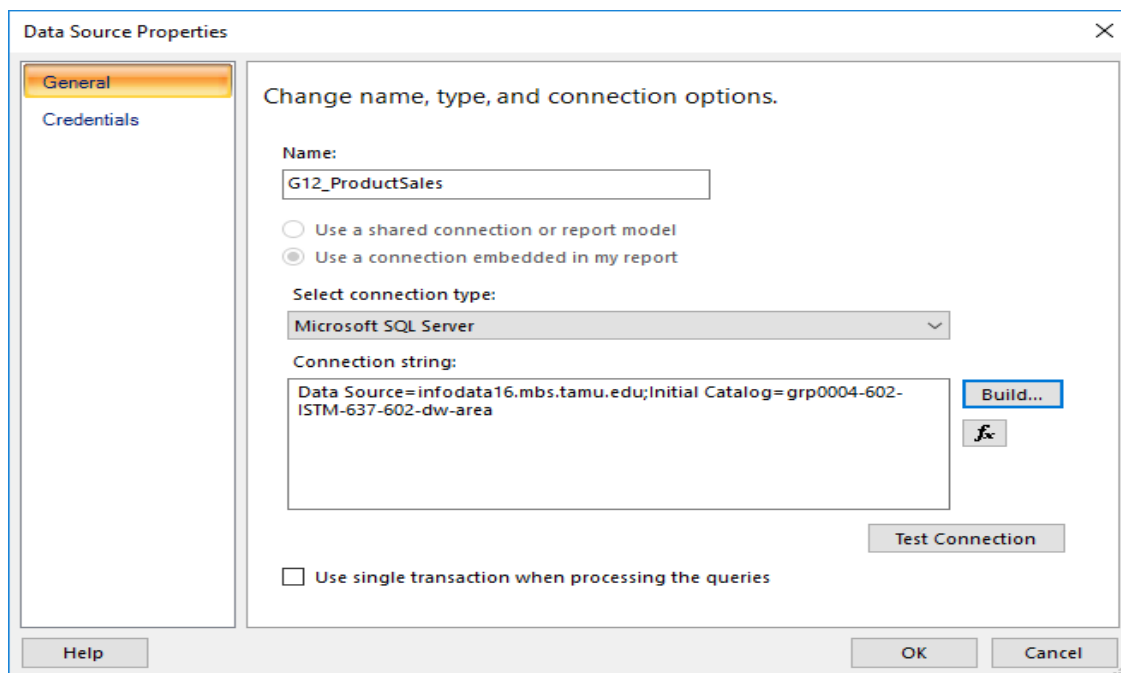


Figure 79 Data Source Connection for BQ -4

Query Design

New Table or Matrix

Design a query

Build a query to specify the data you want from the data source.

Edit as Text Import... Run Query

Database view

- ☒ PRODUCT_SALES_FACT
 - ☐ Product_Sales_ID
 - ☐ Product_ID
 - ☐ Store_ID
 - ☐ Time_ID
 - ☐ Price
 - ☐ Quantity
 - ☐ Profit_Percent_Per_Dollar
 - ☐ Sales_Promotion_Code
 - ☒ Sales
 - ☐ Move
 - ☐ Margin
 - ☐ Gross Margin
- ☐ PRODUCT_SALES_FACT_bkp
- ☐ STORE_DIM
- ☐ sysdiagrams
- ☒ TIME_DIM
 - ☐ Time_ID
 - ☒ Year
 - ☒ Month
 - ☐ Week_Number
 - ☐ Start_Date
 - ☐ End_Date

Selected fields

Field	Aggregate
Year	(none)
Month	(none)
Sales	(none)
"Product_Type"	(none)

Relationships

Auto Detect Edit Fields

Applied filters

Field name	Operator	Value	Parameter
"Product_Type"	is	Tuna	<input type="checkbox"/>

Query results

Help < Back Next > Cancel

Figure 80 Query Design for BQ -4

Choose Layout

New Table or Matrix

Choose the layout

If you choose to show subtotals and grand totals, you can place them above or below the group. Stepped reports show hierarchical structure with indented groups in the same column.

Options:

- ☒ Show subtotals and grand totals
 - ☐ Blocked, subtotal below
 - ☐ Blocked, subtotal above
 - ☒ Stepped, subtotal above
- ☒ Expand/collapse groups

Preview

Month	Sales
[Year]	[Sum(Sales)]
[Month]	[Sum(Sales)]
Total	[Sum(Sales)]

Help < Back Next > Cancel

Figure 81 Layout Design for BQ -4

Chart Design

New Chart

Arrange chart fields

Add data fields to the chart. For most chart types, a field in the Categories list is displayed on the x-axis. A field in the Values list shows aggregated data on the y-axis. A field in the Series list creates a new series in the chart.

Available fields

- Month
- Year
- ID_Product_Type_
- Sales

Series

Categories

- Year
- Month

Σ Values

- Sum(Sales)

Help < Back Next > Cancel

Figure 82 Chart Design for BQ -4 – Part 1


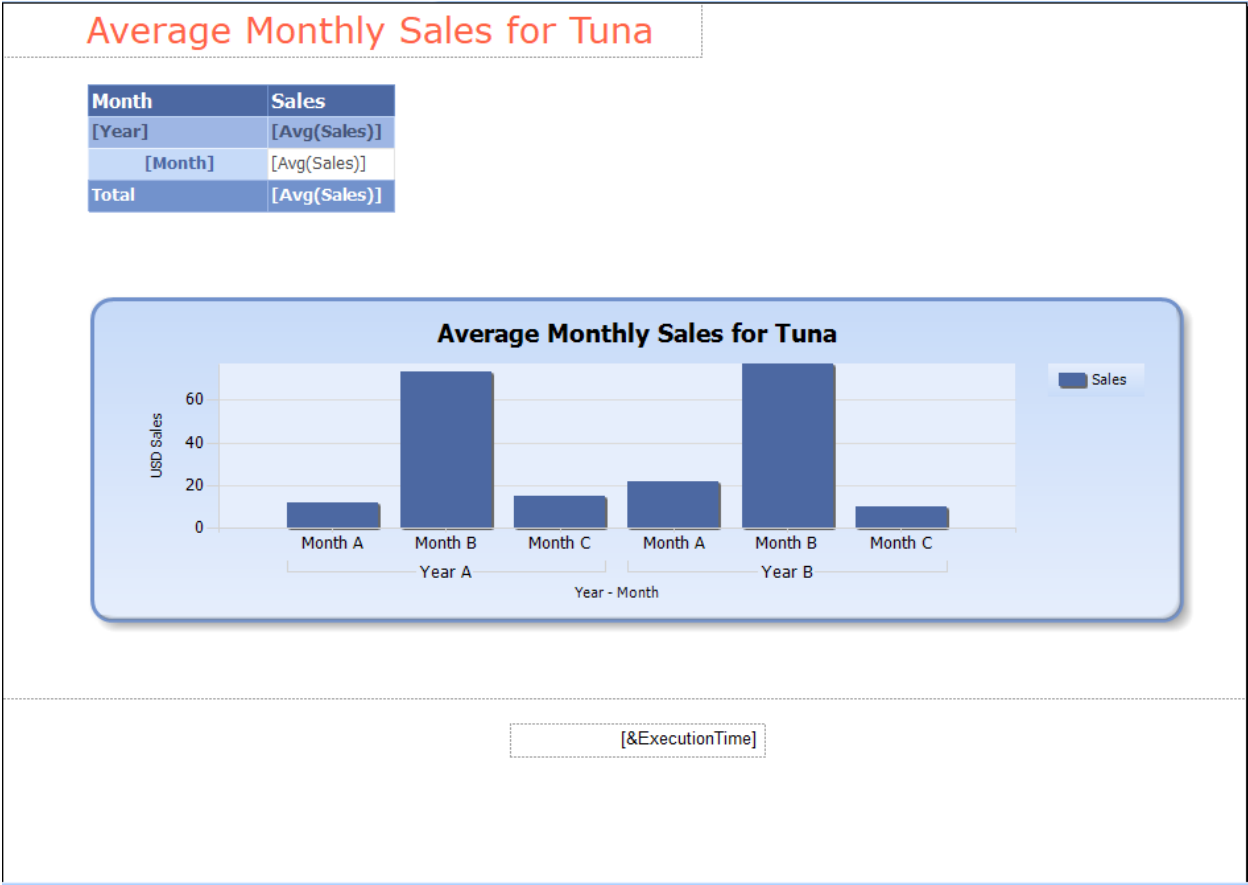


Figure 83 Chart Design for BQ -4 – Part 2

Average Monthly Sales for Tuna

Month	Sales
☐ 1989	25.95
September	26.34
October	24.60
November	25.58
December	27.48
☐ 1990	26.68
January	29.38
February	35.59
March	31.71
April	23.49
May	22.31
June	26.10
July	26.55
August	24.61
September	35.42
October	21.75
November	21.54
December	23.68
☐ 1991	24.06
☐ 1992	20.34
☐ 1993	20.17
☐ 1994	20.43
☐ 1995	19.45
☐ 1996	13.44
☐ 1997	23.92
Total	21

Figure 84 Report for BQ-4 – Part 1

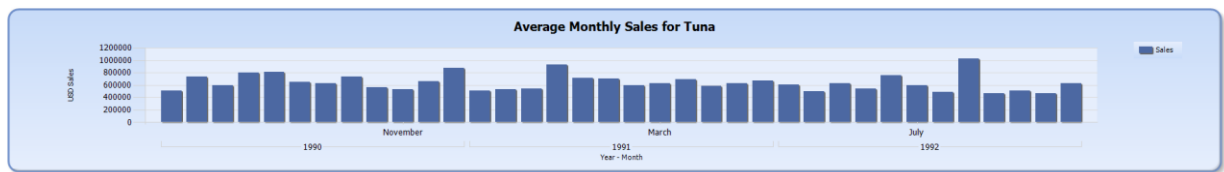

4/29/2018 9:21:46 PM

Figure 85 Report for BQ-4 – Part 2

Conclusion

As we can see in the chart, there is a factor of seasonality and cyclicity for Tuna Sales. We see during the 1st quarter of year, especially during the months of January, February and March, there is a surge in the


average sales price of Tuna. This pattern repeats itself across years. Knowledge of this trend can help DFF to plan their Tuna inventory, new product launch, discounts and channel rebates to increase the volumes, customer base and margins by adopting proper pricing and bundling strategy. We found Report Builder 3.0 to be a useful tool for this report. It aligned with the needs for drill down reports.

6.6 SSAS for BQ-5

Based on the report plan, SSAS is adopted to create visualization for business question 5.

BQ-5: What is annual growth rate of cigarette margins in low tier stores? What is the decreasing trend?

Connect to Database

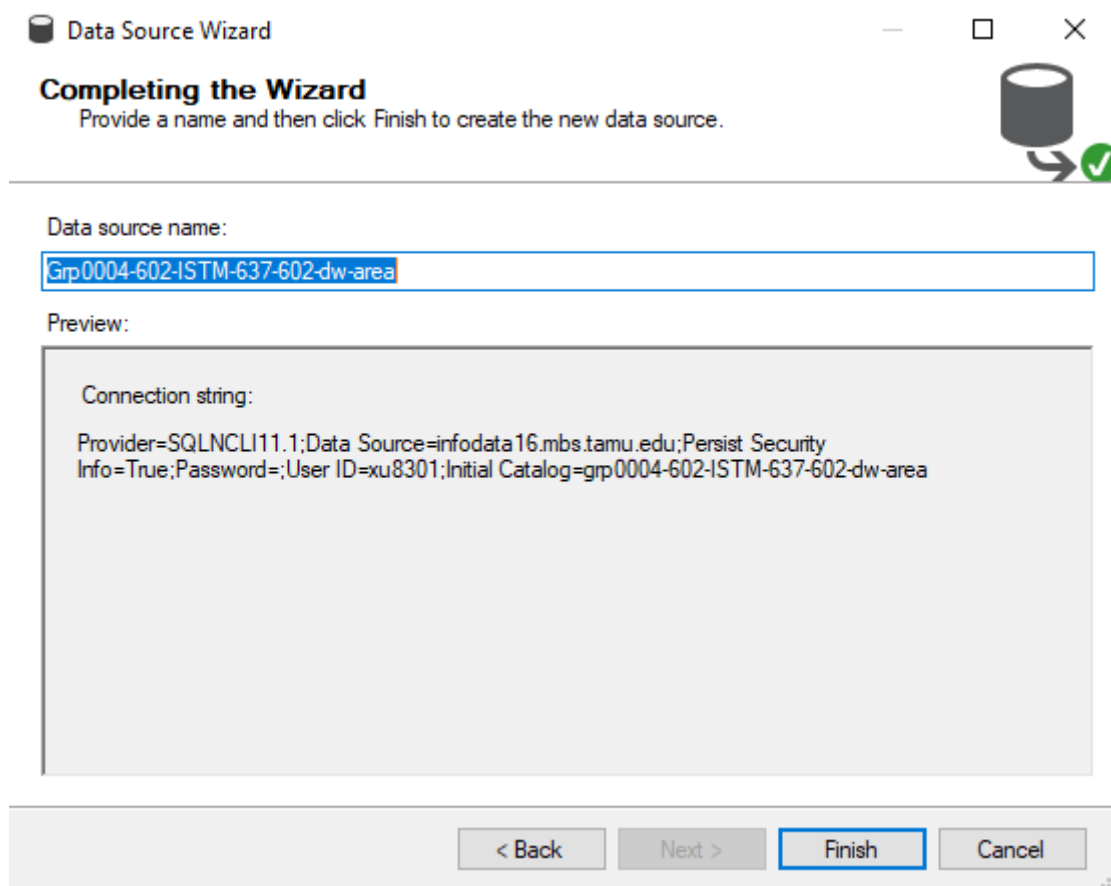

Data Source Wizard

Completing the Wizard
Provide a name and then click Finish to create the new data source.

Data source name:
Grp0004-602-ISTM-637-602-dw-area

Preview:

Connection string:
Provider=SQLNCLI11.1;Data Source=infodata16.mbs.tamu.edu;Persist Security Info=True;Password=;User ID=xu8301;Initial Catalog=grp0004-602-ISTM-637-602-dw-area

< Back Next > **Finish** Cancel

Figure 86 Database Connection for BQ-5

Create Data Source View

Data Source View Wizard

Completing the Wizard
Provide a name, and then click Finish to create the new data source view.

Name:

Preview:

- Grp0004-602-ISTM-637-602-dw-area
 - PRODUCT_DIM (dbo)
 - PRODUCT_SALES_FACT (dbo)
 - STORE_DIM (dbo)
 - TIME_DIM (dbo)

< Back Next > **Finish** Cancel

Figure 87 Data Source View Creation for BQ-5

Create Cube

Cube Wizard

Select Measure Group Tables
Select a data source view or diagram and then select the tables that will be used for measure groups.

Data source view:

Measure group tables:

- ☐ PRODUCT_DIM
- ☒ PRODUCT_SALES_FACT
- ☐ STORE_DIM
- ☐ TIME_DIM

Suggest

< Back Next > Finish >> Cancel

Figure 88 Cube Creation for BQ-5 – Part 1

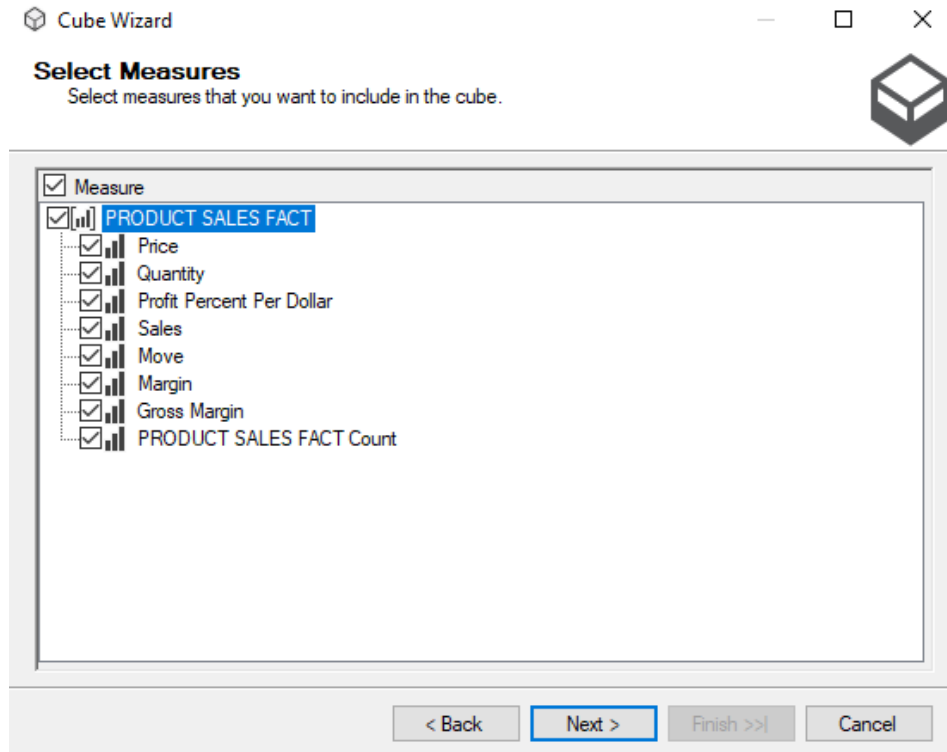


Figure 89 Cube Creation for BQ-5 – Part 2

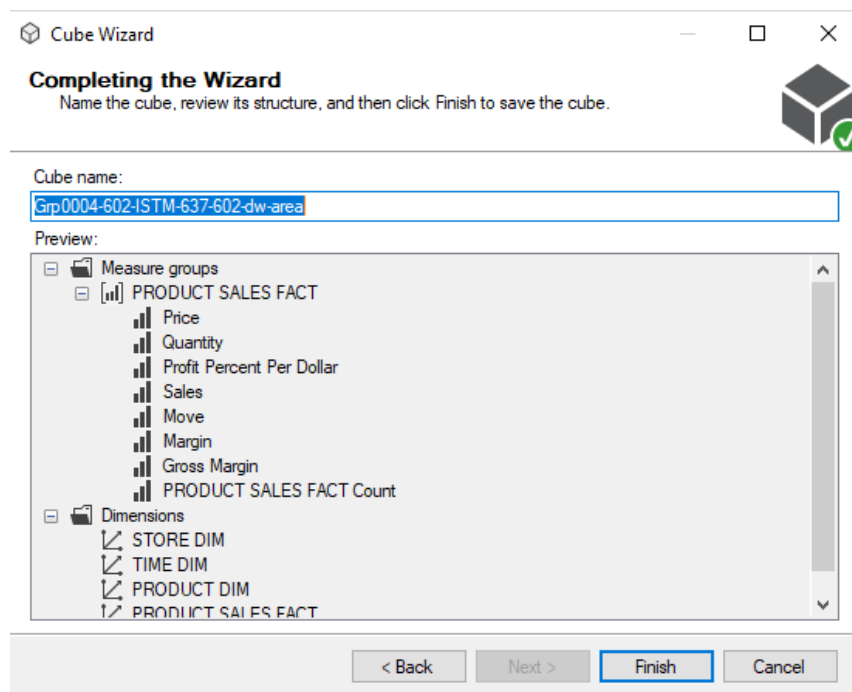


Figure 90 Cube Creation for BQ-5 – Part 3

Cube Structure

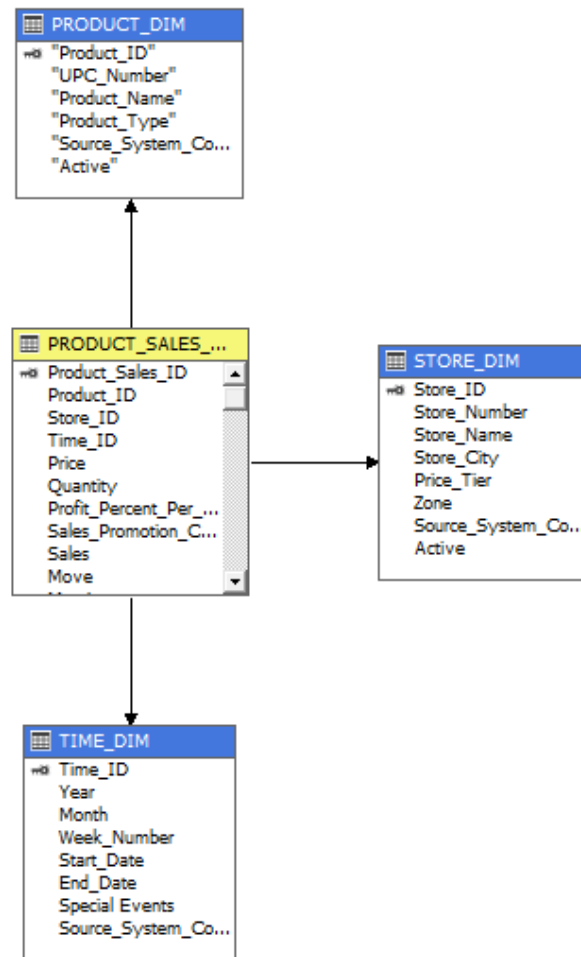


Figure 91 Cube Structure for BQ-5

Deployment

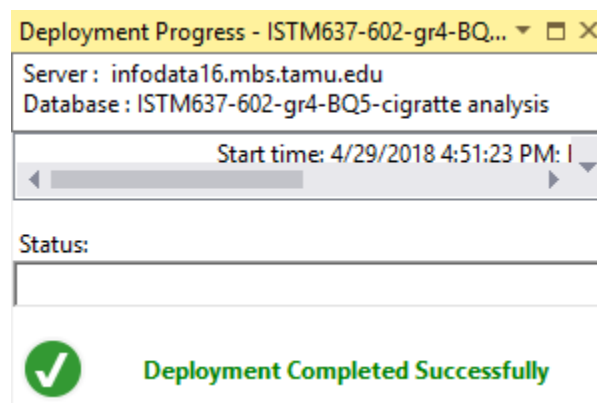


Figure 92 Cube Deployment for BQ-5

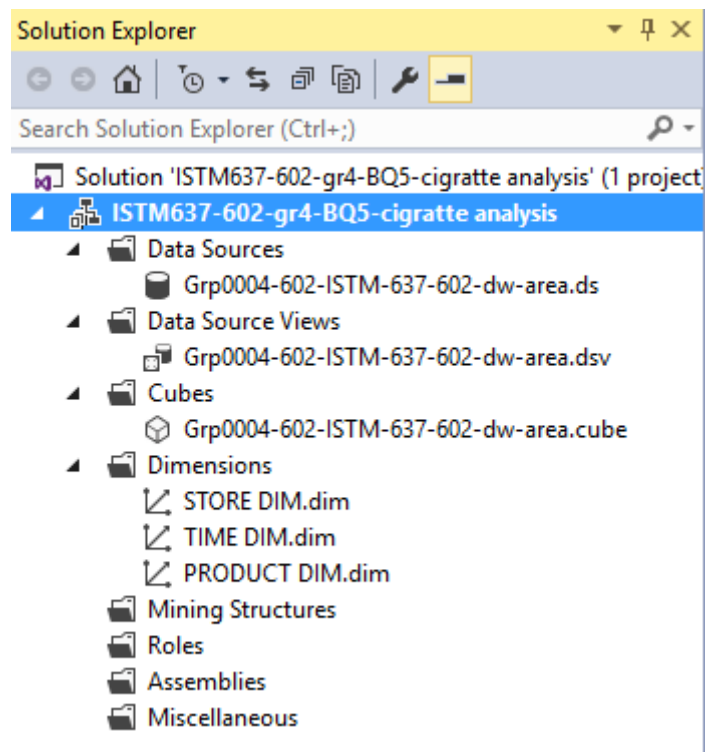


Figure 93 Analysis Service Project Preview for BQ-5

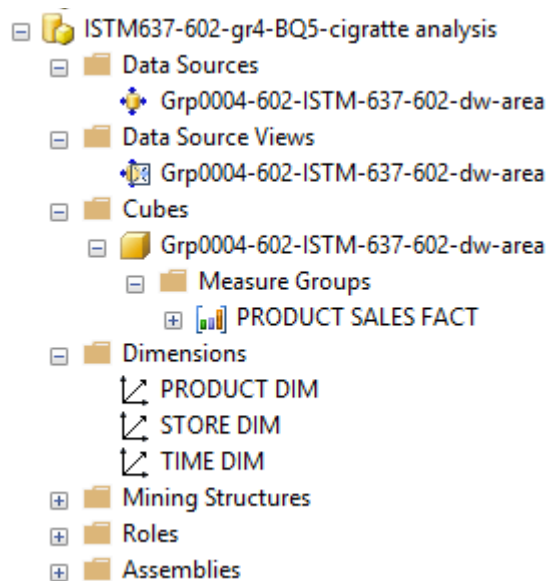


Figure 94 Analysis Service Database Preview for BQ-5

Query Design

Analysis Services Tutorial [Browse] Grp0004-602-ISTM-...2-dw-area [Browse] Language: Default

Edit as Text Import... MDX

Grp0004-602-ISTM-637-602-dw-area

Metadata

Search Model

Measure Group:

<All>

Grp0004-602-ISTM-637-602-dw-area

Measures

- PRODUCT SALES FACT
 - Gross Margin
 - Margin
 - Move
 - Price
 - PRODUCT SALES FACT Count
 - Profit Percent Per Dollar
 - Quantity
 - Sales
- KPIs
- PRODUCT DIM
 - Active
 - Price Tier
 - Source System Code
 - Store City
 - Store ID
 - Store Name
 - Store Number
 - Zone
- TIME DIM
 - End Date
 - Month
 - Source System Code
 - Special Events
 - Start Date
 - Time ID
 - Week Number
 - Year

Dimension	Hierarchy	Operator	Filter Expression
PRODUCT DIM	Product Type	Equal	{ Cigarette }
STORE DIM	Price Tier	Equal	{ Low }
<Select dimension>			

Year	Store ID	Gross Margin
1989	3	53801.722947
1989	7	27957.892788
1989	27	6561.34312
1989	32	17896.013656
1989	49	31687.176333
1989	55	62226.053373
1989	56	52193.471027
1989	64	71388.607413
1989	81	32343.647735
1990	3	164096.530...
1990	7	76256.302675
1990	27	90867.080873
1990	32	61070.595634
1990	49	171362.536...
1990	55	187488.583...
1990	56	179823.739...
1990	64	229238.084...
1990	81	115182.791...
1991	3	95138.4759...
1991	7	61728.374656
1991	27	59990.765867
1991	32	41058.788959
1991	49	94794.106824
1991	55	135235.22036
1991	56	111303.606...

Figure 95 Query Design for BQ-5

Export Excel

Price Tier	Low								
Product Type	Cigarette								
Gross Margin	Store Number								
Row Labels	3	7	32	55	56	64	81	Grand Total	
1989									
1991	76.83%	120.79%	129.43%	117.33%	113.25%	100.47%	195.36%	114.94%	
1992	-59.23%	-56.74%	-35.49%	-57.82%	-67.48%	-56.31%	-38.87%	-55.18%	
1993	-45.74%	-38.52%	-59.26%	-29.81%	-65.90%	-20.05%	-48.70%	-41.01%	
1994	-43.91%	-29.04%	-63.99%	-13.89%	-4.42%	-0.59%	-36.63%	-21.20%	
1995	-3.66%	27.90%	-19.75%	-45.83%	-38.41%	-16.77%	-12.18%	-20.33%	
1996	-42.62%	40.99%	8.62%	11.06%	21.49%	21.59%	37.93%	18.01%	
1997	-67.88%	-70.19%	-52.23%	-30.83%	-62.54%	-60.90%	-66.43%	-58.88%	
Grand Total									

Figure 96 Excel Export for BQ-5

Analysis Report

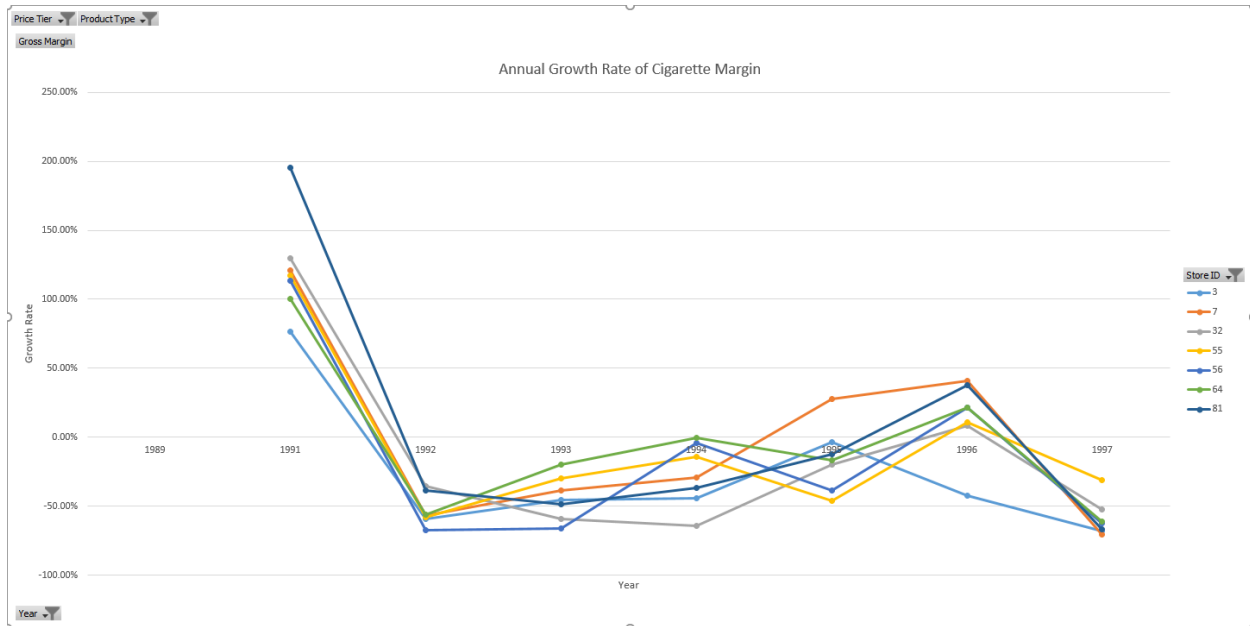


Figure 97 Analysis Report for BQ-5 - Part 1

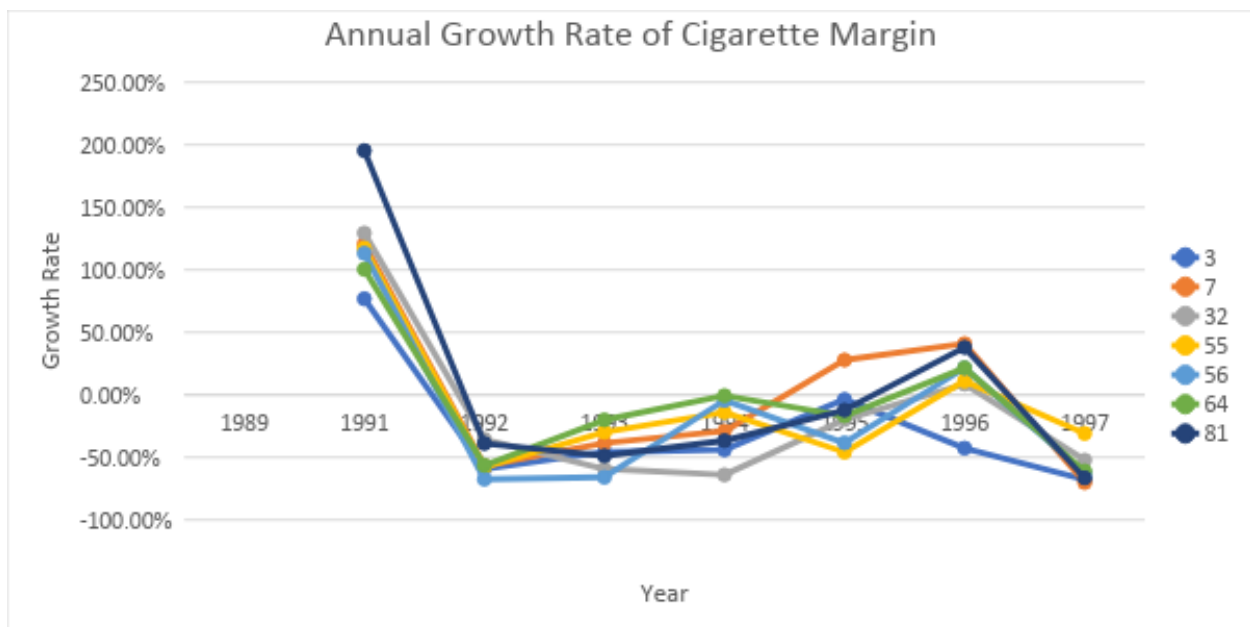


Figure 98 Analysis Report for BQ-5 - Part 2

Conclusion

The graph above addresses the annual growth rate of cigarette margins in low tier stores well. All the listed numbers, like 3, 7, 32, 55, are the store IDs of low tier stores. A clear trend is that from 1991 to 1992, the cigarette sale in all low tier stores decreased sharply. From year 1992 to

1996, the sale was basically increasing. Like store 7 and store 81, the sale of cigarette was always increasing in the five years. And in stores like 55, the sales decreased from 1994 to 1995, but it continued to increase from 1995 to 1996. Overall, the trend was increasing. However, from 1996 to 1997, all stores' cigarette sales were decreasing once again. That trend analysis enables DFD react quickly to the market and adjust the inventory to the market needs. The same analysis method applies to other sale trend discoveries, which facilitates DFD to make better business decisions.

7. Group Special Work on Data Quality, Error Files

We have done the data quality checks at the data warehouse level for referential integrity, value and volume tests by using Industry standard ETL testing procedures. We have successfully tested the data for NULL value and Duplicate checks in Fact and Dimension tables thereby assuring highest data quality to facilitate single version of truth. We have re-directed the bad records to Error file which can be used to reconciliation and Audit purpose to periodically check the overall health of data warehouse.

7.1 NULL CHECK

The image displays two side-by-side screenshots of a SQL query execution interface. Both screenshots show a query: `select COUNT(*) from PRODUCT_SALES_FACT WHERE [Column] is NULL;`. The left screenshot checks for NULL values in the `Product_ID` column, and the right screenshot checks for NULL values in the `Store_ID` column. Both queries returned a single result row with a count of 0.

Left Screenshot:


```
select COUNT(*) from PRODUCT_SALES_FACT
WHERE Product_ID is NULL;
```

(No column name)
1 0


Right Screenshot:


```
select COUNT(*) from PRODUCT_SALES_FACT
WHERE Store_ID is NULL;
```

(No column name)
1 0

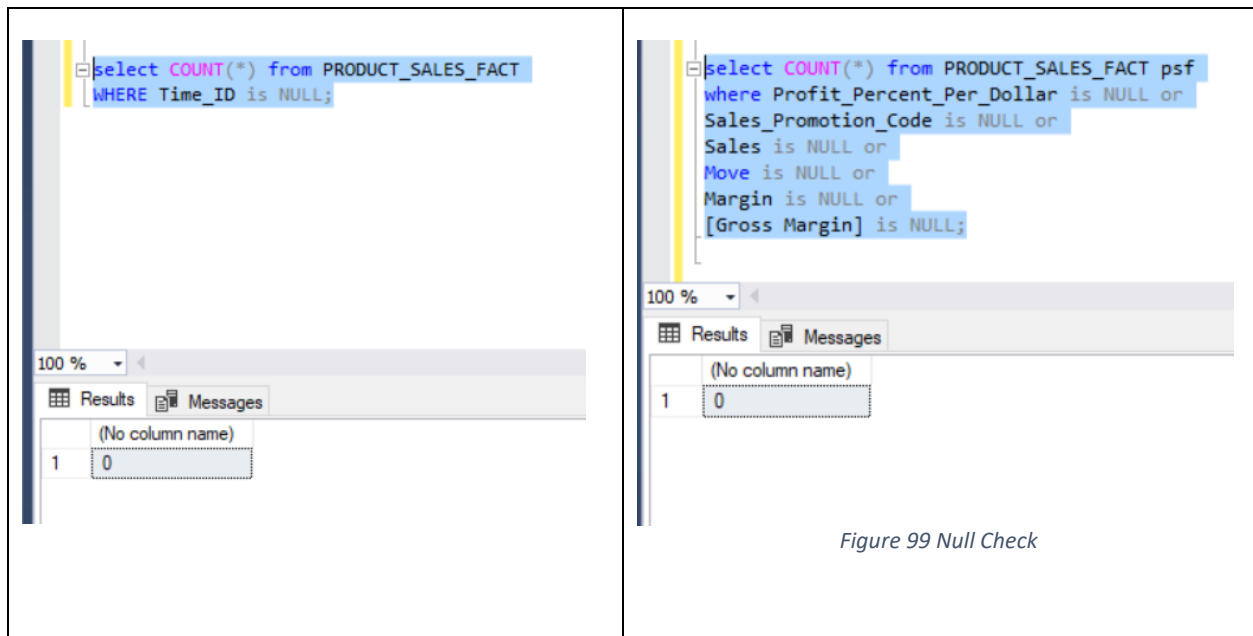

7.2 REFERENTIAL INTEGRITY CHECK

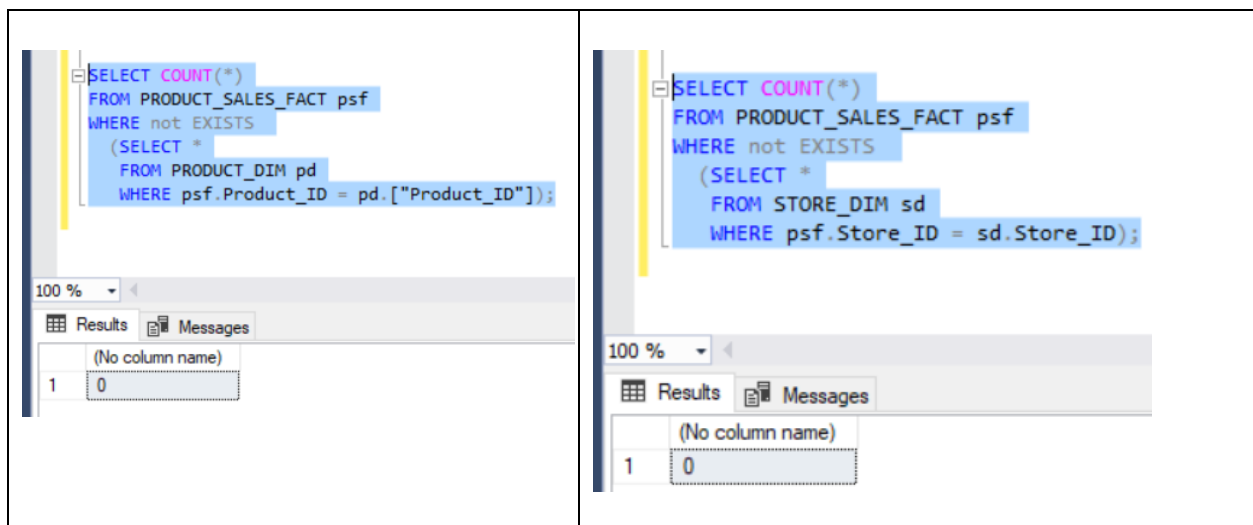


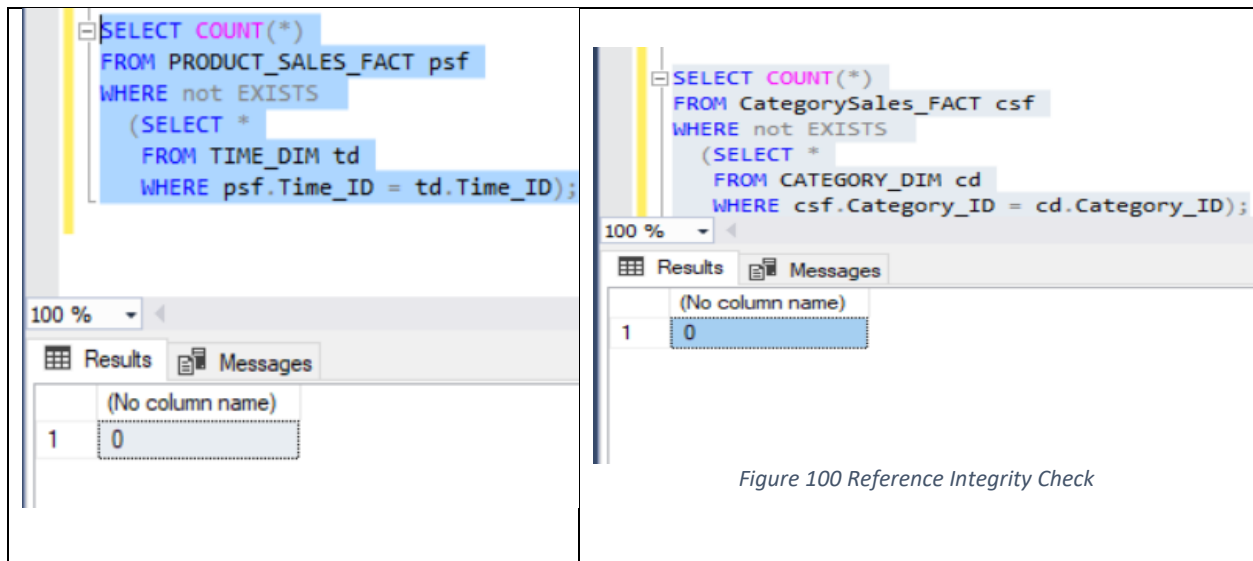

7.3 DUPLICATES CHECK



7.4 Error File Creation

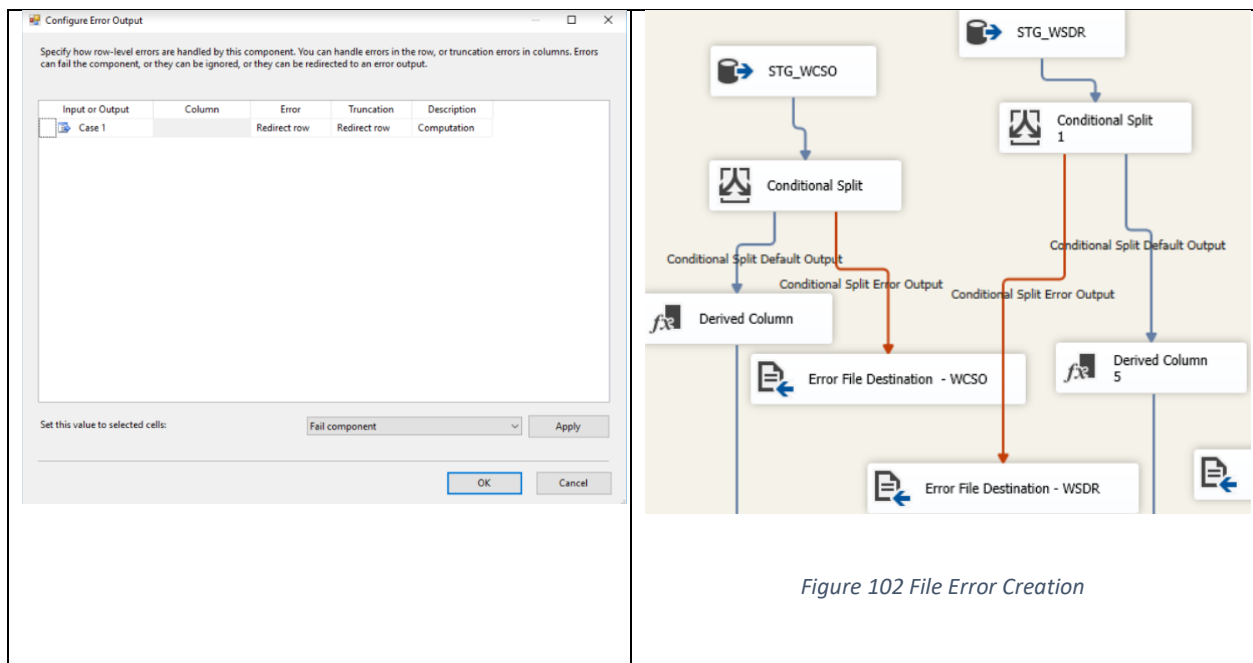

Appendix A

Figure 1 ERD for Dominick's Data Warehouse.....	5
Figure 2 Data for BQ-1	7
Figure 3 Pivot Table for BQ-1	7
Figure 4 Data for BQ-2	8
Figure 5 Pivot Table for BQ-2	9
Figure 6 Data for BQ-3	10
Figure 7 Pivot Table for BQ-3	10
Figure 8 Data for BQ-4	11
Figure 9 Pivot Table for BQ-4	11
Figure 10 Data for BQ-5	12
Figure 11 Pivot Table for BQ-5	13
Figure 12 Product Sales Information Package	14
Figure 13 Category Sales Information Package	14
Figure 14 Star Schema for Product Sales data mart	17
Figure 15 Star Schema for Category Sales data mart	18
Figure 16 Time Dimension Transformation	31
Figure 17 Time Dimension Table	32
Figure 18 Store Dimension Mapping	33
Figure 19 Store Dimension Transformation	34
Figure 20 Store DimensionTable.....	34
Figure 21 Product Dimension Mapping	36
Figure 22 Product Dimension Transformation	37
Figure 23 Product Dimension Table.....	37
Figure 24 CCount File Snapshot	38
Figure 25 CCount File Cleaning	39
Figure 26 Category Dimension Transformation.....	41
Figure 27 ETL of CategorySales Fact Table.....	42
Figure 28 CategorySales Fact Table Snapshot	42
Figure 29 ProductSales Fact Table Mapping.....	45
Figure 30 ETL of ProductSales Fact Table Mapping	46
Figure 31 ProductSales Fact Table Snapshot	46
Figure 32 ETL of CategorySales Fact Table Mapping	47
Figure 33 CategorySales Fact Table Snapshot	49
Figure 34 Table Structure for Product Sales Data Mart.....	50
Figure 35 Table Structure for Category Sales Data Mart	51
Figure 36 Snapshot for Data Warehouse Area	52
Figure 37 Mapping from Data Mart to SSRS report for BQ-1	61
Figure 38 Mapping from Data Mart to SSRS report for BQ-2	62
Figure 39 Mapping from Data Mart to SSRS+SSAS report for BQ-3	63
Figure 40 Mapping from Data Mart to report for BQ-4	64
Figure 41 Mapping from Data Mart to SSAS report for BQ-5	65

Figure 42 Data Source Connection for BQ-1.....	66
Figure 43 Query Design-1 for BQ-1.....	67
Figure 44 Query Design-2 for BQ-1.....	68
Figure 45 Query Design-3 for BQ-1.....	69
Figure 46 Table Design for BQ-1.....	70
Figure 47 Report Parameter Preview for BQ-1.....	71
Figure 48 SQL Query for BQ-1.....	72
Figure 49 Report Deployment for BQ-1.....	72
Figure 50 Report Format for BQ-1.....	73
Figure 51 Report for BQ-1 – Part 1.....	73
Figure 52 Report for BQ-1 – Part 2.....	74
Figure 53 Report for BQ-1 – Part 3.....	74
Figure 54 Data Connection for BQ-2.....	75
Figure 55 Query Builder for BQ-2.....	76
Figure 56 Query Design for BQ-2.....	77
Figure 57 Report Parameter Preview for BQ-2.....	78
Figure 58 Report for BQ-2.....	79
Figure 59 Data Source Creation for BQ-3.....	80
Figure 60 Data Source View Creation for BQ-3.....	81
Figure 61 Analysis Services Project Preview for BQ-3.....	82
Figure 62 Cube Creation for BQ-3 – Part 1.....	83
Figure 63 Cube Creation for BQ-3 – Part 2.....	84
Figure 64 Cube Creation for BQ-3 – Part 3.....	85
Figure 65 Cube Structure for BQ-3.....	86
Figure 66 Cube Deployment for BQ -3.....	86
Figure 67 Excel Export for BQ -3.....	87
Figure 68 Query Design for BQ -3 – Part 1.....	88
Figure 69 Query Design for BQ -3 – Part 2.....	89
Figure 70 Query Design for BQ -3 – Part 3.....	90
Figure 71 Query Builder for BQ -3.....	91
Figure 72 Table Design for BQ -3.....	92
Figure 73 Report Parameter Preview for BQ -3.....	93
Figure 74 Pivot Table from SSAS for BQ -3.....	94
Figure 75 Cube Connection for BQ -3 – Part 1.....	95
Figure 76 Cube Connection for BQ -3 – Part 2.....	96
Figure 77 SSRS on top of SSAS Report for BQ -3 – Part 1.....	97
Figure 78 SSRS on top of SSAS Report for BQ -3 – Part 2.....	97
Figure 79 Data Source Connection for BQ -4.....	98
Figure 80 Query Design for BQ -4.....	99
Figure 81 Layout Design for BQ -4.....	100
Figure 82 Chart Design for BQ -4 – Part 1.....	100
Figure 83 Chart Design for BQ -4 – Part 2.....	101
Figure 84 Report for BQ-4 – Part 1.....	102
Figure 85 Report for BQ-4 – Part 2.....	102

Figure 86 Database Connection for BQ-5	103
Figure 87 Data Source View Creation for BQ-5	104
Figure 88 Cube Creation for BQ-5 – Part 1	104
Figure 89 Cube Creation for BQ-5 – Part 2	105
Figure 90 Cube Creation for BQ-5 – Part 3	105
Figure 91 Cube Structure for BQ-5	106
Figure 92 Cube Deployment for BQ-5.....	106
Figure 93 Analysis Service Project Preview for BQ-5.....	107
Figure 94 Analysis Service Database Preview for BQ-5	107
Figure 95 Query Design for BQ-5	108
Figure 96 Excel Export for BQ-5	108
Figure 97 Analysis Report for BQ-5 - Part 1	109
Figure 98 Analysis Report for BQ-5 - Part 2	109
Figure 99 Null Check	111
Figure 100 Reference Integrity Check.....	112
Figure 101 Duplicates Check	112
Figure 102 File Error Creation	113