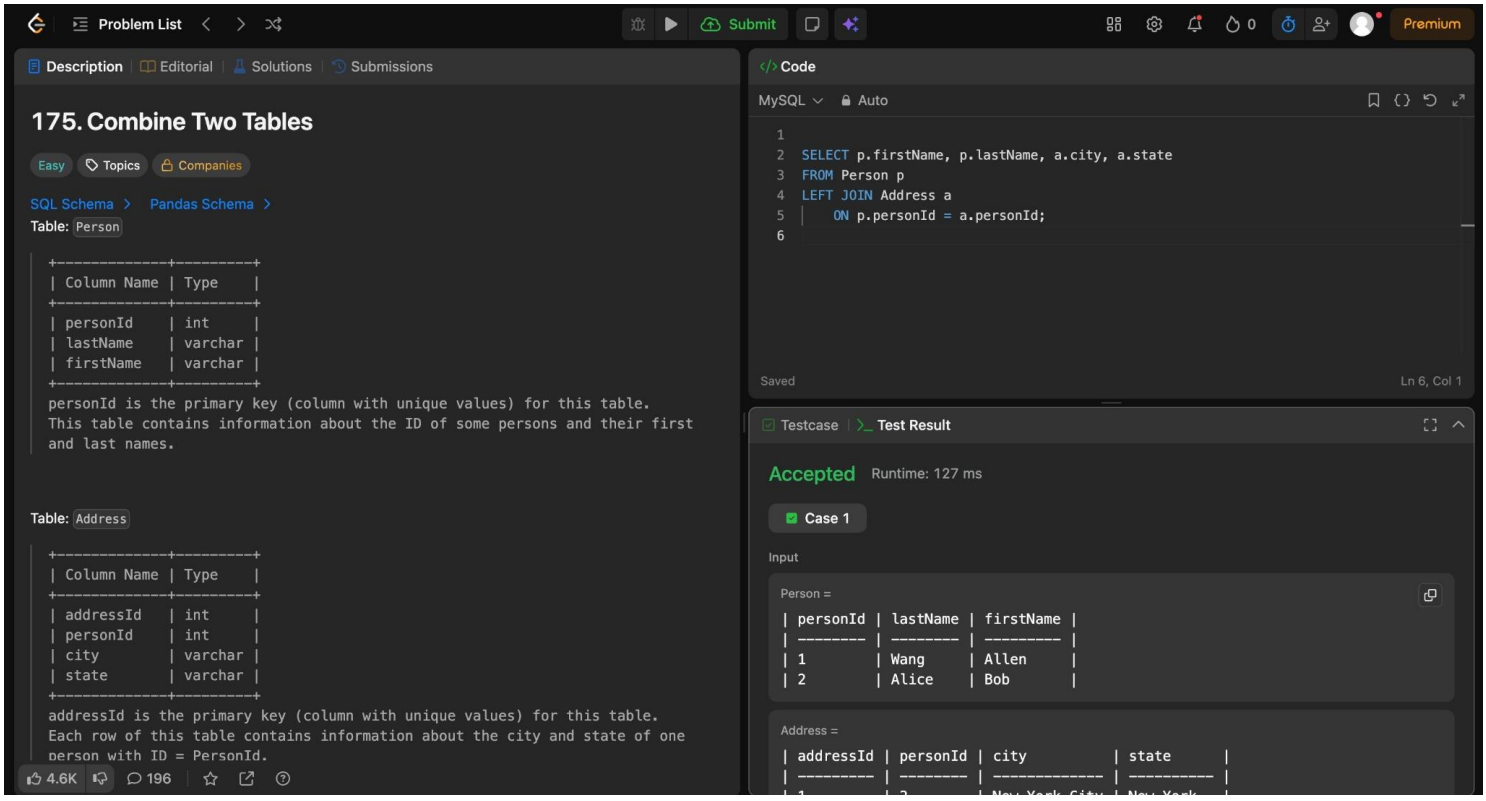
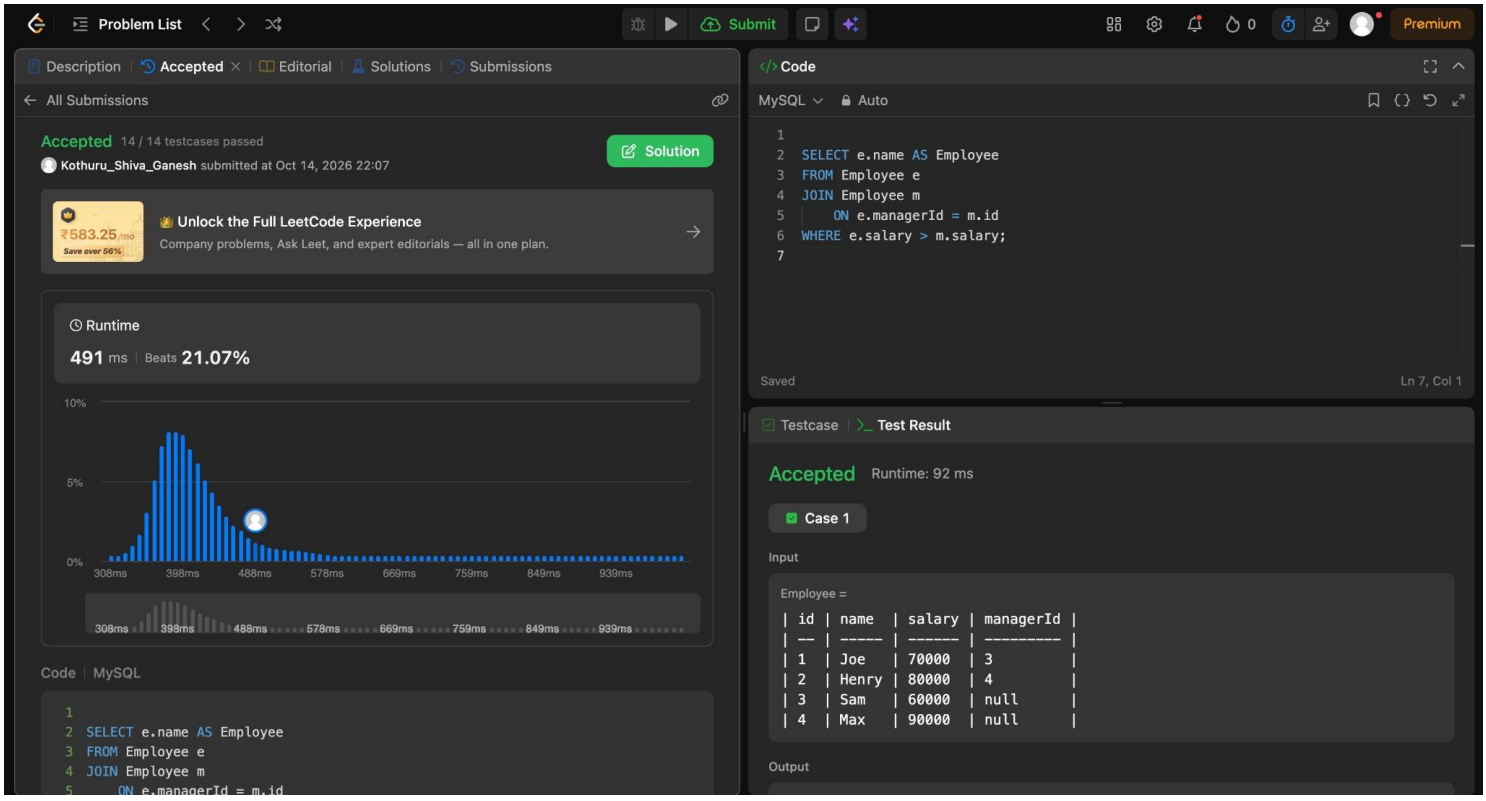
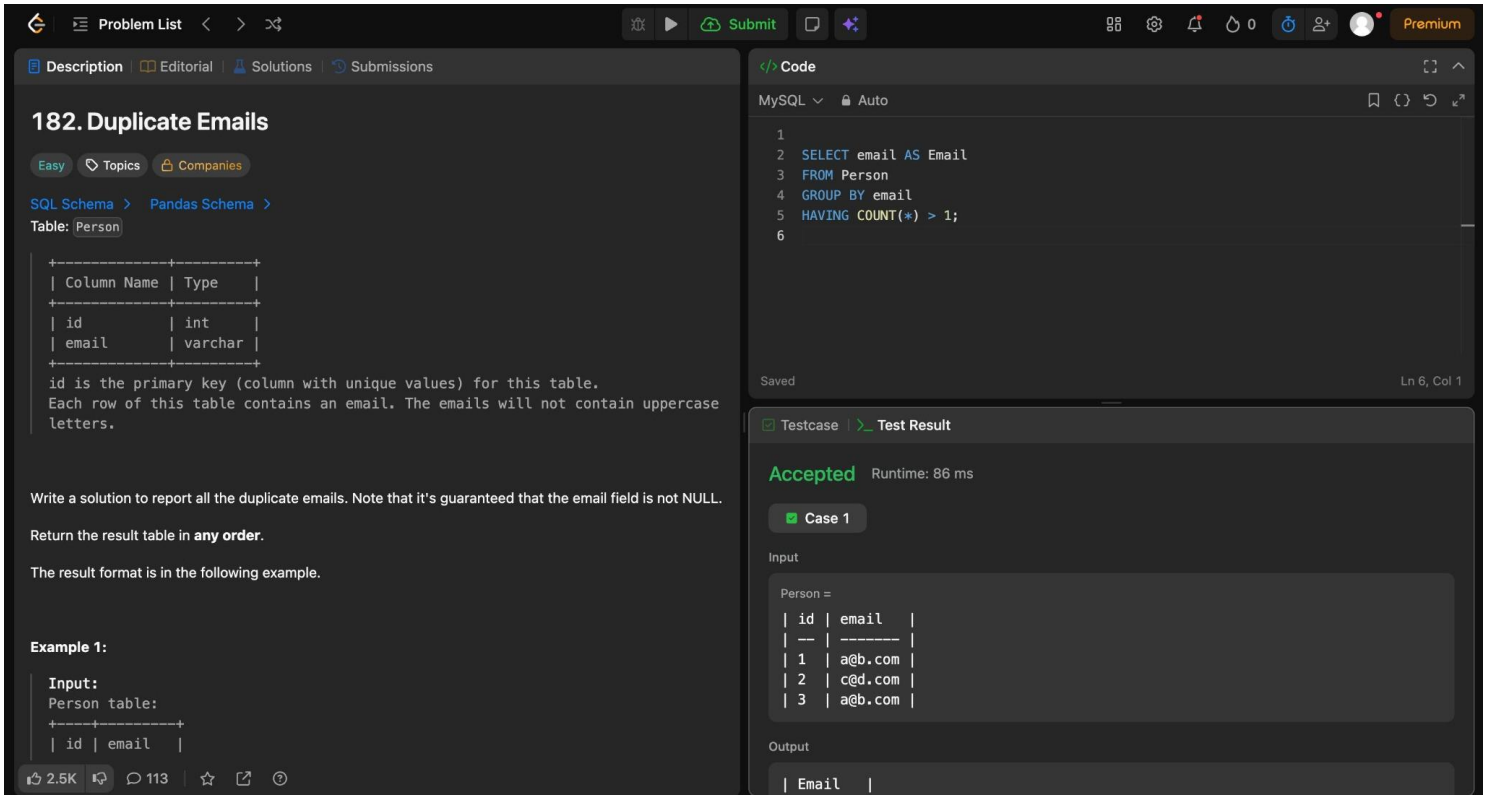
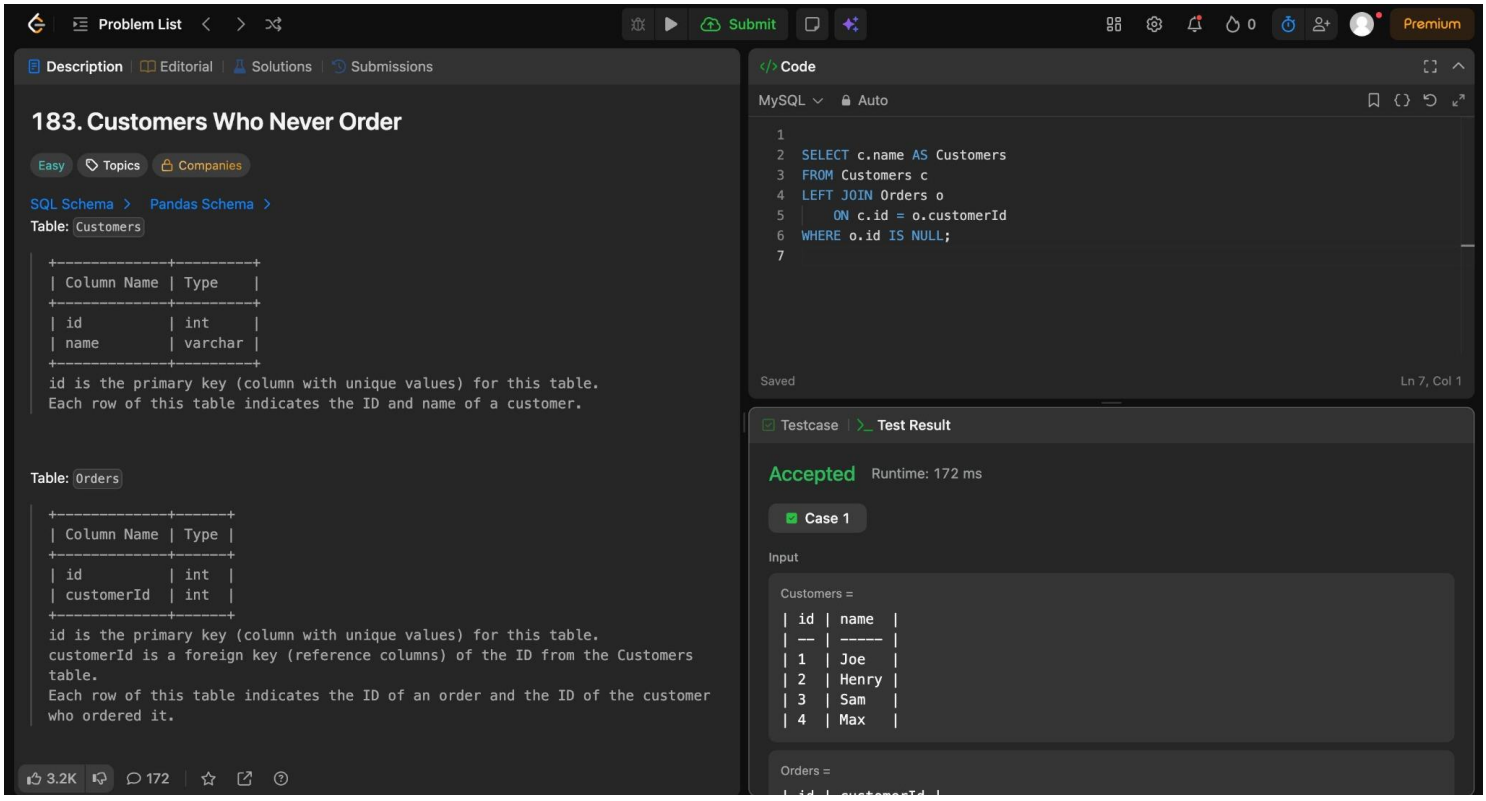
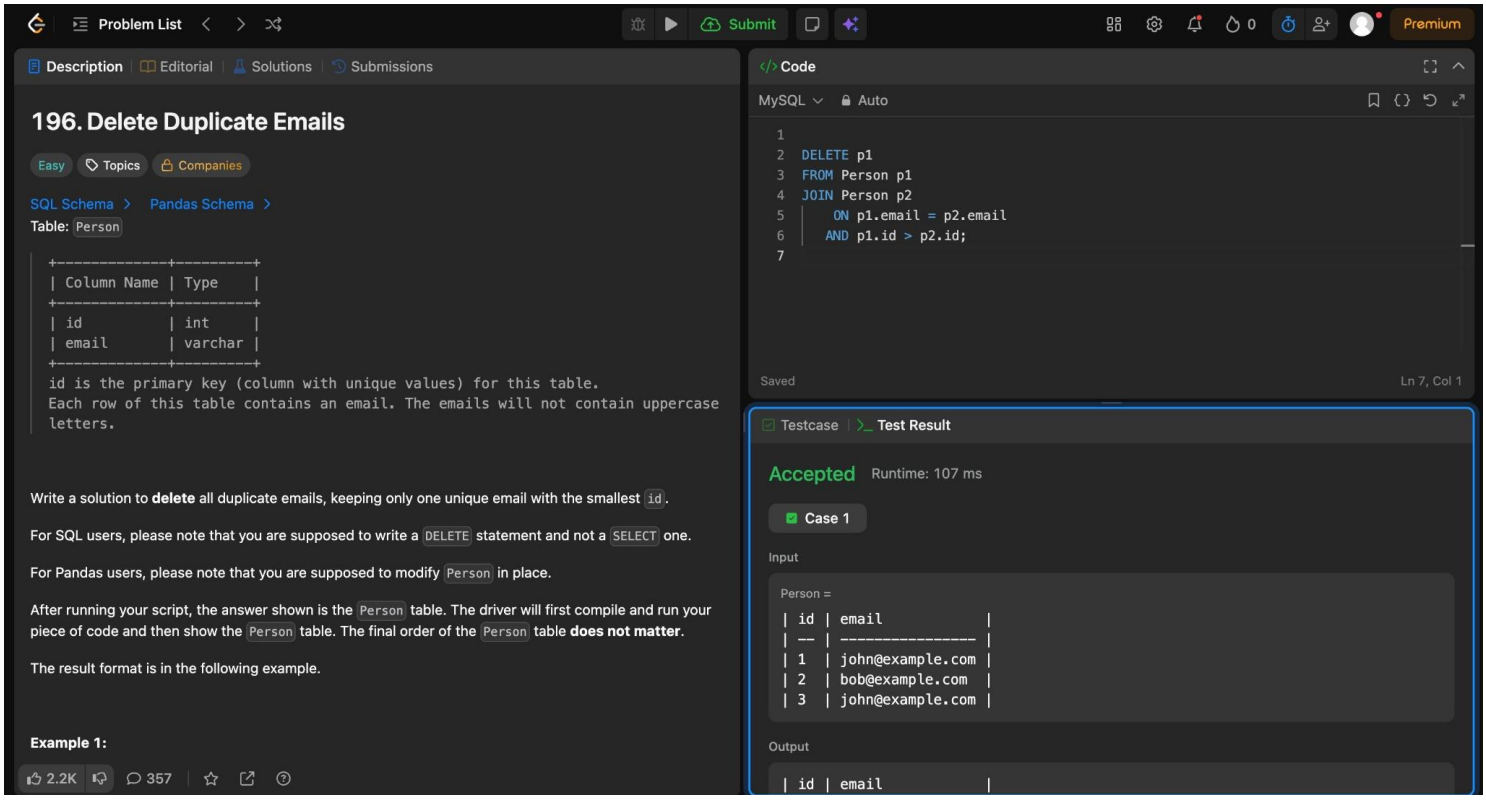
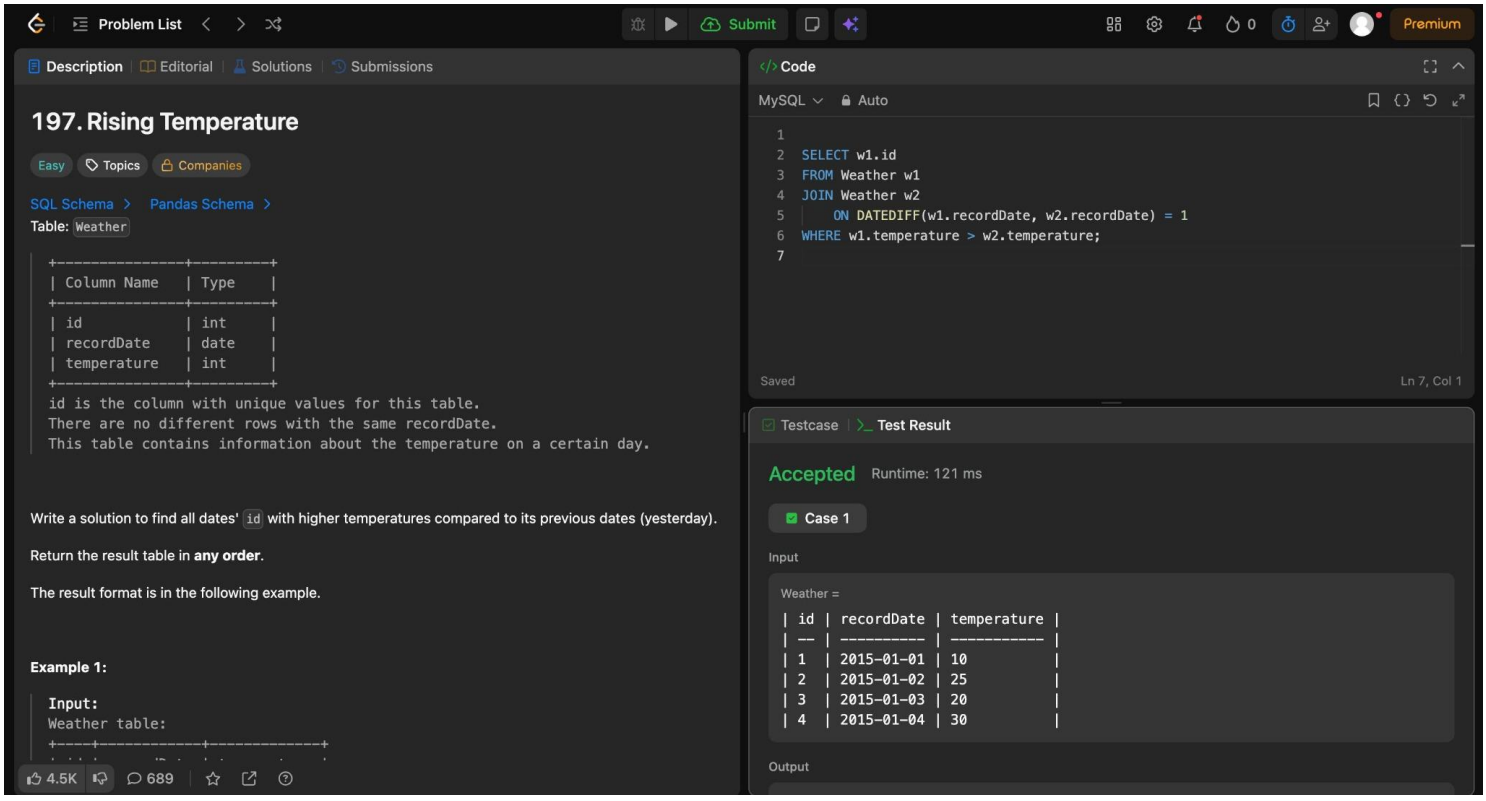

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
175. Combine Two Tables
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Person
+-------------+---------+
| Column Name | Type |
+-------------+---------+
personId	int
lastName	varchar
firstName	varchar
+-------------+---------+
personId is the primary key (column with unique values) for this table.
This table contains information about the ID of some persons and their first and last names.
Table: Address
+-------------+---------+
| Column Name | Type |
+-------------+---------+
addressId	int
personId	int
city	varchar
state	varchar
+-------------+---------+
addressId is the primary key (column with unique values) for this table.
Each row of this table contains information about the city and state of one person with ID = PersonId.
4.6K
196
Code
MySQL
Auto
1
2 SELECT p.firstName, p.lastName, a.city, a.state
3 FROM Person p
4 LEFT JOIN Address a
5 ON p.personId = a.personId;
6
Saved
Ln 6, Col 1
Testcase
Test Result
Accepted
Runtime: 127 ms
Case 1
Input
Person =
personId	lastName	firstName
1	Wang	Allen
2	Alice	Bob
Address =
addressId	personId	city	state

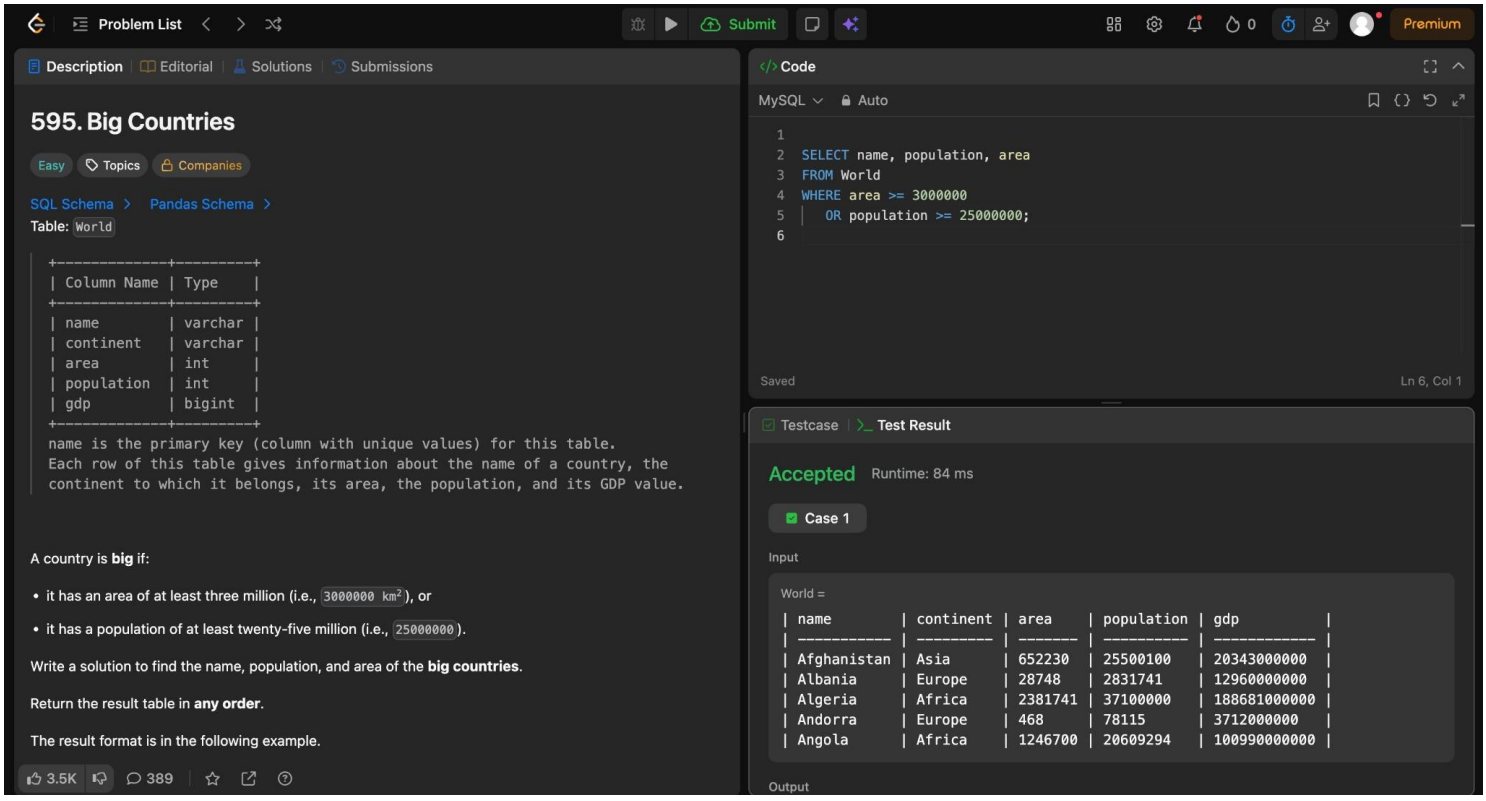

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 14 / 14 testcases passed
Kothuru_Shiva_Ganesh submitted at Oct 14, 2026 22:07
Solution
₹583.25/mo
Save over 66%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
491 ms | Beats 21.07%
10%
5%
0%
308ms 398ms 488ms 578ms 669ms 759ms 849ms 939ms
Code | MySQL
1
2 SELECT e.name AS Employee
3 FROM Employee e
4 JOIN Employee m
5 ON e.managerId = m.id
Code
MySQL
Auto
1
2 SELECT e.name AS Employee
3 FROM Employee e
4 JOIN Employee m
5 ON e.managerId = m.id
6 WHERE e.salary > m.salary;
7
Saved
Ln 7, Col 1
Testcase | Test Result
Accepted Runtime: 92 ms
Case 1
Input
Employee =
id	name	salary	managerId
1	Joe	70000	3
2	Henry	80000	4
3	Sam	60000	null
4	Max	90000	null
Output

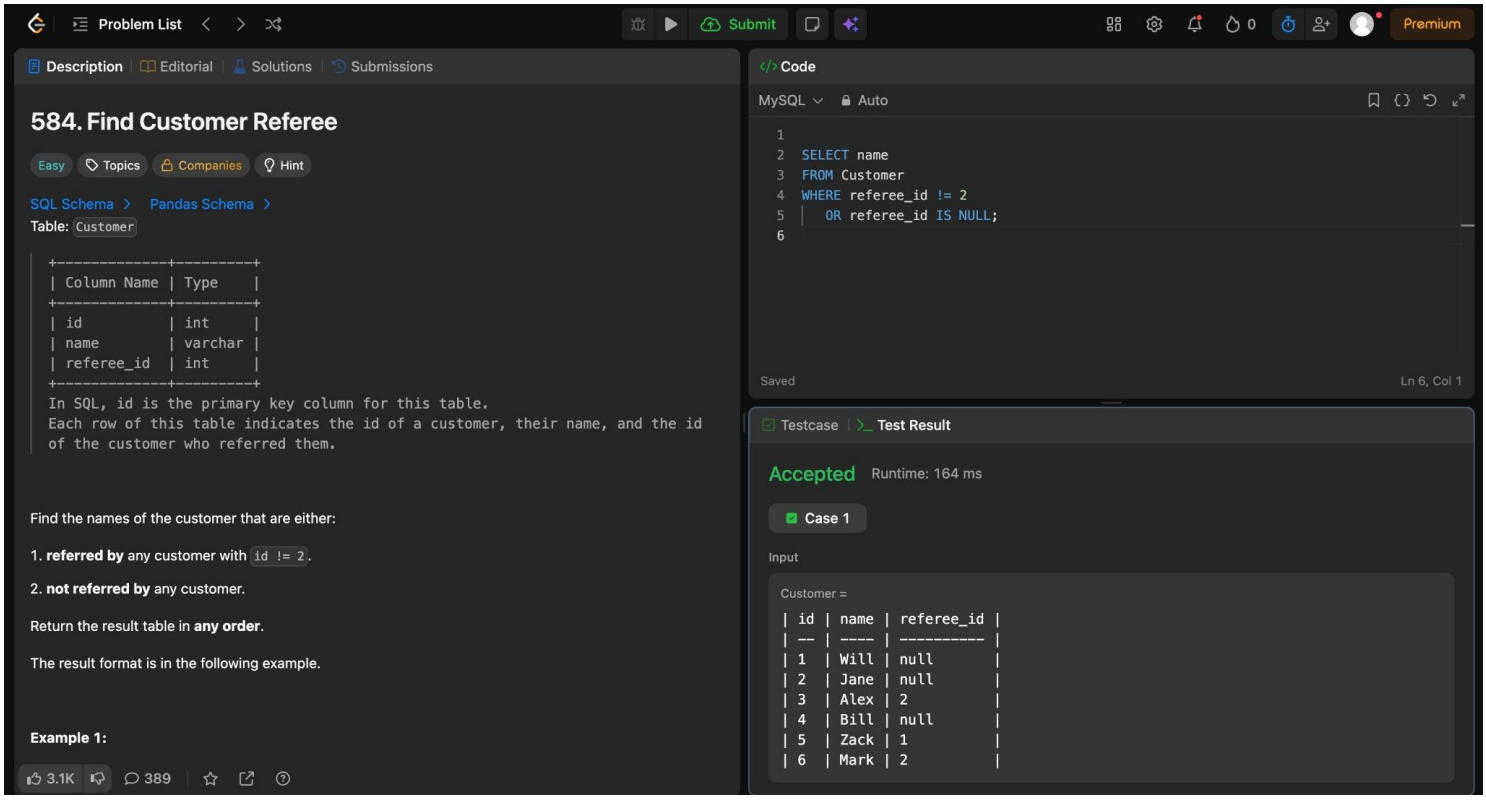

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
182. Duplicate Emails
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Person
+-------------+---------+
| Column Name | Type |
+-------------+---------+
| id | int |
| email | varchar |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table contains an email. The emails will not contain uppercase letters.
Write a solution to report all the duplicate emails. Note that it's guaranteed that the email field is not NULL.
Return the result table in any order.
The result format is in the following example.
Example 1:
Input:
Person table:
+----+----------+
| id | email |
2.5K
113
Code
MySQL
Auto
1
2 SELECT email AS Email
3 FROM Person
4 GROUP BY email
5 HAVING COUNT(*) > 1;
6
Saved
Ln 6, Col 1
Testcase
Test Result
Accepted
Runtime: 86 ms
Case 1
Input
Person =
id	email
1	a@b.com
2	c@d.com
3	a@b.com
Output
Email

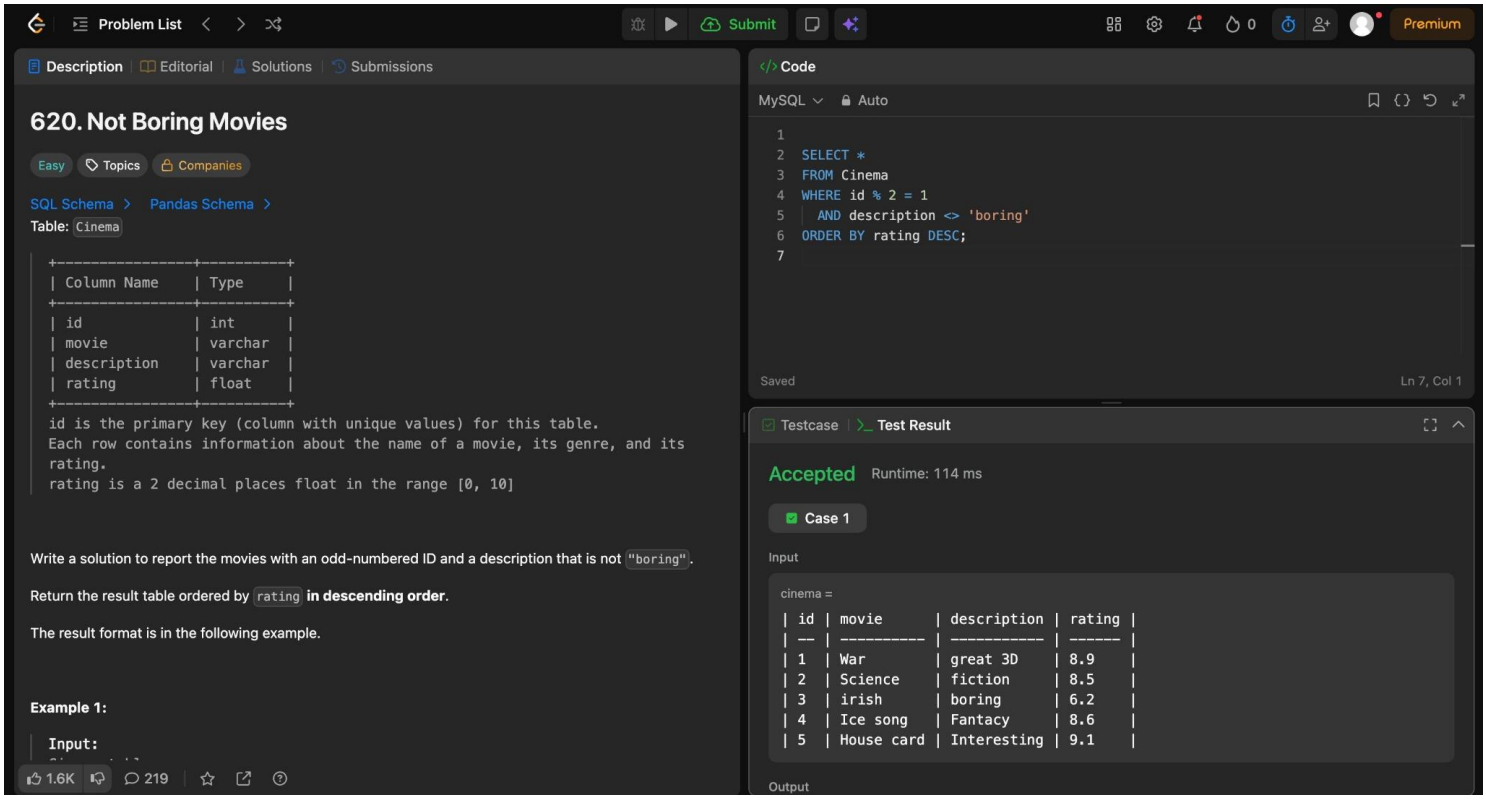

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
183. Customers Who Never Order
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Customers
+-------------+---------+
| Column Name | Type |
+-------------+---------+
| id | int |
| name | varchar |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table indicates the ID and name of a customer.
Table: Orders
+-------------+------+
| Column Name | Type |
+-------------+------+
| id | int |
| customerId | int |
+-------------+------+
id is the primary key (column with unique values) for this table.
customerId is a foreign key (reference columns) of the ID from the Customers table.
Each row of this table indicates the ID of an order and the ID of the customer who ordered it.
3.2K
172
Code
MySQL
Auto
SELECT c.name AS Customers
FROM Customers c
LEFT JOIN Orders o
ON c.id = o.customerId
WHERE o.id IS NULL;
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
Runtime: 172 ms
Case 1
Input
Customers =
id	name
1	Joe
2	Henry
3	Sam
4	Max
Orders =

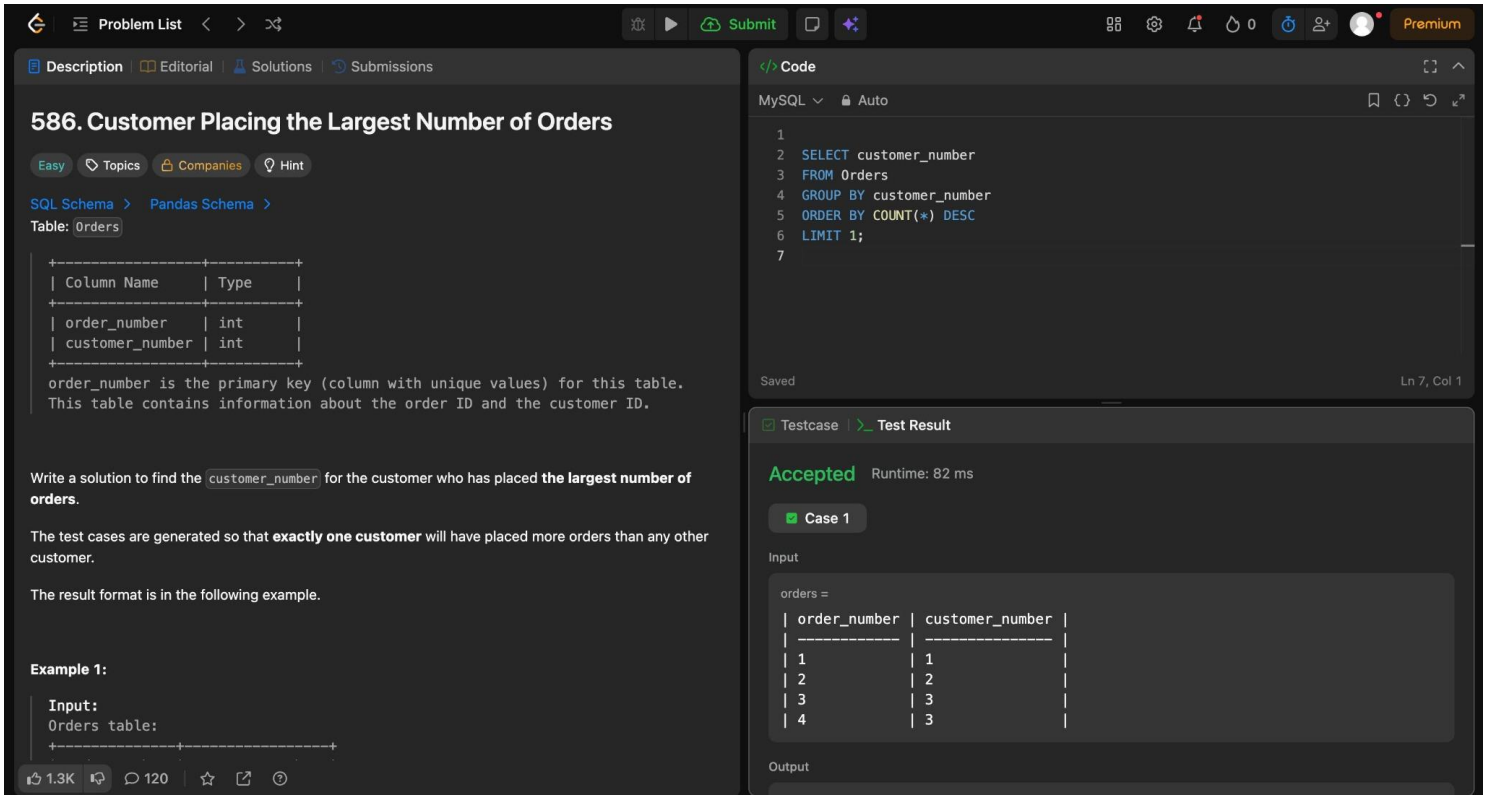

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
196. Delete Duplicate Emails
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Person
+-------------+---------+
| Column Name | Type |
+-------------+---------+
| id | int |
| email | varchar |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table contains an email. The emails will not contain uppercase letters.
Write a solution to delete all duplicate emails, keeping only one unique email with the smallest id.
For SQL users, please note that you are supposed to write a DELETE statement and not a SELECT one.
For Pandas users, please note that you are supposed to modify Person in place.
After running your script, the answer shown is the Person table. The driver will first compile and run your piece of code and then show the Person table. The final order of the Person table does not matter.
The result format is in the following example.
Example 1:
2.2K
357
Code
MySQL
Auto
1
2 DELETE p1
3 FROM Person p1
4 JOIN Person p2
5 ON p1.email = p2.email
6 AND p1.id > p2.id;
7
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
Runtime: 107 ms
Case 1
Input
Person =
id	email
1	john@example.com
2	bob@example.com
3	john@example.com
Output
id	email


Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
197. Rising Temperature
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Weather
+---------------+---------+
| Column Name | Type |
+---------------+---------+
id	int
recordDate	date
temperature	int
+---------------+---------+
id is the column with unique values for this table.
There are no different rows with the same recordDate.
This table contains information about the temperature on a certain day.
Write a solution to find all dates' id with higher temperatures compared to its previous dates (yesterday).
Return the result table in any order.
The result format is in the following example.
Example 1:
Input:
Weather table:
4.5K
689
Code
MySQL
Auto
SELECT w1.id
FROM Weather w1
JOIN Weather w2
ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
WHERE w1.temperature > w2.temperature;
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
Runtime: 121 ms
Case 1
Input
Weather =
id	recordDate	temperature
1	2015-01-01	10
2	2015-01-02	25
3	2015-01-03	20
4	2015-01-04	30
Output


Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
595. Big Countries
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: World
+-------------+---------+
| Column Name | Type |
+-------------+---------+
name	varchar
continent	varchar
area	int
population	int
gdp	bigint
+-------------+---------+
name is the primary key (column with unique values) for this table.
Each row of this table gives information about the name of a country, the
continent to which it belongs, its area, the population, and its GDP value.
A country is big if:
it has an area of at least three million (i.e., 3000000 km²), or
it has a population of at least twenty-five million (i.e., 25000000).
Write a solution to find the name, population, and area of the big countries.
Return the result table in any order.
The result format is in the following example.
3.5K
389
Code
MySQL
Auto
1
2 SELECT name, population, area
3 FROM World
4 WHERE area >= 3000000
5 OR population >= 25000000;
6
Saved
Ln 6, Col 1
Testcase
Test Result
Accepted
Runtime: 84 ms
Case 1
Input
World =
name	continent	area	population	gdp
Afghanistan	Asia	652230	25500100	20343000000
Albania	Europe	28748	2831741	12960000000
Algeria	Africa	2381741	37100000	188681000000
Andorra	Europe	468	78115	3712000000
Angola	Africa	1246700	20609294	100990000000
Output


Problem List
Submit
0
Premium
Description
Editorial
Solutions
Submissions
584. Find Customer Referee
Easy
Topics
Companies
Hint
SQL Schema
Pandas Schema
Table: Customer
+-------------+---------+
| Column Name | Type |
+-------------+---------+
id	int
name	varchar
referee_id	int
+-------------+---------+
In SQL, id is the primary key column for this table.
Each row of this table indicates the id of a customer, their name, and the id of the customer who referred them.
Find the names of the customer that are either:
1. referred by any customer with id != 2.
2. not referred by any customer.
Return the result table in any order.
The result format is in the following example.
Example 1:
3.1K
389
Code
MySQL
Auto
1
2 SELECT name
3 FROM Customer
4 WHERE referee_id != 2
5 OR referee_id IS NULL;
6
Saved
Ln 6, Col 1
Testcase
Test Result
Accepted
Runtime: 164 ms
Case 1
Input
Customer =
id	name	referee_id
1	Will	null
2	Jane	null
3	Alex	2
4	Bill	null
5	Zack	1
6	Mark	2


Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
620. Not Boring Movies
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Cinema
+----------------+----------+
| Column Name | Type |
+----------------+----------+
id	int
movie	varchar
description	varchar
rating	float
+----------------+----------+
id is the primary key (column with unique values) for this table.
Each row contains information about the name of a movie, its genre, and its rating.
rating is a 2 decimal places float in the range [0, 10]
Write a solution to report the movies with an odd-numbered ID and a description that is not "boring".
Return the result table ordered by rating in descending order.
The result format is in the following example.
Example 1:
Input:
1.6K
219
Code
MySQL
Auto
1
2 SELECT *
3 FROM Cinema
4 WHERE id % 2 = 1
5 AND description <> 'boring'
6 ORDER BY rating DESC;
7
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
Runtime: 114 ms
Case 1
Input
cinema =
id	movie	description	rating
1	War	great 3D	8.9
2	Science	fiction	8.5
3	irish	boring	6.2
4	Ice song	Fantacy	8.6
5	House card	Interesting	9.1
Output


Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
586. Customer Placing the Largest Number of Orders
Easy
Topics
Companies
Hint
SQL Schema
Pandas Schema
Table: Orders
+-----------------+----------+
| Column Name | Type |
+-----------------+----------+
| order_number | int |
| customer_number | int |
+-----------------+----------+
order_number is the primary key (column with unique values) for this table.
This table contains information about the order ID and the customer ID.
Write a solution to find the customer_number for the customer who has placed the largest number of orders.
The test cases are generated so that exactly one customer will have placed more orders than any other customer.
The result format is in the following example.
Example 1:
Input:
Orders table:
1.3K
120
Code
MySQL
Auto
1
2 SELECT customer_number
3 FROM Orders
4 GROUP BY customer_number
5 ORDER BY COUNT(*) DESC
6 LIMIT 1;
7
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
Runtime: 82 ms
Case 1
Input
orders =
order_number	customer_number
1	1
2	2
3	3
4	3
Output